

EXTERIOR FEATURES

Panoramic roof

This extensively glazed roof provides incomparable visibility and light in the passenger compartment.

▶▶ 82



Opening rear screen (SW)

This equipment permits easy access to the luggage compartment without the need to open the tailgate.

Check that the rear screen is closed properly before opening the boot or locking the vehicle.

▶▶ 81

Rear parking assistance

This equipment provides a warning when reversing by detecting obstacles located behind the vehicle.

▶▶ 128

Static directional lighting

This additional lighting automatically provides extended visibility when turning.

▶▶ 88

Tyre under-inflation detection

This equipment monitors the pressure in each tyre and warns you if a puncture or deflation occurs.

▶▶ 106

Temporary tyre repair kit

This kit is a complete system, consisting of a compressor and an integrated sealant product, for the temporary repair of a tyre.

▶▶ 136

OPENING

Remote control key



- A. Unfolding/Folding the key.
- B. Unlocking the vehicle.
- C. Unlocking and partially opening the rear screen (SW).

► 70



Also...

- D. Normal locking
or
- Deadlocking of the vehicle.


Fuel tank



1. Opening the fuel filler flap.
2. Opening and hooking the fuel filler cap.

Capacity of the tank: approximately 50 litres.
► 83

Bonnet

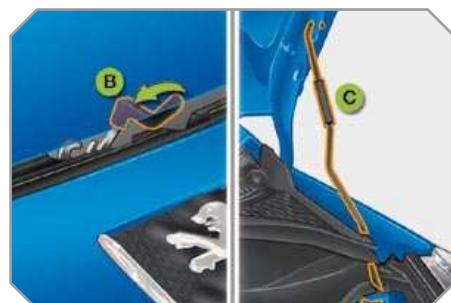

- A. Interior control.
- B. Exterior control.
- C. Bonnet strut.

► 130

OPENING

Boot (SW)



1. Unlocking the vehicle.
2. Opening the boot.

►► 81



The tailgate and the rear screen cannot both be open at the same time, to prevent damage to the glass and to the rear screen itself.

Rear screen (SW)

Vehicle locked



1. Unlocking and partially opening the rear screen.
2. Opening the rear screen.


Vehicle unlocked



1. Partially opening the rear screen.
2. Opening the rear screen.

►► 81

Panoramic roof (SW)

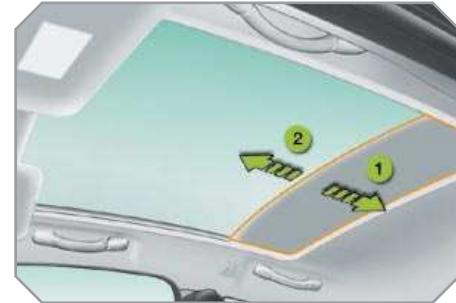

1. Opening the shutter.
2. Closing the shutter.

►► 82

INTERIOR FEATURES

Distance recorder

The trip distance recorder is reset to zero by pressing the right-hand button on the instrument panel for more than two seconds.

► 30

**Audio and communication systems**

This equipment benefits from the latest technology: MP3 compatible PC Sound, USB Player - Plug with Bluetooth hands-free kit, PC Com, PC Nav, auxiliary sockets, JBL audio system.

PC Com

► 185

PC Nav

► 227

PC Sound

► 253

PC Plug


► 259

Dual-zone automatic air conditioning

This equipment permits the setting of a different level of comfort for the driver and front passenger. It then automatically controls this level in relation to the exterior climatic conditions.

► 52

INSTRUMENTS AND CONTROLS

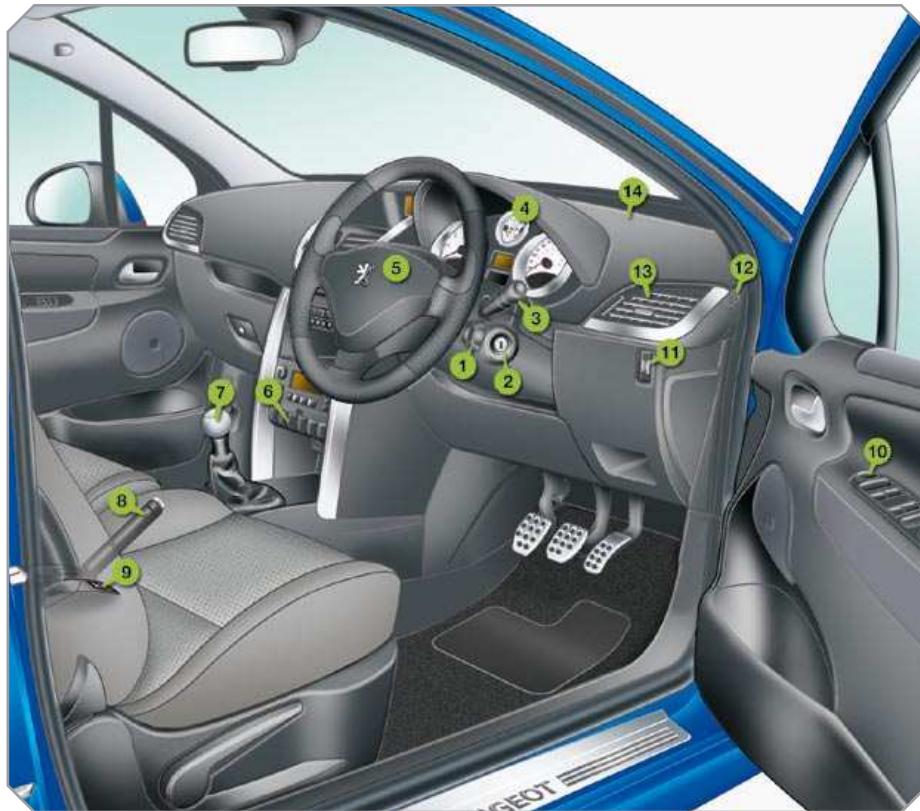

1. Audio equipment steering wheel control.
2. Steering lock and ignition.
3. Wiperswash-wipetrip computer controls.
4. Instrument panel.
5. Driver's airbag.
6. Horn.
7. Dynamic stability control (ESP/ASR) button.
8. Central locking button.
9. Alarm button.
10. Electric child lock button.
11. Gear lever.
12. Parking brake.
13. Panoramic roof blind control (SW).
14. Exterior mirror controls.
15. Electric window controls.
16. Rear electric windows deactivation control.
17. Headlamp height adjustment.
18. Front door window demist/defrost vent.
19. Side adjustable air vent.
20. Windscreen demist/defrost vent.

INSTRUMENTS AND CONTROLS



1. Steering wheel adjustments control.
2. Cruise control speed limiter switch.
3. Lighting and direction indicators controls.
4. Hazard warning lamps switch.
5. Multifunction screen.
Seat belt fastening status warning lamps.
6. Sunshine sensor.
7. Passenger airbag.
8. Speaker (tweeter).
9. Glove box/Passenger airbag deactivation/Audio/video sockets/Fusebox.
10. Bonnet release control.
11. Front ashtray.
12. 12 V accessories socket.
13. USB port.
14. Heating/air conditioning controls.
15. Storage compartment.
16. PC Sound, PC Nav or PC Com.
17. Central adjustable air vents.

SITTING COMFORTABLY

Front seat adjustment



1. Forwards-backwards adjustment.
2. Height adjustment.
3. Seat back angle adjustment.
4. Head restraint height adjustment.

► 54

Steering wheel adjustment



1. Unlocking the wheel adjustment.
2. Height and reach adjustment.
3. Locking the wheel adjustment.

As a safety precaution, it is imperative that these operations are carried out when stationary.

► 61

I Also...

5. Access to the rear seats (3-door).
6. Armrest (except 3-door).

SITTING COMFORTABLY

Exterior mirrors adjustment



- A. Selecting the mirror.
- B. Adjusting the position of the mirror.
- C. De-selecting the mirror.


► 59



Also...

- D. Folding/Unfolding.

Interior mirror adjustment

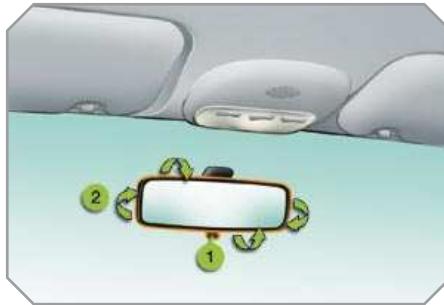

- 1. Selecting the "day" position of the mirror.
- 2. Mirror orientation.

► 60

Front seat belts



- 1. Fastening
- 2. Height adjustment.

► 109

SEEING CLEARLY

Lighting



Ring A

0 Lights off.

AUTO Automatic lighting.

Side lights.

Dipped main beam headlamps.

Ring B


0 Rear foglamps.

or

Front and rear foglamps.

►► 85

Wipers

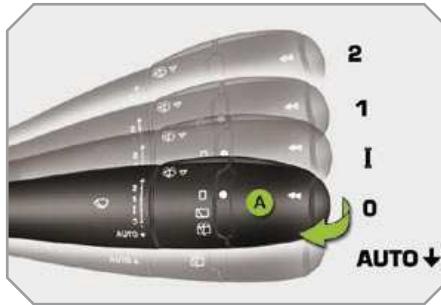


Stalk A: windscreens wipers

2. Fast wipe.
1. Normal wipe.
- I. Intermittent wipe.
0. Park.

AUTO↓ Automatic wiping or single wipe.

Wash-wipe: pull the control towards you.

►► 89

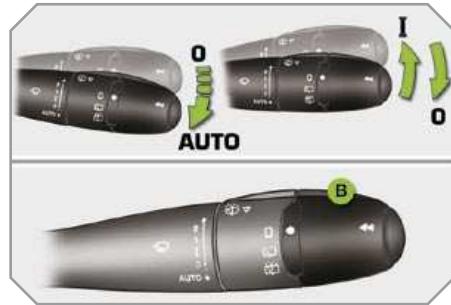

Switching on "AUTO" mode

Push the stalk downwards and release it.

Switching off "AUTO" mode

Push the stalk upwards and return it to position "0".

►► 91

Ring B: rear wiper

0 Park.

Intermittent wipe.

Wash-wipe.

►► 90

VENTILATION

Advice on interior settings

I require...	Heating or Manual air conditioning					Manual A/C
	Air distribution	Air flow	Air recirculation Exterior air intake	Temperature		
HEAT						—
COOL						ON
DEMISTING DEFROSTING						ON

Automatic air conditioning: use of the fully automatic mode by pressing the "AUTO" button is preferable.

MONITORING

Instrument panel



- A. With the ignition on, the fuel gauge needle should rise.
- B. With the engine running, the associated low level warning lamp should switch off.
- C. With the ignition on, the oil level indicator should display "OIL OK" for a few seconds.

If the levels are not correct, top up the level which is low.

►► 18

Warning lamps



1. With the ignition on, the orange and red warning lamps come on.
2. With the engine running, these warning lamps should switch off.
If a warning lamp remains on, refer to the page concerned.
►► 19

Switch panel




Lighting of the indicator lamp indicates the status of the corresponding function.

- A. Deactivation of the ESP/ASR system.
►► 108
- B. Central locking.
►► 70
- C. Deactivation of the interior protection alarm.
►► 74
- D. Activation of the electric child lock*.
►► 103

* Except 3-door.

KEEPING YOUR PASSENGERS SAFE

Front passenger airbag

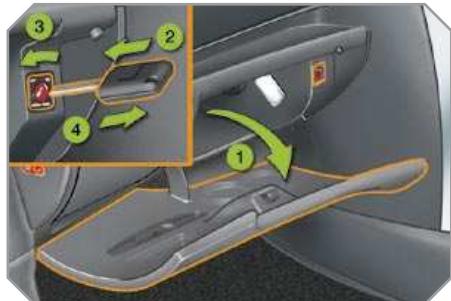

1. Open the glove box.
2. Insert the key.
3. Select position:
"ON" (activation), with front passenger or "forwards facing" child seat,
"OFF" (deactivation), with "rear facing" child seat".
4. Remove the key keeping the switch in the new position.

►► 113

Front and rear seat belts




- A. Front left seat belt not fastened or unfastened warning lamp lit in red.
- B. Front right seat belt not fastened or unfastened warning lamp lit in red.
- C. Rear left seat belt not fastened or unfastened warning lamp lit in red.
- D. Rear centre seat belt not fastened or unfastened warning lamp lit in red**.
- E. Rear right seat belt not fastened or unfastened warning lamp lit in red.

►► 109

** Except GTi.

STARTING

Ignition switch

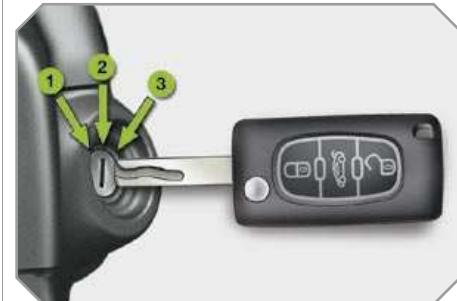

1. Stop position.
2. Ignition position.
3. Starting position.

►► 72



A heavy object (key fob...), attached to the key and weighing down on its shaft in the ignition switch, could cause a malfunction.

DRIVING SAFELY

Speed limiter "LIMIT"



1. SelectingSwitching off speed limiter mode.
2. Decrease the programmed value.
3. Increase the programmed value.
4. Speed limiter on/off.

The values must be set with the engine running.

►► 124

Cruise control "CRUISE"



1. SelectingSwitching off cruise control mode.
2. Decrease the programmed value.
3. Increase the programmed value.
4. Cruise control off/resume.

In order to be programmed or activated, the vehicle speed must be higher than 25 mph (40 km/h), with at least fourth gear engaged on the manual gearbox (second gear on the "2 Tronic" or automatic gearbox).

►► 126

Instrument panel display



The cruise control or speed limiter mode appears on the instrument panel when it is selected.



Cruise control



Speed limiter

DRIVING SAFELY

"2 Tronic" gearbox (Saloon)



This five-speed electronically controlled gearbox offers a choice between the comfort of fully automatic operation or the pleasure of manual gear changing.

1. Gear lever.
2. Steering wheel "-" paddle.
3. Steering wheel control "+" paddle.

Display on the instrument panel



The gear or the driving mode selected appears on the instrument panel.

N: neutral.


R: reverse.

1 2 3 4 5: gears engaged.

AUTO: automatic mode.

*****: automatic "snow" mode.

Moving off

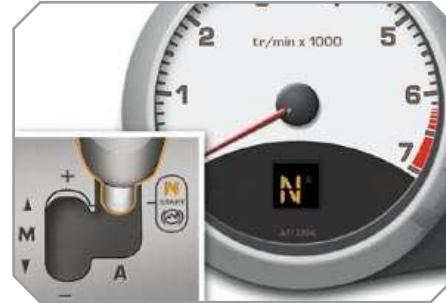

☞ Select position **N** and press the brake pedal firmly while starting the engine.

☞ Engage first gear (position **A** or **M**) or reverse (position **R**) using the gear lever **1**.

☞ Release the parking brake.

☞ Take your foot off the brake pedal and accelerate.

► 118

PETROL - DIESEL MANUAL GEARBOX OR "2 TRONIC" OR AUTOMATIC GEARBOX INSTRUMENT PANELS



Panel which groups together the vehicle operation dials and indicator lamps.

Dials

1. Rev counter.

Indicates the speed of rotation of the engine (x 1 000 rpm).

2. Fuel gauge.

Indicates the quantity of fuel remaining in the tank.

3. Coolant temperature.

Indicates the temperature of the engine coolant (°Celsius).

4. Speedometer.

Indicates the current speed of the moving vehicle (km/h or mph).

5. Screen.

6. Display zero reset button.

Resets the selected function to zero (trip distance recorder or service indicator).

7. Instrument panel lighting button.

Adjusts the brightness of the lighting of the instruments and controls.

8. "2 Tronic" or automatic gearbox.

Indicates the programme selected and the gear engaged.

Display



A. Speed limiter.

or

Cruise control.

(km/h or mph)

B. Trip distance recorder.

(km or miles)

C. Service indicator.

(km or miles) then,

Engine oil level indicator.

then

Distance recorder.

(km or miles)

These three functions are displayed in succession when the ignition is switched on.

For further information, refer to the section which corresponds to the function and to the display associated with it.

Indicator and warning lamps

Visual indicators informing the driver that a system is in operation (operation or deactivation indicator lamps) or of the occurrence of a fault (warning lamp).

When the ignition is switched on

Certain warning lamps come on for a few seconds when the vehicle's ignition is switched on.

When the engine is started, these same warning lamps should switch off.

If they remain on, before moving off, refer to the information on the warning lamp concerned.

Associated warnings

The switching on of certain warning lamps may be accompanied by an audible signal and a message on the multifunction screen.

Operation indicator lamps

If one of the following indicator lamps comes on, this confirms that the corresponding system has come into operation.



The warning lamps may come on continuously (fixed) or flash.

Certain warning lamps may come on in two different modes. Only by relating the type of lighting to the operating status of the vehicle can it be ascertained whether the situation is normal or whether a fault has occurred.

Warning lamp	is on	Cause	Action/Observations
	Left-hand direction indicator	flashing with buzzer.	The lighting stalk is pushed down.
	Right-hand direction indicator	flashing with buzzer.	The lighting stalk is pushed up.
	Dipped beam headlamps	fixed.	The lighting stalk is in the "Dipped beam headlamps" position. Turn the control to the desired position
	Main beam headlamps	fixed.	The lighting stalk is pulled towards you. Pull the stalk to return to dipped beam headlamps.

1 INSTRUMENTS and CONTROLS

Warning lamp	is on	Cause	Action/Observations
	Front foglamps	fixed.	The front foglamps are switched on. Turn the ring on the stalk rearwards twice to switch off the front foglamps.
	Rear foglamps	fixed.	The rear foglamps are switched on. Turn the ring on the stalk rearwards to switch off the rear foglamps.
	Diesel engine pre-heating	fixed.	The ignition switch is at the 2nd position (ignition on). Wait until the warning lamp has switched off before starting. The duration for which the warning lamp is on is determined by the climatic conditions.
	Parking brake	fixed.	The parking brake is applied or not properly released. Release the parking brake to switch off the warning lamp, keeping your foot on the brake pedal. Observe the safety recommendations. For further information on the parking brake, refer to the "Driving" section.

Deactivation warning lamps

If one of the following warning lamps comes on, this confirms that the corresponding system has been switched off intentionally.

Warning lamp	is on	Cause	Action/Observations
 Passenger's air bag system	fixed.	<p>The control, located in the glove box, is set to the OFF position.</p> <p>The passenger's front airbag is deactivated.</p>	<p>Set the control to the ON position to activate the passenger's front airbag. In this case, do not fit a child seat in the rear-facing position.</p> <p>The passenger's airbag system is put into service automatically when the vehicle is started.</p>
 ESP/ASR	fixed.	<p> The button, located in the centre of the dashboard, is pressed. Its indicator lamp is on.</p> <p>The ESP/ASR is deactivated.</p> <p>ESP: electronic stability programme.</p> <p>ASR: anti-skid regulation.</p>	<p>Press the button to activate the ESP/ASR. Its indicator lamp switches off.</p> <p>From approximately 30 mph (50 km/h), the system is reactivated automatically.</p> <p>The ESP/ASR system is activated automatically when the vehicle is started.</p>

Warning lamps

When the engine is running or the vehicle is being driven, the switching on of one of the following warning lamps indicates a fault which requires action on the part of the driver.



Any fault resulting in the switching on of a warning lamp must be investigated further by reading the associated message on the multifunction screen. If you encounter any problems, do not hesitate to contact a PEUGEOT dealer.

Warning lamp	is on	Cause	Action/Observations
STOP	STOP	fixed, associated with another warning lamp and accompanied by an audible signal.	It is associated with the braking system or the engine coolant temperature. Stop as soon as it is safe to do so. Park, switch off the ignition and call a PEUGEOT dealer.
	Service	temporarily.	Identify the fault by reading the message shown on the screen, such as, for example: - the engine oil level, - the screenwash level, - the remote control battery, - saturation of the particle emission filter (Diesel). For any other faults, contact a PEUGEOT dealer.
		fixed.	A minor fault has occurred for which there is no specific warning lamp. Identify the fault by reading the message shown on the screen and contact a PEUGEOT dealer.
	Braking	fixed.	The braking system fluid level has dropped significantly. Top up with brake fluid recommended by PEUGEOT. If the problem persists, have the system checked by a PEUGEOT dealer.
		fixed, associated with the ABS warning lamp.	The electronic brake force distribution (EBFD) system has a fault. Have it checked by a PEUGEOT dealer.

Warning lamp		is on	Cause	Action/Observations
	Anti-lock Braking System (ABS)	fixed.	The anti-lock braking system has a fault.	The vehicle retains conventional braking without servo assistance. Drive carefully at reduced speed and contact a PEUGEOT dealer without delay.
	Dynamic stability control (ESP/ASR)	flashing.	The ESP/ASR regulation is active.	The system optimises traction and improves the directional stability of the vehicle.
		fixed.	Unless it has been deactivated with the indicator lamp on the button on, the ESP/ASR system is faulty.	Have it checked by a PEUGEOT dealer.
	Engine autodiagnosis system	fixed.	The emission control system has a fault.	This lamp should switch off when the engine is started. If it does not switch off, contact a PEUGEOT dealer urgently.
		flashing.	The engine management system has a fault.	Risk of destruction of the catalytic convertor. Have it checked by a PEUGEOT dealer.
	Low fuel level	fixed with the last two segment blocks flashing.	When it first comes on there remains approximately 5 litres of fuel in the tank.	Refuel as soon as possible to avoid running out of fuel. This warning lamp will come on every time the ignition is switched on, until a sufficient addition of fuel is made. Fuel tank capacity: approximately 50 litres (petrol) or 45 litres (Diesel). Never continue to drive until you run out of fuel, this could damage the emission control and injection systems.

1 INSTRUMENTS and CONTROLS

Warning lamp	is on	Cause	Action/Observations
	Maximum coolant temperature fixed red.	The temperature of the cooling system is too high.	Stop as soon as it is safe to do so. Wait until the engine has cooled down before topping up the level, if necessary. If the problem persists, contact a PEUGEOT dealer.
	Engine oil pressure fixed.	There is a fault with the engine lubrication system.	Stop as soon it is safe to do so. Park, switch off the ignition and contact a PEUGEOT dealer.
	Battery charge fixed.	The battery charging circuit has a fault (dirty or loose terminals, slack or cut alternator belt, ...).	This lamp should switch off when the engine is started. If it does not switch off, contact a PEUGEOT dealer.
	Door(s) open fixed if the speed is below 6 mph (10 km/h). fixed and accompanied by an audible signal if the speed is above 6 mph (10 km/h).	A door, the boot, the rear screen or the bonnet is still open.	Close the door or boot.
		The directional headlamps system is faulty.	Have it checked by a PEUGEOT dealer.

Warning lamp	is on	Cause	Action/Observations
	temporarily. fixed.	This lamp comes on for a few seconds when you turn on the ignition, then switches off. One of the airbag or seat belt pretensioner systems has a fault.	This lamp should switch off when the engine is started. If it does not switch off, contact a PEUGEOT dealer. Have it checked by a PEUGEOT dealer.
		fixed then flashing accompanied by an increasing audible signal. fixed then flashing accompanied by an audible signal.	The driver and/or the front passenger has not fastened or has unfastened their seat belt. One or more rear passengers have unfastened their seat belt.
	Power steering	fixed.	The power steering has a fault. Drive carefully at reduced speed. Have it checked by a PEUGEOT dealer.
	Water in Diesel	fixed.	The diesel filter contains water. Risk of damage to the injection system on Diesel engines. Contact a PEUGEOT dealer without delay.
	Punctured wheel	fixed.	One or more wheels are punctured or seriously deflated. Stop immediately avoiding any sharp action on the steering wheel or the brakes. Repair or change the damaged wheel and have the pressure of the tyres checked as soon as possible.

Coolant temperature indicator

System which informs the driver of the changes in the temperature of the engine coolant while driving.



With the engine running, when the needle is:

- in zone **A**, the temperature is correct,
- in zone **B**, the temperature is too high; the max temperature warning lamp **1** and the central **STOP** warning lamp come on, accompanied by an audible signal and a message on the multifunction screen.

You MUST stop as soon as it is safe to do so.

Consult a PEUGEOT dealer.

After driving for a few minutes, the temperature and pressure in the cooling system increase.

To top up the level:

- ☛ wait for the engine to cool,
- ☛ unscrew the cap by two turns to allow the pressure to drop,
- ☛ when the pressure has dropped, remove the cap,
- ☛ top up the level to the "MAX" mark.



On petrol engines, the cooling of the engine is managed electronically to improve consumption. Consequently, the coolant temperature levels are no longer simply linked with the external ambient conditions and the use of the vehicle.

For example, in town, it is normal for the coolant temperature to be slightly higher in cold weather than in hot weather.

Service indicator

System which informs the driver when the next service is due, in accordance with the manufacturer's servicing schedule.

The point at which the service is due is calculated from the last indicator zero reset. It is determined by two parameters:

- the distance travelled,
- the time elapsed since the last service.



More than 620 miles (1 000 km) remain before the next service is due

For 5 seconds after the ignition is switched on, the spanner symbolising the service operations comes on. The distance recorder display line indicates the distance remaining before the next service is due.

Example: 4 800 miles/km remain before the next service is due.

For 5 seconds after the ignition is switched on, the display indicates:



5 seconds after the ignition is switched on, **the spanner is switched off**; the distance recorder resumes its normal operation. The display then indicates the total and trip distances.



Less than 620 miles (1 000 km) remain before the next service is due

Examples: 400 miles (900 km) remain before the next service is due.

For 5 seconds after the ignition is switched on, the display indicates:



5 seconds after the ignition is switched on, the distance recorder resumes its normal operation. **The spanner remains on** to indicate that a service must be carried out soon.



Service overdue

For 5 seconds after the ignition is switched on, the **spanner flashes** to indicate that the service must be carried out as soon as possible.

Example: the service is overdue by 300 miles/km.

For 5 seconds after the ignition is switched on, the display indicates:



5 seconds after the ignition is switched on, the distance recorder resumes its normal operation. **The spanner remains lit.**



The distance remaining may be weighted by the time factor, depending on the driver's driving habits.

Therefore, the spanner may also come on if you have exceeded the two year service interval.

Service indicator zero reset



After each service, the service indicator must be reset to zero.

The procedure for resetting to zero is as follows:

- ☛ switch off the ignition,
- ☛ press and hold the trip distance recorder zero reset button,
- ☛ switch on the ignition; the distance recorder display begins a countdown,
- ☛ when the display indicates "**=0**", release the button; the spanner disappears.



Following this operation, if you wish to disconnect the battery, lock the vehicle and wait at least five minutes for the zero reset to be taken into account.

Engine oil level indicator

System which informs the driver whether the engine oil level is correct or not.



This information is indicated for a few seconds when the ignition is switched on, after the service information.



The level read will only be correct if the vehicle is on level ground and the engine has been off for more than 15 minutes.

Oil level correct



Lack of oil



This is indicated by the flashing of "OIL", linked with the service warning lamp, accompanied by an audible signal and a message on the multifunction screen.

If the lack of oil is confirmed by a check using the dipstick, it is essential that the level is topped up to prevent damage to the engine.

Oil level indicator fault



This is indicated by the flashing of "OIL --". Consult a PEUGEOT dealer.

Dipstick

Refer to the "Checks" section to locate the dipstick and the oil filler cap on your engine.



There are 2 marks on the dipstick:

- **A** = max; never exceed this level (risk of damage to the engine),
- **B** = min; top up the level via the oil filler cap, using the grade of oil suited to your engine.

Total distance recorder

System which measures the total distance travelled by the vehicle during its life.



The total and trip distances are displayed for thirty seconds when the ignition is switched off, when the driver's door is opened and when the vehicle is locked or unlocked.

Trip distance recorder

System which measures a distance travelled during a day or other period since it was reset to zero by the driver.



- With the ignition on, press the button until zeros appear.

Lighting rheostat

System for manual adjustment of the brightness of the instruments and controls in relation to the exterior brightness.



Activation

When the lights are on:

- press the button to change the brightness of the instruments and controls,
- when the lighting reaches the minimum setting, release the button, then press again to increase it,
- or
- when the lighting reaches the maximum setting, release the button, then press again to reduce it,
- when the lighting reaches the level of brightness required, release the button.

Deactivation

When the vehicle lighting is off, or in day mode on vehicles fitted with daytime running lamps, pressing the button does not have any effect.

CLOCK

Integrated system which displays the time with independent setting of the hours and minutes.



Button 1: setting of the hours.

Button 2: setting of the minutes.

Setting

- Press the corresponding button briefly to obtain slow scrolling.
- or
- Continue to press the corresponding button to obtain rapid scrolling.

MONOCHROME SCREEN A (WITHOUT PC SOUND)



Displays on the screen

This displays the following information:

- the time,
- the date,
- the ambient temperature* (this flashes if there is a risk of ice),
- the status of the openings (doors, boot, ...),
- the trip computer (refer to the end of the section).

Warning messages (e.g.: "Emission control system faulty") or information messages (e.g.: "Boot open") may appear temporarily. These can be cleared by pressing the "ESC" button.

Controls



There are three display control buttons:

- "ESC" to abandon the operation in progress,
- "MENU" to scroll through the menus or sub-menus,
- "OK" to select the menu or sub-menu required.

General menu



- ☞ Press the "MENU" button to scroll through the various menus of the **general menu**:
 - vehicle configuration,
 - options,
 - display settings,
 - language,
 - units.
- ☞ Press the "OK" button to select the menu required.

* With air conditioning only.



Vehicle configuration



Once the "Vehicle configuration" menu has been selected, you can activate or deactivate the following equipment:

- wiper linked with reverse gear (refer to the "Visibility" section),
- directional headlamps (refer to the "Visibility" section),
- "guide-me-home" lighting (refer to the "Visibility" section).

Options

Once the "Options" menu has been selected, you can start diagnostics of the status of the equipment (active, not active, faulty).

Display settings

Once the "Display settings" menu has been selected, you can gain access to the following settings:

- year,
- month,
- day,
- hour,
- minutes,
- 12 or 24 hour mode.



☞ Once you have selected a setting, press the "OK" button to change its value.



☞ Wait for approximately ten seconds without any action to allow the changed data to be recorded or press the "ESC" button to cancel.

The screen then returns to the normal display.

Language

Once the "Language" menu has been selected, you can change the language used by the display (Français, Italiano, Nederlands, Portugues, Portugues-Brasil, Deutsch, English, Espanol).

Units

Once the "Units" menu has been selected, you can change the units of the following parameters:

- temperature (°C or °F),
- fuel consumption (l/100 km, mpg or km/l).



For safety reasons, it is imperative configuration of the multifunction screens by the driver is done only when stationary.

MONOCHROME SCREEN A (WITH PC SOUND)



Displays on the screen

This displays the following information:

- the time,
- the date,
- the ambient temperature* (this flashes if there is a risk of ice),
- the status of the openings (doors, boot, ...),
- the audio sources (radio, CD, ...),
- the trip computer (refer to the end of the section).

Warning messages (e.g.: "Emission control system faulty") or information messages (e.g.: "Boot open") may appear temporarily. These can be cleared by pressing the "ESC" button.

Controls



From the audio equipment control panel, you can:

- ☛ press the "**MENU**" button to gain access to the **general menu**,
- ☛ press the "▲" or "▼" buttons to scroll through the items on the screen,
- ☛ press the "**MODE**" button to change the permanent application (trip computer, audio source, ...),
- ☛ press the "◀" or "▶" buttons to change a setting value,
- ☛ press the "**OK**" button to confirm, or
- ☛ press the "**ESC**" button to abandon the operation in progress.

General menu



☛ Press the "**“MENU”**" button to gain access to the **general menu**, then press the "▲" or "▼" buttons to scroll through the various menus:

- radio-CD,
- vehicle configuration,
- options,
- display settings,
- language,
- units.

☛ Press the "**“OK”**" button to select the menu required.

Radio-CD

With the audio equipment switched on, once the "Radio-CD" menu has been selected you can activate or deactivate the functions linked with use of the radio (RDS, REG) or the CD (introscan, shuffle, CD repeat).

For more information on the "Radio-CD" application, refer to the PC Sound part of the "Audio and Telematics" section.

* With air conditioning only.



Vehicle configuration



Once the "Vehicle Configuration" menu has been selected, you can activate or deactivate the following equipment:

- wiper linked with reverse gear (refer to the "Visibility" section),
- directional headlamps (refer to the "Visibility" section),
- "guide-me-home" lighting (refer to the "Visibility" section).

Options

Once the "Options" menu has been selected, you can start diagnostics of the status of the equipment (active, not active, faulty).

Display settings

Once the "Display settings" menu has been selected, you can gain access to the following settings:

- year,
- month,
- day,
- hour,
- minutes,
- 12 or 24 hour mode.



Once you have selected a setting, press the "◀" or "▶" buttons to change its value.



Press the "▲" or "▼" buttons to switch respectively to the previous or next setting.
Press the "OK" button to record the change and return to the normal display or press the "ESC" button to cancel.

Language

Once the "Language" menu has been selected, you can change the language used by the display (Français, Italiano, Nederlands, Portugues, Portugues-Brasil, Deutsch, English, Espanol).

Units

Once the "Units" menu has been selected, you can change the units of the following parameters:

- temperature (°C or °F),
- fuel consumption (l/100 km, mpg or km/l).



For safety reasons, it is imperative configuration of the multifunction screens by the driver is done only when stationary.

MONOCHROME SCREEN C (WITH PC SOUND)



Displays on the screen

This displays the following information:

- the time,
- the date,
- the ambient temperature* (this flashes if there is a risk of ice),
- the status of the openings (doors, boot...),
- the audio sources (radio, CD...),
- the trip computer (refer to the end of the section).

Warning messages (e.g.: "Emission control system faulty") or information messages (e.g.: "Automatic headlamp lighting activated") may appear temporarily. These can be cleared by pressing the "ESC" button.

Controls



From the audio equipment control panel, you can:

- ☛ press the "MENU" button to gain access to the **general menu**,
- ☛ press the "▲" or "▼" buttons to scroll through the items on the screen,
- ☛ press the "MODE" button to change the permanent application (trip computer, audio source...),
- ☛ press the "◀" or "▶" buttons to change a setting value,
- ☛ press the "OK" button to confirm, or
- ☛ press the "ESC" button to abandon the operation in progress.

General menu



- ☛ Press the "MENU" button to gain access to the **general menu**:
 - audio functions,
 - trip computer (refer to the end of the section),
 - personalisation-configuration,
 - telephone (hands-free kit).
- ☛ Press the "▼" "▲" buttons to select the menu required, then confirm by pressing the "OK" button.

"Audio functions" menu

With the audio equipment switched on, once this menu has been selected you can activate or deactivate the functions linked with use of the radio (RDS, REG, RadioText) or the CD (introscan, shuffle, CD repeat).

For more information on the "Audio functions" application, refer to the PC Sound part of the "Audio and Telematics" section.

* With air conditioning only.

"Trip computer" menu

Once this menu has been selected, you can consult information concerning the status of the vehicle (alert log, status of the functions...).



Alert log

This summarises the active warning messages, displaying them in succession on the multifunction screen.

- ☞ Press the "MENU" button to gain access to the general menu.
- ☞ Press the arrows, then the "OK" button to select the "Trip computer" menu.

Status of functions


This summarises the active or inactive status of the functions present on the vehicle.



Enter the distance to the destination

This allows you to enter an approximate value for the distance to the final destination.

- ☞ On the "Trip computer" menu, select one of the following applications:





"Personalisation-Configuration" menu



Once this menu has been selected, you can gain access to the following functions:

- define the vehicle parameters,
- display configuration,
- choice of language.

Define the vehicle parameters


Once this menu has been selected, you can activate or deactivate the following equipment:

- wiper linked with reverse gear (refer to the "Visibility" section),
- directional headlamps (refer to the "Visibility" section),
- "guide-me-home" lighting (refer to the "Visibility" section).


* According to country.

Example: setting of the duration of the "guide-me-home" lighting


- Press the "▲" or "▼" buttons, then the "OK" button to select the menu required.



- Press the "▲" or "▼" buttons, then the "OK" button to select the "Guide-me-home headlamps" line.



- Press the "◀" or "▶" buttons to set the value required (15, 30 or 60 seconds), then press the "OK" button to confirm.



- Press the "▲" or "▼" buttons, then the "OK" button to select the "OK" box and confirm or press the "ESC" button to cancel.

Display configuration

Once this menu has been selected, you can gain access to the following settings:

- brightness-video setting,
- date and time setting,
- selection of the units.

Choice of language

Once this menu has been selected, you can change the screen display language (Deutsch, English, Espanol, Français, Italiano, Nederlands, Portugues, Portugues-Brasil, Türkçe*).

"Telephone" menu

With the audio equipment switched on, once this menu has been selected you can configure your Bluetooth hands-free kit (pairing), consult the various telephone directories (calls log, services...) and manage your communications (pick up, hang up, call waiting, secret mode...).

For further details concerning the "Telephone" application, refer to the PC Sound part of the "Audio and Telematics" section.



For safety reasons, it is imperative that configuration of the multifunction screens by the driver is done only when stationary.

16/9 COLOUR SCREEN (WITH PC COM)



Displays on the screen

When the ignition is switched on, this displays the following information automatically and directly:

- the time,
- the date,
- the ambient temperature (if there is a risk of ice, you are warned by a message).

Warning messages (e.g.: "Fuel level low") and vehicle function status messages (e.g.: "Automatic headlamp lighting activated") may appear temporarily. These can be cleared by pressing the "ESC" button.

General menu



When the PC Com is switched on, select the menu which corresponds to the following applications:

- the satellite navigation system,
- the guidance on the map,
- the traffic information,
- the audio sources (radio, CD, Jukebox, ...),
- the phone books and the telephone functions,
- the configuration of the screen and the setting of the parameters of the vehicle's equipment,
- the displaying of a video,
- the vehicle diagnostics.

Controls



From the PC Com control panel, to select one of the applications:

- ☞ press the "**“MENU”**" button for access to the **general menu**,
- ☞ turn the navigator to move the selection,
- ☞ press the navigator to confirm the selection,

or

- ☞ press the "**“ESC”**" button to abandon the operation in progress and return to the previous display.

For further details concerning these applications, refer to the PC Com part of the "Audio and Telematics" section.




"Configuration" menu

- ☞ Press the "**“MENU”**" button on the WIP Com for access to the **general menu**.
- ☞ Turn the navigator to select the "**“Configuration”**" menu, then press it to confirm.




Once this menu has been selected, you can gain access to the following functions:

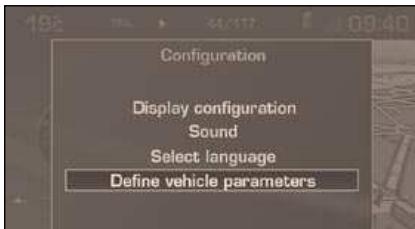


Define vehicle parameters

Once the "Define vehicle parameters" menu has been selected, you can activate or deactivate certain driving and comfort equipment:

- wiper linked with reverse gear (refer to the "Visibility" section),
- directional headlamps (refer to the "Visibility" section),
- "guide-me-home" lighting and duration (refer to the "Visibility" section).

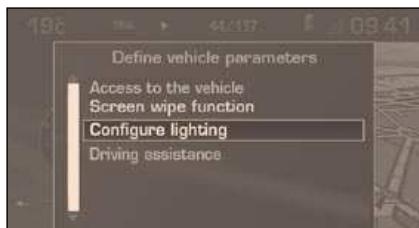

- ☞ Select the line "Duration of the "guide-me-home" lighting" then confirm.

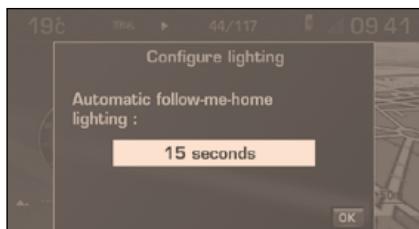

- ☞ Select the duration then press the navigator.
- ☞ Turn the navigator to set the value required (15, 30 or 60 seconds), then press the navigator.
- ☞ Select the "OK" box, then confirm.

Display configuration



Once the "Display configuration" menu has been selected, you gain access to the following parameters:

- selection of the palette of colours available for the display,
- setting of the brightness and brilliance of the display,
- setting of the date and time (12 or 24 hour mode, adjustment of the minutes on GPS),
- selection of the units (temperature in °Celsius or °Fahrenheit; consumption in l/100 km or mpg or km/l).

Sounds

Once the "Sounds" menu has been selected, you gain access to the following parameters:

- setting of the voice commands,
- setting of the voice synthesiser (volume, male or female),
- activation of the auxiliary input AUX.

Choice of language

Once the "Choice of language" menu has been selected, you gain access to the following parameters:

- selection of the display language (Français, English, Italiano, Portugues, Espanol, Deutsch, Nederlands, Türkçe*),
- selection of the information and voice commands language (Français, English, Italiano, Portugues, Espanol, Deutsch, Nederlands, Türkçe*).



The PC Com must reinitialise and re-start in order to change the voice used by the voice synthesiser (male or female) or the language used by the system.



For safety reasons, it is imperative that configuration of the multifunction screens by the driver is done only when stationary.

"Video" menu



You can connect video equipment (camcorder, digital camera, DVD player, ...) to the three audio/video sockets, located in the glove box.

Videos can only be displayed when stationary.

Once this menu has been selected, you can select:

- "Activate video mode" to activate/deactivate the video,
- "Video parameters" to set the display format, the brightness, the contrast and the colours.
- ☞ Press the "**MODE**" or "**DARK**" button to disconnect the displaying of the video.
- ☞ Press the "**SOURCE**" button several times in succession to select an audio source other than that of the video.

* According to country.

"Vehicle Diagnosis" menu

Once this menu has been selected, you can consult information concerning the status of the vehicle, such as the warnings log or the status of the functions.

Alerts log


This summarises the active warning messages, displaying them in succession on the multifunction screen.

Status of the functions

This summarises the active or inactive status of the functions present on the vehicle.



- ☞ On the "Vehicle diagnostics" menu, select one of the following applications:

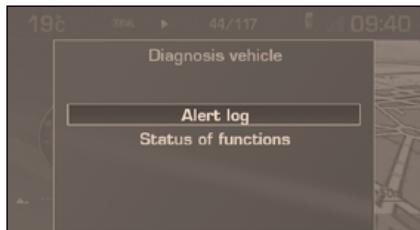

- ☞ Press the "MENU" button to gain access to the general menu.
- ☞ Turn the navigator and press it to select the "Vehicle diagnostics" menu.



16/9 COLOUR SCREEN (WITH WIP NAV)



Displays on the screen

This displays the following information automatically and directly:

- the time,
- the date,
- the altitude,
- the ambient temperature (the value displayed flashes if there is a risk of ice),
- the check on openings,
- the warning and vehicle function status messages, displayed temporarily,
- the audio functions,
- the trip computer information,
- the satellite navigation system information.

Controls




From the PC Nav control panel, to select one of the applications:

- ☞ press the dedicated "**RADIO**", "**MUSIC**", "**NAV**", "**TRAFFIC**", "**SETUP**" or "**PHONE**" button for access to the corresponding menu,
- ☞ turn the navigator to move the selection,
- ☞ press the navigator to confirm the selection,
- or
- ☞ press the "**ESC**" button to abandon the current operation and return to the previous display.



For more information on these applications, refer to the "Audio and Telematics" section or to the specific user guide given to you with the other owner's documents.

"SETUP" menu

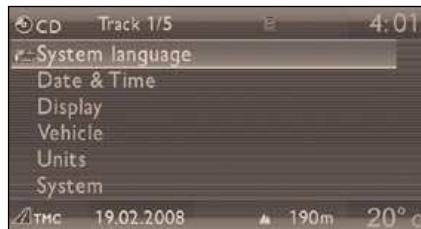

- Press the "SETUP" button for access to the "SETUP" menu. This allows you to select from the following functions:
 - "System language",
 - "Date and time",
 - "Display",
 - "Vehicle",
 - "Units",
 - "System".

System language

This menu allows you to select the language used by the display: Deutsch, English, Espanol, Francais, Italiano, Nederlands, Polski, Portugues, Türkçe*.

Date and time

This menu allows you to set the date and time, the format of the date and the format of the time (refer to the "Audio and Telematics" section or to the specific user guide given to you with the other owner's documents).

Display

This menu allows you to set the brightness of the screen, the screen colour scheme and the colour of the map (day/night or auto mode).



For safety reasons, it is imperative that configuration of the multifunction screens by the driver is done only when stationary.

Vehicle

This menu allows you to activate or deactivate certain driving and comfort equipment:

- wiper linked with reverse gear (refer to the "Visibility" section),
- guide-me-home lighting and duration (refer to the "Visibility" section),
- directional headlamps (refer to the "Visibility" section).

Units

This menu allows you to select the units: temperature (°C or °F) and consumption (km/l, l/100 or mpg).

System

This menu allows you to restore the factory configuration, display the software version and activate the scrolling text.

* According to country.

TRIP COMPUTER

System which provides current information concerning the trip travelled (range, fuel consumption...).

Monochrome screen A



Data displays



☞ Press the button, located at the end of the **wiper stalk**, to display the various items of trip computer data in succession.

The trip computer provides the following information:

- range,



- current fuel consumption,



- distance travelled,



- average fuel consumption,



- average speed.



☞ The next press then returns you to the normal display.

Zero reset



☞ Press the control for more than two seconds to reset to zero the distance travelled, the average fuel consumption and the average speed.

A few definitions...

Range

 (km or miles)
This indicates the number of miles (or kilometres) which can still be travelled with the fuel remaining in the tank in relation to the average fuel consumption over the last few miles (kilometres) travelled.

 This figure may increase following a change of driving style or relief, resulting in a significant change in the current fuel consumption.

When the range falls below 20 miles (30 km), dashes are displayed. After filling with at least 5 litres of fuel, the range is recalculated and is displayed when it exceeds 60 miles (100 km).

 If dashes are displayed continuously while driving in place of the digits, contact a PEUGEOT dealer.



Current fuel consumption

(l/100 km or km/l or mpg)
This is the average quantity of fuel consumed over the last few seconds.



This function is only displayed from 20 mph (30 km/h).



Average fuel consumption

(l/100 km or km/l or mpg)
This is the average quantity of fuel consumed since the last trip computer zero reset.



Distance travelled

(km or miles)
This indicates the distance travelled since the last trip computer zero reset.



Distance remaining to be travelled

(km or miles)
This is the distance remaining to be travelled to the final destination. It is calculated either instantly by the navigation system if guidance is activated, or entered by the user.
If the distance is not entered, dashes are displayed in place of the digits.




Average speed

(km/h or mph)
This is the average speed calculated since the last trip computer zero reset (ignition on).

TRIP COMPUTER

System which provides current information concerning the route travelled (range, consumption, ...).


Monochrome screen C



Colour screen 16/9



Data displays

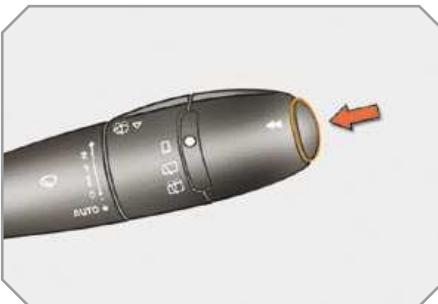

☞ Press the button, located at the end of the **wipers stalk**, to display the various trip computer tabs in succession:




- the current information tab with:
 - the range,
 - the current fuel consumption,
 - the distance remaining to be travelled,
- the trip "1" tab with:
 - the distance travelled,
 - the average fuel consumption,
 - the average speed, for the first trip.



- the trip "2" tab with:
 - the distance travelled,
 - the average fuel consumption,
 - the average speed, for the second trip.

☞ Press again to return to the normal display.

Route zero reset

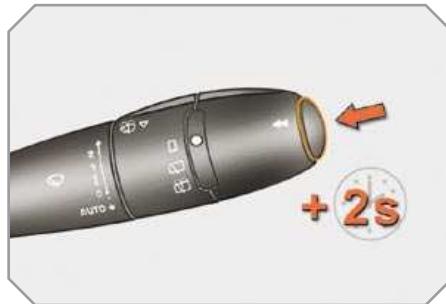

☞ When the route required is displayed, press the control for more than two seconds.

Trips "1" and "2" are independent but their use is identical.

Trip "1" permits, for example, daily calculations, and trip "2" monthly calculations.

A few definitions...

Range

 (km or miles)
This indicates the number of miles (or kilometres) which can still be travelled with the fuel remaining in the tank in relation to the average fuel consumption over the last few miles (kilometres) travelled.

 This figure may increase following a change of driving style or relief, resulting in a significant change in the current fuel consumption.

When the range falls below 20 miles (30 km), dashes are displayed. After filling with at least 5 litres of fuel, the range is recalculated and is displayed when it exceeds 60 miles (100 km).

 If dashes are displayed continuously while driving in place of the digits, contact a PEUGEOT dealer.



Current fuel consumption

(l/100 km or km/l or mpg)
This is the average quantity of fuel consumed over the last few seconds.



This function is only displayed from 20 mph (30 km/h).



Average fuel consumption

(l/100 km or km/l or mpg)
This is the average quantity of fuel consumed since the last trip computer zero reset.



Distance travelled

(km or miles)
This indicates the distance travelled since the last trip computer zero reset.



Distance remaining to be travelled

(km or miles)
This is the distance remaining to be travelled to the final destination. It is calculated either instantly by the navigation system if guidance is activated, or entered by the user.
If the distance is not entered, dashes are displayed in place of the digits.



Average speed

(km/h or mph)
This is the average speed calculated since the last trip computer zero reset (ignition on).



VENTILATION

System which creates and maintains comfortable conditions and good visibility in the vehicle's passenger compartment.

Air intake

The air circulating in the passenger compartment is filtered and originates either from the outside via the grille located at the base of the windscreen or from the inside in air recirculation mode.

Air treatment

The incoming air follows various routes depending on the controls selected by the driver:

- direct arrival in the passenger compartment (air intake),
- passage through a heating circuit (heating),
- passage through a cooling circuit (air conditioning).

The temperature control enables you to obtain the level of comfort required by mixing the air of the various circuits.

The air distribution control enables you to diffuse the air in the passenger compartment combining several air vents.

The air flow control enables you to increase or reduce the speed of the ventilation blower.

Control panel

The controls of this system are grouped together on control panel **A** on the centre console. Depending on the model, the functions offered are:

- the level of comfort required,
- the air flow,
- the air distribution,
- the de-icing and demisting,
- the manual or automatic air conditioning controls.

Air diffusion

1. Windscreen de-icing or demisting vents.
2. Front side window de-icing or demisting vents.
3. Side adjustable and closing vents.
4. Central adjustable and closing vents.
5. Air outlets to the front footwells.
6. Air outlets to the rear footwells.

RECOMMENDATIONS FOR VENTILATION AND AIR CONDITIONING

In order for these systems to be fully effective, follow the operation and maintenance guidelines below:

- ☛ If the interior temperature remains very high after the vehicle has been parked in the sun for a considerable time, first ventilate the passenger compartment for a few minutes.
Place the air flow control at a sufficient level to provide an adequate renewal of air in the passenger compartment.
- ☛ To obtain an even air distribution, take care not to obstruct the exterior air intake grilles located at the base of the windscreen, the nozzles, the vents and the air outlets, as well as the air extractor located in the boot.
- ☛ Do not cover the sunshine sensor, located on the fascia; this is used for regulation of the air conditioning system.
- ☛ Operate the air conditioning system for 5 to 10 minutes, once or twice a month to keep it in perfect working order.
- ☛ Ensure that the passenger compartment filter is in good condition and have the filter elements replaced regularly (refer to the "Checks" section). We recommend the use of a combined passenger compartment filter. Thanks to its second special active filter, it contributes to the purification of the air breathed by the occupants and the cleanliness of the passenger compartment (reduction of allergic symptoms, bad odours and greasy deposits).
- ☛ To guarantee correct operation of the air conditioning system, you are also advised to have it checked regularly.
- ☛ If the system does not produce cold air, do not use it and contact a PEUGEOT dealer.

When towing the maximum load on a steep gradient in high temperatures, switching off the air conditioning permits the recovery of engine power and therefore improvement of the towing capacity.

The condensation created by the air conditioning results in a discharge of water under the vehicle which is perfectly normal.



The air conditioning system does not contain chlorine and does not present any danger to the ozone layer.

HEATING/VENTILATION**Control panel with manual control****MANUAL AIR CONDITIONING****Control panel with manual control****Control panel with electric control****Control panel with electric control**

HEATING/VENTILATION AND MANUAL AIR CONDITIONING

The heating/ventilation or air conditioning systems can only operate when the engine is running.

1. Temperature adjustment



- Turn the dial from blue (cold) to red (hot) to adjust the temperature to suit your requirements.

2. Air flow adjustment



- Turn the dial from position **1** to position **4** to obtain an air flow sufficient to ensure your comfort.



- If you place the air flow control in position **0** (deactivation of the system), the temperature is no longer maintained at a comfortable level. However, a slight flow of air, due to the movement of the vehicle, can still be felt.

3. Air distribution adjustment



Windscreens and side windows.



Windscreens, side windows and footwells.



Footwells.
(vents closed)



Central and side vents.



The air distribution can be adapted by placing the dial in an intermediate position, marked by a dot "●".

4. Air intake/Air recirculation

The intake of exterior air prevents the formation of condensation on the windscreens and side windows.

The recirculation of interior air prevents exterior odours and smoke from entering the passenger compartment.

Return to exterior air intake mode as soon as possible to avoid deterioration of the air quality and prevent condensation.

Control panel with manual control



- Move the manual control to the right to the "Interior air recirculation" position.
- Move the manual control to the left to return to the "Exterior air intake" position.

Control panel with electric control



- Press the button to recirculate the interior air. This is displayed by lighting of the indicator lamp.
- Press the button again to permit the intake of exterior air. This is displayed by switching off of the indicator lamp.

Demisting/defrosting

To quickly demist or defrost the windscreens and side windows:

- place the air intake control **4** in the "Exterior air intake" position,
- place the air distribution dial **3** in the "Windscreens" position,
- place the temperature dial **1** and the air flow dial **2** in the maximum position,
- close the central vents,
- switch on the air conditioning by pressing the "**A/C**" button.

HEATING/VENTILATION

Control panel with manual control



MANUAL AIR CONDITIONING

Control panel with manual control



Control panel with electric control



Control panel with electric control



HEATING/VENTILATION AND MANUAL AIR CONDITIONING

The heating/ventilation or air conditioning systems can only operate when the engine is running.

1. Temperature adjustment



- Turn the dial from blue (cold) to red (hot) to adjust the temperature to suit your requirements.

2. Air flow adjustment



- Turn the dial from position **1** to position **4** to obtain an air flow sufficient to ensure your comfort.



- If you place the air flow control in position **0** (deactivation of the system), the temperature is no longer maintained at a comfortable level. However, a slight flow of air, due to the movement of the vehicle, can still be felt.

3. Air distribution adjustment



Windscreens and side windows.



Windscreens, side windows and footwells.



Footwells.
(vents closed)



Central and side vents.



The air distribution can be adapted by placing the dial in an intermediate position, marked by a dot "●".

4. Air intake/Air recirculation

The intake of exterior air prevents the formation of condensation on the windscreens and side windows.

The recirculation of interior air prevents exterior odours and smoke from entering the passenger compartment.

Return to exterior air intake mode as soon as possible to avoid deterioration of the air quality and prevent condensation.

Control panel with manual control



- Move the manual control to the right to the "Interior air recirculation" position.
- Move the manual control to the left to return to the "Exterior air intake" position.

Control panel with electric control



- Press the button to recirculate the interior air. This is displayed by lighting of the indicator lamp.
- Press the button again to permit the intake of exterior air. This is displayed by switching off of the indicator lamp.

Demisting/defrosting

To quickly demist or defrost the windscreens and side windows:

- place the air intake control **4** in the "Exterior air intake" position,
- place the air distribution dial **3** in the "Windscreens" position,
- place the temperature dial **1** and the air flow dial **2** in the maximum position,
- close the central vents,
- switch on the air conditioning by pressing the "**A/C**" button.

5. Air conditioning On/Off



The air conditioning is designed to operate effectively in all seasons, with the windows closed.

It enables you to:

- lower the temperature, in summer,
- increase the effectiveness of the demisting, in winter above 0 °C.

Switching on

☞ Press the "A/C" button, the associated indicator lamp comes on.

The air conditioning does not operate when the air flow adjustment dial 2 is in position "0".

Switching off

☞ Press the "A/C" button again, the associated indicator lamp switches off.

REAR SCREEN DEMIST/DEFROST



The control button is located on the heating or air conditioning system control panel.

Switching on

The rear screen demist/defrost can only operate when the engine is running.

☞ Press this button to demist/defrost the rear screen and the exterior mirrors. The indicator lamp associated with the button comes on.

Switching off

The demist/defrost switches off automatically to prevent an excessive consumption of current.

☞ It is possible to stop the demist/defrost operation before it is switched off automatically by pressing the button again. The indicator lamp associated with the button switches off.



☞ Switch off the demist/defrost of the rear screen and exterior mirrors as soon as you consider this necessary as lower current consumption results in reduced fuel consumption.



If the engine is switched off before the de-icing is switched off automatically, demist/defrost will resume next time the engine is switched on.

5. Air conditioning On/Off



The air conditioning is designed to operate effectively in all seasons, with the windows closed.

It enables you to:

- lower the temperature, in summer,
- increase the effectiveness of the demisting, in winter above 0 °C.

Switching on

☞ Press the "A/C" button, the associated indicator lamp comes on.

The air conditioning does not operate when the air flow adjustment dial 2 is in position "0".

Switching off

☞ Press the "A/C" button again, the associated indicator lamp switches off.

REAR SCREEN DEMIST/DEFROST



The control button is located on the heating or air conditioning system control panel.

Switching on

The rear screen demist/defrost can only operate when the engine is running.

☞ Press this button to demist/defrost the rear screen and the exterior mirrors. The indicator lamp associated with the button comes on.

Switching off

The demist/defrost switches off automatically to prevent an excessive consumption of current.

☞ It is possible to stop the demist/defrost operation before it is switched off automatically by pressing the button again. The indicator lamp associated with the button switches off.



☞ Switch off the demist/defrost of the rear screen and exterior mirrors as soon as you consider this necessary as lower current consumption results in reduced fuel consumption.



If the engine is switched off before the de-icing is switched off automatically, demist/defrost will resume next time the engine is switched on.

DUAL-ZONE AUTOMATIC AIR CONDITIONING



The air conditioning can only operate with the engine running.

Automatic operation

1. Automatic comfort programme



Press the "AUTO" button. The "AUTO" symbol is displayed.

We recommend that you use this mode: it provides optimised automatic control of all of the functions, passenger compartment temperature, air flow, air distribution and air recirculation, in accordance with the comfort value that you have selected.

This system is designed to operate effectively in all seasons, with the windows closed.

i When the engine is cold, to prevent too great a distribution of cold air, the air flow will only reach its optimum level gradually.

In cold weather, it favours the distribution of warm air to the windscreens, the side windows and the footwells only.

2. Driver's side adjustment

3. Passenger side adjustment



The driver and his front passenger can each set the temperature to suit their requirements.

The value indicated on the display corresponds to a level of comfort and not to a temperature in degrees Celsius or Fahrenheit.

Turn dial 2 or 3 to the left to reduce the value or to the right to increase it.

A setting around 21 enables you to obtain an optimum level of comfort. Depending on your requirements, a setting between 18 and 24 is usual.

In addition, it is recommended that you avoid a left/right setting difference of more than 3.



On entering the vehicle, if the interior temperature is much colder or warmer than the comfort value, there is no need to alter the value displayed in order to obtain the required level of comfort. The system eliminates the temperature difference automatically and as quickly as possible.

4. Automatic visibility programme



The automatic comfort programme may not be sufficient to quickly demist or defrost the windscreens and side windows (humidity, several passengers, ice...).

In this case, select the automatic visibility programme.

The system automatically controls the air conditioning, the air flow and the air intake and provides optimum distribution of the ventilation to the windscreens and side windows.

- To exit this programme, press the "visibility" button again or the "AUTO" button, the indicator lamp on the button switches off and "AUTO" is displayed.

Resuming manual control

Depending on your requirements, you can make a different selection from that offered by the system by changing a setting. The other functions will still be controlled automatically.

- Press the "AUTO" button to return to fully automatic operation.



For maximum cooling or heating of the passenger compartment, you can exceed the minimum value of 14 or the maximum value of 28.

- Turn dial 2 or 3 to the left until "LO" is displayed or to the right until "HI" is displayed.

5. Air conditioning On/Off



- Press this button to switch the air conditioning off.

Switching the system off may result in discomfort (humidity, condensation).

- Press the button again to return to automatic operation of the air conditioning. The symbol "A/C" is displayed.

6. Air distribution adjustment



- Press this button several times in succession to direct the air flow in turn towards:

- the windscreens, the side windows and the footwells,
- the windscreens and side windows (demisting or defrosting),
- the central and side vents,
- the central vents, the side vents and the footwells,
- the footwells.

7. Air flow adjustment



- Press the "small fan" button to reduce the air flow.
- Press the "large fan" button to increase the air flow.

The air flow symbol, the fan, is filled in progressively in relation to the value required.

8. Air intake/Air recirculation



- Press this button to recirculate the interior air. The air recirculation symbol is displayed.

Air recirculation prevents exterior odours and smoke from entering the passenger compartment.

- As soon as possible, press this button again to permit the intake of exterior air and prevent condensation.



Avoid prolonged operation in interior air recirculation mode (risk of condensation and of deterioration of the air quality).

Deactivation of the system

- Press the "small fan" button until the fan symbol disappears.

This action deactivates all of the functions of the air conditioning system.

The temperature is no longer maintained at a comfortable level. However, a slight flow of air, due to the movement of the vehicle, can still be felt.

- Press the "large fan" button again or the "AUTO" button to reactivate the system with the values which were set before it was deactivated.



Avoid driving for too long with the air conditioning deactivated.

FRONT SEATS

Seat consisting of a seat cushion, seat back and head restraint which can all be adjusted to adapt your position for maximum ease of driving and comfort.

1. Forwards-backwards adjustment

- ☞ Lift the control and slide the seat forwards or backwards.



2. Driver's or passenger's seat height adjustment

- ☞ Pull the handle upwards or push it downwards as many times as necessary to obtain the required position.



3. Seat back angle adjustment

- ☞ Push the handle towards the rear.



4. Access to rear seats (3-door)

- Pull the handle to fold the seat back and move the seat forwards. On re-positioning, the seat returns to its initial position.



5. Head restraint height adjustment



- To raise the head restraint, pull it upwards.
- To remove the head restraint, press the lug **A** and pull the head restraint upwards.
- To put the head restraint back in position, locate the stems of the head restraint in the holes, taking care to keep them in line with the seat back.
- To lower the head restraint, press the lug **A** and the head restraint at the same time.



No person or object must prevent the seat slide from returning to its initial position; return to this position is necessary for the seat to lock in place.

Take care not to trap the seat belt to avoid hindering the passage of the rear passengers.



The head restraint has a frame with a notch which prevents the head restraint from lowering; this is a safety device which provides protection in the event of an impact.

The adjustment is correct when the upper edge of the head restraint is level with the top of the head.

Never drive with the head restraints removed; they must be in place and correctly adjusted.

6. Armrests (except 3-door)



These can be folded down and are removable.

- To remove them, press the button located between the armrest and the side of the seat and pull it.

REAR SEATS

Bench seat the left-hand part (2/3) or right-hand part (1/3) of which can be folded to adapt the load space in the boot.

Rear head restraints

These have a high position (comfort) and a low position (rear visibility).



They can also be removed; to remove them:

- pull the head restraint upwards to the stop,
- then, press the lug.



Never drive with the head restraints removed; they must be in place and correctly adjusted.

As the head restraints are not interchangeable, take care to put them back in their original position when refitting (GTi).

6. Armrests (except 3-door)



These can be folded down and are removable.

- To remove them, press the button located between the armrest and the side of the seat and pull it.

REAR SEATS

Bench seat the left-hand part (2/3) or right-hand part (1/3) of which can be folded to adapt the load space in the boot.

Rear head restraints

These have a high position (comfort) and a low position (rear visibility).



They can also be removed; to remove them:

- pull the head restraint upwards to the stop,
- then, press the lug.



Never drive with the head restraints removed; they must be in place and correctly adjusted.

As the head restraints are not interchangeable, take care to put them back in their original position when refitting (GTi).

Folding the seat (Saloon)

To fold a rear seat without any risk of damage to it, **always start with the seat cushion, never the seat back:**

- ☛ move the corresponding front seat forward if necessary,
- ☛ raise the front of the seat cushion **1**,
- ☛ tilt the seat cushion **1** against the front seat,
- ☛ check that the seat belt is positioned correctly on the side of the seat back,
- ☛ pull control **2** upwards to release the seat back **3**,
- ☛ place the head restraints in the low position or remove them if necessary,
- ☛ tilt the seat back **3**.



The seat cushion **1** can be removed to increase the loading volume. Squeeze the seat cushion fixings to detach them from their attachments.

Repositioning the seat (Saloon)

When repositioning the rear seat:

- ☛ straighten the seat back **3** and secure it,
- ☛ fold back the seat cushion **1**.



When repositioning the rear seat, take care not to trap the seat belts.

6. Armrests (except 3-door)



These can be folded down and are removable.

- To remove them, press the button located between the armrest and the side of the seat and pull it.

REAR SEATS

Bench seat the left-hand part (2/3) or right-hand part (1/3) of which can be folded to adapt the load space in the boot.

Rear head restraints

These have a high position (comfort) and a low position (rear visibility).



They can also be removed; to remove them:

- pull the head restraint upwards to the stop,
- then, press the lug.



Never drive with the head restraints removed; they must be in place and correctly adjusted.

As the head restraints are not interchangeable, take care to put them back in their original position when refitting (GTi).

Folding the seat (SW)

This operation can be carried out at the rear seats or through the opening rear screen.

To fold a rear seat without any risk of damage:

- ☛ move the corresponding front seat forward if necessary,
- ☛ place the head restraints in the low position,
- ☛ pull the control **1** forward to release the seat back **2** which folds easily onto the seat cushion **3**.



Repositioning the seat (SW)

- ☛ When repositioning the rear seat, straighten the seat back **2** and lock it.
- ☛ Check that the red indicator, located at control **1**, is no longer visible.



Check that no object could hinder the movement of the bench seat, either above or below.



The seat cushion lowers in order to be covered by the seat back; this quickly enables you to benefit from a flat boot floor.

MIRRORS



Exterior mirrors

Adjustable mirror permitting the lateral rearward vision necessary when overtaking or parking.

Manual model



Adjustment

- Move the lever in all four directions to direct the mirror correctly.

Folding

- When parked, fold the mirror manually to protect it.

Unfolding

- Before starting, unfold the mirror.

Electric model



Adjustment

- Slide switch **A** to the right or to the left to select the corresponding mirror.
- Move knob **B** in all four directions to adjust.
- Return switch **A** to the centre position.

Folding

- from outside: lock the vehicle using the remote control or the key.
- from inside: with the ignition on, pull switch **A** rearwards.

Unfolding

- from outside: unlock the vehicle using the remote control or the key.
- from inside: with the ignition on, pull switch **A** rearwards.



The folding and unfolding of the exterior mirrors can be deactivated by a PEUGEOT dealer.



The objects observed are, in reality, closer than they appear. Take this into account to correctly judge the distance of vehicles approaching from behind.

Interior mirror

Adjustable mirror providing a central rearward view.

Manual model

The mirror is fitted with a night-time anti-dazzle device.



Adjustment

Adjust the mirror so that the glass is directed correctly in the "day" position.

Day/night position

- Pull the lever to change to the "night" anti-dazzle position.
- Push the lever to change to the normal "day" position.



As a safety precaution, the mirrors must be adjusted to reduce the "blind spot".

Automatic day/night model

System which automatically and progressively changes between the day and night uses.



In order to guarantee optimum visibility during your manoeuvres, the mirror lightens automatically when reverse gear is engaged.

STEERING WHEEL ADJUSTMENT

The height and reach of the steering wheel can be adjusted to adapt the driving position to the size of the driver.



Adjustment

- ☞ **When stationary**, pull the control to unlock the steering wheel.
- ☞ Adjust the height and reach.
- ☞ Push the control to lock the steering wheel.



As a safety precaution, it is imperative that these operations are carried out while the vehicle is stationary.

SUN VISOR

Component which protects against sunlight from the front or the side, also equipped with an illuminated courtesy mirror.



- ☞ With the ignition on, raise the concealing flap; the mirror is lit automatically.

This sun visor is also equipped with a ticket holder.

TOLL CARD/CAR PARK TICKET WINDOWS

Facility for affixing toll cards and/or car park tickets.



These windows are located on each side of the base of the interior mirror. They are two non-reflective areas of the athermic windscreen.



The athermic windscreen limits heating of the passenger compartment by reducing the effects of the sun's rays (ultra-violet). It consists of a reflective layer, which also blocks certain radio-electric signals (toll card payments, ...).

MAT

Removable component which protects the carpet against exterior dirt.

Fitting

When fitting the mat for the first time, use only the fixings provided in the wallet attached.

Removal

To remove the mat on the driver's side:

- ☛ move the seat as far back as possible,
- ☛ unclip the fixings,
- ☛ remove the fixings, then the mat.

**Refitting**

To refit the mat on the driver's side:

- ☛ position the mat correctly,
- ☛ refit the fixings by pressing,
- ☛ check that the mat is secured correctly.



To avoid any risk of jamming of the pedals:

- only use mats which are suited to the fixings already present in the vehicle; it is imperative that these are used.
- never fit one mat on top of another.

USB PLUG - READER

This connection box, consisting of a JACK socket and a USB port, is located on the centre console.

It permits the connection of portable equipment, such as a digital audio player or the iPod® or USB stick type.

It reads the audio file formats (mp3, ogg, wma, wav...) which are transmitted to your audio equipment and played via the vehicle's speakers.

You can manage these files using the steering wheel controls or the audio equipment control panel and display them on the multifunction screen.

When it is in use, the portable equipment charges automatically.




For further details concerning the use of this equipment, refer to the PC Sound part of the "Audio and Telematics" section.



INTERIOR LAYOUT

1. **Illuminated glove box**
(see details on following page)
2. **Storage compartment with non-slip mat**
3. **Storage compartment**
4. **Door tray**
5. **Card holder**
6. **Storage compartment with non-slip mat**
7. **USB port**
(see details on previous page)
8. **12 V accessories socket**
(see details on following page)
9. **Storage compartments**
10. **Cup holder**

Illuminated glove box*

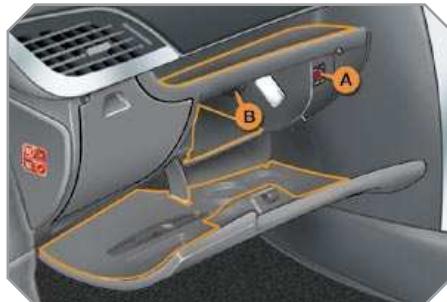

This has an upper open storage compartment and locations for storing a small bottle of water, the vehicle's handbook, ...

Its lid has locations for storing a pen, tokens, cards, cans, ...

It may be fitted with a lock.

☞ To open the glove box, raise the handle.

It is illuminated when the lid is opened.

It houses the front passenger airbag deactivation switch **A**.

If the vehicle is fitted with automatic air conditioning, it provides access to the ventilation nozzle **B**, which can be opened or closed, distributing the same conditioned air as the vents in the passenger compartment.

It also permits access to the dashboard fusebox (refer to the "Practical information - § Changing a fuse" section).

12 V accessories socket



☞ To connect a 12 V accessory (max power: 120 Watts), lift the cover and connect a suitable adaptor.

* According to version.

**BOOT LAYOUT
(SALOON)**

- 1. Rear shelf**
(see details on following page)
- 2. Hooks**
(see details on following page)



Rear shelf (Saloon)

To remove the shelf:

- ☛ unhook the two cords,
- ☛ raise the shelf slightly, then remove it.

You have two storage options:

- either upright behind the front seats,
- or upright behind the rear seats.

Hooks

The hooks permit the securing of shopping bags.

**When changing a wheel**

The hooks permit easy access to the spare wheel by retaining the boot carpet by means of its cord.

BOOT LAYOUT (SW)

1. **Load space cover**
(see details on following page)
2. **12 V accessories socket**
(see details on following page)
3. **Hooks**
(see details on previous page)
4. **Retaining straps**
5. **Stowing rings**
6. **High load retaining net**
(see details on following page)
7. **Storage box**
8. **Storage net**
9. **Storage box**
(refer to the section "Practical information - § Changing a wheel")

Load space cover (SW)

This consists of three sections which can be folded back on each other.

To store it, fold it on itself and place it vertically at the back of the boot.

To fold it from the boot:

- ☞ take hold of the load space cover by its strap **A**,
- ☞ fold it concertina-style to the rear seats.

To unfold it from the boot:

- ☞ take hold of the load space cover by its strap **A**,
- ☞ unfold it to the boot pillars.


To gain access from the rear seats:

- ☞ raise the front section of the load space cover using the handle **B**.



Maximum loads

7.5 kg, load space cover unfolded with high load retaining net at row 2.

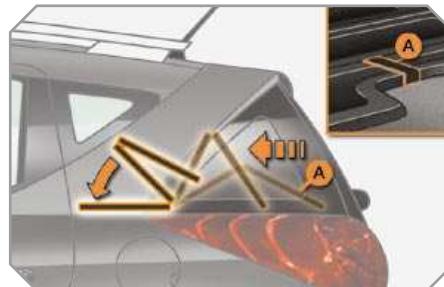

12 V accessories socket (SW)



- ☞ In order to connect a 12 V accessory (max power: 120 Watts), remove the cap and connect the appropriate adaptor.
- ☞ Turn the key to the ignition position.

High load retaining net (SW)

Hooked onto the upper fixings and onto the ISOFIX rings or the lugs, this permits use of the entire loading volume up to the roof:

- behind the rear seats (row 2),
- behind the front seats (row 1) when the rear seats are folded.




When positioning the net, check that the strap loops are visible from the boot; this will make slackening or tightening easier.



To use it in row 1:

- ☞ open the covers of the upper fixings **1**,
- ☞ unroll the high load retaining net,
- ☞ position one of the ends of the net's metal bar in the corresponding upper fixing **1**, then do the same with the other end,
- ☞ slacken the straps fully,
- ☞ fix the snap hook of each of the straps on the corresponding lug **3**, located under the bench seat cushion,
- ☞ fold the rear seats,
- ☞ tighten the straps without raising the bench seat,
- ☞ check that the net is hooked and tightened correctly.

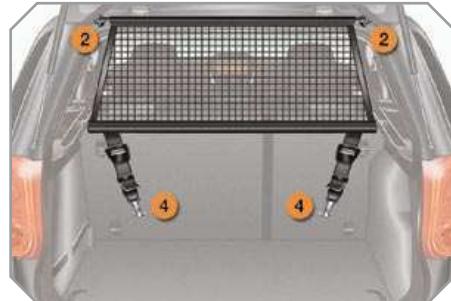

To use it in row 2:

- ☞ fold or remove the load space cover,
- ☞ open the covers of the upper fixings **2**,
- ☞ unroll the high load retaining net,
- ☞ position one of the ends of the net's metal bar in the corresponding upper fixing **2**, then do the same with the other end,
- ☞ attach the hook of each of the net's straps in the corresponding ISOFIX ring **4**,
- ☞ tighten the straps,
- ☞ check that the net is hooked and tightened correctly.

REMOTE CONTROL KEY

System which permits central unlocking or locking of the vehicle using the lock or remotely. It also locates and starts the vehicle, as well as providing protection against theft.



Unlocking the vehicle

Unfolding the key

- ☞ First press button **A** to unfold the key.

Unlocking using the remote control



- ☞ Press the open padlock to unlock the vehicle.

Unlocking using the key

- ☞ Turn the key to the left in the driver's door lock to unlock the vehicle.

Unlocking is confirmed by rapid flashing of the direction indicators for approximately two seconds.

According to version, the exterior mirrors unfold at the same time.

Locking the vehicle

Normal locking using the remote control



- ☞ Press the closed padlock to lock the vehicle.
- ☞ Press the closed padlock for more than two seconds to close the windows automatically in addition to locking (with sequential electric windows).

Normal locking using the key

- ☞ Turn the key to the right in the driver's door lock to lock the vehicle.

Locking is confirmed by fixed lighting of the direction indicators for approximately two seconds.

According to version, the exterior mirrors fold at the same time.



If one of the doors, the boot or the rear screen is still open, the central locking does not take place.

Deadlocking using the remote control

- Press the closed padlock to lock the vehicle.
- Press the closed padlock again within five seconds to deadlock the vehicle.

Deadlocking using the key

- Turn the key to the right in the driver's door lock to lock the vehicle.
- Turn the key to the right again within five seconds to deadlock the vehicle.

Deadlocking is confirmed by fixed lighting of the direction indicators for approximately two seconds.

According to version, the exterior mirrors fold at the same time.



Folding the key

- First press button A to fold the key.



Deadlocking renders the exterior and interior door controls inoperative. It also deactivates the manual centralised control button.

Therefore, do not leave anyone inside the vehicle when it is deadlocked.



The vehicle will relock automatically after thirty seconds unless a door is opened. This system prevents unintentional unlocking.

The folding and unfolding of the exterior mirrors can be deactivated by a PEUGEOT dealer.

Unlocking and partial opening of the rear screen (SW)



- Press this button for more than two seconds to partially open the rear screen. This action will unlock the vehicle first.



The boot and the rear screen cannot both be open at the same time.

Anti-theft protection

Electronic engine immobiliser

The key contains an electronic chip which has a special code. When the ignition is switched on, this code must be recognised in order for starting to be possible.

This electronic engine immobiliser locks the engine management system a few minutes after the ignition is switched off and prevents starting of the engine by anyone who does not have the key.



In the event of a malfunction, you are informed by lighting of this warning lamp, an audible signal and a message on the multifunction screen.

In this case, your vehicle does not start; contact a PEUGEOT dealer as soon as possible.

Deadlocking using the remote control

- Press the closed padlock to lock the vehicle.
- Press the closed padlock again within five seconds to deadlock the vehicle.

Deadlocking using the key

- Turn the key to the right in the driver's door lock to lock the vehicle.
- Turn the key to the right again within five seconds to deadlock the vehicle.

Deadlocking is confirmed by fixed lighting of the direction indicators for approximately two seconds.

According to version, the exterior mirrors fold at the same time.



Folding the key

- First press button A to fold the key.



Deadlocking renders the exterior and interior door controls inoperative. It also deactivates the manual centralised control button.

Therefore, do not leave anyone inside the vehicle when it is deadlocked.



The vehicle will relock automatically after thirty seconds unless a door is opened. This system prevents unintentional unlocking.

The folding and unfolding of the exterior mirrors can be deactivated by a PEUGEOT dealer.

Unlocking and partial opening of the rear screen (SW)



- Press this button for more than two seconds to partially open the rear screen. This action will unlock the vehicle first.



The boot and the rear screen cannot both be open at the same time.

Anti-theft protection

Electronic engine immobiliser

The key contains an electronic chip which has a special code. When the ignition is switched on, this code must be recognised in order for starting to be possible.

This electronic engine immobiliser locks the engine management system a few minutes after the ignition is switched off and prevents starting of the engine by anyone who does not have the key.




In the event of a malfunction, you are informed by lighting of this warning lamp, an audible signal and a message on the multifunction screen.

In this case, your vehicle does not start; contact a PEUGEOT dealer as soon as possible.

Starting the vehicle

- Insert the key in the ignition switch. The system recognises the starting code.
- Turn the key fully towards the fascia to position 3 (Starting).
- When the engine starts, release the key.

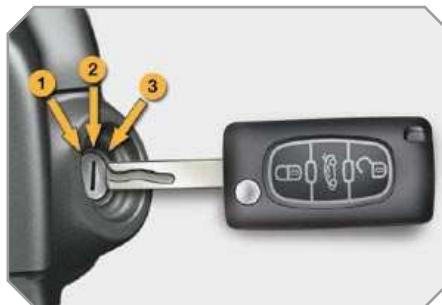

Switching the vehicle off

- Immobilise the vehicle.
- Turn the key fully towards you to position 1 (Stop).
- Remove the key from the ignition switch.



Key in ignition

If the key has been left in the ignition, an audible signal is heard on opening the driver's door.

Locating your vehicle

To locate your vehicle, if you have locked it, in a car park:

- press the closed padlock, the courtesy lights come on and the direction indicators flash for a few seconds.

Remote control problem

Following disconnection of the vehicle battery, replacement of the remote control battery or in the event of a remote control malfunction, you can no longer unlock, lock or locate your vehicle.

- First of all, use the key in the lock to unlock or lock your vehicle.
- Then, reinitialise the remote control. If the problem persists, contact a PEUGEOT dealer as soon as possible.

Reinitialisation

- Switch off the ignition.
- Turn the key to position 2 (Ignition).
- Press the closed padlock immediately for a few seconds.
- Switch off the ignition and remove the key from the ignition switch.

The remote control is fully operational again.

Changing the battery



Battery ref.: CR1620/3 volts.



This replacement battery is available from PEUGEOT dealers. If the battery is flat, you are informed by lighting of this warning lamp, an audible signal and a message on the multifunction screen.

- Unclip the casing using a coin at the notch.
- Slide the flat battery out of its location.
- Slide the new battery into its location observing the original direction.
- Clip the casing.
- Reinitialise the remote control.

Lost keys

Visit a PEUGEOT dealer with the vehicle's V5 registration document and your personal identification documents.

The PEUGEOT dealer will be able to retrieve the key code and the transponder code required to order a replacement key.

Remote control

The high frequency remote control is a sensitive system; do not operate it while it is in your pocket as there is a possibility that it may unlock the vehicle, without you being aware of it.

Do not repeatedly press the buttons of your remote control out of range and out of sight of your vehicle. You run the risk of stopping it from working and the remote control would have to be reinitialised.

The remote control does not operate when the key is in the ignition, even when the ignition is switched off, except for reinitialisation.

Locking the vehicle

Driving with the doors locked may make access to the passenger compartment by the emergency services more difficult in an emergency.

As a safety precaution (with children on board), remove the key from the ignition when you leave the vehicle, even for a short time.

Anti-theft protection

Do not make any modifications to the electronic engine immobiliser system; this could cause malfunctions.

When purchasing a second-hand vehicle

Have the key codes memorised by a PEUGEOT dealer, to ensure that the keys in your possession are the only ones which can start the vehicle.



Do not throw the remote control batteries away, they contain metals which are harmful to the environment.

Take them to an approved collection point.

ALARM

System which protects and provides a deterrent against the theft of your vehicle. It provides two types of protection, exterior and interior, as well as an anti-tamper function.

Exterior perimeter protection

The system detects opening of the vehicle.

The alarm is triggered if anyone tries to enter the vehicle by forcing a door, the boot or the bonnet.

Interior volumetric protection

The system detects any variation in the volume in the passenger compartment.

The alarm is triggered if anyone breaks a window or moves inside the vehicle.

If you wish to leave a pet in the vehicle or a window partially open, deactivate the interior volumetric protection.

Anti-tamper function

The system detects the putting out of service of its components.

The alarm is triggered if anyone tries to put the wires of the siren, the central control or the battery out of service.



Do not make any modifications to the alarm system, this could cause malfunctions.

Locking the vehicle with full alarm



Activation

- ☛ Switch off the ignition and get out of the vehicle.
- ☛ Lock or deadlock the vehicle using the locking button on the remote control.

The alarm is activated; the indicator light on button A flashes once per second.

Deactivation

- ☛ Unlock the vehicle using the unlocking button on the remote control.

The alarm is deactivated; the indicator lamp on button A switches off.

Locking the vehicle with exterior protection alarm only

Deactivation of the interior volumetric protection

- ☛ Switch off the ignition.
- ☛ Within ten seconds, press button A until the indicator lamp is lit continuously.
- ☛ Get out of the vehicle.
- ☛ Lock or deadlock the vehicle using the locking button on the remote control.

The exterior protection alarm alone remains activated; the indicator lamp on button A flashes once per second.



To be effective, this deactivation must be carried out each time the ignition is switched off.

Reactivation of the interior volumetric protection

- ☛ Unlock the vehicle using the unlocking button on the remote control.
- ☛ Relock the vehicle using the remote control.

The alarm is activated again with both types of protection; the indicator lamp on button A switches off.

Triggering

This is indicated by sounding of the siren and flashing of the direction indicators for approximately thirty seconds. After it has been triggered, the alarm is again operational.



If the alarm is triggered ten times in succession, the eleventh time will result in it becoming inactive.

If the indicator lamp on button **A** flashes rapidly, this indicates that the alarm was triggered during your absence. When the ignition is switched on, this flashing stops immediately.

To avoid triggering the alarm when washing your vehicle, lock it using the key.

Do not activate the alarm before disconnecting the battery, otherwise the siren will sound.

Failure of the remote control

- ☞ Unlock the vehicle using the key in the driver's door lock.
- ☞ Open the door; the alarm is triggered.
- ☞ Switch on the ignition; the alarm stops.

Locking the vehicle without alarm

- ☞ Lock or deadlock the vehicle using the key in the driver's door lock.

Malfunction

When the ignition is switched on, lighting of the indicator lamp on button **A** for ten seconds indicates a siren fault.

Have it checked by a PEUGEOT dealer.

Automatic operation*

Depending on the legislation in force in your country, one of these cases may occur:

- 45 seconds after the vehicle is locked using the remote control, the alarm is activated, regardless of the status of the doors and boot.
- 2 minutes after the last door or the boot is closed, the alarm is activated.
- ☞ To avoid triggering the alarm on entering the vehicle, first press the unlocking button on the remote control.

* According to country.

WINDOW MECHANISMS

System which opens or closes a window manually or automatically. It is fitted with a system which provides protection if an obstacle is detected on the one-touch models and a deactivation system to prevent misuse of the rear switches on all models.



1. Driver's electric window switch.
2. Passenger's electric window switch.
3. Rear right electric window switch.
4. Rear left electric window switch.
5. Deactivating the rear electric window switches.

Electric windows



- ☞ Press or pull the switch. The window stops as soon as the switch is released.



The electric window switches remain operational for approximately 45 seconds after the ignition is switched off or until a front door is opened.

One-touch electric windows



There are two methods of operation:

- manual mode

- ☞ Press or pull the switch gently. The window stops as soon as the switch is released.

- automatic mode

- ☞ Press or pull the switch fully. The window opens or closes completely when the switch is released.
- ☞ Pressing the switch again stops the movement of the window.



The electric window switches remain operational for approximately 45 seconds after the ignition is switched off or until a front door is opened.

Safety anti-pinch

In automatic mode, when the window rises and meets an obstacle, it stops and partially lowers again.



In the event of unwanted opening of the window on closing (for example in the presence of frost):

- ☞ press the switch until it opens completely,
- ☞ then pull it immediately until it closes,
- ☞ continue to hold the switch for approximately one second after the window has closed.

The safety anti-pinch function is not active during these operations.

Deactivating the rear window switches



- For the safety of your children, press switch **5** to prevent operation of the rear windows irrespective of their position.

When the button is pressed down, the rear window switches are deactivated.

When the button is raised, the rear window switches are active.

Reinitialisation

Following reconnection of the battery or in the event of a malfunction you must reinitialise the operation of the electric windows:

- release the switch and pull it again until the window closes completely,
- hold the switch for approximately one second after closing,

- press the switch to lower the window automatically,
- when the window has reached the low position, press the switch again for approximately one second.

The safety anti-pinch function is not active during these operations.



Always remove the key from the ignition when leaving the vehicle, even for a short time.

In the event of contact during operation of the windows, you must reverse the movement of the window. To do this, press the switch concerned.

When the driver operates the passenger electric window switches, they must ensure that no one is preventing correct closing of the windows.

The driver must ensure that the passengers use the electric windows correctly.

Be aware of children when operating the windows.

REAR QUARTER WINDOWS

On the 3-door versions, system for ventilation of the rear seats limiting the partial opening of the window.

Opening



- Tilt the lever outwards.
- Push it fully to secure the window in the open position.

Closing

- Pull the lever to release the window.
- Tilt the lever fully inwards to secure the window in the closed position.

Deactivating the rear window switches



- For the safety of your children, press switch **5** to prevent operation of the rear windows irrespective of their position.

When the button is pressed down, the rear window switches are deactivated.

When the button is raised, the rear window switches are active.

Reinitialisation

Following reconnection of the battery or in the event of a malfunction you must reinitialise the operation of the electric windows:

- release the switch and pull it again until the window closes completely,
- hold the switch for approximately one second after closing,

- press the switch to lower the window automatically,
- when the window has reached the low position, press the switch again for approximately one second.

The safety anti-pinch function is not active during these operations.



Always remove the key from the ignition when leaving the vehicle, even for a short time.

In the event of contact during operation of the windows, you must reverse the movement of the window. To do this, press the switch concerned.

When the driver operates the passenger electric window switches, they must ensure that no one is preventing correct closing of the windows.

The driver must ensure that the passengers use the electric windows correctly.

Be aware of children when operating the windows.

REAR QUARTER WINDOWS

On the 3-door versions, system for ventilation of the rear seats limiting the partial opening of the window.

Opening



- Tilt the lever outwards.
- Push it fully to secure the window in the open position.

Closing

- Pull the lever to release the window.
- Tilt the lever fully inwards to secure the window in the closed position.

DOORS

Opening

From outside



- After unlocking the vehicle using the remote control or the key, pull the door handle.

From inside



- Pull the front door control to open the door; this unlocks the vehicle completely.
- Pull the rear door control to open the door; this unlocks the door concerned only.

Closing

If a door is not closed correctly:



- when the engine is running, this warning lamp comes on, accompanied by a message on the multifunction screen for a few seconds,
- when the vehicle is moving (speed above 6 mph (10 km/h)), this warning lamp comes on, accompanied by an audible signal and a message on the multifunction screen for a few seconds.



The interior door controls do not operate when the vehicle is dead-locked.


Manual centralised control

System which provides full manual locking or unlocking of the doors from the inside.




Locking

☞ Press button **A** to lock the vehicle. The red indicator lamp on the button comes on.

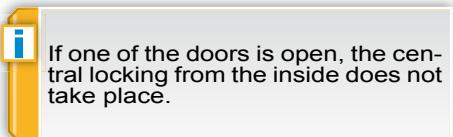

Unlocking

☞ Press button **A** again to unlock the vehicle. The red indicator lamp on the button switches off.

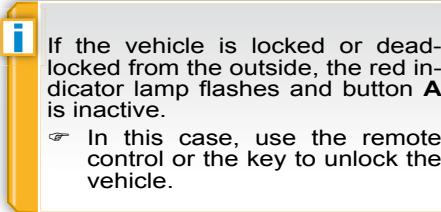

Automatic centralised control

System which provides full automatic locking or unlocking of the doors, boot and rear screen while driving.

You can activate or deactivate this function.

Locking

When the speed exceeds 6 mph (10 km/h), the doors, the boot and the rear screen lock automatically.



Unlocking

☞ Above 6 mph (10 km/h), press button **A** to unlock the doors, the boot and the rear screen temporarily.

Activation



☞ Press button **A** for more than two seconds.

A confirmation message appears on the multifunction screen.

Deactivation

☞ Press button **A** again for more than two seconds.

A confirmation message appears on the multifunction screen.

Emergency control

System which locks or unlocks the doors mechanically in the event of a malfunction of the central locking.

Locking the driver's door

- Insert the key in the lock, then turn it to the right.

Unlocking the driver's door

- Insert the key in the lock, then turn it to the left.

Locking the front and rear passenger doors



- Insert the key in the lock, located on the edge of the door, then turn it **one eighth of a turn**.

Unlocking the front and rear passenger doors

- Pull the interior door opening control.

BOOT (SALOON)



Opening

- After unlocking the vehicle using the remote control or the key, pull the handle and raise the tailgate.

Closing


If the tailgate is not closed correctly:



- **when the engine is running**, this warning lamp comes on, accompanied by a message on the multifunction screen for a few seconds,
- **when the vehicle is moving** (speed above 6 mph (10 km/h)), this warning lamp comes on, accompanied by an audible signal and a message on the multifunction screen for a few seconds.

Tailgate release

System for mechanical unlocking of the boot in the event of a central locking malfunction.

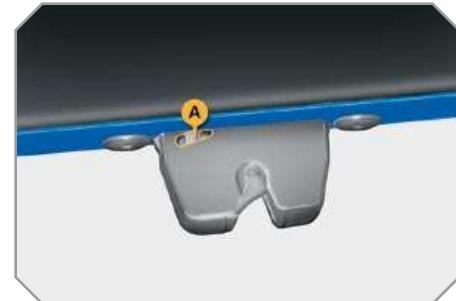

Unlocking

- Fold back the rear seats to gain access to the lock from inside the boot.
- Insert a small screwdriver into hole **A** of the lock to unlock the tailgate.

Emergency control

System which locks or unlocks the doors mechanically in the event of a malfunction of the central locking.

Locking the driver's door

- Insert the key in the lock, then turn it to the right.

Unlocking the driver's door

- Insert the key in the lock, then turn it to the left.

Locking the front and rear passenger doors



- Insert the key in the lock, located on the edge of the door, then turn it **one eighth of a turn**.

Unlocking the front and rear passenger doors

- Pull the interior door opening control.

BOOT (SALOON)



Opening

- After unlocking the vehicle using the remote control or the key, pull the handle and raise the tailgate.

Closing


If the tailgate is not closed correctly:



- **when the engine is running**, this warning lamp comes on, accompanied by a message on the multifunction screen for a few seconds,
- **when the vehicle is moving** (speed above 6 mph (10 km/h)), this warning lamp comes on, accompanied by an audible signal and a message on the multifunction screen for a few seconds.

Tailgate release

System for mechanical unlocking of the boot in the event of a central locking malfunction.

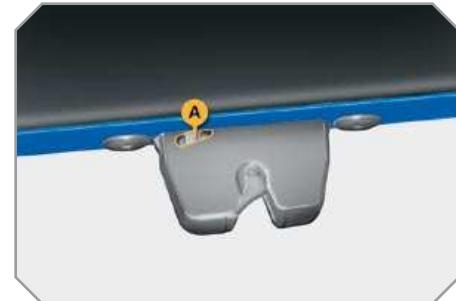

Unlocking

- Fold back the rear seats to gain access to the lock from inside the boot.
- Insert a small screwdriver into hole **A** of the lock to unlock the tailgate.

BOOT (SW)**Opening**

- After unlocking the vehicle using the remote control or the key, with the rear screen closed, pull on the handle **A** and raise the tailgate.

Closing

- Lower the tailgate using the interior grab handle.

If the tailgate is not closed correctly:



- **when the engine is running**, this warning lamp comes on, accompanied by a message on the multifunction screen for a few seconds,
- **when the vehicle is moving** (speed above 6 mph (10 km/h)), this warning lamp comes on, accompanied by an audible signal and a message on the multifunction screen for a few seconds.

REAR SCREEN (SW)**Opening**

- After unlocking the vehicle using the remote control or the key, with the boot closed, press the control **B** and raise the rear screen using the base **C** of the wiper arm.



The boot and the rear screen cannot both be open at the same time.

If the rear wiper is in a wiping position, the rear screen will not open until the end of the cycle.

**Closing**

- Close the rear screen by pressing at the centre of the glass.

If the rear screen is not closed correctly:



- **when the engine is running**, this warning lamp comes on, accompanied by a message on the multifunction screen for a few seconds,

- **when the vehicle is moving** (speed above 6 mph (10 km/h)), this warning lamp comes on, accompanied by an audible signal and a message on the multifunction screen for a few seconds.



If the rear screen is open, the central locking does not take place.

PANORAMIC ROOF (SALOON)

System which consists of a panoramic surface of tinted glass to increase the light and visibility in the passenger compartment. It is fitted with a manual blind in two parts to maintain a comfortable temperature.

Opening



☞ Take the blind by its handle and push it rearwards to the required position.

Closing

☞ Take the blind by its handle and pull it forwards to the required position.

PANORAMIC ROOF (SW)

System which consists of a panoramic surface of tinted glass to increase the light and visibility in the passenger compartment. It is fitted with an electric blind in two parts to maintain a comfortable temperature.

Opening



☞ Pull control **A**.
The blind stops when the control is released.

Closing

☞ Press control **A**.
The blind stops when the control is released.



If an obstacle is encountered during operation of the blind, the movement of the blind must be reversed. To do this, press the control concerned.

When the driver operates the blind control, he must ensure that no one is preventing correct closing of the blind.

The driver must ensure that passengers use the blind correctly.

Be aware of children when operating the blind.

FUEL TANK

Fuel tank capacity: approximately 50 litres (petrol) or 45 litres (Diesel).



The key cannot be removed from the lock until the cap is refitted.

Low fuel level

 When the fuel tank minimum level is reached this warning lamp comes on on the instrument panel. When it first comes on there remains **approximately 5 litres** of fuel in the tank.

Refuel as soon as possible to avoid running out of fuel.

If you run out of fuel (Diesel), refer also to the "Practical information" section.


Opening the filler cap may create a noise a caused by an inrush of air. This vacuum is entirely normal, resulting from the sealing of the fuel system.

To fill the tank in complete safety:

- ☞ **it is imperative that the engine is switched off,**
- ☞ open the fuel filler flap,
- ☞ insert the key in the cap, then turn it to the left,



Filling



DIESEL

A label affixed to the inside of the flap reminds you of the type of fuel to be used depending on your engine.

Additions of fuel must be of at least 5 litres, in order to be taken into account by the fuel gauge.

- ☞ remove the cap and hook it onto the clip located on the inside of the flap,
- ☞ fill the tank, **but do not continue after the 3rd cut-off of the pump;** this could cause malfunctions.



When you have filled the tank:

- ☞ put the cap back in place,
- ☞ turn the key to the right, then remove it from the cap,
- ☞ close the flap.

Quality of the fuel used for petrol engines

The petrol engines are perfectly compatible with E10 type petrol biofuels (containing 10 % ethanol), conforming to European standards EN 228 and EN 15376.

E85 type fuels (containing up to 85 % ethanol) are reserved exclusively for vehicles marketed for the use of this type of fuel (BioFlex vehicles). The quality of the ethanol must comply with European standard EN 15376.

For Brazil only, special vehicles are marketed to run on fuels containing up to 100 % ethanol (type E100).

Quality of the fuel used for Diesel engines

The Diesel engines are perfectly compatible with biofuels which conform to current and future European standards (diesel fuel which complies with standard EN 590 mixed with a biofuel which complies with standard EN 14214) available at the pumps (containing up to 7 % Fatty Acid Methyl Ester).

The B30 biofuel can be used in certain Diesel engines; however, this use is subject to strict application of the special servicing conditions. Consult a PEUGEOT dealer.

The use of any other type of (bio)fuel (vegetable or animal oils, pure or diluted, domestic fuel...) is strictly prohibited (risk of damage to the engine and fuel circuit).

LIGHTING CONTROLS

System for selection and control of the various front and rear lamps providing the vehicle's lighting.

Main lighting

The vehicle's various front and rear lamps are designed to adapt the driver's visibility gradually in relation to the climatic conditions:

- sidelamps, to be seen,
- dipped beam headlamps to see without dazzling other drivers,
- main beam headlamps for good visibility when the road is clear.

Additional lighting

Other lamps are installed to respond to particular driving conditions:

- rear foglamps to be seen from a distance,
- front foglamps for even better visibility,
- directional headlamps for improved visibility around bends.

Programmes

Various automatic lighting control modes are also available according to the following options:

- "guide-me-home" lighting,
- automatic lighting,
- static directional lighting.

Model without AUTO lighting




Model with AUTO lighting



Manual controls

The lighting commands are made directly by the driver by means of ring **A** and stalk **B**.


A. main lighting mode selection ring, with:



lighting off,



sidelamps only,



dipped or main beam headlamps,

B. **AUTO** automatic lighting.

B. stalk for inversion of the beam by pulling: dipped headlamps/main beam headlamps.

In the lighting off and sidelamps modes, the driver can switch on the main beam headlamps directly ("headlamp flash") by pulling and holding the stalk.

Displays

The corresponding indicator lamp comes on on the instrument panel to confirm the switching on of the lighting selected.

Model with rear foglamps only



Model with front and rear foglamps



C. foglamps selection ring.

These operate with the dipped and main beam headlamps.



rear foglamps

- To switch on the foglamps, turn ring **C** forwards.

When the lights are switched off automatically (on AUTO model), the fog lamps and the dipped headlamps will remain on.

- To switch off all of the lighting turn ring **C** rearwards.



front and rear foglamps

- To switch on the foglamps, turn ring **C** forwards.

- To switch off the rear foglamps, turn ring **C** rearwards twice in succession.

When the lighting is switched off automatically (on AUTO model) or when the dipped headlamps are switched off manually, the foglamps and the sidelamps will remain on.

- Turn the ring rearwards to switch off the foglamps, the sidelamps will then switch off.



In good weather or in rain, both day and night, the front foglamps and the rear foglamps are prohibited. In these situations, the intensity of their beams may dazzle other drivers.

Do not forget to switch off the front foglamps and the rear foglamps when they are no longer necessary.



Lighting on reminder


The triggering of an audible signal when a front door is opened warns the driver that they have forgotten to switch off the vehicle's lighting, with the ignition off.

In this case, switching off the lighting will stop the audible signal.

When the ignition is switched off, if the dipped headlamps remain on, they will be switched off automatically after thirty minutes to prevent discharging of the battery.

Daytime running lamps*

On vehicles fitted with daytime running lamps, the dipped headlamps come on when the vehicle is started.



This indicator lamp comes on on the instrument panel.

The instruments and controls (instrument panel, multifunction screen, air conditioning control panel, ...) are not lit, unless the automatic lighting mode is activated or the lighting is switched on manually.

"Guide-me-home" lighting

The dipped headlamps remain on temporarily, after switching off the vehicle's ignition, to make the driver's exit easier in poor light.

Activation

- ☞ With the ignition off, activate a "headlamp flash" using stalk **B**.
- ☞ A second "headlamp flash" switches the function off again.

Switching off

The "guide-me-home" lighting is switched off automatically following the door locking command, after a given time.

* According to country.

Automatic lighting

The sidelamps and dipped beam headlamps are switched on automatically, without any action on the part of the driver, when a low level of external light is detected (sensor behind the interior mirror) or when the windscreen wipers are switched on.

As soon as the brightness returns to a sufficient level or after the windscreen wipers are switched off, the lighting is switched off automatically.



Activation

- ☞ Turn ring **A** to the "**AUTO**" position. The automatic lighting is accompanied by a message on the multifunction screen.

Deactivation

- ☞ Turn ring **A** to a position other than "**AUTO**". Deactivation is accompanied by a message on the multifunction screen.

Coupling with the "Guide-me-home" lighting

Association with the automatic lighting provides the "guide-me-home" lighting with the following additional options:

- selection of the lighting duration to 15, 30 or 60 seconds in the vehicle parameters on the multifunction screen configuration menu,
- automatic activation of "guide-me-home" lighting when automatic lighting is in operation.

Operating fault

 In the event of a malfunction of the brightness sensor, the lighting comes on accompanied by the service warning lamp, an audible signal and a message on the multifunction screen.

Have it checked by a PEUGEOT dealer.




In fog or snow, the brightness sensor may detect sufficient light. Therefore, the lighting will not come on automatically.

Do not cover the brightness sensor, coupled with the rain sensor and located in the centre of the windscreen behind the interior mirror; the associated functions would no longer be controlled.

Daytime running lamps*

On vehicles fitted with daytime running lamps, the dipped headlamps come on when the vehicle is started.



This indicator lamp comes on on the instrument panel.

The instruments and controls (instrument panel, multifunction screen, air conditioning control panel, ...) are not lit, unless the automatic lighting mode is activated or the lighting is switched on manually.

"Guide-me-home" lighting

The dipped headlamps remain on temporarily, after switching off the vehicle's ignition, to make the driver's exit easier in poor light.

Activation

- ☞ With the ignition off, activate a "headlamp flash" using stalk **B**.
- ☞ A second "headlamp flash" switches the function off again.

Switching off

The "guide-me-home" lighting is switched off automatically following the door locking command, after a given time.

* According to country.

Automatic lighting

The sidelamps and dipped beam headlamps are switched on automatically, without any action on the part of the driver, when a low level of external light is detected (sensor behind the interior mirror) or when the windscreen wipers are switched on.

As soon as the brightness returns to a sufficient level or after the windscreen wipers are switched off, the lighting is switched off automatically.



Activation

- ☞ Turn ring **A** to the "**AUTO**" position. The automatic lighting is accompanied by a message on the multifunction screen.

Deactivation

- ☞ Turn ring **A** to a position other than "**AUTO**". Deactivation is accompanied by a message on the multifunction screen.

Coupling with the "Guide-me-home" lighting

Association with the automatic lighting provides the "guide-me-home" lighting with the following additional options:

- selection of the lighting duration to 15, 30 or 60 seconds in the vehicle parameters on the multifunction screen configuration menu,
- automatic activation of "guide-me-home" lighting when automatic lighting is in operation.

Operating fault

 In the event of a malfunction of the brightness sensor, the lighting comes on accompanied by the service warning lamp, an audible signal and a message on the multifunction screen.

Have it checked by a PEUGEOT dealer.



In fog or snow, the brightness sensor may detect sufficient light. Therefore, the lighting will not come on automatically.


Do not cover the brightness sensor, coupled with the rain sensor and located in the centre of the windscreen behind the interior mirror; the associated functions would no longer be controlled.

STATIC DIRECTIONAL LIGHTING


When the dipped or main beam headlights are on, this function enables the beam to light the inside of the turn with an additional angle of approximately 30°.

The use of this lighting is optimum above all at low and average speed (city driving, winding roads, ...).

with directional lighting

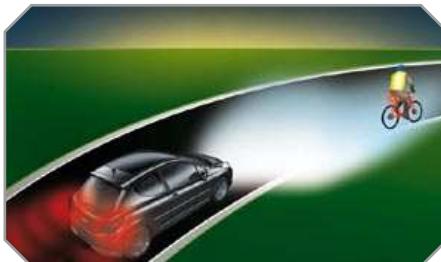

without directional lighting

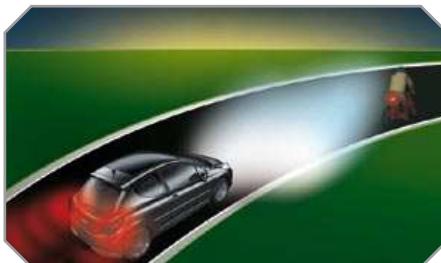

Programming



The function is activated or deactivated via the multifunction screen configuration menu.

By default, this function is activated.

Switching on

The system is switched on from a certain speed and a certain angle of rotation of the steering wheel.

Switching off

The system is switched off below a certain angle of rotation of the steering wheel.

It is switched off when reverse gear is engaged.

Operating fault



In the event of a malfunction, this warning lamp flashes on the instrument panel, accompanied by a message on the multifunction screen.

Have it checked by a PEUGEOT dealer.

HEADLAMP ADJUSTMENT



To avoid causing a nuisance to other road users, the height of the headlamps should be adjusted in relation to the load in the vehicle.

0. 1 or 2 people in the front seats.
- 3 people.
1. 5 people.
2. 5 people + maximum authorised load.
3. Driver + maximum authorised load.



The initial setting is position "0".

WIPER CONTROLS

System for the selection and control of the various front and rear wiping modes permitting the dispersal of rain and cleaning.

The vehicle's various front and rear wipers are designed to gradually improve the driver's visibility in relation to the weather conditions.

Programmes

Various automatic wiping control modes are also available depending on the following options:

- automatic windscreen wiping,
- rear wiping on engaging reverse gear.

Model with intermittent wiping



Model with AUTO wiping



Manual controls

The wiping commands are made directly by the driver using stalk **A** and ring **B**.

Windscreen wipers

A. wiping speed selection control:

2
1
I
0
↓

- fast (heavy rain),
- normal (moderate rain),
- intermittent (in proportion to the speed of the vehicle),
- off,
- single wipe (press downwards),

AUTO ↓ automatic (refer to the following page).

Rear wiper**B. rear wiper selection ring:**

off,



intermittent wipe,



wiping with screenwash (fixed duration).

Reverse gear

When reverse gear is engaged, if the windscreen wipers are operating, the rear wiper will start.

Programming

The function is activated or switched off via the multi-function screen configuration menu.

By default, this function is activated.



In the presence of snow or considerable frost and when using a tailgate bicycle carrier, deactivate the automatic rear wiper via the multifunction screen configuration menu.

Windscreen and headlamp wash

☞ Pull the windscreen wiper stalk towards you. The windscreen wash then the windscreen wipers operate for a fixed period.

The headlamp wash is also activated, **if the dipped headlamps are on**.



On vehicles fitted with automatic air conditioning, any action on the windscreen wash control results in temporary closing of the air intake to avoid odour inside the passenger compartment.

Automatic windscreen wipping

The windscreen wipers operate automatically, without any action on the part of the driver, if rain is detected (sensor behind the interior mirror), adapting their speed to the intensity of the rainfall.



Activation

This is controlled manually by the driver by pushing the stalk **A** to the "**AUTO**" position.

It is accompanied by a message on the multifunction screen.

Switching off

This is controlled manually by the driver by moving the stalk **A** to another position and returning it to position "**0**".

It is accompanied by a message on the multifunction screen.



The automatic wiping must be reactivated if the ignition has been off for more than one minute, by pushing the stalk **A** downwards.

Operating fault

If an automatic wiping malfunction occurs, the wipers will operate in intermittent mode.


Have it checked by a PEUGEOT dealer.



Do not cover the rain sensor, coupled with the brightness sensor and located in the centre of the windscreen behind the interior mirror. Switch off the ignition when using an automatic car wash.

In winter, it is advisable to wait until the windscreen is completely clear of ice before activating the automatic wiping.

Special position of the windscreen wipers

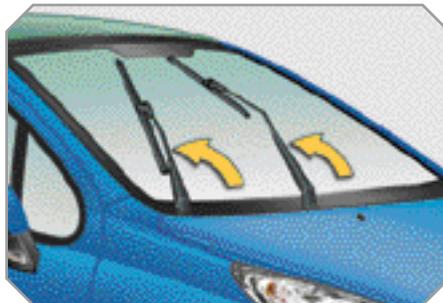


In the minute following switching off of the ignition, any action on the stalk positions the wipers in the centre of the windscreen.

This action enables you to position the wiper blades for winter parking.

To park the wipers after this has been done, switch on the ignition and operate the stalk.

COURTESY LAMPS

Selection and control of the various passenger compartment lamps.

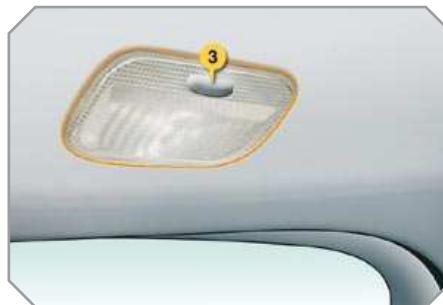

1. Front courtesy lamp
2. Map reading lamp
3. Rear courtesy lamp

Front and rear courtesy lamps



In this position, the courtesy lamp comes on gradually:

- when the vehicle is unlocked,
- when the key is removed from the ignition,
- when the remote control locking button is activated, in order to locate your vehicle.

It switches off gradually:

- when the vehicle is locked,
- when the ignition is switched on,
- 30 seconds after the last door is closed.



Permanently off.



Permanent lighting.



In permanent lighting mode, different lighting times are available:

- with the ignition off, approximately ten minutes,
- in energy economy mode, approximately thirty seconds,
- with the engine running, unlimited.

Map reading lamps

☞ With the ignition on, press the corresponding switch.



ADVICE ON CHILD SEATS

The incorrect installation of a child seat in a vehicle compromises the child's protection in the event of an accident.

Remember to fasten the seat belts or the child seat harnesses **keeping the slack** in relation to the child's body to a minimum, even for short journeys.

For optimum installation of the "forward facing" child seat, ensure that the back of the child seat is in contact with the back of the vehicle's seat and that the head restraint does not cause any discomfort.

If the head restraint has to be removed, ensure that it is stored or attached securely to prevent it from being thrown around the vehicle in the event of sharp braking.

Children under the age of 10 must not travel in the "forward facing" position on the front passenger seat, unless the rear seats are already occupied by other children, cannot be used or are absent.

Deactivate the passenger airbag when a "rear facing" child seat is installed on the front seat. Otherwise, the child would risk being seriously injured or killed if the airbag were to inflate.

Installing a booster seat

The chest part of the seat belt must be positioned on the child's shoulder without touching the neck.

Ensure that the lap part of the seat belt passes correctly over the child's thighs.

PEUGEOT recommends the use of a booster seat which has a back, fitted with a seat belt guide at shoulder level.

As a safety precaution, do not leave:

- one or more children alone and unsupervised in a vehicle,
- a child or an animal in a vehicle which is exposed to the sun, with the windows closed,
- the keys within reach of children inside the vehicle.

To prevent accidental opening of the doors, use the "Child lock".

Take care not to open the rear windows by more than one third.

To protect young children from the rays of the sun, fit side blinds on the rear windows.

GENERAL POINTS RELATING TO CHILD SEATS

Although one of PEUGEOT's main criteria when designing your vehicle, the safety of your children also depends on you.

For maximum safety, please follow these precautions:

- in accordance with European regulations, **all children under the age of 12 or less than one and a half metres tall must travel in approved child seats suited to their weight**, on seats fitted with a seat belt or ISOFIX mountings*,
- statistically, the safest seats in your vehicle for the transportation of children are the rear seats,
- a child weighing less than 9 kg must travel in the "rearwards-facing" position both in the front and in the rear.



PEUGEOT recommends that children should travel in the **rear seats** of your vehicle:

- "rearwards-facing" up to the age of 2,
- "forwards-facing" over the age of 2.

INSTALLING A CHILD SEAT USING A THREE POINT SEAT BELT

"Rearwards-facing"

When a "rearwards-facing" child seat is installed on the **front passenger seat**, it is essential that the passenger airbag is deactivated. Otherwise, **the child would risk being seriously injured or killed if the airbag were to inflate**.




"Forwards-facing"

When a "forwards-facing" child seat is installed on the **front passenger seat**, adjust the vehicle's seat to the intermediate longitudinal position with the seat back upright and leave the passenger airbag activated.




Intermediate longitudinal position

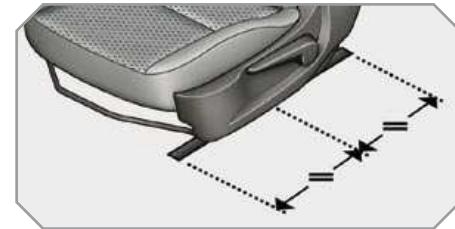

* The rules for transporting children are specific to each country. Refer to the current legislation in your country.



Passenger air bag OFF

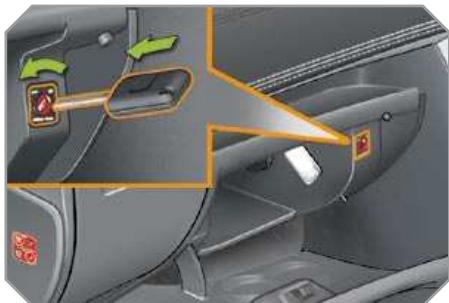

CHILD SEATS RECOMMENDED BY PEUGEOT

PEUGEOT offers a complete range of recommended child seats which are secured using a **three point seat belt**:

Group 0: from birth to 10 kg
Group 0+: from birth to 13 kg



L1
"RÖMER Baby-Safe Plus"
 Installed in the
 rearwards-facing
 position.

Groups 1, 2 and 3: from 9 to 36 kg



L2
"KIDDY Life"
 The use of the
 restraining cushion
 is compulsory for
 the transportation
 of young children
 (from 9 to 18 kg).

Groups 2 and 3: from 15 to 36 kg




L3
"RECARO Start"



L4
"KLIPPAN Optima"
 From the age
 of 6 years
 (approximately
 22 kg), the
 booster is used on
 its own.



Passenger air bag OFF

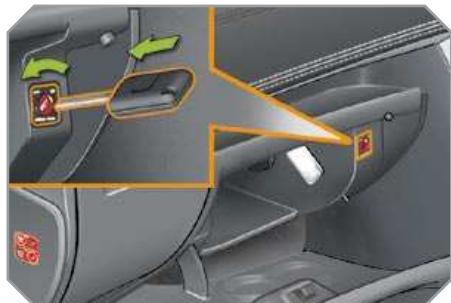

CHILD SEATS RECOMMENDED BY PEUGEOT

PEUGEOT offers a complete range of recommended child seats which are secured using a **three point seat belt**:

Group 0: from birth to 10 kg
Group 0+: from birth to 13 kg



L1
"RÖMER Baby-Safe Plus"
 Installed in the rearwards-facing position.

Groups 1, 2 and 3: from 9 to 36 kg



L2
"KIDDY Life"
 The use of the restraining cushion is compulsory for the transportation of young children (from 9 to 18 kg).

Groups 2 and 3: from 15 to 36 kg



L3
"RECARO Start"



L4
"KLIPPAN Optima"
 From the age of 6 years (approximately 22 kg), the booster is used on its own.

LOCATION OF CHILD SEATS SECURED USING THE SEAT BELT (SALOON)

In accordance with the European regulation, this table indicates the options for the installation of child seats secured using the seat belt and universally approved (a) in relation to the weight of the child and the seat in the vehicle.

Seat	Weight of the child/indicative age			
	Less than 13 kg (groups 0 (b) and 0+) Up to 1 year approx	From 9 to 18 kg (group 1) From 1 to 3 years approx	From 15 to 25 kg (group 2) From 3 to 6 years approx	From 22 to 36 kg (group 3) From 6 to 10 years approx
Front passenger seat (c)				
- fixed	U	U	U	U
- height adjustable				
Rear side seats		U	U	U
Rear centre seat*		U	X	X

* Except GTi.

(a) Universal child seat: child seat which can be installed in all vehicles using the seat belt.

(b) Group 0: from birth to 10 kg. Infant car seats and "car cots" cannot be installed on the front passenger seat.

(c) Consult the legislation in force in your country before installing your child on this seat.

U: seat suitable for the installation of a child seat secured using the seat belt and universally approved "rear facing" and/or "forward facing".

X: seat not suitable for the installation of a child seat of the weight group indicated.

LOCATION OF CHILD SEATS SECURED USING THE SEAT BELT (SW)

In accordance with the European regulation, this table indicates the options for the installation of child seats secured using the seat belt and universally approved (a) in relation to the weight of the child and the seat in the vehicle.

Seat	Weight of the child/indicative age			
	Less than 13 kg (groups 0 (b) and 0+) Up to 1 year approx	From 9 to 18 kg (group 1) From 1 to 3 years approx	From 15 to 25 kg (group 2) From 3 to 6 years approx	From 22 to 36 kg (group 3) From 6 to 10 years approx
Front passenger seat (c)				
- fixed	U	U	U	U
- height adjustable				
Rear side seats		U	U	U
Rear centre seat		U*	U*	U*

* The rear left side seat becomes unusable.

(a) Universal child seat: child seat which can be installed in all vehicles using the seat belt.

(b) Group 0: from birth to 10 kg. Infant car seats and "car cots" cannot be installed on the front passenger seat.

(c) Consult the legislation in force in your country before installing your child on this seat.

U: seat suitable for the installation of a child seat secured using the seat belt and universally approved "rear facing" and/or "forward facing".

"ISOFIX" MOUNTINGS

Your vehicle has been approved in accordance with the **new ISOFIX regulation**.

The seats, represented below, are fitted with regulation ISOFIX mountings:



These are three rings for each seat:



- two rings **A**, located between the vehicle seat back and cushion, indicated by a label,



- a ring **B**, for fixing the upper strap referred to as the **TOP TETHER**.

This ISOFIX mounting system guarantees you fast, reliable and safe fitting of the child seat in your vehicle.

The **ISOFIX child seats** are fitted with two locks which are secured easily on the two rings **A**.

Some also have an **upper strap** which is attached to ring **B**.

To attach this strap, raise the vehicle seat's head restraint then pass the hook between its rods. Then fix the hook on ring **B** and tighten the upper strap.



The incorrect installation of a child seat in a vehicle compromises the child's protection in the event of an accident.



For information regarding the ISOFIX child seats which can be installed in your vehicle, consult the summary table for the location of the ISOFIX child seats.

ISOFIX CHILD SEAT RECOMMENDED BY PEUGEOT AND APPROVED FOR YOUR VEHICLE**RÖMER Duo Plus ISOFIX (size category B1)****Group 1: from 9 to 18 kg**

Installed in the forwards-facing position.
Fitted with an upper strap to be secured on the upper ring **B**,
referred to as the TOP TETHER.

Three seat body angles: sitting, reclining, lying.



This child seat can also be used on seats which are not fitted with ISOFIX mountings. In this case, it must be attached to the vehicle seat using the three point seat belt.

Follow the instructions for fitting the child seat given in the seat manufacturer's installation guide.

SUMMARY TABLE FOR THE INSTALLATION OF ISOFIX CHILD SEATS (SALOON)

In accordance with the European regulation, this table indicates the options for the installation of ISOFIX child seats on the vehicle seats fitted with ISOFIX mountings.

In the case of the universal and semi-universal ISOFIX child seats, the child seat's ISOFIX size category, determined by a letter from **A** to **G**, is indicated on the child seat next to the ISOFIX logo.

	Weight of the child/indicative age										
	Less than 10 kg (group 0) Up to 6 months approx		Less than 10 kg (group 0) Less than 13 kg (group 0+) Up to 1 year approx			From 9 to 18 kg (group 1) From 1 to 3 years approx					
	Type of ISOFIX child seat		Infant car seat*		"rear facing"			"rear facing"		"forward facing"	
ISOFIX size category	F	G	C	D	E	C	D	A	B	B1	
Universal and semi-universal ISOFIX child seats which can be installed on the rear seats	IL-SU**		X	IL-SU**			X	IL-SU**		IUF** IL-SU**	

IUF: seat suitable for the installation of an Isofix Universal seat, "Forward facing" and secured using the "Top Tether" upper strap.

IL-SU: seat suitable for the installation an Isofix Semi-Universal seat which is:

- "rear facing" fitted with a "Top Tether" upper strap or a stay,
- "forward facing" fitted with a stay,
- an infant car seat fitted with a "Top Tether" upper strap or a stay.

For the securing of the "Top Tether" upper strap, refer to the "Isofix Mountings" section.

X: seat which is not suitable for the installation of an ISOFIX seat of the size category indicated.

* The ISOFIX infant car seat, fixed to the lower rings of a seat equipped with ISOFIX mountings, occupies the three rear seats. To install it on the rear seats of a 3-door model, the front seat belt must be adjusted to the lowest position. Infant car seats and "car cots" cannot be installed on the front passenger seat.

** The head restraint of the seat equipped with ISOFIX mountings must be removed and stored.

SUMMARY TABLE FOR THE INSTALLATION OF ISOFIX CHILD SEATS (GTI)

In accordance with the European regulation, this table indicates the options for the installation of ISOFIX child seats on the vehicle seats fitted with ISOFIX mountings.

In the case of the universal and semi-universal ISOFIX child seats, the child seat's ISOFIX size category, determined by a letter from **A** to **G**, is indicated on the child seat next to the ISOFIX logo.

	Weight of the child/indicative age									
	Less than 10 kg (group 0) Up to 6 months approx			Less than 10 kg (group 0) Less than 13 kg (group 0+) Up to 1 year approx			From 9 to 18 kg (group 1) From 1 to 3 years approx			
	Type of ISOFIX child seat	Infant car seat***	"rear facing"			"rear facing"		"forward facing"		
ISOFIX size category	F	G	C*	D**	E	C*	D**	A	B	B1
Universal and semi-universal ISOFIX child seats which can be installed on the rear seats	X		IL-SU			IL-SU		IUF IL-SU		

IUF: seat suitable for the installation of an Isofix Universal seat, "Forward facing" and secured using the "Top Tether" upper strap.

IL-SU: seat suitable for the installation of an Isofix Semi-Universal seat which is:

- "rear facing" fitted with a "Top Tether" upper strap or a stay,
- "forward facing" fitted with a stay.

For the securing of the "Top Tether" upper strap, refer to the "Isofix Mountings" section.

X: seat which is not suitable for the installation of an ISOFIX seat of the size category indicated.

* The corresponding front seat belt must be adjusted to the highest position minus one notch.

The corresponding front seat must be adjusted to the mid-way longitudinal position plus two notches.

** The corresponding front seat belt must be adjusted to the highest position minus one notch.

*** Infant car seats and "car cots" cannot be installed on the front passenger seat.

SUMMARY TABLE FOR THE INSTALLATION OF ISOFIX CHILD SEATS (SW)

In accordance with the European regulation, this table indicates the options for the installation of ISOFIX child seats on the vehicle seats fitted with ISOFIX mountings.

In the case of the universal and semi-universal ISOFIX child seats, the child seat's ISOFIX size category, determined by a letter from **A** to **G**, is indicated on the child seat next to the ISOFIX logo.

	Weight of the child/indicative age										
	Less than 10 kg (group 0) Up to 6 months approx		Less than 10 kg (group 0) Less than 13 kg (group 0+) Up to 1 year approx			From 9 to 18 kg (group 1) From 1 to 3 years approx					
	Type of ISOFIX child seat		Infant car seat*		"rear facing"			"rear facing"		"forward facing"	
ISOFIX size category	F	G	C**	D	E	C**	D	A	B	B1	
Universal and semi-universal ISOFIX child seats which can be installed on the rear seats	IL-SU (a)		IL-SU (a)			IL-SU (a)			IUF (a) IL-SU (a)		

IUF: seat suitable for the installation of an Isofix Universal seat, "Forward facing" and secured using the "Top Tether" upper strap.

IL-SU: seat suitable for the installation an Isofix Semi-Universal seat which is:

- "rear facing" fitted with a "Top Tether" upper strap or a stay,
- "forward facing" fitted with a stay,
- an infant car seat fitted with a "Top Tether" upper strap or a stay.

For the securing of the "Top Tether" upper strap, refer to the "Isofix Mountings" section.

(a) The head restraint where the ISOFIX seat is fitted must be removed and stored safely.

* The ISOFIX infant car seat, fixed to the lower rings of a seat equipped with ISOFIX mountings, occupies the three rear seats and prevents use of the 2/3 - 1/3 modularity.


Infant car seats and "car cots" cannot be installed on the front passenger seat.

** The front seat must be adjusted to the most forward position minus five notches.

MANUAL CHILD LOCK

Mechanical system to prevent opening of the rear door using its interior control. The control is located on the edge of each rear door.

Locking

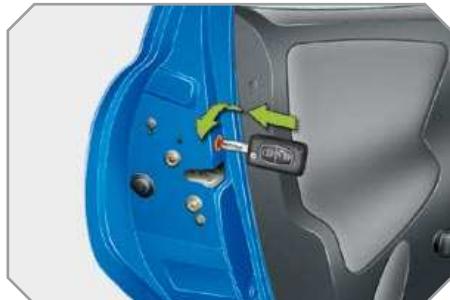

- Turn the red control one quarter of a turn to the right using the ignition key.

Unlocking

- Turn the red control one quarter of a turn to the left using the ignition key.

ELECTRIC CHILD LOCK

Remote control system to prevent opening of the rear doors using their interior controls.

The control is located in the centre of the dashboard.

Activation



- Press button A. The indicator lamp on button A comes on, accompanied by a message on the multifunction screen.

Deactivation

- Press button A again.

The indicator lamp on button A switches off, accompanied by a message on the multifunction screen.



This system is independent and in no circumstances does it take the place of the central locking control. Check the status of the child lock each time you switch on the ignition. Always remove the key from the ignition when leaving the vehicle, even for a short time. In the event of a serious impact, the electric child lock is deactivated automatically to allow the rear passengers to exit the vehicle.

DIRECTION INDICATORS

Selection of the left or right direction indicators to signal a change of direction of the vehicle.



- Lower the lighting stalk when moving to the left.
- Raise the lighting stalk when moving to the right.



If you forget to cancel the direction indicators for more than twenty seconds, the volume of the audible signal will increase if the speed is above 40 mph (60 km/h).

"Motorway" function

System for indicating a change of lane on a motorway.

- Move the lighting stalk briefly upwards or downwards, without going beyond the resistance point; the direction indicators will flash 3 times.

This function can be used at any speed, but it is particularly useful when changing lane on high-speed roads.

EMERGENCY OR ASSISTANCE CALL

This system allows you to make an emergency or assistance call to the emergency services or to the dedicated PEUGEOT platform.



For further details of the use of this equipment, refer to the "Audio and telematics" section PC Nav and PC Sound.

HAZARD WARNING LAMPS

A visual warning by means of the direction indicators to alert other road users to a vehicle breakdown, towing or accident.



- ☞ Press the button **A**, the direction indicators flash.

They can operate with the ignition off.

Automatic lighting of hazard warning lamps

When braking in an emergency, depending on the deceleration, the hazard warning lamps come on.

They will switch off automatically the first time you accelerate.

- ☞ If they do not, press button **A** to switch the direction indicators off.



As a safety precaution in a traffic jam, switch on the hazard warning lamps if you are the last in the queue.

HORN

Audible warning to alert other road users to an imminent danger.



- ☞ Press one of the spokes of the steering wheel.



Use the horn moderately and only in the following cases:

- immediate danger,
- when passing a cyclist or a pedestrian,
- when approaching an area where there is no visibility.

TYRE UNDER-INFLATION DETECTION

System which automatically checks the pressure of the tyres while driving.



Sensors fitted in each valve trigger a warning in the event of malfunction. The speed has to be above 12 mph (20 km/h).

i The tyre under-inflation detection system is an aid to driving which does not replace the need for the driver to be vigilant or to drive responsibly.

Flat tyre

A message appears on the multifunction screen, accompanied by an audible signal, to locate the wheel concerned.

- Check the tyre pressures as soon as possible.

This check must be carried out when the tyres are cold.

Puncture



This warning lamp and the **STOP** warning lamp come on on the instrument panel, accompanied by an audible signal and a message on the multifunction screen locating the wheel concerned.

- Stop immediately, avoiding any sudden movement of the steering wheel and the brakes.
- Change the damaged wheel (punctured or very deflated tyre), and have the tyre pressure checked as soon as possible.

Sensor(s) not detected or faulty

A message appears on the multifunction screen, accompanied by an audible signal, to locate the wheel or wheels which are not detected or to indicate a fault in the system.

Contact a PEUGEOT dealer to replace the faulty sensor(s).



This message is also displayed when one of the wheels is away from the vehicle (being repaired) or when one or more wheels without a sensor are fitted.

The spare wheel is not fitted with a sensor.



All repairs and changing of tyres on a wheel fitted with this system must be carried out by a PEUGEOT dealer.

If, when changing a tyre, you install a wheel which is not detected by your vehicle (example: fitting of snow tyres), you must have the system reinitialised by a PEUGEOT dealer.



This system does not eliminate the need to have the tyre pressure checked regularly (refer to the "Identification markings" paragraph) to ensure that the optimum dynamic performance of the vehicle is maintained and prevent premature wear of the tyres, particularly in arduous driving conditions (heavy load, high speed).

The tyre pressures must be checked cold, at least once a month. Remember to check the pressure of the spare wheel.

The tyre under-inflation detection system may experience temporary interference due to electro-magnetic emissions on a frequency close to that used by the system.

BRAKING ASSISTANCE SYSTEMS*

Group of supplementary systems which help you to obtain optimum braking in complete safety in emergency situations:

- the anti-lock braking system (ABS),
- the electronic brake force distribution (EBFD),
- the emergency braking assistance (EBA).

Anti-lock braking system and electronic brake force distribution

Linked systems which improve the stability and manoeuvrability of your vehicle when braking, in particular on poor or slippery surfaces.

Activation

The anti-lock braking system comes into operation automatically when there is a risk of wheel lock.

Normal operation of the ABS may make itself felt by slight vibration of the brake pedal.

! When braking in an emergency, press very firmly without releasing the pressure.

Operating fault

 If this warning lamp comes on, accompanied by an audible signal and a message on the multifunction screen, it indicates a malfunction of the anti-lock braking system which could result in loss of control of the vehicle when braking.

 If this warning lamp comes on, together with the **STOP** and **ABS** warning lamps, accompanied by an audible signal and a message on the multifunction screen, it indicates a malfunction of the electronic brake force distribution which could result in loss of control of the vehicle when braking.

You must stop as soon as it is safe to do so.

In either case, contact a PEUGEOT dealer.



When replacing wheels (tyres and rims), ensure that they conform to the manufacturer's recommendations.

Emergency braking assistance

System which, in an emergency, enables you to obtain the optimum braking pressure more quickly, thus reducing the stopping distance.

Activation

It is triggered by the speed at which the brake pedal is pressed.

The effect of this is a reduction in the resistance of the pedal and an increase in braking efficiency.



When braking in an emergency, press firmly without releasing the pressure.

* According to country.

TRAJECTORY CONTROL SYSTEMS

Anti-skid regulation (ASR) and electronic stability programme (ESP)

The anti-skid regulation (also known as Traction Control) optimises traction to prevent skidding of the wheels, by acting on the brakes of the driving wheels and on the engine.

The electronic stability programme acts on the brake of one or more wheels and on the engine to keep the vehicle on the trajectory required by the driver.

Activation

These systems are activated automatically each time the vehicle is started.



They come into operation in the event of a grip or trajectory problem.

This is indicated by flashing of this warning lamp on the instrument panel.

Deactivation

In exceptional conditions (starting a vehicle which is bogged down, stuck in snow, on soft ground, ...), it may be advisable to disarm the ASR and ESP systems, so that the wheels can move freely and regain grip.



- ☞ Press the "ESP OFF" button, located in the centre of the dashboard.



If this warning lamp comes on on the instrument panel and the indicator lamp on the button comes on, this indicates that the ASR and ESP systems are deactivated.

Reactivation

These systems are reactivated automatically each time the ignition is switched back on or from 30 mph (50 km/h) (except in the case of the 1.6 i 16V THP 175 hp petrol engine).

- ☞ Press the "ESP OFF" button again to reactivate them manually.

Operating fault



If this warning lamp comes on, accompanied by an audible signal and a message on the multi-function screen, this indicates a malfunction of these systems.

Have them checked by a PEUGEOT dealer.

Steering/ESP coupling system (SSP)

This system optimises the stability of the vehicle and its braking capacity by combining the actions of the ESP and electric power steering when braking on surfaces on which the grip of the right-hand and left-hand wheel differs.

It permits increased braking of the wheels which are in contact with the section of road offering the higher level of grip and, anticipating the instability of the vehicle, the application of a slight correction to the turning angle of the wheels to assist the driver in maintaining his trajectory.



The ESP/ASR systems offer exceptional safety in normal driving, but this should not encourage the driver to take extra risks or drive at high speed.

The correct functioning of these systems depends on observation of the manufacturer's recommendations regarding the wheels (tyres and rims), the braking components, the electronic components and the PEUGEOT assembly and operation procedures.

After an impact, have these systems checked by a PEUGEOT dealer.

SEAT BELTS

Front seat belts

The front seat belts are fitted with a pretensioning and force limiting system.

This system improves safety in the front seats in the event of front impacts. Depending on the severity of the impact, the pretensioning system instantly tightens the seat belts against the body of the occupants.

The pretensioning seat belts are active when the ignition is on.

The force limiter reduces the pressure of the seat belt on the chest of the occupant, increasing his protection.

On the 5-door and GTi versions, a slider, fitted on the seat belt, makes it possible to support the buckle as close as possible to the strap return.

Fastening



- ☞ Pull the strap, then insert the tongue in the buckle.
- ☞ Check that the seat belt is fastened correctly by pulling the strap.

Unfastening

- ☞ Press the red button on the buckle.

Height adjustment



- ☞ To lower the attachment point, squeeze control **A** and slide it downwards.
- ☞ To raise the attachment point, slide control **A** upwards.

Seat belt not fastened/unfastened warning lamp on the instrument panel



When the ignition is switched on, this warning lamp comes on on the instrument panel if the driver has not fastened their seat belt.

Above approximately 12 mph (20 km/h) and for two minutes, this warning lamp flashes accompanied by an audible signal of increasing volume. When the two minutes have elapsed, this warning lamp remains on until the driver fastens his seat belt.

This warning lamp comes on on the instrument panel if one or more passengers unbuckle their seat belt.

Seat belt not fastened/unfastened warning lamp panel



1. Front left seat belt warning lamp.
2. Front right seat belt warning lamp.
3. Rear left seat belt warning lamp.
4. Rear centre seat belt warning lamp**.
5. Rear right seat belt warning lamp.

On the central panel, the corresponding warning lamp **1** or **2** comes on in red if the seat belt is not fastened or is unfastened.

When the engine is running, the corresponding warning lamp **1** or **2** comes on in red, accompanied by an audible signal and a message on the multifunction screen, if a front occupant has unfastened their seat belt.

Rear seat belts

The rear seats are fitted with three seat belts**, each with three anchoring points and an inertia reel with force limiter.

Fastening

- ☛ Pull the strap, then insert the tongue in the buckle.
- ☛ Check that the seat belt is fastened correctly by pulling the strap.

Unfastening

- ☛ Press the red button on the buckle.

Seat belt unfastened warning lamp panel



When the ignition is switched on, the corresponding warning lamps **3**, **4**** and **5** come on for approximately 30 seconds in red if the seat belt is not fastened.

When the engine is running, the corresponding warning lamp **3**, **4**** or **5** comes on in red, accompanied by an audible signal and a message on the multifunction screen, if a rear passenger has unfastened their seat belt.

** Except GTi.

i The driver must ensure that the passengers use the seat belts correctly and that they are all properly restrained before setting off.

Wherever you are seated in the vehicle, always fasten your seat belt, even for short journeys.

Do not invert the seat belt buckles as they will not fulfil their role fully.

If the seats have armrests*, the lap part of the seat belt must always pass under the armrest.

The seat belts are fitted with an inertia reel permitting automatic adjustment of the length of the strap to your size. The seat belt is stored automatically when not in use.

Before and after use, ensure that the seat belt is reeled in correctly.

The lower part of the strap must be positioned as low as possible on the pelvis.

The upper part must be positioned in the hollow of the shoulder.

The inertia reels are fitted with an automatic locking device which comes into operation in the event of a collision, on emergency braking or if the vehicle rolls over. You can release the device by pulling rapidly on the strap and releasing it.

In order to be effective, a seat belt:

- must be tightened as close to the body as possible,
- must restrain one adult only,
- must not bear any trace of cuts or fraying,
- must be pulled in front of you with a smooth movement, checking that it does not twist,
- must not be transformed or modified to avoid altering its performance.

In accordance with current safety regulations, all repairs and checks must be carried out by a PEUGEOT dealer who guarantees that the work is carried out correctly.

Have your seat belts checked regularly by a PEUGEOT dealer and particularly if the straps show signs of damage.

Clean the seat belt straps with soapy water or a textile cleaning product, sold by PEUGEOT dealers.

After folding or moving a seat or rear bench seat, ensure that the seat belt is positioned and rolled up correctly.

Recommendations for children:

- use a suitable child seat if the passenger is less than 12 years old or shorter than one metre fifty,
- do not use the strap-guide* when a child seat is installed,
- never use the same seat belt to secure more than one person,
- never allow a child to travel on your lap.

Depending on the nature and seriousness of the impacts, the pre-tensioning device may be triggered before and independently of the air bags. Triggering of the pre-tensioners is accompanied by a slight emission of harmless smoke and a noise, due to the activation of the pyrotechnic cartridge incorporated in the system.

In all cases, the airbag warning lamp comes on.

Following an impact, have the seat belts system checked, and if necessary replaced, by a PEUGEOT dealer.

* According to model.

AIR BAGS

System designed to maximise the safety of the occupants (with the exception of the rear centre passenger) in the event of violent collisions. It supplements the action of the force-limiting seat belts.

If a collision occurs, the electronic detectors record and analyse the front and side impacts sustained in the impact detection zones:


- in the case of a serious impact, the air bags are triggered instantly and protect the occupants of the vehicle (with the exception of the rear centre passenger); immediately after the impact, the air bags deflate rapidly so that they do not hinder visibility or the exit of the occupants,
- in the case of a minor or rear impact or in certain roll-over conditions, the air bags will not be triggered; the seat belt alone is sufficient to provide optimum protection in these situations.



The air bags do not operate when the ignition is switched off.

This equipment will only operate once. If a second impact occurs (during the same or a subsequent accident), the air bag will not operate.

Impact detection zones

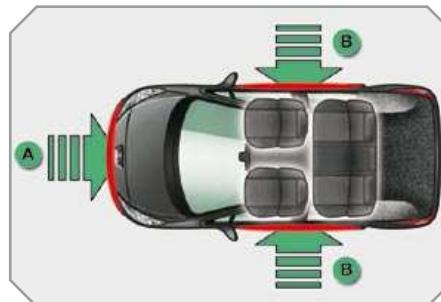

A. Front impact zone.
B. Side impact zone.



Triggering of the air bag(s) is accompanied by a slight emission of harmless smoke and a noise, due to the activation of the pyrotechnic cartridge incorporated in the system.


This smoke is not harmful, but sensitive individuals may experience slight irritation.

The noise of the detonation may result in a slight loss of hearing for a short time.

Front airbags

System which protects the head and chest of the driver and front passenger in the event of a front impact.

The driver's airbag is incorporated in the centre of the steering wheel; the front passenger's airbag is incorporated in the dashboard above the glove box.

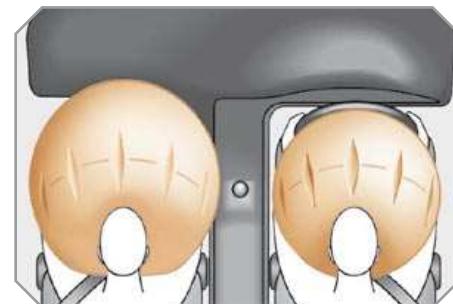

Activation


The airbags are triggered simultaneously, unless the passenger's front airbag is deactivated, in the event of a serious front impact applied to all or part of the front impact zone **A**, in the longitudinal centreline of the vehicle on a horizontal plane and directed from the front to the rear of the vehicle.

The front airbag inflates between the front occupant of the vehicle and the dashboard to cushion their forward movement.

Deactivation

Only the front passenger's airbag can be deactivated:

- ☛ **with the ignition off**, insert the key in the passenger airbag deactivation switch **1**,
- ☛ turn it to the "**OFF**" position,
- ☛ then, remove the key keeping the switch in the new position.

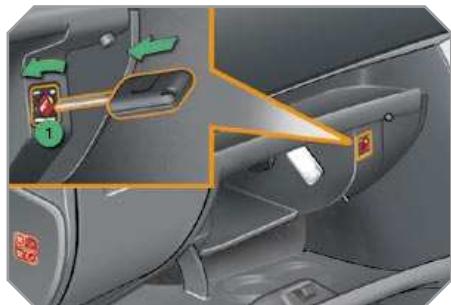

According to version, this warning lamp comes on either on the instrument panel or on the central panel when the ignition is on and until the airbag is reactivated.



To assure the safety of your child, it is imperative that the passenger airbag is deactivated when you install a "rear facing" child seat on the front passenger seat.

Otherwise, the child would risk being seriously injured or killed if the airbag were triggered.

Reactivation

When you remove the child seat, turn switch **1** to the "**ON**" position to reactivate the airbag and so assure the safety of your front passenger in the event of an impact.

Operating fault



If this warning lamp comes on on the instrument panel, accompanied by an audible warning and a message on the multifunction screen, contact a PEUGEOT dealer to have the system checked. The airbags may no longer be triggered in the event of a serious impact.



If both airbag warning lamps come on continuously, do not install a "rear facing" child seat on the front passenger seat.

Have the system checked by a PEUGEOT dealer.

Side airbags*

System which protects the driver and front passenger in the event of a serious side impact in order to limit the risk of injury to the chest.

Each side airbag is incorporated in the front seat back frame, on the door side.




Operation

It is triggered unilaterally in the event of a serious side impact applied to all or part of the side impact zone **B**, perpendicular to the longitudinal centreline of the vehicle on a horizontal plane and directed from the outside towards the inside of the vehicle.

The side airbag inflates between the front occupant of the vehicle and the corresponding door trim pad.

Impact detection zones

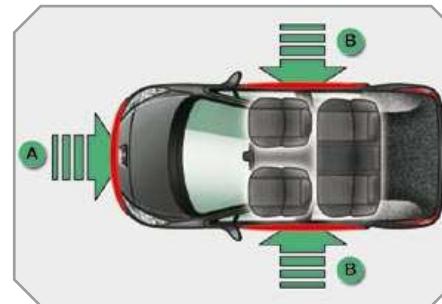

- A. Front impact zone.
- B. Side impact zone.

Curtain airbags*

System which protects the driver and passengers (with the exception of the rear centre passenger) in the event of a serious side impact in order to limit the risk of head injuries.

Each curtain airbag is incorporated in the pillars and the upper part of the passenger compartment.

Operation

It is triggered at the same time as the corresponding side airbag in the event of a serious side impact applied to all or part of the side impact zone **B**, perpendicular to the longitudinal centreline of the vehicle on a horizontal plane and directed from the outside towards the inside of the vehicle.

The curtain airbag inflates between the front or rear occupant of the vehicle and the windows.



In the event of a minor impact or bump on the side of the vehicle or if the vehicle rolls over, the airbag may not be triggered.

The airbag is not triggered in the event of a rear or front collision.

Operating fault

If this warning lamp comes on in the instrument panel, accompanied by an audible signal and a message on the multifunction screen, contact a PEUGEOT dealer to have the system checked. The airbags may no longer be triggered in the event of a serious impact.

! **For the airbags to be fully effective, observe the following safety rules:**

Sit in a normal upright position.

Wear a correctly adjusted seat belt.

Do not leave anything between the occupants and the airbags (a child, pet, object...). This could hamper the operation of the airbags or injure the occupants.

After an accident or if the vehicle has been stolen or broken into, have the airbag systems checked.

All work on the airbag system is strictly forbidden unless it is carried out by qualified personnel of the PEUGEOT dealer network.

Even if all of the precautions mentioned above are observed, a risk of injury or of slight burns to the head, chest or arms when an airbag is triggered cannot be ruled out. In fact, the bag inflates almost instantly (within a few milliseconds) then deflates within the same time discharging hot gas via the openings provided for this purpose.

Front airbags

Do not drive holding the steering wheel by its spokes or resting your hands on the centre part of the wheel.

Passengers must not place their feet on the dashboard.

Smoke as little as possible as deployment of the airbags can cause burns or the risk of injury from a cigarette or pipe.

Never remove or pierce the steering wheel or hit it violently.

Side airbags*

Only put approved covers on the seats. These will not hinder the inflation of the side airbags. Consult a PEUGEOT dealer.

Do not fix or attach anything to the seat backs. This could cause injury to the chest or arms when the side airbag inflates.

Do not sit with the upper part of the body any nearer to the door than necessary.

Curtain airbags*


Do not fix or attach anything to the roof. This could cause injury to the head when the curtain airbag inflates.

Do not remove the grab handles installed on the roof, they play a part in securing the curtain airbags.

* According to country.

PARKING BRAKE

Mechanical brake to hold the vehicle when stationary.

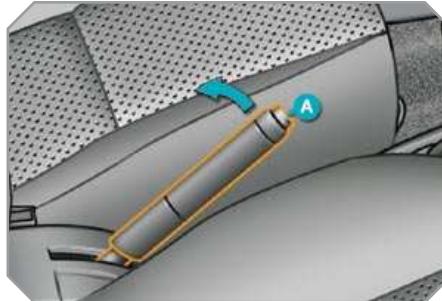

Applying

☞ Pull the parking brake to immobilise your vehicle.

Releasing

☞ Pull on the handle and press the button **A** to release the parking brake.

 When the vehicle is being driven, if this warning lamp and the **STOP** warning lamp come on, accompanied by an audible signal and a message on the multi-function screen, this indicates that the parking brake is still on or has not been properly released.



When parking on a slope, direct your wheels against the pavement, pull the parking brake on and engage a gear.

GEAR CHANGE INDICATOR*

System which reduces fuel consumption by advising the driver to change up a gear on vehicles fitted with a manual gearbox.

Operation

The system acts solely in the context of economical driving.

Depending on the driving situation and your vehicle's equipment, the system may advise you to skip one or more gears. You can follow this instruction without engaging the intermediate gears.

The gear engagement recommendations must not be considered compulsory. In fact, the configuration of the road, the amount of traffic and safety remain determining factors when choosing the best gear. Therefore, the driver remains responsible for deciding whether or not to follow the advice given by the system.

This function cannot be deactivated.

Example:

- You are in third gear.



- You press the accelerator pedal moderately.



- The system may suggest that you engage a higher gear, if appropriate.



The information appears in the form of an arrow on the instrument panel display.



In the case of driving which makes particular demands on the performance of the engine (firm pressure on the accelerator pedal, for example, when overtaking...), the system will not recommend a gear change.

The system never suggests:

- engaging of first gear,
- engaging of reverse gear,
- engaging of a lower gear.

* According to engine.

"2 TRONIC" GEARBOX (SALOON)

Five-speed electronically controlled gearbox which offers a choice between the comfort of automatic operation or the pleasure of manual gear changing.

Three driving modes are offered:

- the **automated** mode for automatic control of the gears by the gearbox,
- the **sequential** mode for manual changing of the gears by the driver,
- the **auto sequential** mode for overtaking, for example, remaining in the automated mode while using the functions of the sequential mode.

Gear lever



Steering wheel controls



R. Reverse

- ☞ With your foot on the brake, move the lever upwards to select this position.

N. Neutral.

- ☞ With your foot on the brake, select this position to start the engine.

A. Automated mode.

- ☞ Move the lever downwards to select this mode.

M. + / - Sequential mode with manual gear changing.

- ☞ Move the lever downwards, then to the left to select this mode, then:
 - push forwards to change up a gear,
 - or push rearwards to change down a gear.

+. Change up paddle.

- ☞ Press the back of the steering wheel "+" paddle to change up a gear.

- Change down paddle.

- ☞ Press the back of the steering wheel "-" paddle to change down a gear.



The steering wheel paddles do not permit the selection of neutral or the engaging and disengaging of reverse gear.

Instrument panel displays



Gear lever positions

N. Neutral

R. Reverse

1, 2, 3, 4, 5 Gears in sequential mode

AUTO. This comes on when the automated mode is selected. It switches off on changing to sequential mode.

* In the automated mode, if the gearbox detects poor grip, this warning lamp comes on.



* Place your **foot on the brake** when this warning lamp flashes (e.g.: starting the engine).



When reverse gear is engaged, an audible signal is triggered.

Moving off



- ☛ Select position **N**.
- ☛ Press the brake pedal.
- ☛ Start the engine.

N appears on the instrument panel.



N flashes on the instrument panel display if the gear lever is not in position **N** on starting.

- ☛ Select first gear (position **M** or **A**) or reverse (position **R**).
- ☛ Release the parking brake.
- ☛ Take your foot off the brake pedal, then accelerate.



AUTO and **1** or **R** appear on the instrument panel.



i When stopping on a slope, do not use the accelerator to immobilise the vehicle; apply the parking brake.

When moving off on a slope, accelerate gradually while releasing the parking brake.

Sequential mode

- ☛ After starting the vehicle, select position **M** to change to sequential mode.



AUTO disappears and the gears engaged appear in succession on the instrument panel.

The gear change requests are only carried out if the engine speed permits.

When driving at low speed, on approaching a stop sign or traffic lights for example, the gearbox changes down to first gear automatically.

Automated mode

- ☛ Following use of the sequential mode, select position **A** to return to the automated mode.



AUTO and the gear engaged appear on the instrument panel.

The gearbox then operates in auto-adaptive mode, without any action on the part of the driver. It continuously selects the most suitable gear in relation to the following parameters:

- driving style,
- road conditions,
- vehicle load.



If you press the accelerator pedal beyond the point of resistance, the gearbox selects the gear below to permit sharper acceleration.

"Auto sequential" mode

In the automated mode, you can resume control temporarily at any time using the steering wheel controls.

The use of these controls permits manual selection of the gears in situations which require a more rapid change-down than in the automated mode (arrival at a roundabout, leaving a car park with a steep gradient, overtaking...).

The gearbox engages the required gear if the engine speed permits. **AUTO** remains displayed on the instrument panel.

After a few minutes, the gearbox resumes automatic control of the gears.

"Snow" automated mode

In the automated mode, if the vehicle detects poor grip, the gearbox will change automatically to the "snow" automated mode.



AUTO and ***** appear on the instrument panel.

Stopping the vehicle

Before switching off the engine, you can change to position **N** to be in neutral.

In this case, it is imperative that you apply the parking brake to immobilise the vehicle.

Reinitialisation

Following disconnection of the battery, the gearbox must be reinitialised.

☞ Switch on the ignition.



AUTO, ***** and **-** appear on the instrument panel.

☞ Select position **N**.

☞ Press the brake pedal.

☞ Wait approximately 30 seconds until **N** or a gear appears on the instrument panel.

☞ Release the brake pedal.

The gearbox is operational again.

Operating fault



With the ignition on, if this warning lamp comes on and **AUTO** flashes, accompanied by an audible signal and a message on the multifunction screen, this indicates a gearbox malfunction.

Have it checked by a PEUGEOT dealer.



You must press the brake pedal while starting the engine.

Never select neutral **N** while the vehicle is moving.

Only engage reverse gear **R** when the vehicle is immobilised, with your foot on the brake pedal.

In all cases, it is imperative that you apply the parking brake to immobilise the vehicle.

4-SPEED AUTOMATIC GEARBOX

Four-speed automatic gearbox which offers a choice between the comfort of fully automatic operation, enhanced by sport and snow programmes, or manual gear changing.

Therefore, four driving modes are offered:

- **automatic** operation for electronic management of the gears by the gearbox,
- **sport** programme for a more dynamic style of driving,
- **snow** programme to improve driving when traction is poor,
- **manual** operation for sequential changing of the gears by the driver.

Gear selection gate



1. Gear lever.
2. Button "S" (sport).
3. Button "*" (snow).

Gear lever



- P.** Park.
 - Immobilisation of the vehicle, parking brake on or off.
 - Starting the engine.
- R.** Reverse.
 - Reversing manoeuvres, vehicle stationary, engine at idle.
- N.** Neutral.
 - Immobilisation of the vehicle, parking brake on.
 - Starting the engine.
- D.** Automatic operation.
- M. +/-** Manual operation with sequential changing of the four gears.
 - ☞ Push forwards to change up through the gears.
or
 - ☞ Pull backwards to change down through the gears.

Displays on the instrument panel



When you move the lever in the gate to select a position, the corresponding indicator is displayed on the instrument panel.

- P.** Park
- R.** Reverse
- N.** Neutral
- D.** Drive (Automatic driving)
- S.** **Sport** programme
- ***. **Snow** programme
- 1, 2, 3, 4.** Gear engaged during manual operation
- .** Invalid value during manual operation

Foot on brake



- ☞ Press the brake pedal when this indicator lamp is displayed on the instrument panel (e.g.: starting the engine).

Moving off

- Apply the parking brake.
- Select position **P** or **N**.
- Start the engine.

If this procedure is not followed, an audible signal is heard, accompanied by a message on the multifunction screen.

- With the engine running, press the brake pedal.
- Release the parking brake.
- Select position **R**, **D** or **M**.
- Gradually release the brake pedal.

The vehicle moves off immediately.



If position **N** is engaged inadvertently while driving, allow the engine to return to idle then engage position **D** to accelerate.



When the engine is running at idle, with the brakes released, if position **R**, **D** or **M** is selected, the vehicle moves even without the accelerator being pressed.

When the engine is running, never leave children in the vehicle without supervision.

When carrying out maintenance with the engine running, apply the parking brake and select position **P**.

Automatic operation

- Select position **D** for automatic changing of the four gears.

The gearbox then operates in auto-adaptive mode, without any intervention on the part of the driver. It continuously selects the most suitable gear according to the style of driving, the profile of the road and the load in the vehicle.

For maximum acceleration without touching the lever, press the accelerator pedal down fully (kick down). The gearbox changes down automatically or maintains the gear selected until the maximum engine speed is reached.

On braking, the gearbox changes down automatically to provide efficient engine braking.

If you release the accelerator sharply, the gearbox will not change to a higher gear for safety reasons.



Never select position **N** while the vehicle is moving.

Never select positions **P** or **R** unless the vehicle is completely stationary.

Sport and snow programmes

These two special programmes supplement the automatic operation in very specific conditions of use.

Sport programme "S"

- Press button "S", after starting the engine.

The gearbox automatically favours a dynamic style of driving.



S appears on the instrument panel.

Snow programme "※"

- Press button "※", after starting the engine.

The gearbox adapts to driving on slippery roads.

This programme improves starting and drive when traction is poor.



※ appears on the instrument panel.

Return to automatic operation

- At any time, press the button selected again to quit the programme engaged and return to auto-adaptive mode.

Manual operation

- ☞ Select position **M** for **sequential** changing of the four gears.
- ☞ Push the lever towards the + sign to change up a gear.
- ☞ Pull the lever towards the - sign to change down a gear.

It is only possible to change from one gear to another if the vehicle speed and engine speed permit; otherwise, the gearbox will operate temporarily in automatic mode.



D disappears and the gears engaged appear in succession on the instrument panel.

In the event of the engine labouring or over-revving, the gear selected flashes for a few seconds, then the actual gear engaged is displayed.

It is possible to change from position **D** (automatic) to position **M** (manual) at any time.

When the vehicle is stationary or moving very slowly, the gearbox selects gear **M1** automatically.

The sport and snow programmes do not operate in manual mode.

Invalid value during manual operation



This symbol is displayed if a gear is not engaged correctly (selector between two positions).

Stopping the vehicle

Before switching off the engine, you can engage position **P** or **N** to place the gearbox in neutral.

In both cases, apply the parking brake to immobilise the vehicle.



If the lever is not in position **P**, when the driver's door is opened or approximately 45 seconds after the ignition is switched off, a message appears in the multifunction screen.

- ☞ Return the lever to position **P**; the message disappears.

Operating fault



When the ignition is on, the lighting of this warning lamp, accompanied by an audible signal and a message on the multifunction screen, indicates a gearbox malfunction.

In this case, the gearbox switches to back-up mode and is locked in 3rd gear. You may feel a substantial knock when changing from **P** to **R** and from **N** to **R**. This will not cause any damage to the gearbox.

Do not exceed 60 mph (100 km/h), local speed restrictions permitting.

Contact a PEUGEOT dealer as soon as possible.



There is a risk of damage to the gearbox:

- if you press the accelerator and brake pedals at the same time,
- if you force the movement of the gear lever from the **P** position to another position when the battery is flat.

SPEED LIMITER

System which prevents the vehicle from exceeding the speed programmed by the driver.

When the programmed speed limit is reached, pressing the accelerator pedal no longer has any effect.

The speed limiter is **switched on** manually: it requires a programmed speed of at least 20 mph (30 km/h).

The speed limiter is **switched off** by manual operation of the control.

The programmed speed can be exceeded temporarily by pressing the accelerator firmly.

To return to the programmed speed, simply slow down to a speed below the programmed speed.

The programmed speed remains in the memory when the ignition is switched off.

Steering wheel controls



The controls of this system are grouped together on stalk **A**.

1. Speed limiter mode selection dial
2. Value decrease button
3. Value increase button
4. Speed limiter on/off button

Displays on the instrument panel




The programmed information is grouped together on the instrument panel display.

5. Speed limiter on/off indication
6. Speed limiter mode selection indication
7. Programmed speed value



The speed limiter cannot, in any circumstances, replace the need to respect speed limits, nor can it replace the need for vigilance and responsibility on the part of the driver.



Programming

- Turn dial **1** to the "LIMIT" position: the speed limiter mode is selected but is not switched on (OFF).

You do not have to switch the speed limiter on in order to set the speed.

- Set the speed value by pressing button **2** or **3** (e.g.: 70 mph (110 km/h)).

You can then change the programmed speed using buttons **2** and **3**:

- by + or - 1 mph (km/h) = short press,
- by + or - 5 mph (km/h) = long press,
- in steps of + or - 5 mph (km/h) = maintained press.

- Switch the speed limiter on by pressing button **4**.
- Switch the speed limiter off by pressing button **4**: the display confirms that it has been switched off (OFF).
- Switch the speed limiter back on by pressing button **4** again.

Exceeding the programmed speed


Pressing the accelerator pedal to exceed the programmed speed will not have any effect unless you press the pedal **firmly** past the **point of resistance**.

The speed limiter is deactivated temporarily and the programmed speed, which is still displayed, flashes.

Returning to the programmed speed, by means of intentional or unintentional deceleration of the vehicle, automatically cancels the flashing of the programmed speed.


Return to normal driving

- Turn dial **1** to the "0" position: the speed limiter mode is deselected. The display returns to the distance recorder.



Operating fault

In the event of a speed limiter malfunction, the speed is cleared resulting in flashing of the dashes. Contact a PEUGEOT dealer to have the system checked.



On a steep descent, the speed limiter will not be able to prevent the vehicle from exceeding the programmed speed.

To avoid any risk of jamming of the pedals:

- ensure that the mat is positioned correctly,
- do not fit one mat on top of another.

CRUISE CONTROL

System which automatically maintains the speed of the vehicle at the value programmed by the driver, without any action on the accelerator pedal.

The cruise control is **switched on** manually: it requires a minimum vehicle speed of 25 mph (40 km/h), as well as the engaging:

- of fourth gear on the manual gearbox,
- of second gear with the "2 Tronic" or automatic gearbox, in sequential mode,
- of position **A** on the "2 Tronic" gearbox or **D** on the automatic gearbox.

The cruise control is **switched off** manually or by pressing the brake or clutch pedal or on triggering of the ESP system for safety reasons.

It is possible to exceed the programmed speed temporarily by pressing the accelerator pedal.

To return to the programmed speed, simply release the accelerator pedal.

Switching off the ignition cancels any programmed speed value.

Steering wheel controls



The controls of this system are grouped together on stalk **A**.

1. Cruise control mode selection dial
2. Value decrease button
3. Value increase button
4. Cruise control off/resume button

Displays on the instrument panel



The programmed information is grouped together on the instrument panel display.

5. Cruise control off/resume indication
6. Cruise control mode selection indication
7. Programmed speed value



The cruise control cannot, in any circumstances, replace the need to respect speed limits, nor can it replace the need for vigilance and responsibility on the part of the driver.

You are advised to keep your feet near the pedals at all times.



Programming

- Turn dial 1 to the "CRUISE" position: the cruise control mode is selected but is not switched on (OFF).
- Set the programmed speed by accelerating to the required speed, then press button 2 or 3 (e.g.: 70 mph (110 km/h)).

You can then change the programmed speed using buttons 2 and 3:

- by + or - 1 mph (km/h) = short press,
- by + or - 5 mph (km/h) = long press,
- in steps of + or - 5 mph (km/h) = maintained press.
- Switch off the cruise control by pressing button 4: the display confirms that it has been switched off (OFF).
- Switch the cruise control back on by pressing button 4 again.


Exceeding the programmed speed

Intentional or unintentional exceeding of the programmed speed results in flashing of this speed on the display.

Return to the programmed speed, by means of intentional or unintentional deceleration of the vehicle, automatically cancels the flashing of the speed.

Return to normal driving

- Turn dial 1 to the "0" position: the cruise control mode is deselected. The display returns to the distance recorder.



Operating fault

In the event of a cruise control malfunction, the speed is cleared resulting in flashing of the dashes. Contact a PEUGEOT dealer to have the system checked.



When the cruise control is switched on, be careful if you maintain the pressure on one of the programmed speed changing buttons: this may result in a very rapid change in the speed of your vehicle.

Do not use the cruise control on slippery roads or in heavy traffic.

On a steep descent, the cruise control will not be able to prevent the vehicle from exceeding the programmed speed.

To avoid any risk of jamming of the pedals:

- ensure that the mat is positioned correctly,
- never fit one mat on top of another.

VISUAL AND AUDIBLE REAR PARKING ASSISTANCE

System consisting of four proximity sensors, installed in the rear bumper.



It detects any obstacle (person, vehicle, tree, barrier...) located behind the vehicle, however, it will not be able to detect obstacles located immediately below the bumper.



An object, such as a stake, a road-works cone or any other similar object may be detected at the start of the manoeuvre but may no longer be detected when the vehicle moves nearer to it.

The parking assistance is **switched on** by engaging reverse gear. This is accompanied by an audible signal.



The proximity information is indicated by:

- an audible signal which becomes more rapid as the vehicle approaches the obstacle,
- a diagram on the multifunction screen*, with blocks which move closer to the vehicle.

When the distance between the rear of the vehicle and the obstacle is less than approximately thirty centimetres, the audible signal becomes continuous and the "Danger" symbol appears, depending on the multifunction screen version.

The parking assistance is **switched off** by moving the gear lever to neutral.



The parking assistance system cannot, in any circumstances, replace the need for vigilance and responsibility on the part of the driver.

Operating fault

If an operating fault occurs, this warning lamp comes on, when reverse gear is engaged, accompanied by an audible signal (short beep) and a message on the multifunction screen.

Have it checked by a PEUGEOT dealer.



In bad weather or in winter, ensure that the sensors are not covered with mud, ice or snow. When reverse gear is engaged, an audible signal (long beep) indicates that the sensors may be dirty.

* According to version.

BONNET

Protects the components of the engine and provides access for checking levels.

Opening


- ☛ Open the front left door.
- ☛ Pull the interior control **A**, located at the bottom of the door frame.



- ☛ Push the exterior control **B** to the left and raise the bonnet.



- ☛ Unclip the strut **C** from its housing.
- ☛ Fix the strut in one of the two notches to hold the bonnet open.

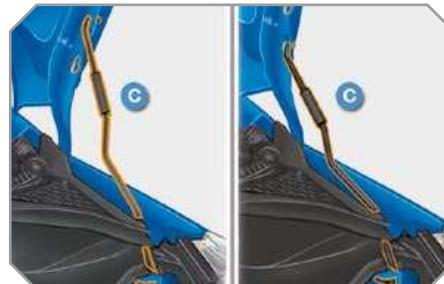

Closing

- ☛ Take the strut out of the support notch.
- ☛ Clip the strut in its housing.
- ☛ Lower the bonnet and release it at the end of its travel.
- ☛ Pull on the bonnet to check that it is secured correctly.



The location of the interior control prevents opening of the bonnet while the front left door is closed.

RUNNING OUT OF FUEL (DIESEL)

If your vehicle is fitted with an HDI engine, the fuel circuit must be reprimed if you run out of fuel (refer to the corresponding graphic).

This system consists of a repriming pump and a transparent pipe.

1.4 litre Turbo HDI engine

- ☛ Open the bonnet.
- ☛ Fill the fuel tank with at least five litres of diesel.
- ☛ Squeeze and release the repriming pump until fuel appears in the transparent pipe.
- ☛ Operate the starter until the engine starts.
- ☛ Close the bonnet.

1.6 litre Turbo HDI 16V engine

- ☛ Open the bonnet.
- ☛ Fill the fuel tank with at least five litres of diesel.
- ☛ Unclip the style cover to gain access to the repriming pump.
- ☛ Squeeze and release the repriming pump until fuel appears in the transparent pipe with the green connector.
- ☛ Operate the starter until the engine starts.
- ☛ Put the style cover back in position and clip it in place.
- ☛ Close the bonnet.



PETROL ENGINES

These allow you access to check the level of the various fluids and to replace certain components.

1. Coolant reservoir.
2. Passenger compartment filter.
3. Wash-wipe and headlamp wash reservoir.
4. Air filter.
5. Brake fluid reservoir.
6. Fuse box.
7. Battery.
8. Dipstick.
9. Engine oil filler cap.



DIESEL ENGINES

These allow you access to check the level of the various fluids, to replace certain components and to reprime the fuel.

1. Coolant reservoir.
2. Passenger compartment filter.
3. Wash-wipe and headlamp wash reservoir.
4. Repriming pump.
5. Brake fluid reservoir.
6. Fuse box.
7. Battery.
8. Dipstick.
9. Engine oil filler cap.
10. Air filter.

CHECKING LEVELS

Check all of these levels regularly and top them up if necessary, unless otherwise indicated.

If a level drops significantly, have the corresponding system checked by a PEUGEOT dealer.

Oil level



The reading will only be correct if the vehicle is on level ground and the engine has been off for more than 15 minutes.

The check is carried out either when the ignition is switched on using the oil level indicator on the instrument panel, or using the dipstick.

Between two oil changes, the consumption should not exceed 0.5 litre per 600 miles (1,000 km).

Changing the engine oil

Refer to the Warranty and Maintenance Record for details of the interval for this operation.

In order to maintain the reliability of the engine and emission control system, the use of additives in the engine oil is prohibited.

Oil specification

The oil must correspond to your engine and conform to the manufacturer's recommendations.

Brake fluid level



The brake fluid level should be close to the "MAX" mark. If it is not, check the brake pad wear.

Changing the brake fluid

Refer to the Warranty and Maintenance Record for details of the interval for this operation.

Fluid specification

The brake fluid must conform to the manufacturer's recommendations and fulfil the DOT4 standards.

Coolant level



The coolant level should be close to the "MAX" mark but should never exceed it.

When the engine is warm, the temperature of the coolant is regulated by the fan. This can operate with the ignition off.

On vehicles which are fitted with a particle emission filter, the fan may operate after the vehicle has been switched off, even if the engine is cold.

In addition, as the cooling system is pressurised, wait at least one hour after switching off the engine before carrying out any work.

To avoid any risk of scalding, unscrew the cap by two turns to allow the pressure to drop. When the pressure has dropped, remove the cap and top up the level.

Changing the coolant

The coolant does not have to be changed.

Fluid specification

The coolant must conform to the manufacturer's recommendations.

Wash-wipe and headlamp wash fluid*



The minimum level of this fluid is indicated by an audible signal and a message on the multifunction screen.

Top up the level when you stop the vehicle.

Fluid specification

To guarantee optimum cleaning and avoid freezing, water should not be used to top up or replace this fluid.

* According to country.

Diesel additive level (Diesel with particle emission filter)

The minimum level of this additive is indicated by lighting of the service warning lamp, accompanied by an audible signal and a message on the multifunction screen.

Topping up

It is imperative that this additive is topped up by a PEUGEOT dealer without delay.

Used products



Avoid any prolonged contact of used oil or fluids with the skin. Most of these fluids are harmful to health or indeed very corrosive.



Do not discard used oil or fluids into sewers or onto the ground. Take used oil to an authorised waste disposal site or a PEUGEOT dealer.

CHECKS

Unless otherwise indicated, check these components in accordance with the Warranty and Maintenance Record and in relation to your engine.

Otherwise, have them checked by a PEUGEOT dealer.

Battery



The battery does not require any maintenance.

However, check that the terminals are clean and correctly tightened, particularly in summer and winter.

When carrying out work on the battery, refer to the "Practical information" section for details of the precautions to be taken before disconnecting the battery and following its reconnection.

Air filter and passenger compartment filter



Refer to the Warranty and Maintenance Record for details of the replacement intervals for these components.

Depending on the environment (dusty atmosphere...) and the use of the vehicle (city driving...), **replace them twice as often if necessary** (refer to the "Engines" paragraph).

A clogged passenger compartment filter may have an adverse effect on the performance of the air conditioning system and generate undesirable odours.

Particle emission filter (Diesel)

It is imperative that the maintenance of the particle emission filter is carried out by a PEUGEOT dealer.



Following prolonged operation of the vehicle at very low speed or at idle, you may, exceptionally, notice the emission of water vapour at the exhaust on acceleration. This does not have any adverse effect on the performance of the vehicle or on the environment.

Oil filter



Replace the oil filter each time the engine oil is changed.

Refer to the Warranty and Maintenance Record for details of the replacement interval for this component.

Diesel additive level (Diesel with particle emission filter)

The minimum level of this additive is indicated by lighting of the service warning lamp, accompanied by an audible signal and a message on the multifunction screen.

Topping up

It is imperative that this additive is topped up by a PEUGEOT dealer without delay.

Used products



Avoid any prolonged contact of used oil or fluids with the skin. Most of these fluids are harmful to health or indeed very corrosive.



Do not discard used oil or fluids into sewers or onto the ground. Take used oil to an authorised waste disposal site or a PEUGEOT dealer.

CHECKS

Unless otherwise indicated, check these components in accordance with the Warranty and Maintenance Record and in relation to your engine.

Otherwise, have them checked by a PEUGEOT dealer.

Battery



The battery does not require any maintenance.

However, check that the terminals are clean and correctly tightened, particularly in summer and winter.

When carrying out work on the battery, refer to the "Practical information" section for details of the precautions to be taken before disconnecting the battery and following its reconnection.

Air filter and passenger compartment filter



Refer to the Warranty and Maintenance Record for details of the replacement intervals for these components.

Depending on the environment (dusty atmosphere...) and the use of the vehicle (city driving...), **replace them twice as often if necessary** (refer to the "Engines" paragraph).

A clogged passenger compartment filter may have an adverse effect on the performance of the air conditioning system and generate undesirable odours.

Particle emission filter (Diesel)

It is imperative that the maintenance of the particle emission filter is carried out by a PEUGEOT dealer.



Following prolonged operation of the vehicle at very low speed or at idle, you may, exceptionally, notice the emission of water vapour at the exhaust on acceleration. This does not have any adverse effect on the performance of the vehicle or on the environment.

Oil filter



Replace the oil filter each time the engine oil is changed.

Refer to the Warranty and Maintenance Record for details of the replacement interval for this component.

Manual gearbox



The gearbox does not require any maintenance (no oil change). Refer to the Warranty and Maintenance Record for details of the level checking intervals for this component.

"2 Tronic" gearbox



The gearbox does not require any maintenance (no oil change). Refer to the Warranty and Maintenance Record for details of the level checking intervals for this component.

Automatic gearbox



The gearbox does not require any maintenance (no oil change). Refer to the Warranty and Maintenance Record for details of the checking intervals for this component.

Brake pads



Brake wear depends on the style of driving, particularly in the case of vehicles used in town, over short distances. It may be necessary to have the condition of the brakes checked, even between vehicle services.

Unless there is a leak on the circuit, a drop in the brake fluid level indicates that the brake pads are worn.

Brake disc and drum wear



For any information relating to checking of the brake disc and/or drum wear, contact a PEUGEOT dealer.



Only use products recommended by PEUGEOT or products of equivalent quality and specifications.

In order to optimise the operation of units as important as the braking system, PEUGEOT selects and offers very specific products.

To avoid damaging the electrical units, the use of a high pressure washer in the engine compartment is strictly **prohibited**.

Parking brake



If the parking brake travel is too long or if you notice a loss of effectiveness of this system, the parking brake must be adjusted, even between two services.

This system must be checked by a PEUGEOT dealer.

TEMPORARY PUNCTURE REPAIR KIT

Complete system consisting of a compressor and an incorporated sealant cartridge which permits **temporary repair** of the tyre so that you can drive to the nearest garage.

Access to the kit



This repair kit is available from PEUGEOT dealers. It is designed to repair most punctures which could affect the tyre, located on the tyre tread or shoulder. Avoid removing any foreign bodies which have penetrated the tyre.

Using the kit

This procedure, comprising several steps, must be carried out in full.

- ☛ Switch off the ignition.
- ☛ Turn the selector **A** to the "SEALANT" position.
- ☛ Check that the switch **B** is in position "0".



- ☛ Connect the white pipe **C** to the valve of the tyre to be repaired.



- ☛ Connect the compressor's electric plug to the vehicle's 12 V socket.
- ☛ Affix the speed limitation sticker to the vehicle's steering wheel to remind you that a wheel is in temporary use.
- ☛ Start the vehicle and leave the engine running.




- Switch on the compressor by moving the switch **B** to position "1" until the tyre pressure reaches 2.0 bars.



If after around 5 to 7 minutes the pressure is not attained, this indicates that the tyre is not repairable; contact a PEUGEOT dealer for assistance.

- Remove the kit, taking care to avoid staining your vehicle with traces of fluid. Keep the kit to hand.
- Drive immediately for approximately three miles (five kilometres), at reduced speed (between 15 and 35 mph [20 and 60 km/h]), to plug the puncture.
- Stop to check the repair and the tyre pressure using the kit.

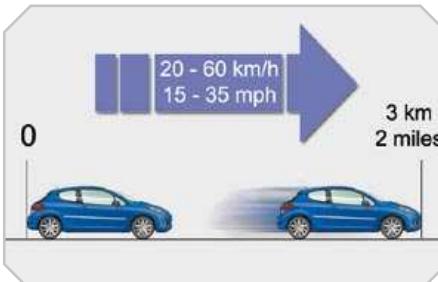

- Turn the selector **A** to the AIR position.
- Connect the black pipe **D** to the valve of the wheel.



Checking/Adjusting tyre pressures

You can also use this kit for routine checking and adjustment of the tyre pressures on your vehicle. For this, carry out just the following 6 points.

- ☞ Connect the compressor's electric plug to the vehicle's 12 V socket.
- ☞ Start the vehicle again and leave the engine running.



Take care, this product is harmful (e.g. ethylene-glycol, colophony, ethanediol...) if swallowed and causes irritation to the eyes. Keep it out of reach of children.

The expiry date of the fluid is indicated on the cartridge.

The sealant cartridge is designed for single use; even if only partly used, it must be replaced.

To remove the cartridge, unscrew it completely at its cap and pull off.

After use, do not discard the cartridge into the environment, take it to an authorised waste disposal site or a PEUGEOT dealer.

Do not forget to obtain a new sealant cartridge, available from PEUGEOT dealers.



- ☞ Drive at reduced speed (50 mph [80 km/h] max) limiting the distance travelled to approximately 120 miles (200 km).
- ☞ Visit a PEUGEOT dealer as soon as possible to have the tyre repaired or replaced by a technician.

CHANGING A WHEEL*

Procedure for changing a faulty wheel for the spare wheel using the tools provided with the vehicle.

Access to the tools



The tools are installed in the boot under the floor.

To gain access to them:

- ☛ open the boot,
- ☛ raise the floor,
- ☛ secure it by hooking the cord(s) on the hook(s) on the rear shelf support,
- ☛ remove the box containing the tools.

* According to country.

List of tools



1. Wheelbrace.

Permits removal of the wheel trim and removal of the wheel fixing bolts.

2. Jack with integral handle.

Permits raising of the vehicle.

3. "Bolt cover" tool.

Permits removal of the bolt protectors (covers) on alloy wheels.

4. Socket for the security bolts (located in the glove box).

Permits adaptation of the wheelbrace to the special "security" bolts.

Other accessories



5. Removable towing eye.

Refer to the paragraph "Towing the vehicle".

All of these tools are specific to your vehicle. Do not use them for other purposes.



Wheel with trim

When removing the wheel, detach the trim first using the wheelbrace 1 pulling at the valve passage hole.

When refitting the wheel, refit the trim starting by placing its notch facing the valve and press around its edge with the palm of your hand.

Access to the spare wheel (Saloon)



The spare wheel is installed in the boot under the floor.

To gain access to it, refer to the paragraph "Access to the tools" on the previous page.

Taking out the wheel

- ☛ Unscrew the yellow central bolt.
- ☛ Raise the spare wheel towards you from the rear.
- ☛ Take the wheel out of the boot.



Putting the wheel back in place

- ☛ Put the wheel back in its housing.
- ☛ Unscrew the yellow central bolt by a few turns then put it in place in the centre of the wheel.
- ☛ Tighten fully until the central bolt clicks to retain the wheel correctly.



i Fitting the steel spare wheel

If your vehicle is fitted with alloy wheels, it is normal to notice, when tightening the bolts on fitting, that the washers do not come into contact with the steel spare wheel. The wheel is secured by the conical contact of each bolt.

- ☛ Put the box back in place in the centre of the wheel.
- ☛ Put the boot floor back in place.

i Tyre under-inflation detection

The spare wheel is not fitted with a sensor. The punctured wheel must be repaired by a PEUGEOT dealer.



Access to the spare wheel (SW)



The spare wheel is installed in the boot under the floor.

To gain access to it, refer to the paragraph "Access to the tools".

Taking out the wheel

- ☛ Unscrew the yellow central bolt.
- ☛ Raise the spare wheel towards you from the rear.
- ☛ Take the wheel out of the boot.



Putting the wheel back in place

- ☛ Put the wheel back in its housing.
- ☛ Unscrew the yellow central bolt by a few turns then put it in place in the centre of the wheel.
- ☛ Tighten fully until the central bolt clicks to retain the wheel correctly.



i Fitting the steel spare wheel

If your vehicle is fitted with alloy wheels, it is normal to notice, when tightening the bolts on fitting, that the washers do not come into contact with the steel spare wheel. The wheel is secured by the conical contact of each bolt.

- ☛ Put the box back in place in the centre of the wheel.
- ☛ Put the boot floor back in place.



Tyre under-inflation detection

The spare wheel is not fitted with a sensor. The punctured wheel must be repaired by a PEUGEOT dealer.



Removing the wheel



Parking the vehicle

Immobilise the vehicle where it does not block traffic: the ground must be level, stable and non-slippery.

Apply the handbrake, switch off the ignition and engage first gear* to lock the wheels.

If necessary, place a chock under the wheel diagonally opposite the wheel to be changed.

It is imperative that you ensure that the occupants get out of the vehicle and wait where they are safe.

Never go underneath a vehicle raised using a jack; use an axle stand.

List of operations

- ☛ Remove the chromed bolt cover from each of the bolts using the tool **3**.
- ☛ If your vehicle is equipped with this, fit the security socket **4** on the wheelbrace **1** to slacken the security bolt.
- ☛ Slacken the other bolts using the wheelbrace **1** only.



- ☛ Place the jack **2** in contact with one of the two front **A** or rear **B** locations provided on the underframe, whichever is closest to the wheel to be changed.

- ☛ Extend the jack **2** until its base plate is in contact with the ground. Ensure that the centreline of the jack base plate is directly below the location **A** or **B** used.



- ☛ Raise the vehicle until there is sufficient space between the wheel and the ground to admit the spare (not punctured) wheel easily.

- ☛ Remove the bolts and store them in a clean place.
- ☛ Remove the wheel.



* position **R** for the "2 Tronic" gearbox; **P** for the automatic gearbox.

Fitting the wheel



List of operations

- ☛ Put the wheel in place on the hub.
- ☛ Screw in the bolts by hand to the stop.
- ☛ Pre-tighten the security bolt using the wheelbrace 1 fitted with the security socket 4 (if your vehicle is equipped with this).
- ☛ Pre-tighten the other bolts using the wheelbrace 1 only.
- ☛ Lower the vehicle fully.
- ☛ Fold the jack 2 and detach it.



After changing a wheel

To store the punctured wheel in the boot correctly, first remove the central cover.

Have the tightening of the bolts and the pressure of the spare wheel checked by a PEUGEOT dealer without delay.

Have the punctured wheel repaired and replace it on the vehicle as soon as possible.

CHANGING A BULB

Procedure for the replacement of a faulty bulb with a new bulb without the use of tools.



In certain climatic conditions (low temperature, humidity), **condensation on the internal surface of the glass of the headlamps and rear lamps is normal**; it disappears a few minutes after the lamps are switched on.

Front lamps

Model with conventional lamps



- Handle the bulbs with a dry cloth.

The headlamps are fitted with polycarbonate glass with a protective coating:

- do not clean them using a dry or abrasive cloth, or using a detergent or solvent product,**
- use a sponge and soapy water.

Model with elliptical module dipped beam headlamps and directional headlamps



- Direction indicators (PY 21 W amber).
- Sidelamps (W5W).
- Dipped beam headlamps (H7-55W).
- Main beam headlamps (H1-55W).
- Directional headlamps (H7-55W).
- Foglamps (H11-55W).

Changing the direction indicator bulbs



- Turn the bulb holder one quarter of a turn and remove it.
- Pull the bulb then change it.

To refit, carry out these operations in reverse order.




Amber coloured bulbs, such as the direction indicators, must be replaced with bulbs of identical specification and colour.

Changing the sidelamp bulbs


- ☛ Disconnect the main headlamp connector.
- ☛ Remove the plastic protective cover by pulling on the tab.
- ☛ Turn the bulb holder one quarter of a turn and remove it.
- ☛ Pull the bulb and change it.

To refit, carry out these operations in reverse order.

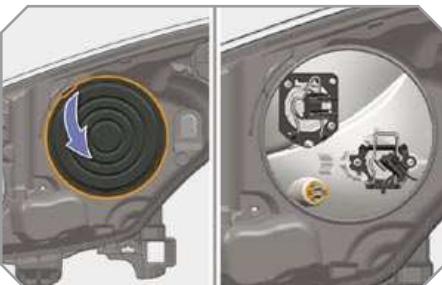

Changing the dipped, main beam or directional headlamps

- ☛ Disconnect the main headlamp connector.
- ☛ Remove the corresponding plastic protective cover by pulling on the tab.

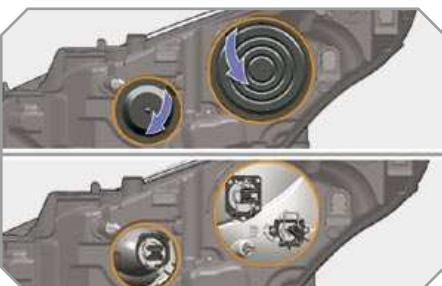

- ☛ Disconnect the connector of the corresponding lamp.
- ☛ Move aside the spring to release the bulb and remove the bulb.


To refit, carry out these operations in reverse order.



Changing the foglamp bulbs

For replacement of these bulbs, contact a PEUGEOT dealer.

Changing the integrated direction indicator side repeaters

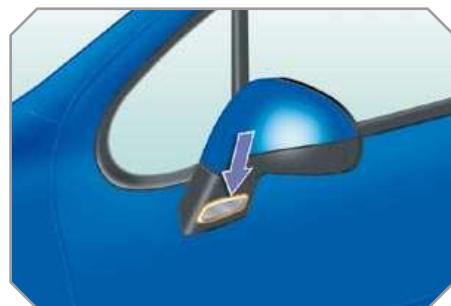


- ☛ Insert a screwdriver towards the centre of the repeater between the repeater and the base of the mirror.
- ☛ Tilt the screwdriver to extract the repeater and remove the repeater.
- ☛ Disconnect the repeater connector.

To refit, carry out these operations in reverse order.

To obtain a replacement repeater, contact a PEUGEOT dealer.

Rear lamps (Saloon)

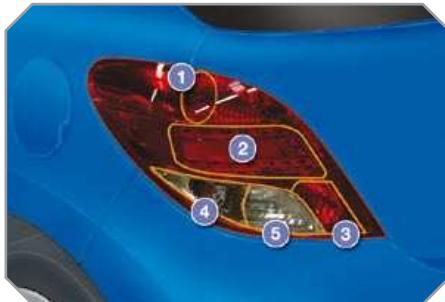

1. Brake lamps (P 21 W).
2. Sidelamps (diodes).
3. Foglamps (P 21 W).
4. Direction indicators (PY 21 W amber).
5. Reversing lamps (R 10 W).

Changing bulbs


These bulbs (with the exception of the diode lamps) are changed from outside the boot :

- ☞ remove the lamp fixing bolt,
- ☞ remove the lamp from the outside,
- ☞ disconnect the lamp connector,
- ☞ remove the lamp seal,



- ☞ press the four tabs and remove the bulb holder,
- ☞ turn the bulb one quarter of a turn and change it.

To refit, carry out these operations in reverse order.

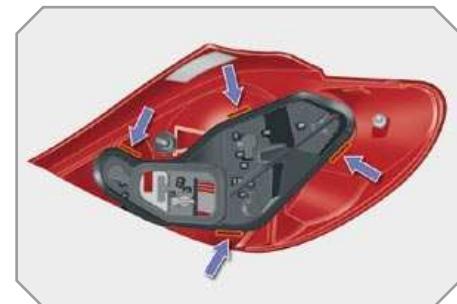


Amber coloured bulbs, such as the direction indicators, must be replaced with bulbs of identical specification and colour.

For the replacement of diode lamps, consult a PEUGEOT dealer.



If the vehicle is fitted with the JBL audio system, on the right-hand side, open the flap first to gain access to the fixing bolt.

Changing the third brake lamp bulbs (4 bulbs W 5 W)

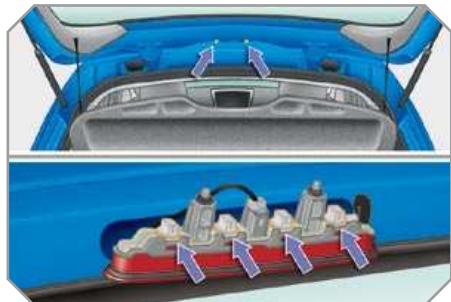

- ☞ Press on the fixing pins on each side of the lamp.
- ☞ Remove the lamp from the outside.
- ☞ Turn the bulb holder which corresponds to the faulty bulb one quarter of a turn and remove it.
- ☞ Pull the bulb and change it.

To refit, carry out these operations in reverse order.

Changing the number plate lamp bulbs (W 5 W)




- ☞ Insert a thin screwdriver in one of the exterior holes of the lens.
- ☞ Push it towards the outside to unclip it.
- ☞ Remove the lens.
- ☞ Pull the bulb and change it.



High pressure washing

When using this type of washing on stubborn dirt, do not persist on the headlamps, the lamps and their surrounds, to avoid damaging their protective coating and seals.

Rear lamps (SW)

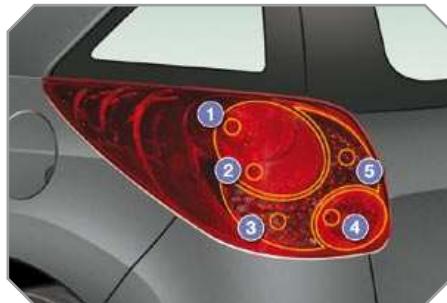

1. Brake lamps (P 21 W).
2. Sidelamps (R 5 W).
3. Direction indicators (PY 21 W amber).
4. Foglamps (P 21 W).
5. Reversing lamps (R 10 W).

Changing bulbs

These five bulbs are changed from outside the boot:

- ☞ remove the access flap,
- ☞ disconnect the lamp connector,
- ☞ remove the lamp fixing bolt,
- ☞ take out the lamp from the outside,




- ☞ press on the four tabs and remove the bulb holder,
- ☞ turn the bulb a quarter of a turn and change it.

To refit, carry out these operations in reverse order.

Take care to engage the lamp in its guides keeping it in the centrelne of the vehicle.

Tighten the fixing bolt sufficiently by hand to guarantee the sealing of the lamp.

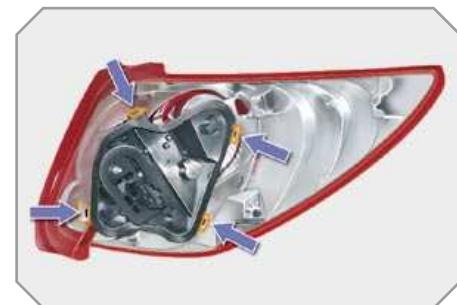

Amber coloured bulbs, such as the direction indicators, must be replaced with bulbs of identical specification and colour.

Changing the third brake lamp bulbs (4 bulbs W 5 W)



- ☞ Remove the two lamp fixing nuts.
- ☞ Remove the lamp from the outside.
- ☞ Press on the two tabs and remove the bulb holder
- ☞ Pull the bulb and change it.

To refit, carry out these operations in reverse order.

Tighten the fixing bolt sufficiently by hand to guarantee the sealing of the lamp.

Changing the number plate bulbs (W 5 W)



- ☞ Insert a thin screwdriver into one of the exterior holes of the lens.
- ☞ Push it towards the outside to unclip it
- ☞ Remove the lens.
- ☞ Pull the bulb and change it.



High pressure washing

When using this type of washing on stubborn dirt, do not persist on the headlamps, the lamps and their surrounds, to avoid damaging their protective coating and seals.

CHANGING A FUSE

Procedure for the replacement of a faulty fuse with a new fuse in order to rectify a failure of the corresponding function.



Access to the tools

The extraction pliers are positioned on the back of the dashboard fusebox cover.

To gain access to them:

- ☛ open the glove box lid,
- ☛ push the opening guide to the left to go beyond the first notch,
- ☛ open the glove box lid fully,
- ☛ unclip the fusebox cover pulling at the top,


- ☛ remove the cover completely,
- ☛ remove the pliers.

To close the glove box, take care to push the opening guide back to the left to go beyond the first notch.


Replacing a fuse

Before replacing a fuse, the cause of the failure must be identified and rectified.

- ☛ Identify the faulty fuse by examining the condition of its filament.



Correct



Incorrect

- ☛ Use the special pliers to extract the fuse from its housing.
- ☛ Always replace the faulty fuse with a fuse of the same rating.
- ☛ Check that the number engraved on the box and the rating engraved on the top correspond to the tables which follow.



Installation of electrical accessories

Your vehicle's electrical circuit is designed to operate with the standard or optional equipment.

Before installing other electrical equipment or accessories in your vehicle, contact a PEUGEOT dealer.



PEUGEOT does not accept any responsibility for the costs incurred in repairing your vehicle or for the malfunctions resulting from the installation of additional accessories which are not supplied or recommended by PEUGEOT and which are not installed in accordance with its instructions, particularly when the combined consumption of all of the additional equipment connected exceeds 10 milliamperes.


Dashboard fuses

The fusebox is located in the lower part of the dashboard (left-hand side).




Access to the fuses

☞ refer to the "Access to the tools" paragraph.

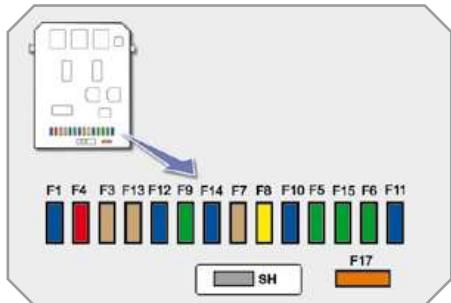

Fuse tables

Fuse N°	Rating	Functions
G39	20 A	Hi-Fi amplifier.
G40	-	Not used.
Fuse	Rating	Functions
F1	15 A	Rear wiper
F2	-	Not used.
F3	5 A	Air bags and pre-tensioners control unit.
F4	10 A	Clutch pedal switch, diagnostic socket, electro-chromatic interior mirror, air conditioning, steering wheel angle sensor, particle emission filter pump (Diesel).
F5	30 A	Electric windows, rear one-touch electric windows, panoramic roof blind (SW).
F6	30 A	Front one-touch electric windows, folding mirrors supply.
F7	5 A	Front and rear courtesy lamps, map reading lamps, sun visor lighting, glove box lighting, clock.

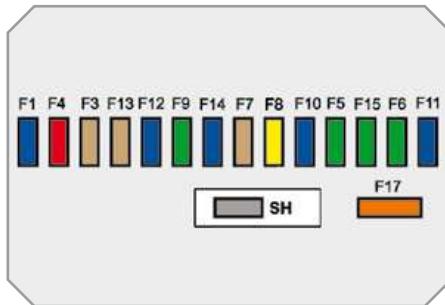

Fuse N°	Rating	Functions
F8	20 A	Audio equipment, audio/telephone, multifunction screen, clock, steering wheel controls, tyre under-inflation detection, trailer fuse box.
F9	30 A	Front 12 V socket, rear 12 V socket (SW).
F10	15 A	Alarm siren, alarm control unit, directional headlamps.
F11	15 A	Diagnostic socket, low current ignition switch, automatic gearbox control unit.
F12	15 A	Rain/brightness sensor, amplifier, trailer fuse box, driving school module.
F13	5 A	Engine fusebox, ABS relay, dual-function brake switch, "2 Tronic" gearbox gear lever.
F14	15 A	Instrument panel, seat belt warning lamps bar, headlamp adjustment, air conditioning, hands-free kit, rear parking assistance control unit, airbags.
F15	30 A	Locking and deadlocking.
F17	40 A	Rear screen and exterior mirrors demist/defrost.
SH	-	PARC shunt.


Engine compartment fuses

The fuse box is placed in the engine compartment, near the battery (left-hand side).




Access to the fuses

- ☞ Unclip the cover.
- ☞ Replace the fuse (refer to the corresponding paragraph).
- ☞ When you have finished, close the cover carefully to ensure the sealing of the fuse box.

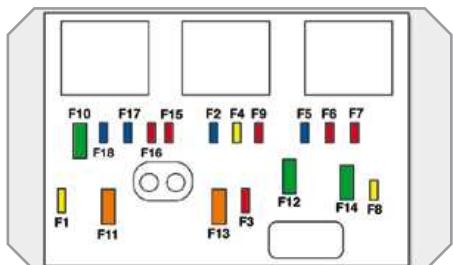

Fuse table

Fuse N°	Rating	Functions
F1	20 A	Engine control unit and fan assembly control relay supply, timing and canister electrovalves (1.6 I 16V THP), air flow sensor (Diesel), injection pump (Diesel), water in diesel sensor (Diesel), EGR electrovalves, air heating (Diesel).
F2	15 A	Horn
F3	10 A	Front and rear wash-wipe.
F4	20 A	Headlamp wash.
F5	15 A	Fuel pump (petrol), Turbo electrovalves (1.6 I 16V THP).
F6	10 A	Vehicle speed sensor, automatic gearbox.
F7	10 A	Electric power steering, directional headlamps, directional headlamps control relay, switching and protection unit (Diesel).
F8	25 A	Starter control.
F9	10 A	ABS/ESP control unit, brake pedal switch.
F10	30 A	Engine control unit actuators (petrol: ignition coils, electrovalves, oxygen sensors, injectors, heaters, controlled thermostat) (Diesel: solenoid valves, heaters).
F11	40 A	Air conditioning blower.
F12	30 A	Windscreen wipers Low/High speed.

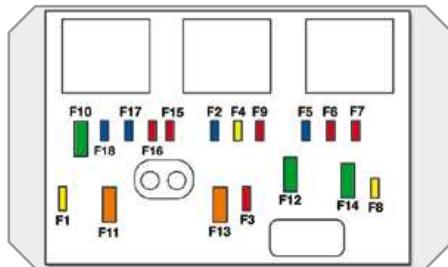

Fuse N°	Rating	Functions
F13	40 A	Built-in systems interface supply (ignition positive).
F14	30 A	Diesel heater (Diesel).
F15	10 A	Left main beam headlamp.
F16	10 A	Right main beam headlamp.
F17	15 A	Left dipped beam headlamp.
F18	15 A	Right dipped beam headlamp.

Maxi-fuse table

	Fuse N°	Rating	Functions
Box 1	MF1*	70 A	Fan assembly.
	MF2*	20 A/30 A	ABS/ESP pump.
	MF3*	20 A/30 A	ABS/ESP electrovalves.
	MF4*	60 A	Built-in systems interface supply.
	MF5*	60 A	Built-in systems interface supply.
	MF6*	30 A	Additional fan assembly (1.6 I 16V THP).
	MF7*	80 A	Passenger compartment fusebox.
Box 2	MF8*	30 A	"2 Tronic" gearbox ECU.
	MF9*	80 A	Heating unit (Diesel).
	MF10*	80 A	Electric power steering.
	MF11*	40 A	Valvetronic electric motor (1.6 I 16V THP).

* The maxi-fuses provide additional protection for the electrical systems. All work on the maxi-fuses must be carried out by a PEUGEOT dealer.

BATTERY

Procedure for charging your battery when it is flat or for starting the engine using another battery.

Access to the battery




The battery is located under the bonnet on the left.

To gain access to it:


- ☛ open the bonnet using the interior lever, then the exterior lever,
- ☛ secure the bonnet strut,
- ☛ remove the plastic cover to gain access to the two terminals.

Starting using another battery

- ☛ Connect the red cable to the positive terminal (+) of the flat battery **A**, then to the positive terminal (+) of the slave battery **B**.

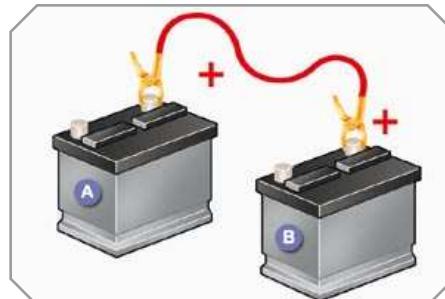

- ☛ Connect one end of the green or black cable to the negative terminal (-) of the slave battery **B**.
- ☛ Connect the other end of the green or black cable to an earth point **C** on the broken down vehicle, as far as possible from the battery (for example, right-hand engine mounting).

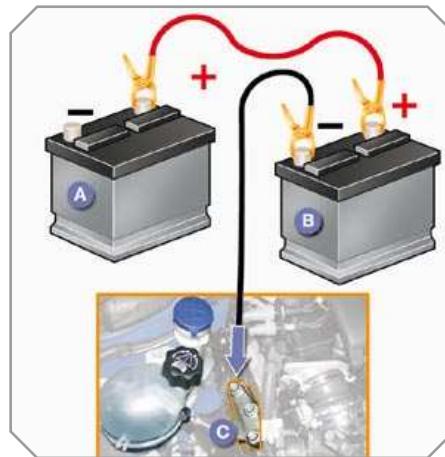

- ☛ Operate the starter, let the engine run.
- ☛ Wait until the engine returns to idle and disconnect the cables.

Charging the battery using a battery charger

- Disconnect the battery from the vehicle.
- Follow the instructions for use provided by the manufacturer of the charger.
- Reconnect starting with the negative terminal (-).
- Check that the terminals and connectors are clean. If they are covered with sulphate (whitish or greenish deposit), remove them and clean them.



The batteries contain harmful substances such as sulphuric acid and lead. They must be disposed of in accordance with regulations and must not, in any circumstances, be discarded with household waste. Take used remote control batteries and vehicle batteries to a special collection point.



It is advisable to disconnect the battery if the vehicle is to be left unused for more than one month.



Do not disconnect the terminals while the engine is running.
Do not charge the batteries without disconnecting the terminals first.
Do not push the vehicle to start the engine if it is fitted with a "2 Tronic" gearbox.

Before disconnecting the battery

Wait 2 minutes after switching off the ignition before disconnecting the battery.

Close the windows and the doors before disconnecting the battery.

Following reconnection of the battery

Following reconnection of the battery, switch on the ignition and wait 1 minute before starting to permit initialisation of the electronic systems. However, if slight difficulties are encountered following this operation, contact a PEUGEOT dealer.

Referring to the corresponding section, you must yourself reinitialise:

- the remote control key,
- the one-touch electric windows,
- the GPS satellite navigation system.

LOAD REDUCTION MODE

System which manages the use of certain functions in relation to the level of charge remaining in the battery.

When the vehicle is being driven, the load reduction function temporarily deactivates certain functions, such as the air conditioning, the rear screen de-icing...

The deactivated functions are reactivated automatically as soon as conditions permit.



At the risk of discharging the battery, the deactivated functions can be reactivated manually.

Charging the battery using a battery charger

- Disconnect the battery from the vehicle.
- Follow the instructions for use provided by the manufacturer of the charger.
- Reconnect starting with the negative terminal (-).
- Check that the terminals and connectors are clean. If they are covered with sulphate (whitish or greenish deposit), remove them and clean them.



The batteries contain harmful substances such as sulphuric acid and lead. They must be disposed of in accordance with regulations and must not, in any circumstances, be discarded with household waste. Take used remote control batteries and vehicle batteries to a special collection point.



It is advisable to disconnect the battery if the vehicle is to be left unused for more than one month.



Do not disconnect the terminals while the engine is running.
Do not charge the batteries without disconnecting the terminals first.
Do not push the vehicle to start the engine if it is fitted with a "2 Tronic" gearbox.

Before disconnecting the battery

Wait 2 minutes after switching off the ignition before disconnecting the battery.

Close the windows and the doors before disconnecting the battery.

Following reconnection of the battery

Following reconnection of the battery, switch on the ignition and wait 1 minute before starting to permit initialisation of the electronic systems. However, if slight difficulties are encountered following this operation, contact a PEUGEOT dealer.

Referring to the corresponding section, you must yourself reinitialise:

- the remote control key,
- the one-touch electric windows,
- the GPS satellite navigation system.

LOAD REDUCTION MODE

System which manages the use of certain functions in relation to the level of charge remaining in the battery.

When the vehicle is being driven, the load reduction function temporarily deactivates certain functions, such as the air conditioning, the rear screen de-icing...

The deactivated functions are reactivated automatically as soon as conditions permit.



At the risk of discharging the battery, the deactivated functions can be reactivated manually.

ENERGY ECONOMY MODE

System which manages the duration of use of certain functions to conserve a sufficient level of charge in the battery.

After the engine has stopped, you can still use functions such as the audio equipment, windscreen wipers, dipped headlamps, courtesy lights, etc. for a maximum combined duration of thirty minutes.

Switching to economy mode

Once the thirty minutes are over, a message appears on the multi-function display indicating that the vehicle has switched to economy mode and the active functions are put on standby.



If the telephone is being used at this time:

- it will be maintained for 5 minutes with your PC Sound hands-free kit,
- it will still be possible to finish the call with the PC Com.

Exiting economy mode

These functions are reactivated automatically next time the vehicle is driven.

- ☛ In order to resume the use of these functions immediately, start the engine and let it run for a few minutes.

The time available to you will then be double the duration for which the engine is left running. However, this period will always be between five and thirty minutes.



A flat battery prevents the engine from starting (refer to the corresponding paragraph).

CHANGING A WIPER BLADE

Procedure for replacing a worn wiper blade with a new one without the use of tools.

Removing a front or rear wiper blade

- ☛ Raise the corresponding wiper arm.
- ☛ Unclip the wiper blade and remove it.

Fitting a front or rear wiper blade

- ☛ At the front, check the size of the wiper blade as the shorter blade is fitted on the right-hand side of the vehicle.
- ☛ Put the corresponding new wiper blade in place and clip it.
- ☛ Fold down the wiper arm carefully.

TOWING THE VEHICLE

Procedure for having your vehicle towed or for towing another vehicle using a removable towing eye.

Access to the tools



The towing eye is stowed in the boot under the floor.

To gain access to it:

- ☛ open the boot,
- ☛ raise the floor,
- ☛ secure it by hooking its cord on the hook on the shelf support,
- ☛ remove the towing eye from the holder.

Towing your vehicle



- ☛ On the front bumper, unclip the cover by pressing at the bottom.
- ☛ Screw the towing eye in fully.
- ☛ Install the tow bar.
- ☛ Switch on the hazard warning lamps on the towed vehicle.

Towing another vehicle



- ☛ On the rear bumper, unclip the cover by pressing at the bottom.
- ☛ Screw the towing eye in fully.
- ☛ Install the tow bar.
- ☛ Switch on the hazard warning lamps on the towed vehicle.



- ☛ Place the gear lever in neutral (position **N** on the "2 Tronic" or automatic gearbox).

Failure to comply with this special requirement may result in damage to certain braking components and the absence of braking assistance the next time the engine is started.



When towing with all four wheels on the ground, always use a tow bar.

When towing with only two wheels on the ground, always use professional lifting equipment.

When towing with the engine off, there is no longer any braking or steering assistance.

TOWING A TRAILER, A CARAVAN, ETC.

Towbar suitable for the attachment of a trailer or caravan with additional lighting and signalling.



Your vehicle is primarily designed for transporting people and luggage, but it may also be used for towing a trailer.



We recommend the use of genuine PEUGEOT towbars and their harnesses that have been tested and approved from the design stage of your vehicle, and that the fitting of the towbar is entrusted to a PEUGEOT dealer.

If the trailer is not fitted by a PEUGEOT dealer, it is imperative that it is fitted using the electrical pre-equipment installed at the rear of the vehicle, in accordance with the manufacturer's instructions.

Driving with a trailer subjects the towing vehicle to more significant stress and its driver must be particularly careful.

Driving advice

Distribution of loads

☞ Distribute the load in the trailer so that the heaviest items are as close as possible to the axle and the nose weight approaches the maximum permitted without exceeding it.

Air density decreases with altitude, thus reducing engine performance. Above 1 000 metres, the maximum towing load must be reduced by 10 % and so on for every 1 000 metres of altitude.

Refer to the "Technical Data" section for details of the weights and towing loads which apply to your vehicle.

The maximum towing load on a long slope depends on the gradient and the ambient temperature.

In all cases, pay attention to the coolant temperature.



☞ If the warning lamp and the **STOP** warning lamp come on, stop the vehicle and switch off the engine as soon as possible.

Braking

Towing a trailer increases the braking distance.

Tyres

☞ Check the tyre pressures of the towing vehicle and of the trailer, observing the recommended pressures.

Lighting

☞ Check the electrical signalling on the trailer.



The rear parking assistance will be deactivated automatically if a genuine PEUGEOT towbar is used.

Side wind

☞ Take into account the increased sensitivity to side wind.

Cooling

Towing a trailer on a slope increases the temperature of the coolant.

As the fan is electrically controlled, its cooling capacity is not dependent on the engine speed.

☞ To lower the engine speed, reduce your speed.

FITTING ROOF BARS (SALOON)

When fitting transverse roof bars, use the four quick-fit fixings provided for this purpose:

- lift the concealing flaps,
- adjust the roof bar quick-fit fixings.



Maximum authorised weight on the roof rack, for a loading height not exceeding 40 cm (with the exception of bicycle carriers): 65 kg.

If the height exceeds 40 cm, adapt the speed of the vehicle to the profile of the road to avoid damaging the roof bars and the fixings on the roof.

Be sure to refer to national legislation in order to comply with the regulations for transporting objects which are longer than the vehicle.



FITTING ROOF BARS (SW)

Consult a PEUGEOT dealer for the installation of longitudinal roof bars.

When fitting transverse roof bars, ensure that they are positioned correctly as shown by marks on the longitudinal roof bars.

Use accessories recommended by PEUGEOT and follow the accessory manufacturer's fitting instructions.

In order to place a load on the roof, your vehicle must be fitted with longitudinal roof bars with transverse roof bars fitted on top of these.

The longitudinal roof bars cannot be removed.



Lashing the straps through the ends of the longitudinal roof bars is prohibited.



Maximum authorised weight on the roof bars, for a loading height not exceeding 40 cm (except bicycle carriers): 75 kg.

If the height exceeds 40 cm, adapt the speed of the vehicle to the condition of the road, to avoid damaging the roof bars and the fixings on the roof.

Please refer to national legislation to comply with the regulations regarding the transportation of objects which are longer than the vehicle.

ACCESSORIES

You can obtain a wide range of accessories and original parts from the PEUGEOT network.

These accessories and parts have been tested and approved for reliability and safety.

They are all adapted to your vehicle and benefit from PEUGEOT's recommendation and warranty.

The product range offered by PEUGEOT Accessories is structured around 5 categories: PROTECTION - TOURING - IN-CAR TECHNOLOGY - STYLING - UNIVERSAL.

"Protection":



anti-theft alarm, window engraving, wheel locks, breathalyser, first aid kit, warning triangle, high visibility jacket, stolen vehicle tracking system, temporary puncture repair kit, snow chains, anti-skid covers.

"Touring":



mats*, boot tray, luggage net, fixed coat hook on head restraint, lighter, aluminium or PVC door sills.

For leisure pursuits: roof bars, bicycle carrier on towbar, bicycle carrier on roof bars, ski carrier, roof box, booster seats and child seats, side blinds and rear blind, front centre armrest, under shelf storage.

Trailer towbar which must be fitted by the PEUGEOT network.

"In-car technology":



audio systems, satellite navigation systems, hands-free kit, CD changer, speakers, DVD player, connection kit for MP3 player or portable CD player, USB Box, front and rear parking assistance.

"Styling":



seat covers compatible with side airbags, aluminium gear lever knob, foglamps, door deflectors, spoiler, styling strips, alloy wheels, trims, chromed mirror shells, body kit.

- * To avoid any risk of jamming of the pedals:
- ensure that the mat is positioned and secured correctly,
- never fit one mat on top of another.

"Universal":



screenwash, interior and exterior maintenance and cleaning products.

You can obtain "Van" conversion kits to transform a private vehicle into a van.



Depending on the country in which the vehicle is sold, it is compulsory to have a high visibility jacket, warning triangle and spare bulbs available in the vehicle.



The fitting of electrical equipment or accessories which are not recommended by PEUGEOT may result in a failure of your vehicle's electronic system.

Please note this specific warning. You are advised to contact a representative of the Marque to be shown the range of recommended equipment and accessories.

MODELS:		ENGINES AND GEARBOXES		
PETROL ENGINES		1.4 litre 75 hp	1.4 litre 16V 90 hp*	1.4 litre VTi 16V 95 hp
Cubic capacity (cc)		1 360	1 360	1 397
Bore x stroke (mm)		75 x 77	75 x 77	75 x 77
Maximum power: EU standard (kW)		54	65	70
Maximum power engine speed (rpm)		5 400	5 250	6 000
Maximum torque: EU standard (Nm)		118	133	136
Maximum torque engine speed (rpm)		3 300	3 250	4 000
Fuel	Unleaded	Unleaded		Unleaded
Catalytic converter	Yes	Yes		Yes
GEARBOXES		Manual (5-speed)	Manual (5-speed)	"2 Tronic" (5-speed)
OIL CAPACITIES (in litres)				
Engine (with filter replacement)	3.25	3.25	3.25	4.25
Gearbox - Final drive	1.9	1.9	-	1.9

* Not available on SW and SW Outdoor.

MODELS:		ENGINES AND GEARBOXES			
PETROL ENGINES		1.6 litre 16V 110 hp*	1.6 litre VTi 16V 120 hp	1.6 litre THP 16V 150 hp*	1.6 litre THP 16V 175 hp
Cubic capacity (cc)		1 587	1 598	1 598	1 598
Bore x stroke (mm)		78.5 x 82	77 x 85.8	77 x 85.8	77 x 85.8
Maximum power: EU standard (kW)		80	88	110	128
Maximum power engine speed (rpm)		5 800	6 000	5 800	6 000
Maximum torque: EU standard (Nm)		147	160	240	240
Maximum torque engine speed (rpm)		4 000	4 250	1 400	1 600
Fuel		Unleaded	Unleaded	Unleaded	Unleaded**
Catalytic converter		Yes	Yes	Yes	Yes
GEARBOXES		Manual (5-speed)	Manual (5-speed)	Auto (4-speed)	Manual (5-speed)
OIL CAPACITIES (in litres)					
Engine (with filter replacement)		3.25	4.25	4.25	4.25
Gearbox - Final drive		1.9	1.9	-	1.9

* Not available on SW and SW Outdoor.

** PEUGEOT recommends the use of RON 98 unleaded petrol for optimum engine performance.

MODELS:		ENGINES AND GEARBOXES		
DIESEL ENGINES		1.4 litre Turbo HDI 70 hp*	1.6 litre Turbo HDI 16V 90 hp	1.6 litre Turbo HDI 16V 110 hp
Cubic capacity (cc)		1 398	1 560	1 560
Bore x stroke (mm)		73.7 x 82	75 x 88.3	75 x 88.3
Maximum power: EU standard (kW)		50	66	80
Maximum power engine speed (rpm)		4 000	4 000	4 000
Maximum torque: EU standard (Nm)		160	215	240
Maximum torque engine speed (rpm)		2 000	1 750	1 750
Fuel		Diesel	Diesel	Diesel
Catalytic converter		Yes	Yes	Yes
Particle emission filter		No	No	Yes
GEARBOXES		Manual (5-speed)	Manual (5-speed)	Manual (5-speed)
OIL CAPACITIES (in litres)				
Engine (with filter replacement)		3.75	3.25	3.25
Gearbox - Final drive		1.9	1.9	1.9

* Not available on SW and SW Outdoor.

SALOON FUEL CONSUMPTION		In accordance with EC directive 80/1268 (as amended)			
Petrol engines	Gearboxes	Urban mpg (litres/100 km)	Extra-urban mpg (litres/100 km)	Combined mpg (litres/100 km)	CO ₂ emissions (g/km)
1.4 litre 75 hp	Manual	32.5 (8.7)	56.5 (5.0)	44.1 (6.4)	147
1.4 litre 16V 90 hp	Manual	33.2 (8.5)	54.3 (5.2)	44.1 (6.4)	152
	"2 Tronic"	35.8 (7.9)	54.3 (5.2)	45.6 (6.2)	146
1.4 litre VTi 16V 95 hp	Manual	35.8 (7.9)	56.5 (5.0)	46.3 (6.1)	140

The fuel consumption figures shown here correspond to the values communicated at the time of printing. These fuel consumption values were established in accordance with EC Directive 80/1268 (as amended). They may vary depending on the style of driving, traffic conditions, weather conditions, the load in the vehicle, the maintenance of the vehicle and the use of the equipment.

SALOON FUEL CONSUMPTION		In accordance with EC directive 80/1268 (as amended)			
Petrol engines	Gearboxes	Urban mpg (litres/100 km)	Extra-urban mpg (litres/100 km)	Combined mpg (litres/100 km)	CO ₂ emissions (g/km)
1.6 litre 16V 110 hp	Manual	30.4 (9.3)	50.4 (5.6)	40.4 (7.0)	166
1.6 litre VTi 16V 120 hp	Manual	34.9 (8.1)	56.5 (5.0)	46.3 (6.1)	141
	Auto.	29.1 (9.7)	53.3 (5.3)	40.9 (6.9)	160
1.6 litre THP 16V 150 hp	Manual	30.4 (9.3)	50.4 (5.6)	40.4 (7.0)	164
1.6 litre THP 16V 175 hp	Manual	28.5 (9.9)	49.6 (5.7)	39.2 (7.2)	171

The fuel consumption figures shown here correspond to the values communicated at the time of printing. These fuel consumption values were established in accordance with EC Directive 80/1268 (as amended). They may vary depending on the style of driving, traffic conditions, weather conditions, the load in the vehicle, the maintenance of the vehicle and the use of the equipment.

SALOON FUEL CONSUMPTION		In accordance with EC directive 80/1268 (as amended)			
Diesel engines	Gearboxes	Urban mpg (litres/100 km)	Extra-urban mpg (litres/100 km)	Combined mpg (litres/100 km)	CO ₂ emissions (g/km)
1.4 litre Turbo HDI 70 hp	Manual	49.6 (5.7)	76.3 (3.7)	64.2 (4.4)	117
1.6 litre Turbo HDI 16V 90 hp	Manual	49.6 (5.7)	76.3 (3.7)	64.2 (4.4)	117
		48.7 (5.8)	74.3 (3.8)	62.8 (4.5)	120
1.6 litre Turbo HDI 16V 110 hp	Manual	45.6 (6.2)	68.9 (4.1)	57.6 (4.9)	129
		48.7 (5.8)	74.6 (3.8)	62.8 (4.5)	120

The fuel consumption figures shown here correspond to the values communicated at the time of printing. These fuel consumption values were established in accordance with EC Directive 80/1268 (as amended). They may vary depending on the style of driving, traffic conditions, weather conditions, the load in the vehicle, the maintenance of the vehicle and the use of the equipment.

SW FUEL CONSUMPTION		In accordance with EC directive 80/1268 (as amended)			
Petrol engines	Gearboxes	Urban mpg (litres/100 km)	Extra-urban mpg (litres/100 km)	Combined mpg (litres/100 km)	CO ₂ emissions (g/km)
1.4 litre 75 hp	Manual	31.7 (8.9)	54.3 (5.2)	42.8 (6.6)	152
1.4 litre VTi 16V 95 hp	Manual	34.4 (8.2)	54.3 (5.2)	44.8 (6.3)	150
1.6 litre VTi 16V 120 hp	Manual	33.6 (8.4)	56.5 (5.0)	45.6 (6.2)	143
	Auto.	28.0 (10.1)	50.4 (5.6)	39.2 (7.2)	165
1.6 litre THP 16V 175 hp	Manual	27.7 (10.2)	47.9 (5.9)	38.2 (7.4)	175

The fuel consumption figures shown here correspond to the values communicated at the time of printing. These fuel consumption values were established in accordance with EC Directive 80/1268 (as amended). They may vary depending on the style of driving, traffic conditions, weather conditions, the load in the vehicle, the maintenance of the vehicle and the use of the equipment.

SW FUEL CONSUMPTION		In accordance with EC directive 80/1268 (as amended)			
Diesel engines	Gearboxes	Urban mpg (litres/100 km)	Extra-urban mpg (litres/100 km)	Combined mpg (litres/100 km)	CO ₂ emissions (g/km)
1.6 litre Turbo HDI 16V 90 hp	Manual	49.6 (5.7)	72.4 (3.9)	62.8 (4.5)	119
		48.7 (5.8)	74.3 (3.8)	62.8 (4.5)	120
1.6 litre Turbo HDI 16V 110 hp	Manual	-	-	-	-
		48.7 (5.8)	74.3 (3.8)	62.8 (4.5)	120

The fuel consumption figures shown here correspond to the values communicated at the time of printing. These fuel consumption values were established in accordance with EC Directive 80/1268 (as amended). They may vary depending on the style of driving, traffic conditions, weather conditions, the load in the vehicle, the maintenance of the vehicle and the use of the equipment.

SW OUTDOOR FUEL CONSUMPTION		In accordance with EC directive 80/1268 (as amended)			
Petrol engines	Gearboxes	Urban mpg (litres/100 km)	Extra-urban mpg (litres/100 km)	Combined mpg (litres/100 km)	CO ₂ emissions (g/km)
1.4 litre VTi 16V 95 hp	Manual	34.4 (8.2)	54.3 (5.2)	44.8 (6.3)	150
1.6 litre VTi 16V 120 hp	Manual	33.2 (8.5)	54.3 (5.2)	44.1 (6.4)	148
	Auto.	28.0 (10.1)	49.6 (5.7)	39.2 (7.2)	168

The fuel consumption figures shown here correspond to the values communicated at the time of printing. These fuel consumption values were established in accordance with EC Directive 80/1268 (as amended). They may vary depending on the style of driving, traffic conditions, weather conditions, the load in the vehicle, the maintenance of the vehicle and the use of the equipment.

SW OUTDOOR FUEL CONSUMPTION		In accordance with EC Directive 80/1268 (as amended)			
Diesel engines	Gearboxes	Urban mpg (litres/100 km)	Extra-urban mpg (litres/100 km)	Combined mpg (litres/100 km)	CO ₂ emissions (g/km)
1.6 litre Turbo HDI 16V 90 hp	Manual	48.7 (5.8)	68.9 (4.1)	60.1 (4.7)	125
		-	-	-	130
1.6 litre Turbo HDI 16V 110 hp	Manual	-	-	-	-
		45.6 (6.2)	65.7 (4.3)	56.5 (5.0)	130

The fuel consumption figures shown here correspond to the values communicated at the time of printing. These fuel consumption values were established in accordance with EC Directive 80/1268 (as amended). They may vary depending on the style of driving, traffic conditions, weather conditions, the load in the vehicle, the maintenance of the vehicle and the use of the equipment.

SALOON WEIGHTS AND TOWED LOADS (in kg)

Petrol engines	1.4 litre 75 hp	1.4 litre 16V 90 hp	
Gearboxes	Manual	Manual	"2 Tronic"
- Kerb weight	1 300 - 1 288 - 1 232	1 224 - 1 214	1 241 - 1 231
- Payload	320 - 292 - 338	416 - 406	409 - 399
- Gross vehicle weight (GVW)	1 620 - 1 580 - 1 570	1 640 - 1 620	1 650 - 1 630
- Gross train weight (GTW)			
on a 12 % gradient	2 400	2 580	2 580
- Braked trailer (within GTW limit)			
on a 10 % or 12 % gradient	780 - 820 - 830	940 - 960	930 - 950
on an 8 % gradient	830 - 870	980 - 1 000	950 - 970
- Braked trailer*** (with load transfer within GTW limit)	950	1 150	1 150
- Unbraked trailer	600 - 600 - 590	600	600
- Recommended nose weight	38 - 38 - 46	46	46

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High ambient temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the ambient temperature is higher than 37 °C, limit the weight towed.

SALOON WEIGHTS AND TOWED LOADS (in kg)

Petrol engines	1.4 litre VTi 16V 95 hp	1.6 litre 16V 110 hp
Gearboxes	Manual	Manual
- Kerb weight	1 253 - 1 240	1 300 - 1 288
- Payload	387 - 400	380 - 382
- Gross vehicle weight (GVW)	1 640	1 680 - 1 670
- Gross train weight (GTW)		
on a 12 % gradient	2 580	2 630
- Braked trailer (within GTW limit)		
on a 10 % or 12 % gradient	940	950 - 960
on an 8 % gradient	-	1 000 - 1 010
- Braked trailer*** (with load transfer within GTW limit)	1 150	1 150
- Unbraked trailer	600	600
- Recommended nose weight	46	46

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High ambient temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the ambient temperature is higher than 37 °C, limit the weight towed.

SALOON WEIGHTS AND TOWED LOADS (in kg)

Petrol engines	1.6 litre VTi 16V 120 hp	1.6 litre THP 16V 150 hp	1.6 litre THP 16V 175 hp	
Gearboxes	Manual	Auto.	Manual	Manual
- Kerb weight	1 275	1 321 - 1 312	1 370 - 1 356	1 325
- Payload	375 - 365	374 - 366	340 - 344	275
- Gross vehicle weight (GVW)	1 650 - 1 640	1 695 - 1 678	1 710 - 1 700	1 600
- Gross train weight (GTW)				
on a 12 % gradient	2 600	2 645 - 2 638	2 640	2 500
- Braked trailer (within GTW limit)				
on a 10 % or 12 % gradient	950 - 960	950 - 960	930	900
on an 8 % gradient	1 000 - 1 010	1 000 - 1 010	1 000	1 000
- Braked trailer*** (with load transfer within GTW limit)	1 150	1 150	1 150	1 080
- Unbraked trailer	600	600	600	600
- Recommended nose weight	46	46	46	44

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High ambient temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the ambient temperature is higher than 37 °C, limit the weight towed.

SALOON WEIGHTS AND TOWED LOADS (in kg)

Diesel engines	1.4 litre Turbo HDI 70 hp	1.6 litre Turbo HDI 16V 90 hp	1.6 litre Turbo HDI 16V 110 hp
Gearboxes	Manual	Manual	Manual
- Kerb weight	1 261 - 1 251 - 1 269	1 280 - 1 272 - 1 290	1 328 - 1 319 - 1 358
- Payload	399 - 369 - 341	420 - 408 - 340	382 - 391 - 323
- Gross vehicle weight (GVW)	1 660 - 1 620 - 1 610	1 700 - 1 680 - 1 630	1 710 - 1 710 - 1 681
- Gross train weight (GTW)			
on a 12 % gradient	2 600	2 650	2 690
- Braked trailer (within GTW limit)			
on a 10 % or 12 % gradient	940 - 980 - 990	950 - 970 - 1 020	980
on an 8 % gradient	940 - 980	980 - 1 000	1 030
- Braked trailer** (with load transfer within GTW limit)	1 150	1 150	1 150
- Unbraked trailer	600	600	600
- Recommended nose weight	46	46	46

** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its roadholding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High ambient temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the ambient temperature is higher than 37 °C, limit the weight towed.

SW WEIGHTS AND TOWED LOADS (in kg)

Petrol engines	1.4 litre 75 hp	1.4 litre VTi 16V 95 hp
Gearboxes	Manual	Manual
- Kerb weight	1 271	1 290
- Payload	371	401
- Gross vehicle weight (GVW)	1 642	1 691
- Gross train weight (GTW)		
on a 12 % gradient	2 422	2 591
- Braked trailer (within GTW limit)		
on a 10 % or 12 % gradient	780	900
on an 8 % gradient	800	900
- Braked trailer*** (with load transfer within GTW limit)	1 045	1 150
- Unbraked trailer	600	600
- Recommended nose weight	42	46

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High ambient temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the ambient temperature is higher than 37 °C, limit the weight towed.

SW WEIGHTS AND TOWED LOADS (in kg)

Petrol engines	1.6 litre VTi 16V 120 hp	1.6 litre THP 16V 175 hp	
Gearboxes	Manual	Auto.	Manual
- Kerb weight	1 302	1 335	1 428
- Payload	403	402	340
- Gross vehicle weight (GVW)	1 705	1 737	1 768
- Gross train weight (GTW)			
on a 12 % gradient	2 605	2 687	2 718
- Braked trailer (within GTW limit)			
on a 10 % or 12 % gradient	900	950	950
on an 8 % gradient	950	950	950
- Braked trailer*** (with load transfer within GTW limit)	1 150	1 150	1 150
- Unbraked trailer	600	600	600
- Recommended nose weight	46	46	46

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High ambient temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the ambient temperature is higher than 37 °C, limit the weight towed.

SW WEIGHTS AND TOWED LOADS (in kg)		
Diesel engines	1.6 litre Turbo HDI 16V 90 hp	1.6 litre Turbo HDI 16V 110 hp
Gearboxes	Manual	Manual
- Kerb weight	1 339	1 350
- Payload	402	408
- Gross vehicle weight (GVW)	1 741	1 758
- Gross train weight (GTW)		
on a 12 % gradient	2 691	2 708
- Braked trailer (within GTW limit)		
on a 10 % or 12 % gradient	950	950
on an 8 % gradient	980	1 000
- Braked trailer** (with load transfer within GTW limit)	1 150	1 150
- Unbraked trailer	600	600
- Recommended nose weight	46	46

** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its roadholding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High ambient temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the ambient temperature is higher than 37 °C, limit the weight towed.

SW OUTDOOR WEIGHTS AND TOWED LOADS (in kg)			
Petrol engines	1.4 litre VTi 16V 95 hp	1.6 litre VTi 16V 120 hp	
Gearboxes	Manual	Manual	Auto.
- Kerb weight	1 330	1 378	1 415
- Payload	391	354	351
- Gross vehicle weight (GVW)	1 721	1 732	1 766
- Gross train weight (GTW)			
on a 12 % gradient	2 572	2 582	2 716
- Braked trailer (within GTW limit)			
on a 10 % or 12 % gradient	900	850	950
on an 8 % gradient	900	900	950
- Braked trailer*** (with load transfer within GTW limit)	1 150	1 150	1 150
- Unbraked trailer	600	600	600
- Recommended nose weight	46	45	46

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High ambient temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the ambient temperature is higher than 37 °C, limit the weight towed.

SW OUTDOOR WEIGHTS AND TOWED LOADS (in kg)		
Diesel engines	1.6 litre Turbo HDI 16V 90 hp	1.6 litre Turbo HDI 16V 110 hp
Gearboxes	Manual	Manual
- Kerb weight	1 387	1 431
- Payload	378	352
- Gross vehicle weight (GVW)	1 765	1 783
- Gross train weight (GTW)		
on a 12 % gradient	2 715	2 733
- Braked trailer (within GTW limit)		
on a 10 % or 12 % gradient	950	950
on an 8 % gradient	950	950
- Braked trailer** (with load transfer within GTW limit)	1 150	1 150
- Unbraked trailer	600	600
- Recommended nose weight	46	46


** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its roadholding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High ambient temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the ambient temperature is higher than 37 °C, limit the weight towed.

DIMENSIONS (IN MM)

207 saloon (3 and 5 door versions)/207 GTi

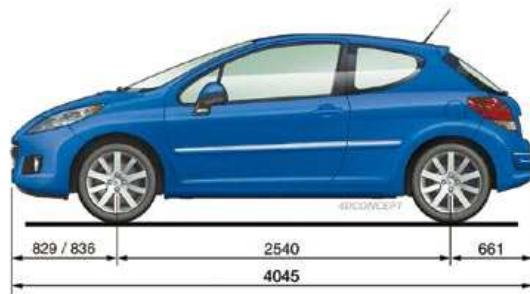

207 SW/207 SW Outdoor



* SW with roof bars.

** SW Outdoor with roof bars.

IDENTIFICATION MARKINGS

Various visible marking elements for the identification and tracking of your vehicle.



A. Vehicle identification (VIN) number under the bonnet.

This number is etched on the bodywork near the passenger compartment filter.

B. Visible VIN on the dashboard.

This number is indicated on a self-adhesive label which is visible through the windscreens.

C. VIN on the chassis.

This number is indicated on a self-destroying label affixed to the centre pillar, near the driver's door striker.

D. Manufacturer's label.

This label is affixed to the edge of the door on the driver's side.

It bears the following information:

- the wheel rim and tyre sizes,
- the brands of tyre recommended by the manufacturer,
- the associated inflation pressures,
- the paint colour code.



Wheels which are fitted with 205/45 R17 tyres cannot be fitted with snow chains. For further information, contact a PEUGEOT dealer.



The inflation pressures must be checked when the tyres are cold, at least once a month.



If the inflation pressures are too low, this increases fuel consumption.

EMERGENCY OR ASSISTANCE CALL



In an emergency, press this button for more than 2 seconds. Flashing of the green diode and a voice message confirm that the call has been made to the PEUGEOT Emergency team*.

Pressing this button again immediately cancels the request. The green diode switches off.

The green diode remains on (without flashing) when communication is established. It switches off at the end of communication.

This call is dealt with by the PEUGEOT Emergency team which receives locating information from the vehicle and can send a detailed alert to the appropriate emergency services. In countries in which the team is not operational, or when the locating service has been expressly refused, the call is dealt with directly by the emergency services (112) without locating.



If an impact is detected by the airbag ECU, and independently of any triggering of the airbags, an emergency call is made automatically.

* This service is subject to conditions and availability.
Consult a PEUGEOT dealer.



Press this button for more than 2 seconds to request assistance (vehicle breakdown).
A voice message confirms that the call has been made**.

Pressing this button again immediately cancels the request.
The cancellation is confirmed by a voice message.

** This service is subject to conditions and availability.
Consult a PEUGEOT dealer.



When the ignition is switched on, the green indicator lamp comes on for 3 seconds indicating that the system is operating correctly.



If the orange indicator lamp flashes: there is a system malfunction.
If the orange indicator lamp is lit continuously: the backup battery must be replaced.
In both cases, consult a PEUGEOT dealer.

EMERGENCY OR ASSISTANCE CALL using the PC Com



In order for an emergency call to be made, a valid SIM card must be inserted.



In an emergency, press the SOS button until a CONFIRMATION/ CANCELLATION screen is displayed. A call is made* to the PEUGEOT Emergency team which receives locating information from the vehicle and can send a detailed alert to the appropriate emergency services. In countries in which the team is not operational, or when the locating service has been expressly refused, the call is directed to the emergency services (112).



If necessary, the internal telephone is activated automatically to make an emergency call.

* This service is subject to conditions and availability. Consult a PEUGEOT dealer.



If the SIM card used was not supplied by PEUGEOT, we suggest that you check its compatibility by making a call to the PEUGEOT Emergency team.



Press this button to gain access to the PEUGEOT services*.



Select "Customer call" to request any information about the PEUGEOT marque.

CUSTOMER CALL




Select "PEUGEOT Assistance" to make a breakdown assistance call.

PEUGEOT ASSISTANCE



* These services and options are subject to conditions and availability.

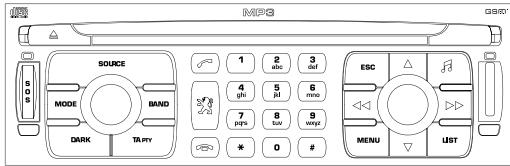

PC Com

MULTIMEDIA AUDIO EQUIPMENT/TELEPHONE
JUKEBOX FUNCTION (10 GB)/GPS (EUROPE)



The PC Com is coded in such a way that it will only operate in your vehicle, contact your PEUGEOT dealer for configuration of the system.



For safety reasons, it is imperative that the driver carries out operations which require prolonged attention while the vehicle is stationary. When the engine is off and in order to prevent discharging of the battery, the PC Com may switch off after a few minutes.

CONTENTS

- **01 First steps** p. 186
- **02 General menu** p. 187
- **03 GPS** p. 190
- **04 Traffic information** p. 199
- **05 Audio/Video** p. 201
- **06 Telephone** p. 209
- **07 Trip computer** p. 213
- **08 Steering wheel controls** p. 215
- **09 Configuration** p. 217
- **10 Screen menu map** p. 218
- **Frequently asked questions** p. 223

01 FIRST STEPS



1. On/Off and Volume adjustment.
2. Selection of the source: radio, Jukebox, CD and auxiliary (AUX, if activated on the Configuration menu). Long press: CD copy to hard disc.
3. Audio option adjustments: front/rear, left/right balance, loudness, sound ambiances.
4. Display of the list of local radio stations, of the tracks on the CD or of the MP3/USB/Jukebox directories. Long press: updating of the local radio stations.
5. Automatic search for a lower/higher frequency. Selection of the previous/next CD, MP3, USB or Jukebox track. Long press: fast forward and backward play.
6. Selection of the wavebands FM1, FM2, FMast, AM.
7. TA (Traffic Announcement) function on/off. Long press: access to the PTY (radio Programme TYPes) mode.
8. Ejection of the CD.
9. SIM card slot.
10. Keypad for entering descriptions by successive presses.
11. Access to the "PEUGEOT" services menu.
12. Selection and confirmation.
13. Selection of the previous/next MP3/USB/Jukebox directory.
14. Cancellation of the current operation. Long press: return to the current application.
15. Display of the general menu.
16. Modification of the screen display. Long press: reinitialisation of the system.
17. Selection of the display on the screen from the modes: TRIP, TEL, NAV and AUDIO.
18. Long press on the SOS button: emergency call.

DISPLAY AND GENERAL MENU 02

> COLOUR SCREEN



This displays the following information, via the audio control panel:

- time,
- date,
- ambient temperature (if there is a risk of ice, you are warned by a message),
- audio source displays (radio, CD, jukebox, ...),
- telematic system displays (telephone, services, ...),
- check of openings (doors, boot, ...),
- warning messages (e.g.: "Fuel level low") and vehicle function status messages (e.g.: "Auto lighting activated") displayed temporarily,
- trip computer information,
- GPS (Europe) satellite navigation system information.




Screen configuration: refer to the section - Screen menu map.



New

The system uses the complete and detailed NAVTEQ maps installed directly on the equipment's hard disk. There is no need to keep a mapping CD in the CD player. Updates of the maps of the UK and of the other European countries, offered by our partner NAVTEQ, will be available from the PEUGEOT network.

02 GENERAL MENU

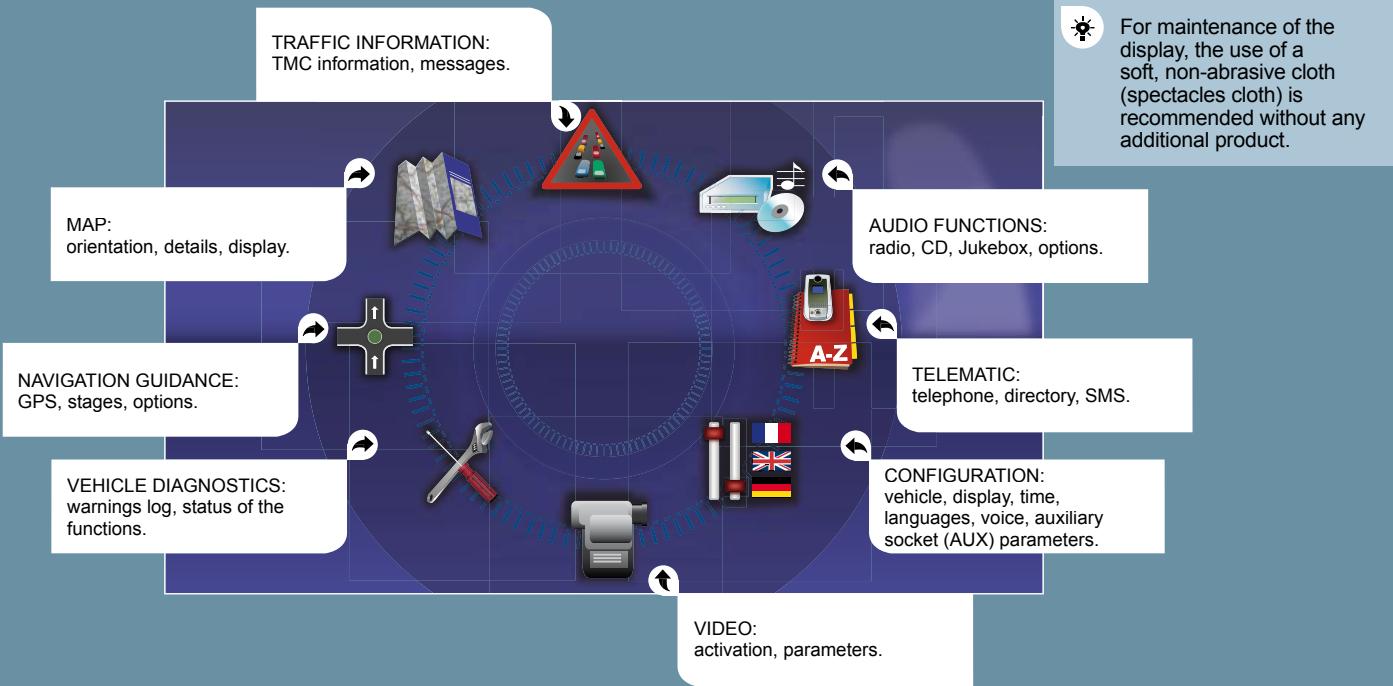

02 DISPLAY AND GENERAL MENU

DISPLAY ACCORDING TO THE CONTEXT



Press the OK dial to access short-cut menus according to the display on the screen.

NAVIGATION (IF NAVIGATION IS IN PROGRESS):

- 1 resume/stop guidance
- 1 divert route
- 1 route type
- 1 consult traffic info
- 1 zoom/scroll map

IN "ZOOM/SCROLL" MODE:

- 1 position info
- 1 select as destination
- 1 select as stage
- 1 store this position
- 1 exit map mode
- 1 guidance option

INTERNAL TELEPHONE:

- 1 call list
- 1 dial
- 1 phone book
- 1 voice mail

BLUETOOTH TELEPHONE:

- 1 call list
- 1 call
- 1 phone book
- 1 private mode/hands-free mode
- 1 place call on hold/resume call

TRIP COMPUTER:

- 1 alert log
- 1 status of functions

CD (MP3 OR AUDIO):

- 1 copy CD to JBX/stop copy
- 1 activate/deactivate Introscan
- 1 activate/deactivate random play
- 1 activate/deactivate repeat

RADIO:

- 1 enter a frequency
- 1 activate/deactivate RDS
- 1 activate/deactivate REG mode
- 1 hide/display "Radio Text"

JKUKEBOX:

- 1 select playlist
- 1 activate/deactivate Introscan
- 1 activate/deactivate random play
- 1 activate/deactivate repeat

USB:


- 1 copy USB to JBX/stop copy
- 1 eject USB
- 1 activate/deactivate Introscan
- 1 activate/deactivate random play
- 1 activate/deactivate repeat

03 GPS



SELECTING A DESTINATION

Tip: for a detailed global view of the menus available, refer to the "Screen menu map" part of this PC Com section.



Press the MENU button.



Turn the dial and select the NAVIGATION GUIDANCE function.



Press the dial to confirm the selection.



Turn the dial and select the ENTER AN ADDRESS function.

ENTER AN ADDRESS



Press the dial to confirm the selection.



Turn the dial and select the DESTINATION CHOICE function.

DESTINATION CHOICE FUNCTION




Press the dial to confirm the selection.



When the country has been selected, turn the dial and select the TOWN function.

TOWN





Press the dial to confirm the selection.



Turn the dial and select the letters of the town one by one confirming each time by pressing the dial.

PARIS



To speed up the process, the POST CODE can be entered instead of the name of the town. Use the alphanumeric keypad to enter the letters and digits and "C" to correct.



Turn the dial and select OK.

OK



Press the dial to confirm the selection.




Repeat steps 8 to 12 for the ROAD and N° functions.



OK



Press the dial to confirm the selection.



Select the STORE function to record the address entered in a directory record and press the dial to confirm the selection. The points of interest (POI) indicate all of the service locations in the vicinity (hotels, various businesses, airports, ...).

STORE

POI

03 GPS



GUIDANCE OPTIONS

The route chosen by the audio equipment depends directly on the guidance options.
Changing these options may completely change the route.



Press the MENU button.



Turn the dial and select the NAVIGATION GUIDANCE function.



Press the dial to confirm the selection.




Press the dial to confirm the selection.



Turn the dial and select the GUIDANCE OPTIONS function.

GUIDANCE OPTIONS



Turn the dial and select the DEFINE CALCULATION CRITERIA function.

DEFINE CALCULATION CRITERIA



Press the dial to confirm the selection.



Turn the dial and select, for example, the DISTANCE/TIME function.

DISTANCE/TIME

SETTING HAZARDOUS AREAS ALERT PARAMETERS



Press the dial to confirm the selection.



Turn the dial and select the TRAFFIC INFO function if it is not ticked.

TRAFFIC INFO



Tick this box for optimum operation of the traffic information, diversions will be suggested.



Press the dial to confirm the selection.



Select OK and press the dial to confirm.

OK



Repeat steps 1 to 5 of the guidance option.



Turn the dial and select the SET HAZARDOUS AREAS PARAMETERS function, then press the dial to confirm the warning message. Press the dial to confirm the selection.

SET HAZARDOUS AREAS PARAMETERS



Select:
- visual warnings,
- audible warnings with an announcement duration (in seconds),
- warn during guidance only, then select OK and press the dial to confirm.

OK



These functions are only available if the hazardous areas have been downloaded and installed on the system. The hazardous areas are, in general, fixed speed cameras, level crossings, dangerous uphill and downhill gradients. They may change on a regular basis.

03 GPS



GUIDANCE SPEECH SYNTHESIS



During announcements, the volume of each speech synthesis function (guidance, traffic information...) can be adjusted directly using the volume button.

1




Press the MENU button.



2



Turn the dial and select the NAVIGATION GUIDANCE function.



3



Press the dial to confirm the selection.



4



Turn the dial and select the GUIDANCE OPTIONS function.

GUIDANCE OPTIONS



5



Press the dial to confirm the selection.



6



Select the ADJUST SPEECH SYNTHESIS function and press the dial to confirm.

ADJUST SPEECH SYNTHESIS



7



Press the dial then adjust the volume of the speech synthesis or select the DEACTIVATE function and press the dial to confirm.

DEACTIVATE



8



Select OK and press the dial to confirm.


OK



03 GPS



ACTIONS ON THE MAP



Press the MENU button.



Turn the dial and select the MAP function.



Press the dial to confirm the selection.



Turn the dial and select the MAP DETAILS function.
Permits selection of the services which can be seen on the map (hotels, restaurants, hazardous areas...).

MAP DETAILS



MAP ORIENTATION



For improved visibility, beyond the scale of 6 miles (10 km), the map automatically switches to North Orientation.



5

Repeat steps 1 to 3 then turn the dial and select the MAP ORIENTATION function.

MAP ORIENTATION



6

Press the dial to confirm the selection.



7

Turn the dial and select the orientation of your choice.

VEHICLE ORIENTATION

NORTH ORIENTATION

3D VIEW



8

Select OK and press the dial to confirm.


OK



03 GPS



DISPLAYING THE MAP IN A WINDOW OR IN FULL SCREEN MODE



Press the MENU button.



Turn the dial and select the MAP function.



Press the dial to confirm the selection.



Turn the dial and select the DISPLAY MAP function.

DISPLAY MAP



Press the dial to confirm the selection.



Turn the dial and select the MAP IN WINDOW or FULL SCREEN MAP tab.

MAP IN WINDOW

FULL SCREEN MAP



Select OK and press the dial to confirm.

OK



03 GPS



List of POI

 Flying club	 Station	 Covered parking
 Airport	 Dock station	 Skating rink
 Lay-by	 Bus station	 Ports
 Bowling alley	 Hospitals	 Restaurant
 Casino	 Hotels	 Shopping
 Business park	 Vehicle hire	 Show/Exhibition
 Sports centre	 Town halls	 Winter sports centre
 Town centre	 Historical monuments	 Service station
 Cinema	 Tourist information	 Supermarkets
 Sports complexes	 Theme park	 Golf course
 Culture/Museum	 Park/Garden	 Tourism
 Vineyard	 Park and ride	 University
 Garage	 Car park	 Night life

03 GPS



ADDING A STAGE



During guidance, press the MENU button.



Turn the dial and select the NAVIGATION GUIDANCE function.



Press the dial to confirm the selection.




Turn the dial and select the JOURNEY LEGS AND ROUTE function.

JOURNEY LEGS AND ROUTE



Press the dial to confirm the selection.




Select the ADD A STAGE function (9 stages maximum) and press the dial to confirm.

ADD A STAGE



Enter for example a new address.


ENTER AN ADDRESS



When the new address has been entered, select OK and press the dial to confirm.



Select OK and press the dial to confirm the order of the stages.




Select STRICT (the stage must be completed in order to continue to the next destination) or PROXIMITY then press the dial to confirm.

04 TRAFFIC INFORMATION



ACTIVATING THE FILTER ON THE ROUTE



Press the MENU button.



Turn the dial and select the TRAFFIC INFORMATION function.



Press the dial to confirm the selection.



Select the GEOGRAPHIC FILTER function and press the dial to confirm.


GEOGRAPHIC FILTER



Turn the dial and select the filter of your choice.

AROUND THE VEHICLE

ON ROUTE



Select OK and press the dial to confirm.

OK




FILTER TRAFFIC INFORMATION

04 TRAFFIC INFORMATION



CONFIGURING THE TMC MESSAGE ANNOUNCEMENTS

We recommend that you do not tick the NEW MESSAGE DISPLAY tab for regions with heavy traffic.



Press the MENU button.



Turn the dial and select the TRAFFIC INFORMATION function.



Press the dial to confirm the selection.



Turn the dial and select the CONFIGURE MESSAGE ANNOUNCEMENT function.

CONFIGURE MESSAGE ANNOUNCEMENT



Press the dial to confirm the selection.



Select the READ MESSAGES tab. The Traffic Information Messages will be read by the voice synthesiser.

READ MESSAGES



Select the NEW MESSAGE DISPLAY tab. The traffic information messages are extended to the filters selected (geographic...) and can also be displayed when guidance is not active.

NEW MESSAGE DISPLAY



Select OK and press the dial to confirm.


OK



05 AUDIO/VIDEO





RADIO SELECTING A STATION





1 Press the SOURCE button several times in succession and select the RADIO.



2 Press the BAND AST button to select a waveband: FM1, FM2, FMast, AM.



3 Briefly press one of the buttons to carry out an automatic search of the radio stations.



4 Press one of the buttons to carry out a manual search of the radio stations.



5 Press the LIST button to display the list of stations received locally (60 maximum). To update this list, press for more than two seconds.



RDS



1 Press the MENU button.



2 Select AUDIO FUNCTIONS then press OK.



3 Select the FM WAVEBAND PREFERENCES function then press OK.

FM WAVEBAND PREFERENCES



4 Select ACTIVATE FREQUENCY FOLLOWING (RDS) then press OK. RDS appears on the display.

ACTIVATE FREQUENCY FOLLOWING (RDS)



6 The RDS, if displayed, enables you to continue listening to the same station by automatic retuning to alternative frequencies. However, in certain conditions, coverage of an RDS station may not be assured throughout the country as radio stations do not cover 100 % of the territory. This explains the loss of reception of the station during a journey.

05 AUDIO/VIDEO



MP3 CD INFORMATION AND ADVICE



The MP3 format, an abbreviation of MPEG 1.2 & 2.5 Audio Layer 3, is an audio compression standard which permits the recording of several tens of music files on a single disc.



In order to be able to play a recorded CDR/DVDR or CDRW/DVDRW, when recording it is preferable to select standards ISO 9660 level 1.2 or Joliet.

If the disc is recorded in another format, it may not be played correctly.

It is recommended that the same recording standard is always used for an individual disc, with as low a speed as possible (4x maximum) for optimum sound quality.

In the particular case of a multi-session CD, the Joliet standard is recommended.



The audio equipment will only play audio files with the extension ".mp3" with a sampling rate of 22.05 KHz or 44.1 KHz. No other type of file (.wma, .mp4, .m3u...) can be played.



It is advisable to restrict file names to 20 characters without using special characters (e.g.: "?; ü) to avoid any playing or displaying problems.


CD

PLAYING A CD OR AN MP3 COMPILATION



Insert circular compact discs only. Some anti-pirating systems, on original discs or CDs copied using a personal recorder, may generate malfunctions regardless of the quality of the original player. Insert an audio CD or an MP3 compilation in the player, play begins automatically.

1



If the player already contains a disc, press the SOURCE button several times in succession and select CD to listen to it.



2



Press one of the buttons to select a track on the CD. Press the LIST button to display the list of tracks on the CD or of the directories of the MP3 compilation.



The playing and displaying of an MP3 compilation may depend on the recording programme and/or the parameter settings used. We recommend use of the ISO 9660 recording standard.

JUKEBOX FUNCTION


COPYING A CD ONTO THE HARD DISC



1 Insert a CD or an MP3 compilation and press the MENU button.



2 Select AUDIO FUNCTIONS and press the dial to confirm.



3 Select COPY CD TO JUKEBOX and press the dial to confirm.

COPY CD TO JUKEBOX



4 Select COMPLETE CD to copy the entire CD and press the dial to confirm.

COMPLETE CD



5 Select CREATE ALBUM and press the dial to confirm.

CREATE ALBUM



The AUTO CREATION tab automatically copies the CD by default into an album of the type "album n°...".



6 Select the letters one by one and select OK to confirm.

OK



The audio or MP3 CD is copied onto the hard disc. Copying may take approximately 20 minutes depending on the duration of the CD. During this copying phase, it is not possible to listen to the albums previously recorded on the hard disc or the CDs.

If it is not an MP3 CD, the Jukebox automatically compresses the CD in MP3 format. The compression may take approximately 20 minutes depending on the duration of the CD. During this compression phase, it is possible to listen to the CD or to albums previously recorded on the hard disc.



A long press on the SOURCE button starts the copying of the CD.




When copying an MP3 CD, the Jukebox only retains the last album level. It is not possible to copy files from the Jukebox to a CD. The STOP THE CD COPY action does not delete the files which have already been transferred onto the jukebox hard disc.



JUKEBOX FUNCTION PLAYING AN MP3 USB STICK



Insert a USB stick in the space provided.



If another source is being played, press the SOURCE button several times in succession and select USB to play it.



Press one of the buttons to select a track on the USB stick.
Press the LIST button to display the list of folders on the MP3 USB stick.




To eject the USB stick, press the MENU button, select AUDIO FUNCTIONS, USB, then select EJECT USB.
The playing and displaying of an MP3 compilation may depend on the parameters programme used.


JUKEBOX FUNCTION COPYING AN MP3 USB STICK ONTO THE HARD DISC




Insert a USB stick in the space provided and press the MENU button.



Select AUDIO FUNCTIONS and press the dial to confirm.



Select USB and press the dial to confirm.







Select COPY USB TO JUKEBOX and press the dial to confirm.




Select COMPLETE DISC to copy the entire USB stick and press the dial to confirm.





JUKEBOX FUNCTION RENAMING AN ALBUM

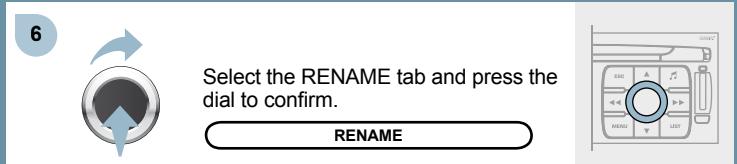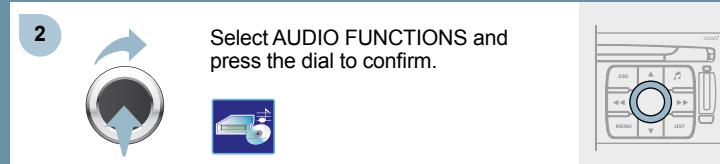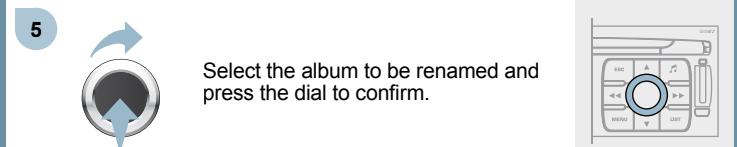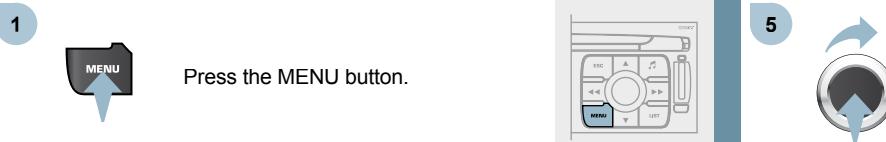


RENAME

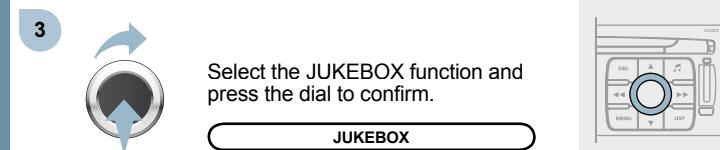

JUKEBOX

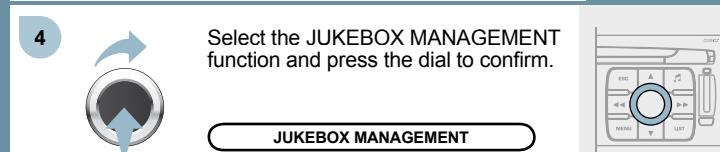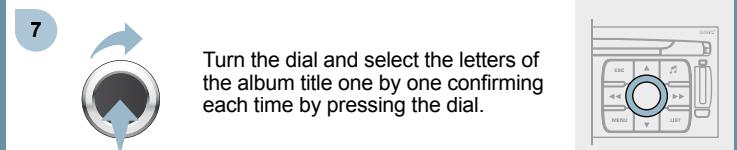

JUKEBOX MANAGEMENT

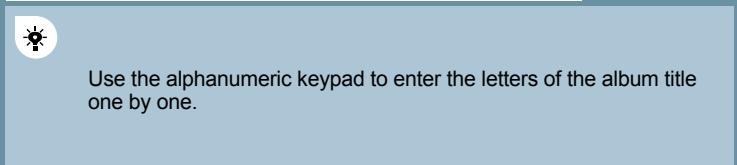

JUKEBOX FUNCTION

LISTENING TO THE JUKEBOX

8



Select OK and press the dial to confirm.

OK



!

To rename the tracks of an album, follow the same procedure, selecting the tracks to be renamed.
Use the ESC button to exit from the list of tracks.

!

Select the DELETE function to delete an album or a track from the Jukebox.

DELETE




1



Press the SOURCE button several times in succession and select the JUKEBOX function.

JUKEBOX



2

Press the LIST button.



3



Turn the dial to select the files.



!

Press the ESC button to return to the first file level.


USING THE AUXILIARY INPUT (AUX) AUDIO/RCA CABLE NOT SUPPLIED




Press the MENU button then select the CONFIGURATION function, then SOUNDS, then ACTIVATE AUXILIARY SOURCE to activate the audio/telephone auxiliary input.

1


Connect the portable equipment (MP3 player...) to the JACK socket or to the audio sockets (white and red, RCA type) located in the glove box using a suitable cable.



2



Press the SOURCE button several times in succession and select AUX.



The displaying and management of the commands takes place via the portable equipment.



! It is not possible to copy the files onto the hard disc from the auxiliary input.

VIDEO MENU



- 1  After connecting the video equipment, press the MENU button.
- 2  Turn the dial and select the VIDEO function.
- 3  Press the dial to confirm the selection.
- 4  Turn the dial and select the ACTIVATE VIDEO MODE function to activate/deactivate the video.
ACTIVATE VIDEO MODE
- 5  Press the dial to confirm the selection.



You can connect video equipment (camcorder, digital camera, DVD player...) to the three audio/video sockets, located in the glove box.

- 6  Turn the dial and select the VIDEO PARAMETERS function to set the display format, the brightness, the contrast and the colours.
VIDEO PARAMETERS
- 7  Press the dial to confirm the selection.



Pressing the "DARK" button disconnects display of the video.



Pressing the "SOURCE" button several times in succession permits the selection of an audio source other than that of the video.




! Videos can only be displayed when stationary.

06 INTERNAL TELEPHONE



INSTALLING YOUR SIM CARD (NOT SUPPLIED)


1



Open the slot by pressing the button using the tip of a pen.



2



Install the SIM card in the holder and then insert it in the slot.



3

To remove the SIM card, repeat step 1.



!

Your SIM card must be installed and removed with the PC Com audio and telematics system switched off and the ignition off.


ENTERING THE PIN CODE

1



Enter the PIN code on the keypad.

CODE PIN



2



Confirm the PIN code by pressing button #.



!

When entering your PIN code, tick the STORE PIN tab for access to the telephone without having to enter this code when it is used subsequently.

06 BLUETOOTH TELEPHONE



CONNECTING A BLUETOOTH TELEPHONE



For reasons of safety, the driver should only carry out operations which require prolonged attention when the vehicle is stationary (pairing the Bluetooth mobile telephone to the hands-free kit).

1

Activate the telephone's Bluetooth function. The last telephone connected is reconnected automatically.



2

Press the MENU button, select TELEMATICS, then BLUETOOTH FUNCTIONS. Press the dial to confirm each operation.



3



Select BLUETOOTH ACTIVATION MODE, then ACTIVATED AND VISIBLE. Press the dial to confirm each operation.



4



On your telephone, select the name of the PEUGEOT audio/telephone. Enter the authentication code (0000 by default).



06 BLUETOOTH TELEPHONE



CONNECTING A BLUETOOTH TELEPHONE



To change the authentication code, repeat step 2 then select AUTHENTICATION CODE and save the code of your choice.



Once the telephone has been connected, the system can synchronise the address book and the call list. Repeat step 2 then select PHONE BOOK SYNCHRONISATION MODE. Select the synchronisation of your choice and press the dial to confirm.

The synchronisation may take a few minutes.



To change the telephone connected, repeat step 2 then select LIST OF MATCHED TELEPHONES and press OK to confirm. The list of previously connected telephones (10 maximum) appears. Select the telephone of your choice, confirm, then select CONNECT and press the dial to confirm.



The call list consists of calls made from the vehicle's audiotelphone only.

06 TELEPHONE



CALLING A CONTACT




Press the PICK UP button to display the telephone short-cut menu.




Select CALL LIST or PHONE BOOK and press OK. Select the number required and confirm to make the call.



Turn the dial and select the DIAL function.



Press the dial to confirm the selection.



Dial the telephone number of your contact using the alphanumeric keypad.



To select the telephone used, press MENU, then select TELEMATICS, then BLUETOOTH FUNCTIONS, then BLUETOOTH ACTIVATION MODE. Then select:

- DEACTIVATED: to use the internal telephone,
- ACTIVATED AND VISIBLE: to use the bluetooth telephone, visible to all telephones,
- ACTIVATED AND NOT VISIBLE: to use the bluetooth telephone, not visible to other telephones, it is not possible to match a new telephone.



Press the PICK UP button to call the number dialled.



Press the HANG UP button to end the call.



ACCEPTING OR REFUSING A CALL




Press the PICK UP button to accept a call.



Press the HANG UP button to refuse a call.



Press the end of the steering wheel stalk for more than 2 seconds to access the telephone menu: calls log, directory, voice mailbox.



07 TRIP COMPUTER

VEHICLE DIAGNOSTICS




Each press of the button, located at the end of the wiper stalk, displays the different trip computer information in succession, depending on the screen.



With the "vehicle" tab:

- the range, the current fuel consumption and the distance remaining to the destination.

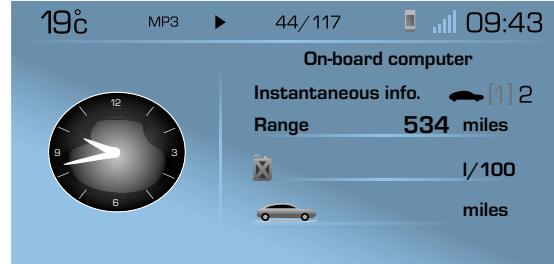

Zero reset

When the required route is displayed, press the button for more than two seconds.



VEHICLE DIAGNOSTICS

1 WARNINGS LOG

2 STATUS OF FUNCTIONS

2 TYRE UNDER-INFLATION DETECTOR ZERO RESET

07 TRIP COMPUTER



With tab "1" (trip 1):

- the average speed, the average consumption and the distance travelled calculated over trip "1".

Tab "2" (trip 2) with the same functions for a second route.

A few definitions

Range: displays the distance which can be travelled with the remaining fuel detected in the tank, based on the average consumption over the last few miles (kilometres).

This displayed value may vary significantly following a change in the vehicle speed or the relief of the route.

When the range falls below 20 miles (30 km), dashes are displayed. After filling with at least 5 litres of fuel, the range is recalculated and is displayed as soon as it exceeds 60 miles (100 km).

If, whilst driving, dashes are displayed continuously in place of digits, contact a PEUGEOT dealer.

Current fuel consumption: only calculated and displayed above 20 mph (30 km/h).

Average fuel consumption: this is the average fuel consumption since the last trip recorder zero reset.

Distance travelled: calculated since the last trip computer zero reset.


Distance remaining to the destination: calculated with reference to the final destination entered by the user. If guidance is activated, the navigation system calculates it as a current value.

Average speed: this is the average speed calculated since the last trip computer zero reset (ignition on).

08 CONTROL SHORT-CUTS

STEERING WHEEL CONTROLS

RADIO: selection of the previous stored station.
MP3/JUKEBOX: selection of the previous directory.
Selection of the previous item on a menu.

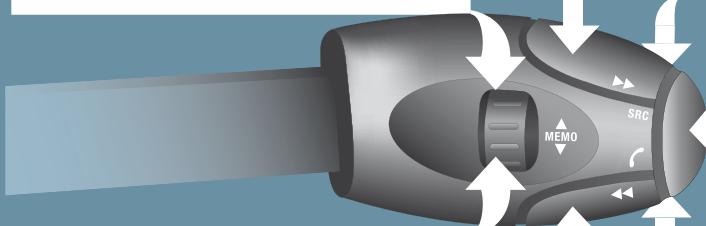

RADIO: selection of the next stored station.
MP3/JUKEBOX: selection of the next directory.
Selection of the next item on a menu.

RADIO: automatic search for a higher frequency.
CD/MP3/JUKEBOX: selection of the next track.
CD: continuous press: fast forwards play.

Volume increase.

- Change of sound source.
- Confirmation of a selection.
- Pick up/Hang up the telephone.
- Press for more than 2 seconds: access to the telephone menu.

Volume decrease.

Mute: by pressing the volume increase and decrease buttons simultaneously.

The sound is restored by pressing one of the two volume buttons.

RADIO: automatic search for a lower frequency.
CD/MP3/JUKEBOX: selection of the previous track.
CD: continuous press: fast backwards play.

VOICE COMMANDS DISPLAYING THE LIST AND USING THEM



1



To display the list of available voice commands, press the end of the lights stalk to start the voice recognition, then say HELP or WHAT CAN I SAY.

2



For the same operation, press and hold the MENU button and select the function VOICE COMMANDS LIST.

VOICE COMMANDS LIST



2



Press the end of the lights stalk to start the voice recognition.
Say the words one by one and wait for the audible confirmation signal between each word.
The list which follows is exhaustive.

LEVEL 1	LEVEL 2	LEVEL 3
radio	memory autostore previous/next list	1 to 6/*
cd player Jukebox (if activated) USB	previous/next track track number/track scan random play directory (CD-MP3 inserted) list	1 to 250/* previous/next repeat help/what can I say/cancel
call/guide to	"Pre-recorded description"	
telephone	last number voice box voice mail directory	"Pre-recorded description"
message	display read directory	"Pre-recorded description"
navigation	stop/resume zoom in/out view	* destination vehicle
traffic info	display read	
display	audio telephone trip computer Navigation air conditioning	
previous/next stop delete yes/no	for all level 1 and 2	
* help/what can I say/cancel	for all level 1, 2 or *	

09 CONFIGURATION



ADJUSTING THE DATE AND TIME



Press the MENU button.



Turn the dial and select the CONFIGURATION function.



Press the dial to confirm the selection.



Turn the dial and select the DISPLAY CONFIGURATION function.

DISPLAY CONFIGURATION



Press the dial to confirm the selection.



The CONFIGURATION function gives access to the colour, brightness and units settings and to voice commands.



Turn the dial and select the ADJUST THE DATE AND TIME function.



ADJUST THE DATE AND TIME



Press the dial to confirm the selection.



Adjust the settings one by one confirming by pressing the dial. Next select the OK tab on the screen then confirm.



OK



10 SCREEN MENU MAP



- 1 MAIN FUNCTION**
- 2 CHOICE A**
- 3 choice A1
- 3 choice A2
- 2 CHOICE B...**



NAVIGATION - GUIDANCE

1 SELECT DESTINATION

2 enter an address

3 country:

4 town:

4 road:

4 N°/_:

4 curr. loc

4 Archive

4 POI

5 near

5 on the route

5 around current place

5 search by name

3 GPS coordinates

3 directory

3 previous destinations

2 JOURNEY LEGS AND ROUTE

3 add a stage

4 enter an address

4 directory

4 previous destinations

3 order/delete journey legs

3 divert route

3 chosen destination

2 GUIDANCE OPTIONS

3 define calculation criteria

4 fastest

4 shortest

4 distance/time

4 with tolls

4 with ferry

4 traffic info

3 set speech synthesis

3 activate/deactivate road names

3 delete last destinations

2 STOP/RESUME GUIDANCE



MAP

1 MAP ORIENTATION

3 vehicle direction

3 north direction

3 3D view

2 MAP DETAILS

3 administration and safety

4 town halls, town centre

4 universities, colleges

4 hospitals

3 hotels, restaurants and shops

4 hotels

4 restaurants

4 vineyards

4 business centres

- 4 supermarkets, shopping
- 3 culture, tourism and shows
- 4 culture and museums
- 4 casinos and nightlife
- 4 cinemas and theatres
- 4 tourism
- 4 shows and exhibitions
- 3 sports and open air centres
- 4 sports centres
- 4 golf courses
- 4 skating rinks, bowling alleys
- 4 winter sports resorts
- 4 parks, gardens
- 4 theme parks
- 3 transport and automobile
- 4 airports, ports
- 4 stations, bus stations
- 4 vehicle rental
- 4 lay-bys, car parks
- 4 service stations, garages
- 2 DISPLAY MAP
- 3 full screen map
- 3 map in window

- 2 MOVE THE MAP/FOLLOW VEHICLE
- 2 MAP DATABASE DESCRIPTION
-  **TRAFFIC INFORMATION**
 - 1 READ MESSAGES
 - 2 FILTER TRAFFIC INFORMATION
 - 2 geographic filter
 - 3 store all messages
 - 3 store messages
 - 4 around the vehicle
 - 4 on the route
 - 3 road information
 - 4 traffic information
 - 4 road closure
 - 4 size limit
 - 4 road condition
 - 4 weather and visibility
 - 3 urban/city information
 - 4 parking
 - 4 public transport
 - 4 demonstrations
 - 2 CONFIGURE MESSAGE ANNOUNCEMENT

- 3 read messages
- 3 new message display
- 2 SELECT TMC STATION
 - 3 automatic TMC
 - 3 manual TMC
 - 3 list of TMC stations
-  **AUDIO FUNCTIONS**
 - 1 RADIO FAVOURITES
 - 2 enter a frequency
 - 3 activate/deactivate RDS mode
 - 3 activate/deactivate regional mode
 - 3 display/hide radio text
 - 2 CD, USB, JUKEBOX FAVOURITES
 - 3 activate/deactivate Introscan (SCN)
 - 3 activate/deactivate Random mode (RDM)
 - 3 activate/deactivate Repeat (RPT)
 - 3 activate/deactivate display of CD info
 - 2 CD
 - 3 copy CD to Jukebox
 - 4 copy complete CD
 - 4 multiple selection

4 current album

4 current track

3 eject CD

2 USB

3 copy USB to Jukebox

4 complete disc

4 multiple selection

4 current album

4 current track

3 eject USB

2 JUKEBOX

3 jukebox management

3 jukebox configuration

4 hi-fi (320 kbps)

4 high (192 kbps)

4 normal (128 kbps)

3 playlist management

3 delete jukebox data

3 Jukebox status



TELEMATICS

1 CALL

3 call list

3 dial

3 directory

3 mailbox

3 services

4 customer contact centre

4 PEUGEOT assistance

4 PEUGEOT service

4 messages received

2 DIRECTORY

3 managing directory files

4 consult or modify a file

4 add a file

4 delete a file

4 delete all files

3 configure directory

4 select a directory

4 name directory

4 select starting directory

3 file transfer

4 exchange by infrared

5 send all records

5 send one record

5 receive by infrared

4 exchange with SIM card

5 send all records to SIM

5 send one record to SIM

5 receive all SIM files

5 receive a SIM file

4 exchange with Bluetooth

2 TEXT MESSAGES (SMS)

3 read received text messages

3 send a text message

3 write a text message

3 delete list of text messages

2 TELEPHONE FUNCTIONS

3 network

4 network search mode

5 automatic mode

5 manual mode

4 networks available

3 length of calls

4 reset

3 manage PIN code

4 activate/deactivate

4 save PIN code

- 4 modify PIN code
- 3 **call options**
 - 4 configure calls
 - 5 display my number
 - 5 automatic reply after x ring(s)
 - 4 ring options
 - 5 for voice calls
 - 5 for text messages (SMS)
 - 6 text message ring
 - 3 calls diversion to mailbox n°
 - 3 delete calls log
- 2 **BLUETOOTH FUNCTIONS**
 - 3 activation mode
 - 4 deactivated
 - 4 activated and visible
 - 4 activated and not visible
 - 3 list of matched peripheral equipment
 - 3 change the name of the audio/telephone
 - 3 authentication code

* The parameters vary according to vehicle.

Display short cuts version 8.2

- 3 **phone book synchronisation mode**
 - 4 no synchronisation
 - 4 view telephone phone book
 - 4 view SIM card phone book
 - 4 view all phone books
- 1 **CONFIGURATION**
 - 2 **DISPLAY CONFIGURATION**
 - 3 choose colour
 - 3 adjust luminosity
 - 3 set date and time
 - 3 select units
 - 2 **SOUND**
 - 3 voice commands setting
 - 3 speech synthesis setting
 - 4 guidance instructions volume
 - 4 other message volume
 - 4 select female/male voice
 - 3 activate/deactivate auxiliary source
 - 2 **SELECT LANGUAGE**
 - 2 **DEFINE VEHICLE PARAMETERS***



VIDEO

- 1 **ACTIVATE VIDEO MODE**
- 2 **VIDEO PARAMETERS**
 - 3 display formats
 - 3 adjust luminosity
 - 3 set colours
 - 3 set contrasts



VEHICLE DIAGNOSTICS

- 1 **ALERT LOG**
- 2 **STATUS OF FUNCTIONS***
- 2 **RESET TYRE PRESS. DETEC. SYS.***



Press the MENU button for more than 2 seconds to access the following flow chart.

VOICE COMMANDS LIST

- 1 AUDIO/TELEPHONE DIAGNOSTICS
- 2 GPS COVERAGE
- 2 UNIT BACKUP POWER
- 2 UNIT DESCRIPTION
- 1 NAVIGATION DEMONSTRATION
- 1 SERVICES CONFIGURATION



Press the Music button several times in succession to access the following settings.

MUSICAL AMBIENCE

BASS

TREBLE

LOUDNESS CORRECTION

FR - RR BALANCE

LH - RH BALANCE

AUTO VOLUME CORRECTION



Each audio source (Radio, CD, MP3, Jukebox, CD changer) has its own separate settings.

FREQUENTLY ASKED QUESTIONS

The table below groups together the answers to the most frequently asked questions.

QUESTION	ANSWER	SOLUTION
There is a difference in sound quality between the different audio sources (radio, CD...).	For optimum sound quality, the audio settings (Volume, Bass, Treble, Ambience, Loudness) can be adapted to the different sound sources, which may result in audible differences when changing source (radio, CD...).	Check that the audio settings (Volume, Bass, Treble, Ambience, Loudness) are adapted to the sources listened to. It is advisable to set the AUDIO functions (Bass, Treble, Front-Rear Balance, Left-Right Balance) to the middle position, select the musical ambience "None" and set the loudness correction to the "Active" position in CD mode or to the "Inactive" position in radio mode.
The CD is ejected automatically or is not played by the player.	The CD is inserted upside down, is unplayable, does not contain any audio data or contains an audio format which the player cannot play.	<p>The CD is protected by an anti-pirating protection system which is not recognised by the audio equipment.</p> <ul style="list-style-type: none">- Check that the CD is inserted in the player the right way up.- Check the condition of the CD: the CD cannot be played if it is too damaged.- Check the content in the case of a recorded CD: consult the advice in the Audio section.- The audio equipment's CD player does not play DVDs.- Due to inadequate quality, certain recorded CDs will not be played by the audio system.
The CD player sound is poor.	The CD used is scratched or of poor quality.	Insert good quality CDs and store them in suitable conditions.
	The audio equipment settings (bass, treble, ambiances) are unsuitable.	Set the treble or bass level to 0, without selecting an ambience.


QUESTION	ANSWER	SOLUTION
The stored stations do not function (no sound, 87.5 Mhz is displayed...).	An incorrect waveband is selected.	Press the BAND AST button to return to the waveband (AM, FM1, FM2, FMAST) on which the stations are stored.
The quality of reception of the radio station listened to gradually deteriorates or the stored stations do not function (no sound, 87.5 Mhz is displayed...).	The vehicle is too far from the transmitter used by the station listened to or there is no transmitter in the geographical area through which the vehicle is travelling.	Activate the RDS function to enable the system to check whether there is a more powerful transmitter in the geographical area.
	The environment (hills, buildings, tunnels, basement car parks...) block reception, including in RDS mode.	This phenomenon is normal and does not indicate a failure of the audio equipment.
	The aerial is absent or has been damaged (for example when going through a car wash or into an underground car park).	Have the aerial checked by a PEUGEOT dealer.
Sound cut-outs of 1 to 2 seconds in radio mode.	During this brief sound cut-out, the RDS searches for any frequency permitting better reception of the station.	Deactivate the RDS function if the phenomenon is too frequent and always on the same route.
With the engine off, the audio equipment switches off after a few minutes of use.	When the engine is switched off, the audio equipment operating time depends on the battery charge. The switch-off is normal: the audio equipment switches to economy mode and switches off to prevent discharging of the vehicle's battery.	Start the vehicle's engine to increase the battery charge.

QUESTION	ANSWER	SOLUTION
The TRAFFIC INFO box is ticked. However, certain traffic jams along the route are not indicated in real time.	On starting, it is several minutes before the system begins to receive the traffic information.	Wait until the traffic information is being received correctly (displaying of the traffic information symbols on the map).
	In certain countries, only major routes (motorways, ...) are listed for the traffic information.	This phenomenon is normal. The system is dependent on the traffic information available.
The time taken to calculate a route sometimes seems longer than usual.	The performance of the system may slow down temporarily if a CD is being copied onto the Jukebox at the same time as a route is being calculated.	Wait until the CD has been copied or stop the copying before starting the guidance function.
Does the emergency call function work without a SIM card?	Certain national regulations impose the presence of a SIM card in order to make an emergency call.	Insert a valid SIM card in the slot on the system.
The altitude is not displayed.	On starting, the initialisation of the GPS may take up to 3 minutes to receive more than 4 satellites correctly.	Wait until the system has started up completely. Check that there is a GPS coverage of at least 4 satellites (long press on the MENU button, then select AUDIO/TELEPHONE DIAGNOSTICS, then GPS COVERAGE).
	Depending on the geographical environment (tunnel, ...) or the weather, the conditions of reception of the GPS signal may vary.	This phenomenon is normal. The system is dependent on the conditions of reception of the GPS signal.
My SIM card is not recognised.	The system accepts 3.3 V SIM cards, the old 5 V and 1.8 V SIM cards are not recognised.	Contact your telephone operator.

QUESTION	ANSWER	SOLUTION
The route is not calculated successfully.	The exclusion criteria may conflict with the current location (exclusion of toll roads on a motorway with tolls).	Check the exclusion criteria.
There is a long wait after inserting a CD.	When a new medium is inserted, the system reads a certain amount of data (folder, title, artist, etc.). This may take a few seconds.	This phenomenon is normal.
I cannot connect my Bluetooth telephone.	The telephone's Bluetooth function may be switched off or the equipment may not be visible.	<ul style="list-style-type: none"> - Check that your telephone's Bluetooth function is switched on. - Check that your telephone is visible.

PC Nav

MULTIMEDIA AUDIO EQUIPMENT/BLUETOOTH TELEPHONE
GPS EUROPE BY SD CARD

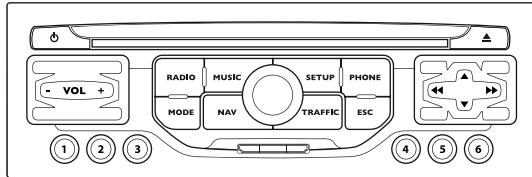

The PC Nav system is protected in such a way that it will only operate in your vehicle. If it is to be installed in another vehicle, contact a PEUGEOT dealer for configuration of the system.



For safety reasons, it is imperative that the driver carries out operations which require prolonged attention while the vehicle is stationary.

When the engine is switched off and to prevent discharging of the battery, the PC Nav switches off following the activation of the Energy Economy mode.



Certain functions described in this handbook will become available during the course of the year.

CONTENTS

- 01 First steps p. 228
- 02 General operation p. 229
- 03 Navigation - Guidance p. 231
- 04 Traffic information p. 238
- 05 Radio p. 239
- 06 Music media players p. 240
- 07 Bluetooth telephone p. 243
- 08 Configuration p. 245
- 09 Steering wheel controls p. 246
- 10 Screen menu map p. 247
- Frequently asked questions p. 250

01 FIRST STEPS

PC Nav CONTROL PANEL




1. Engine not running
 - Short press: on/off.
 - Long press: CD pause, mute for the radio.
2. Volume adjustment.
3. Access to the "Radio" Menu. Display the list of stations.
4. Access to the "Music" Menu. Display the tracks.
5. Access to the "SETUP" Menu.
 - Long press: access to the GPS coverage and the demonstration mode.
6. Access to the "Phone" Menu. Display the call list.
7. Access to the "MODE" Menu.
 - Selection of the successive display of: Radio, Map, NAV (if navigation is in progress), Telephone (if a conversation is in progress).
 - Long press: display of a black screen (DARK).
8. Access to the "Navigation" Menu. Display the last destinations.
9. Access to the "Traffic" Menu. Display the current traffic alerts.
10. ESC: abandon the operation in progress.
11. CD eject.
12. Selection of the previous/next radio station from the list.
 - Selection of the previous/next MP3 directory.
 - Selection of the previous/next page of a list.
13. Selection of the previous/next radio station.
 - Selection of the previous/next CD or MP3 track.
 - Selection of the previous/next line of a list.
14. Buttons 1 to 6:
 - Selection of the stored radio station.
 - Long press: store the current radio station.
15. SD card reader.
16. Dial for selection of the screen display and according to the context of the menu.
 - Short press: confirmation.

GENERAL OPERATION 02

Press the MODE button several times in succession for access to the following menus:

RADIO/MUSIC MEDIA
PLAYERS




FULL SCREEN MAP



TELEPHONE
(If a conversation is in progress)



NAVIGATION
(If guidance is in progress)



SETUP:
system language, date and time, display,
vehicle settings, unit and system settings, "Demo
mode".



TRAFFIC:
TMC information and messages.



For cleaning the screen, the use of a soft, non-abrasive cloth
(spectacles cloth) is recommended, with no additional product.



For a detailed global view of the menus available, refer to section 10.

02 GENERAL OPERATION

DISPLAY ACCORDING TO THE CONTEXT



A press on the OK dial gives access to short-cut menus according to the display on the screen.

NAVIGATION (IF GUIDANCE IS IN PROGRESS):

- 1 ABORT GUIDANCE
- 1 REPEAT ADVICE
- 1 BLOCK ROAD
- 1 ROUTE INFO
- 2 SHOW DESTINATION
- 2 TRIP INFO
- 3 Route type
- 3 Avoid
- 3 Satellites
- 2 ZOOM/SCROLL
- 1 VOICE ADVICE
- 1 ROUTE OPTIONS

TELEPHONE:

- 1 END CALL
- 1 HOLD CALL
- 1 DIAL
- 1 DTMF-TONES
- 1 PRIVATE MODE
- 1 MICRO OFF

MUSIC MEDIA PLAYERS:

- 1 TRAFFIC INFO (TA)
- 1 PLAY OPTIONS
- 2 NORMAL ORDER
- 2 RANDOM TRACK
- 2 REPEAT FOLDER
- 2 SCAN
- 1 SELECT MUSIC

RADIO:

- 1 IN FM MODE
- 2 TRAFFIC INFO (TA)
- 2 RDS
- 2 RADIOTEXT
- 2 REGIONAL PROG.
- 2 AM
- 1 IN AM MODE
- 2 TA
- 2 REFRESH AM LIST
- 2 FM


FULL SCREEN MAP:

- 1 ABORT GUIDANCE/RESUME GUIDANCE
- 1 SET DESTINATION
- 1 POIS NEARBY
- 1 POSITION INFO
- 1 MAP SETTINGS
- 1 ZOOM/SCROLL


03 NAVIGATION - GUIDANCE

SELECTING A DESTINATION

1



Press the NAV button.




The list of the last 20 destinations appears under the "Navigation" Menu function.

2



Press the NAV button again or select the "Navigation" Menu function and press the dial to confirm.

"NAVIGATION" MENU




3



Select the "Destination input" function and press the dial to confirm.

DESTINATION INPUT




4



Select the "Address input" function and press the dial to confirm.


ADDRESS INPUT



5




Once the country has been selected, turn the dial and select the town function. Press the dial to confirm.



6



Select the letters of the town one by one confirming each time by pressing the dial.



7




A pre-set list (by entering the first few letters) of the towns in the country selected can be accessed via the LIST button on the virtual keypad.

To clear a destination; from steps 1 to 3, select "Choose from last destinations".
A long press on one of the destinations displays a list of actions from which you can select:
Delete entry
Delete list



7

Turn the dial and select OK.
Press the dial to confirm.




To speed up the process, the post code can be entered directly after selecting the "Postal code" function.
Use the virtual keypad to enter the letters and digits.



8

Repeat steps 5 to 7 for the "Street"
and "House number" functions.




Select the "Save to address book" function to record the address
entered in a directory file. Press the dial to confirm the selection.
PC Nav allows up to 4 000 contact files to be recorded.



9

During guidance, pressing the end
of the lighting stalk repeats the last
guidance instruction.




10



Then select "Start route guidance"
and the press the dial to confirm.

START ROUTE GUIDANCE



Select the route type:
"Fast route", "Short route" or "Optimized route" and press the dial to
confirm.
It is also possible to select a destination via "Choose from address
book" or "Choose from last destinations".

CHOOSE FROM ADDRESS BOOK

CHOOSE FROM LAST DESTINATIONS




You can zoom in/zoom out on the map using the dial.
It is possible to scroll the map or select its orientation via the
short-cut menu of the FULL SCREEN MAP. Press the dial then
select "Map settings".



03 NAVIGATION - GUIDANCE

ROUTE OPTIONS

The route selected by the PC Nav audio/telephone depends directly on the route options. Changing these options may change the route completely.





Press the NAV button.





Press the NAV button again or select the "Navigation" Menu function and press the dial to confirm.

"NAVIGATION" MENU




Select the "Route options" function and press the dial to confirm.

ROUTE OPTIONS




Select the "Route type" function and press the dial to confirm. This function allows you to change the route type.

ROUTE TYPE




Select the "Route dynamics" function. This function gives access to the "Traffic independent" or "Semi-dynamic" options.

ROUTE DYNAMICS




Select the "Avoidance criteria" function. This function provides access to the AVOID options (motorways, toll roads, ferries).

AVOIDANCE CRITERIA









Turn the dial and select the "Recalculate" function to take into account the route options selected. Press the dial to confirm.

RECALCULATE












ADDING A STOPOVER

Stopovers can be added to the route once the destination has been selected.

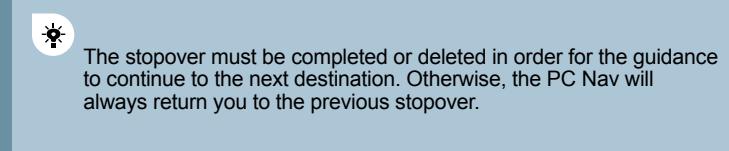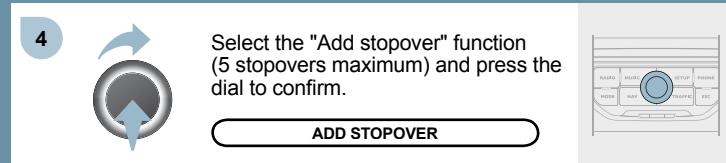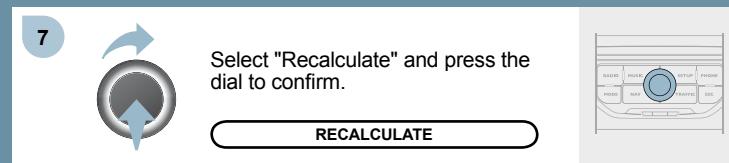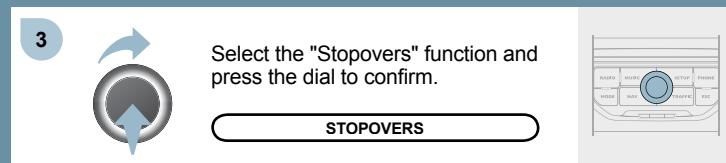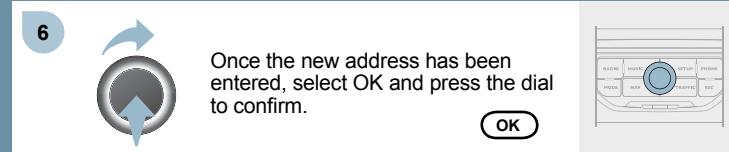
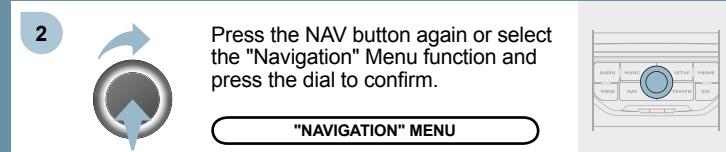


03 NAVIGATION - GUIDANCE





SEARCHING FOR POINTS OF INTEREST



The points of interest (POIs) indicate all of the service locations in the vicinity (hotels, various businesses, airports...).

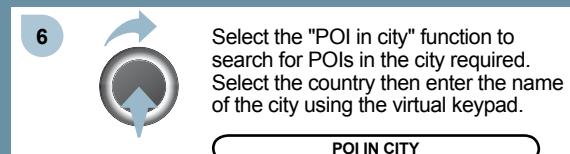

A list of cities present in the country selected can be accessed via the LIST button on the virtual keypad.

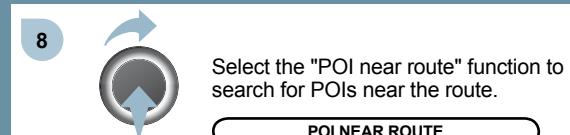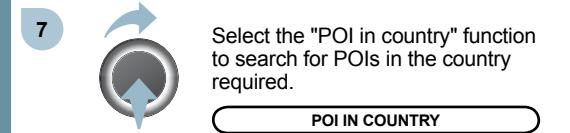

03 NAVIGATION - GUIDANCE

List of POIs

	Service station
	LPG station
	Garage
	PEUGEOT
	Motor racing circuit
	Covered car park
	Car park
	Rest area
	Hotel
	Restaurant
	Refreshment area
	Picnic area
	Cafeteria

	Airport
	Railway station
	Bus station
	Port
	Industrial estate
	Supermarket
	Bank
	Vending machine
	Tennis court
	Swimming pool
	Golf course
	Winter sports resort
	Theatre



This icon appears when several POIs are grouped together in the same area. Zooming in on this icon shows details of the POIs.

	Cinema
	Camp site
	Theme parks
	Hospital
	Pharmacy
	Police station
	School
	Post office
	Museum
	Tourist information
	Automatic speed camera*
	Red light camera*
	Hazardous location*


* According to availability in the country.

03 NAVIGATION - GUIDANCE

NAVIGATION SETTINGS

Contact a PEUGEOT dealer for details of the procedure for obtaining the HAZARDOUS LOCATION POIs. Updating of the HAZARDOUS LOCATION POIs requires an SDHC (High Capacity) compatible reader.

1



Press the NAV button.




4



Select the "Navi volume" function and turn the dial to set the volume of each voice synthesiser (traffic information, alert messages...).

NAVI VOLUME




2



Press the NAV button again or select the "Navigation" Menu function and press the dial to confirm.

"NAVIGATION" MENU




5



Select the "POI categories on Map" function to select the POIs to be displayed on the map by default.

POI CATEGORIES ON MAP




3



Select the "Settings" function and press the dial to confirm.

SETTINGS




6



Select "Set parameters for risk areas" to gain access to the "Display on map", "Visual alert" and "Sound alert" functions.

SET PARAMETERS FOR RISK AREAS




04 TRAFFIC INFORMATION

CONFIGURE THE FILTERING AND DISPLAY OF TMC MESSAGES



Press the TRAFFIC button.




The list of TMC messages appears under the "Traffic" Menu sorted in order of proximity.



Press the TRAFFIC button again or select the "Traffic" Menu function and press the dial to confirm.

"TRAFFIC" MENU



The TMC icon, at the bottom left of the screen, may appear in 3 different forms:

- No TMC station available,
- TMC station available, no message on route,
- TMC station available and messages on route (if guidance is active).



The filters are independent and their results are cumulative.

We recommend a filter on the route and a filter around the vehicle of:

- 2 miles (3 km) or 3 miles (5 km) for a region with heavy traffic,
- 6 miles (10 km) for a region with normal traffic,
- 30 miles (50 km) for long journeys (motorway).



Select the filter of your choice:

MESSAGES ON ROUTE

ONLY WARNINGS ON ROUTE

ALL WARNING MESSAGES

ALL MESSAGES



The messages appear on the map and on the list. To exit, press ESC.






Select the "Geo. Filter" function and press the dial to confirm.

GEO. FILTER



Then select the radius of the filter (in miles (km)) required in accordance with the route, press the dial to confirm. When all of the messages on the route are selected, the addition of a geographical filter is recommended (within a radius of 3 miles (5 km) for example) to reduce the number of messages displayed on the map. The geographical filter follows the movement of the vehicle.




05 RADIO

SELECTING A STATION

1




Press the RADIO button to display the list of stations received locally sorted in alphabetical order. Select the station required by turning the dial and press to confirm.



2




While listening to the radio, press one of the buttons to select the previous or next station on the list.



3



A long press of one of the buttons starts the automatic search for a station with a lower or higher frequency.



4



Press one of the buttons on the numeric keypad for more than 2 seconds to store the current station. Press the button on the numeric keypad to recall the stored radio station.


The external environment (hill, building, tunnel, underground car park...) may interfere with the reception, including in RDS following mode. This phenomenon is a normal result of the way in which radio waves are transmitted and does not in any way indicate a failure of the audio equipment.

RDS - REGIONAL MODE - TRAFFIC INFO

1




When the current radio station is displayed on the screen, press the dial.



2


The radio source short-cuts menu appears and provides access to the following short-cuts:



3



Select the function required and press the dial to confirm to gain access to the corresponding settings.



5



The RDS, if displayed, allows you to continue listening to the same station by automatic retuning to alternative frequencies. However, in certain conditions, coverage of an RDS station may not be assured throughout the entire country as radio stations do not cover 100 % of the territory. This explains the loss of reception of the station during a journey.

06 MUSIC MEDIA PLAYERS

CD, MP3/WMA CD INFORMATION AND ADVICE



The MP3 format, an abbreviation of MPEG 1, 2 & 2.5 Audio Layer 3 and the WMA format, an abbreviation of Windows Media Audio and the property of Microsoft, are audio compression standards which permit the recording of several tens of music files on a single disc.



The PC Nav will only play audio files with the extension ".mp3" with a speed of between 8 Kbps and 320 Kbps and the extension ".wma" with a speed of between 5 Kbps and 384 Kbps. It also supports the VBR (Variable Bit Rate) mode. No other type of file (.mp4, .m3u...) can be played.



In order to be able to play a recorded CDR or CDRW, when recording it is preferable to select the ISO 9660 level 1, 2 or Joliet standard. If the disc is recorded in another format it may not be played correctly. It is recommended that the same recording standard is always used for an individual disc, with as low a speed as possible (4x maximum) for optimum sound quality. In the particular case of a multi-session CD, the Joliet standard is recommended.




It is advisable to restrict file names to 20 characters, without using of special characters (e.g.: " " ?; º) to avoid any playing and displaying problems.

SELECTING/PLAYING MUSIC CD, MP3/WMA CD

1




Press the MUSIC button.



4



Select the music source required:
CD, MP3/WMA CD. Press the dial to
confirm. Play begins.




!

The list of tracks or MP3/WMA files appears under "Music" Menu.

2



Press the MUSIC button again or
select the "Music" Menu function and
press the dial to confirm.




"MUSIC" MENU

5




Press the up or down button to select
the next/previous folder.



6



Press one of the buttons to select a
music track.
Press and hold one of the buttons for
fast forward or rewind play.



3



Select the "Select music" function and
press the dial to confirm.



SELECT MUSIC

7

The playing and displaying of an MP3/WMA compilation may
depend on the recording programme and/or the settings used.
We recommend the ISO 9660 file standard.

06 MUSIC MEDIA PLAYERS

USING THE AUXILIARY INPUT (AUX) AUDIO/JACK CABLE NOT SUPPLIED

1

Connect the portable device (MP3/WMA player...) to the JACK socket using a suitable cable.




2

Press the MUSIC button then press it again or select the Music Menu function and press the dial to confirm.



MUSIC MENU




3

Select the External device function and press the dial to activate it.




EXTERNAL DEVICE



4

Select the AUX music source and press the dial to confirm. Play begins automatically.



!

The display and management of the controls are operated via the portable device.

07 BLUETOOTH TELEPHONE



CONNECTING A TELEPHONE

!

For reasons of safety and because they require prolonged attention on the part of the driver, the operations for pairing the Bluetooth mobile telephone to the hands-free system of the PC Nav must be carried out with the vehicle stationary. The ignition must be on.

1


Activate the telephone's Bluetooth function. The last telephone connected is reconnected automatically.



2



Press the PHONE button.



The list of telephones connected previously (4 maximum) appears on the multifunction screen. Select the telephone required for a new connection.


The services available depend on the network, the SIM card and the compatibility of the Bluetooth equipment used. Refer to your telephone's manual and your operator to check which services you have access to. A list of mobile telephones which offer the best range of services is available from dealers.

3



For a first connection, select "Search phone" and press the dial to confirm. Then select the name of the telephone.


SEARCH PHONE



4



Enter the authentication code on the telephone. The code to be entered is displayed on the screen.




i

Once the telephone has been connected, PC Nav can synchronise the address book and the call list. This synchronisation may take a few minutes.

1



To change the telephone connected, press the PHONE button, then select "Phone" Menu and press the dial to confirm.




2



Select "Connect phone". Select the telephone and press to confirm.

CONNECT PHONE



RECEIVING A CALL


1

An incoming call is announced by a ring and a superimposed display on the multifunction screen.

2

Select the "Yes" tab to accept or "No" to refuse and confirm by pressing the dial.


YES **NO**



3

To hang up, press the PHONE button or press the dial and select "End call" then confirm by pressing the dial.

END CALL



Press the end of the steering wheel control to accept the call or end the call in progress.

MAKING A CALL

1



Press the PHONE button.



The list of the last 20 calls made and received in the vehicle appears under "Phone" Menu. You can select a number and press the dial to make the call.

2



Select the "Phone" Menu function and press the dial to confirm.

"PHONE" MENU

Select "Dial number", then dial the telephone number using the virtual keypad.

DIAL NUMBER



It is also possible to select a number from the address book. You can select "Dial from address book". The PC Nav permits the recording of up to 4 000 entries.


Press the end of the steering wheel control for more than two seconds to gain access to the address book.





To delete a number, press the PHONE button then press and hold on a call number to display a list of actions including:
Delete entry
Delete list

08 CONFIGURATION



SETTING THE DATE AND TIME



Press the SET UP button.




Select the "Date & Time" function and press the dial to confirm.



Select the "Set date & time" function and press the dial to confirm.




Set the parameters one by one using the direction arrows and confirm by means of the dial.




This function gives access to the options: System language, Date & Time, Display (Brightness, Colour, Map colour), Vehicle, Units, System.



Select the "Date format" function and press the dial to confirm.



Confirm the format required using the dial.
Select the "Time format" function and press the dial to confirm.



Confirm the format required using the dial.
Pressing the SET UP button for more than 2 seconds gives access to:


DESCRIPTION OF THE UNIT

GPS COVERAGE

DEMO MODE

09 STEERING WHEEL CONTROLS

RADIO: selection of the next stored station.
Selection of the next entry in the address book.

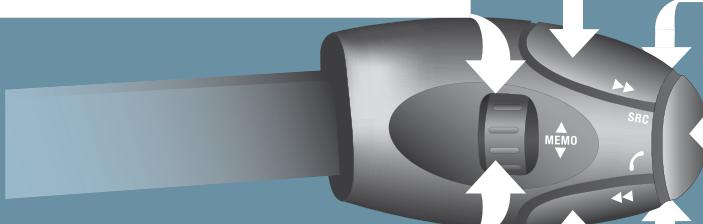

RADIO: selection of the previous stored station.
Selection of the previous entry in the address book.

RADIO: change to the next radio station on the list.
Long press: automatic search for a higher frequency.
CD: selection of the next track.
CD: continuous press: fast forward play.

Volume increase.

- Change the sound source.
- Make a call from the address book.
- Pick up/Hang up the telephone.
- Press for more than 2 seconds: access to the address book.

Volume decrease.

Mute: function activated by pressing the volume increase and decrease buttons simultaneously.

Restore the sound by pressing one of the two volume buttons.

RADIO: change to the previous radio station on the List.
Long press: automatic search for a lower frequency.
CD: selection of the previous track.
CD: continuous press: fast reverse.

10 SCREEN MENU MAP



- 1 MAIN FUNCTION
- 2 CHOICE A
- 3 choice A1
- 3 choice A2
- 2 CHOICE B...



"TRAFFIC" MENU

- 1 MESSAGES ON ROUTE
- 2 ONLY WARNINGS ON ROUTE
- 2 ALL WARNING MESSAGES
- 2 ALL MESSAGES
- 2 GEO. FILTER
 - 3 Within 2 miles (3 km)
 - 3 Within 3 miles (5 km)
 - 3 Within 6 miles (10 km)
 - 3 Within 30 miles (50 km)
 - 3 Within 60 miles (100 km)



"MUSIC" MENU

- 1
- 2 SELECT MUSIC
- 2 SOUND SETTINGS
 - 3 Balance/Fader
 - 3 Bass/Treble
 - 3 Equalizer
 - 4 Linear
 - 4 Classic
 - 4 Jazz
 - 4 Rock/Pop
 - 4 Techno
 - 4 Vocal
 - 3 Loudness
 - 3 Speed dependent volume
 - 3 Reset sound settings



"RADIO" MENU

- 1
- 2 WAVEBAND
- 3 FM
- 3 AM
- 2 MANUAL TUNE
- 2 SOUND SETTINGS
 - 3 Balance/Fader
 - 3 Bass/Treble
 - 3 Equalizer
 - 4 Linear
 - 4 Classic
 - 4 Jazz
 - 4 Rock/Pop
 - 4 Techno
 - 4 Vocal
 - 3 Loudness
 - 3 Speed dependent volume
 - 3 Reset sound settings

1 "NAVIGATION" MENU**2 ABORT GUIDANCE/RESUME GUIDANCE****2 DESTINATION INPUT****3 Address input**

4 Country

4 City

4 Street

4 House number

4 Start route guidance

4 Postal code

4 Save to address book

4 Intersection

4 City district

4 Geo position

4 Map

3 Navigate HOME**3 Choose from address book****3 Choose from last destinations****3 TMC station information****2 STOPOVERS****3 Add stopover**

4 Address input

4 Navigate HOME

4 Choose from address book

4 Choose from last destinations

3 Rearrange route**3 Replace stopover****3 Delete stopover****3 Recalculate**

4 Fast route

4 Short route

4 Optimized route

2 POI SEARCH**3 POI nearby****3 POI near destination****3 POI in city****3 POI in country****3 POI near route****2 ROUTE OPTIONS****3 Route type**

4 Fast route

4 Short route

4 Optimized route

3 Route dynamics

4 Traffic independent

4 Semi-dynamic

3 Avoidance criteria

4 Avoid motorways

4 Avoid toll roads

4 Avoid ferries

3 Recalculate**2 SETTINGS****3 Navi volume****3 POI categories on MAP**



1 "PHONE" MENU

- 1 DIAL NUMBER
- 2 DIAL FROM ADDRESS BOOK
- 2 CALL LISTS
- 2 CONNECT PHONE
 - 3 Search phone
 - 3 Phones connected
 - 4 Disconnect phone
 - 4 Rename phone
 - 4 Delete pairing
 - 4 Delete all pairings
 - 4 Show details
- 2 SETTINGS
 - 3 Select ring tone
 - 3 Phone/Ring tone volume
 - 3 Enter mailbox number



1 "SETUP" MENU

- 2 SYSTEM LANGUAGE
 - 3 Deutsch
 - 3 English
 - 3 Español
 - 3 Français
 - 3 Italiano
 - 3 Nederlands
 - 3 Polski
 - 3 Portuguese
- 2 DATE & TIME
 - 3 Set date & time
 - 3 Date format
 - 3 Time format
- 2 DISPLAY
 - 3 Brightness
 - 3 Colour
 - 4 Pop titanium
 - 4 Toffee
 - 4 Blue steel
 - 4 Technogrey

4 Dark blue

3 Map colour

4 Day mode for MAP

4 Night mode for MAP

4 Auto. Day/Night for MAP

2 VEHICLE

3 Vehicle information

4 Alert log

4 Status of functions

2 UNITS

3 Temperature

4 Celsius

4 Fahrenheit

3 Metric/Imperial

4 Kilometres (Consumption: l/100)

4 Kilometres (Consumption: km/l)

4 Miles (Consumption: MPG)

2 SYSTEM

3 Factory reset

3 Software version


3 Automatic scrolling

FREQUENTLY ASKED QUESTIONS

QUESTION	ANSWER	SOLUTION
There is a difference in sound quality between the different audio sources (radio, CD...).	For optimum sound quality, the audio settings (Volume, Bass, Treble, Ambience, Loudness) can be adapted to the different sound sources, which may result in audible differences when changing source (radio, CD...).	Check that the audio settings (Volume, Bass, Treble, Ambience, Loudness) are adapted to the sources listened to. It is advisable to set the AUDIO functions (Bass, Treble, Front-Rear Balance, Left-Right Balance) to the middle position, select the Linear musical ambience and set the loudness correction to the "Active" position in CD mode or to the "Inactive" position in radio mode.
The CD is ejected automatically or is not played by the player.	<p>The CD is inserted upside down, is unplayable, does not contain any audio data or contains an audio format which the player cannot play.</p> <p>The CD is protected by an anti-pirating protection system which is not recognised by the audio equipment.</p>	<ul style="list-style-type: none"> - Check that the CD is inserted in the player the right way up. - Check the condition of the CD: the CD cannot be played if it is too damaged. - Check the content in the case of a recorded CD: consult the advice in the Audio section. - The audio equipment's CD player does not play DVDs. - Because of their quality level, certain writeable CDs will not be played by the audio system.
The CD player sound is poor.	The CD used is scratched or of poor quality.	Insert good quality CDs and store them in suitable conditions.
	The audio equipment settings (bass, treble, ambiences) are unsuitable.	Set the treble or bass level to 0, without selecting an ambience.

QUESTION	ANSWER	SOLUTION
The stored stations do not function (no sound, 87.5 Mhz is displayed...).	An incorrect waveband is selected.	Press the BAND AST button to return to the waveband (AM, FM1, FM2, FMAST) on which the stations are stored.
The quality of reception of the radio station listened to gradually deteriorates or the stored stations do not function (no sound, 87.5 Mhz is displayed...).	The vehicle is too far from the transmitter used by the station listened to or there is no transmitter in the geographical area through which the vehicle is travelling.	Activate the RDS function to enable the system to check whether there is a more powerful transmitter in the geographical area.
	The environment (hills, buildings, tunnels, basement car parks...) block reception, including in RDS mode.	This phenomenon is normal and does not indicate a failure of the audio equipment.
	The aerial is absent or has been damaged (for example when going through a car wash or into an underground car park).	Have the aerial checked by a PEUGEOT dealer.
Sound cut-outs of 1 to 2 seconds in radio mode.	During this brief sound cut-out, the RDS searches for any frequency permitting better reception of the station.	Deactivate the RDS function if the phenomenon is too frequent and always on the same route.
With the engine off, the audio equipment switches off after a few minutes of use.	When the engine is switched off, the audio equipment operating time depends on the battery charge. The switch-off is normal: the audio equipment switches to economy mode and switches off to prevent discharging of the vehicle's battery.	Start the vehicle's engine to increase the battery charge.

QUESTION	ANSWER	SOLUTION
The TA box is ticked. However, certain traffic jams along the route are not indicated in real time.	On starting, it is several minutes before the system begins to receive the traffic information.	Wait until the traffic information is being received correctly (displaying of the traffic information symbols on the map).
	In certain countries, only major routes (motorways...) are listed for the traffic information.	This phenomenon is normal. The system is dependent on the traffic information available.
The time taken to calculate a route sometimes seems longer than usual.	The performance of the system may slow down temporarily if a CD is being copied onto the Jukebox at the same time as a route is being calculated.	Wait until the CD has been copied or stop the copying before starting the guidance function.
The altitude is not displayed.	On starting, the initialisation of the GPS may take up to 3 minutes to receive more than 3 satellites correctly.	Wait until the system has started up completely. Check that there is a GPS coverage of at least 3 satellites (long press on the SETUP button, then select GPS coverage).
	Depending on the geographical environment (tunnel...) or the weather, the conditions of reception of the GPS signal may vary.	This phenomenon is normal. The system is dependent on the conditions of reception of the GPS signal.
The route is not calculated successfully.	The exclusion criteria may conflict with the current location (exclusion of toll roads on a motorway with tolls).	Check the exclusion criteria.
There is a long waiting time after inserting a CD.	When a new medium is inserted, the system reads a certain amount of data (directory, title, artist, etc.). This may take a few seconds.	This phenomenon is normal.
I cannot connect my Bluetooth telephone.	The telephone's Bluetooth function may be deactivated or the equipment may not be visible.	<ul style="list-style-type: none"> - Check that your telephone's Bluetooth function is activated. - Check that your telephone is visible.

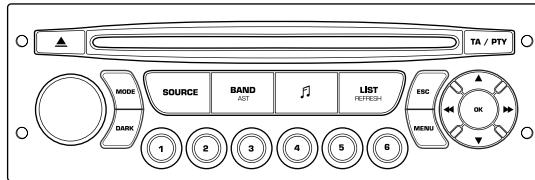

PC Sound



The PC Sound is coded in such a way that it will only operate in your vehicle. If it is to be installed in another vehicle, contact your PEUGEOT dealer for configuration of the system.



For safety reasons, the driver must carry out operations which require prolonged attention while the vehicle is stationary.
When the engine is off and in order to prevent discharging of the battery, the PC Sound may switch off after a few minutes.

CONTENTS

- **01 First steps** p. 254
- **02 General menu** p. 255
- **03 Audio** p. 256
- **04 USB reader** p. 259
- **05 Bluetooth** p. 262
- **06 Steering wheel controls** p. 264
- **07 Configuration** p. 265
- **08 Screen menu map** p. 266
- **Frequently asked questions** p. 268

01 FIRST STEPS



1. On/Off and volume adjustment.
2. CD eject.
3. Selection of the display on the screen from the modes: Audio (AUDIO), Trip Computer (TRIP) and Telephone (TEL) functions.
4. Selection of the source: radio, audio CD/MP3 CD, USB, Jack connection, Streaming.
5. Selection of the FM1, FM2, FMast and AM wavebands.
6. Setting audio options: front/rear balance, left/right balance, loudness, sound ambiences.
7. Display the list of local stations, of the tracks on the CD or of the MP3 directories.
8. Abandon current operation.
9. TA (Traffic Announcement) function on/off.
Long press: access to the PTY (Types of radio programme) mode.
10. Confirmation.
11. Automatic search for a lower/higher frequency.
Selection of previous/next CD, MP3 or USB track.
12. Selection of a lower/higher radio frequency.
Selection of the previous/next MP3 directory.
Selection of the previous/next USB equipment directory/genre/artist/playlist.
13. Display the general menu.
14. Buttons 1 to 6:
Selection of a stored radio station.
Long press: storing of a station.
15. The DARK button changes the display on the screen to improve driving comfort at night.
1st press: lighting of the top banner only.
2nd press: displaying of a black screen.
3rd press: return to the standard display.

GENERAL MENU 02

> MONOCHROME SCREEN C

AUDIO FUNCTIONS:
radio, CD, USB, options.

TELEPHONE:
hands-free kit, pairing,
management of a call.



TRIP COMPUTER:
warnings, status of functions.

PERSONALISATION-CONFIGURATION:
vehicle parameters, display, languages.

> MONOCHROME SCREEN A



For a detailed global view of the menus available, refer to the "Screen menu map" section of this chapter.

03 AUDIO




The external environment (hills, buildings, tunnels, basement car parks) may block reception, including in RDS mode. This is a normal effect of the way in which radio waves are transmitted and does not indicate any failure of the audio equipment.

RADIO SELECTING A STATION




Press the SOURCE button several times in succession and select the radio.




Press the BAND AST button to select a waveband: FM1, FM2, FMast, AM.



Briefly press one of the buttons to carry out an automatic search of the radio stations.




Press one of the buttons to carry out a manual search of the radio stations.




Press the LIST REFRESH button to display the list of stations received locally (30 stations maximum). To update this list, press for more than two seconds.




RDS



Press the MENU button.



Select AUDIO FUNCTIONS then press OK.



Select the FM WAVEBAND PREFERENCES function then press OK.

FM WAVEBAND PREFERENCES



Select ACTIVATE FREQUENCY FOLLOWING (RDS) then press OK. RDS appears on the display.

ACTIVATE FREQUENCY FOLLOWING (RDS)



The RDS, if displayed, enables you to continue listening to the same station by automatic retuning to alternative frequencies. However, in certain conditions, coverage of an RDS station may not be assured throughout the country as radio stations do not cover 100 % of the territory. This explains the loss of reception of the station during a journey.


CD PLAYING A CD




Insert circular compact discs only. Some anti-pirating systems, on original discs or CDs copied using a personal recorder, may cause faults which are no reflection on the quality of the original player. Without pressing the EJECT button, insert a CD in the player, play begins automatically.

1

To play a disc which has already been inserted, press the SOURCE button several times in succession and select CD.

**2**

Press one of the buttons to select a track on the CD. Press the LIST REFRESH button to display the list of tracks on the CD. Press and hold one of the buttons for fast forward or backward.



MP3 CD PLAYING AN MP3 COMPILATION



Insert an MP3 compilation in the player. The audio equipment searches for all of the music tracks, which may take anything between a few seconds and several tens of seconds, before play begins.




On a single disc, the CD player can read up to 255 MP3 files spread over 8 directory levels. However, it is advisable to keep to a limit of two levels to reduce the access time before the CD is played. While the CD is being played, the directory flow chart is not followed. All of the files are displayed on a single level.

1

To play a disc which has already been inserted, press the SOURCE button several times in succession and select CD.

**2**

Press one of the buttons to select a track on the CD. Press the LIST REFRESH button to display the list of directories of the MP3 compilation. Press and hold one of the buttons for fast forward or backward play.



03 AUDIO

MP3 CD INFORMATION AND ADVICE



The MP3 format, an abbreviation of MPEG 1.2 & 2.5 Audio Layer 3, is an audio compression standard which permits the recording of several tens of music files on a single disc.

In order to be able to play a recorded CDR or CDRW, when recording it is preferable to select standards ISO 9660 level 1.2 or Joliet.



The audio equipment will only play files with the extension ".mp3" with a sampling rate of 22.05 KHz or 44.1 KHz. No other type of file (.wma, .mp4, .m3u...) can be played.



If the disc is recorded in another format, it may not be played correctly.

It is recommended that the same recording standard is always used for an individual disc, with as low a speed as possible (4x maximum) for optimum sound quality.

In the particular case of a multi-session CD, the Joliet standard is recommended.



It is advisable to restrict file names to 20 characters without using special characters (e.g. " " ?; ü) to avoid any playing or displaying problems.

04 USB PLAYER - PLUG

USING THE USB SOCKET - PLUG

1



This unit consists of a USB port and a Jack socket*. The audio files are transmitted from portable equipment such as a digital player or a USB memory stick to your PC Sound to be listened to via the vehicle's speakers.

2

USB key (1.1, 1.2 and 2.0) or Ipod® of generation 5 or later:
- USB memory sticks should be formatted FAT or FAT 32 (NTFS not supported),
- the Ipod® lead is essential,
- navigation through the file database is by means of the steering wheel controls,
- the IPod software should be regularly updated for the best connection.



3

Other Ipod® players of earlier generations and players using the MTP protocol*:
- play via Jack-Jack lead only (not supplied),
- navigation through the file database is from the portable equipment.



The list of compatible equipment is available from PEUGEOT dealers.

CONNECTING A USB MEMORY STICK

1



Connect the memory stick to the port, directly or using a lead. If the audio equipment is switched on, the USB source is detected as soon as it is connected. Play begins automatically after a delay which depends on the capacity of the USB stick.

The file formats recognised are .mp3 (mpeg1 layer 3 only), .wma (standard 9 only, 128 kbits/sec compression), .wav and .ogg. The playlists types accepted are m3u, .pls, .wpl.

!

The system puts together playlists (temporary memory) created over a period which depends on the capacity of the USB equipment. The other sources are available during this time. The playlists are updated each time the ignition is switched off or each time a USB memory stick is connected. When connecting for the first time, the classification suggested is by folder. When you reconnect, the classification selected previously is retained.

* According to vehicle.

04 USB PLAYER - PLUG

USING THE USB SOCKET - PLUG

2

Press and hold LIST to display the different classifications. Select by Folder/Artist/Genre/Playlist, press OK to select the classification required, then press OK again to confirm.

OK




- by Folder: all folders containing audio files recognised on the peripheral device, classified in alphabetical order without following the flow chart.
- by Artist: all of the artist names defined in the ID3 Tags, classified in alphabetical order.
- by Genre: all of the genres defined in the ID3 Tags.
- by Playlist: in accordance with the playlists recorded on the USB device.



4




Press one of these buttons to gain access to the previous/next track on the classification list currently being played. Press and hold one of the buttons for fast forward or backward play.



5



Press one of these buttons to gain access to the previous/next Genre, Folder, Artist or Playlist on the classification list currently being played.



3

Press LIST briefly to display the previously selected classification. Navigate through the list using the left/right and up/down buttons. Confirm the selection by pressing OK.



CONNECTING AN IPOD® VIA THE USB PORT

1

The lists available are Artist, Genre and Playlist (as defined on the iPod®). Selection and Navigation are described in steps 1 to 5 above.

!

Do not connect a hard disk or USB devices other than audio equipment to the USB port. This could damage your installation.

USING THE AUXILIARY INPUT (AUX) JACK SOCKET OR RCA SOCKET (according to vehicle)



The auxiliary input, JACK and RCA, permits the connection of portable equipment (MP3 player...).



Do not connect a single piece of equipment via the USB port and the JACK socket at the same time.



1 Connect the portable equipment (MP3 player...) to the JACK socket or to the audio sockets (white and red, RCA type) using a suitable cable (not supplied).



2 Press the SOURCE button several times in succession and select AUX.



ADJUSTING THE VOLUME OF THE AUXILIARY SOURCE



1 First adjust the volume of your portable equipment.



2 Then adjust the volume of your audio equipment.



3 The controls are displayed and managed via the portable equipment.



05 BLUETOOTH



BLUETOOTH TELEPHONE SCREEN C



PAIRING A TELEPHONE



For safety reasons and because they require prolonged attention on the part of the driver, the operations for pairing of the Bluetooth mobile telephone with the Bluetooth hands-free system of your audio equipment must be carried out with the vehicle stationary and the ignition on.



1 Activate the telephone's Bluetooth function.




2 Press the MENU button.



3 In the menu, select:

- Bluetooth telephone function - Audio
- Bluetooth configuration
- Perform a Bluetooth search



4 A window is displayed with "Searching...".



5 The first 4 telephones recognised are displayed in this window.

The services offered depend on the network, the SIM card and the compatibility of the Bluetooth equipment used.

Consult your telephone's manual and your operator to find out which services are available to you.

A list of mobile telephones which offer the best range of services is available from the network.

Consult a PEUGEOT dealer.



6 The TELEPHONE menu permits access to the following functions in particular: Directory*, Call list, Pairing management.

* If your telephone hardware is fully compatible.



7 Select the telephone to be connected from the list. Only one telephone can be connected at a time.



A virtual keypad is displayed on the screen: enter a code with at least 4 digits. Confirm by pressing OK.



8 A message is displayed on the screen of the telephone chosen: to accept the pairing, enter the same code on the telephone, then confirm by pressing OK. If pairing fails, the number of attempts is not limited.



9 "Pairing of Name_telephone successful" appears on the screen.



10 The automatic connection authorised is only active after the telephone has been configured. The directory and the call list can be accessed after the synchronisation period.

The pairing can also be initiated from the telephone.

BLUETOOTH AUDIO STREAMING (AVAILABLE DURING THE YEAR)

RECEIVING A CALL

1 An incoming call is announced by a ring and a superimposed display on the multifunction screen.

2 Select the YES tab on the display using the buttons and confirm by pressing OK.



YES



Press the steering wheel control OK to accept the call.



MAKING A CALL

1 From the Bluetooth telephone function Audio menu, select Manage the telephone call then Call, Call list or Directory.

2 Press the end of the steering wheel control for more than two seconds to gain access to your directory.

Or

To dial a number, use your telephone's keypad, with the vehicle stationary.



! Wireless transmission of the telephone's music files via the audio equipment. The telephone must be able to manage the appropriate bluetooth profiles (Profiles A2DP/AVRCP).

1 Initiate the pairing between the telephone and the vehicle. This pairing can be initiated from the vehicle's telephone function menu or via the telephone's keypad. See steps 1 to 10 on the previous pages. During the pairing phase, the vehicle must be stationary with the key in the ignition.



2 Select the telephone to be connected from the telephone function menu. The audio system connects to a newly paired telephone automatically.

3 Activate the streaming source by pressing the SOURCE button*. The tracks to be played can be controlled as usual via the buttons on the Radio control panel and the steering wheel controls**. The contextual information can be displayed on the screen.



* In certain cases, playing of the Audio files must be initiated from the keypad.

** If the telephone supports the function.

06 STEERING WHEEL CONTROLS

RADIO: selection of the previous stored station.
USB: selection of the previous genre/artist/directory from the classification list.
Selection of the previous item on a menu.

RADIO: automatic search for a higher frequency.
CD/CD CHANGER/MP3/USB: selection of the next track.
CD/CD CHANGER/USB: continuous press: fast forwards play.
Selection of the previous item.

RADIO: selection of the next stored station.
USB: selection of the next genre/artist/directory from the classification list.
Selection of the next item on a menu.

Volume increase.

- Change of sound source.
- Confirmation of a selection.
- Pick up/Hang up the telephone.
- Press for more than 2 seconds: access to the telephone menu.

Volume decrease.

Mute: press the volume increase and decrease buttons simultaneously.


The sound is restored by pressing one of the two volume buttons.

RADIO: automatic search for a lower frequency.
CD/MP3/USB: selection of the previous track.
CD/USB: continuous press: fast reverse.
Selection of the next item.


07 CONFIGURATION




ADJUSTING THE DATE AND TIME SCREEN C



Press the MENU button.




Press to confirm the selection.



Using the arrows, select the PERSONALISATION CONFIGURATION function.



PERSONALISATION CONFIGURATION




Using the arrows, select the ADJUST DATE AND TIME function.


ADJUST DATE AND TIME



Press to confirm the selection.




Press to confirm the selection.




Using the arrows, select the DISPLAY CONFIGURATION function.

DISPLAY CONFIGURATION



Adjust the settings one by one confirming by pressing the OK button. Next select the OK tab on the screen then confirm.

OK



08 SCREEN MENU MAP

monochrome A

01:17 20°
27 MAI 2009
10 405 78

- 1** RADIO-CD
- 2** RDS SEARCH
- 2** REG MODE
- 2** CD REPEAT
- 2** RANDOM PLAY
- 1** VEHICLE CONFIG*
- 2** REV WIPE ACT
- 2** GUIDE LAMPS
- 1** OPTIONS
- 2** DIAGNOSTICS
- 3** consult
- 3** abandon
- 1** UNITS
- 2** TEMPERATURE: °CELSIUS/°FAHRENHEIT
- 2** FUEL CONSUMPTION: KM/L - L/100 - MPG

* The parameters vary according to vehicle.



- 1** MAIN FUNCTION
- 2** CHOICE A
- 3** Choice A1
- 3** Choice A2
- 2** CHOICE B...

DISPLAY ADJUST

- 1** YEAR
- 2** MONTH
- 2** DAY
- 2** HOUR
- 2** MINUTES
- 2** 12 H/24 H MODE

LANGUAGES

- 2** FRANCAIS
- 2** ITALIANO
- 2** NEDERLANDS
- 2** PORTUGUES
- 2** PORTUGUES-BRASIL
- 2** DEUTSCH
- 2** ENGLISH
- 2** ESPANOL

monochrome C



Press the OK dial for access to short-cut menus according to the display on the screen:

RADIO

- 1** activate/deactivate RDS
- 1** activate/deactivate REG mode
- 1** activate/deactivate radiotext

CD/MP3 CD

- 1** activate/deactivate Intro
- 1** activate/deactivate track repeat
- 1** Audio CD/Changer: the entire CD
- 1** MP3 CD/MP3 Changer: the entire current folder
- 1** activate/deactivate random play
- 1** Audio CD/Changer: the entire CD
- 1** MP3 CD: the entire current folder
- 1** MP3 Changer: all of the folders

USB

- 1** activate/deactivate track repeat
- 1** current folders/artist/genre/playlist
- 1** activate/deactivate random play
- 1** current folders/artist/genre/playlist

08 SCREEN MENU MAP

monochrome A

01:17 20°
27 MAI 2009
10 405 78

- 1 RADIO-CD
- 2 RDS SEARCH
- 2 REG MODE
- 2 CD REPEAT
- 2 RANDOM PLAY
- 1 VEHICLE CONFIG*
- 2 REV WIPE ACT
- 2 GUIDE LAMPS
- 1 OPTIONS
- 2 DIAGNOSTICS
- 3 consult
- 3 abandon
- 1 UNITS
- 2 TEMPERATURE: °CELSIUS/°FAHRENHEIT
- 2 FUEL CONSUMPTION: KM/L - L/100 - MPG

* The parameters vary according to vehicle.



- 1 MAIN FUNCTION
- 2 CHOICE A
- 3 Choice A1
- 3 Choice A2
- 2 CHOICE B...

DISPLAY ADJUST

- 1 YEAR
- 2 MONTH
- 2 DAY
- 2 HOUR
- 2 MINUTES
- 2 12 H/24 H MODE

LANGUAGES

- 2 FRANCAIS
- 2 ITALIANO
- 2 NEDERLANDS
- 2 PORTUGUES
- 2 PORTUGUES-BRASIL
- 2 DEUTSCH
- 2 ENGLISH
- 2 ESPANOL

monochrome C



Press the OK dial for access to short-cut menus according to the display on the screen:

RADIO

- 1 activate/deactivate RDS
- 1 activate/deactivate REG mode
- 1 activate/deactivate radiotext

CD/MP3 CD

- 1 activate/deactivate Intro
- 1 activate/deactivate track repeat
- 1 Audio CD/Changer: the entire CD
- 1 MP3 CD/MP3 Changer: the entire current folder
- 1 activate/deactivate random play
- 1 Audio CD/Changer: the entire CD
- 1 MP3 CD: the entire current folder
- 1 MP3 Changer: all of the folders

USB

- 1 activate/deactivate track repeat
- 1 current folders/artist/genre/playlist
- 1 activate/deactivate random play
- 1 current folders/artist/genre/playlist

09 SCREEN MENU MAP monochrome C



1 AUDIO FUNCTIONS

2 FM BAND PREFERENCES

3 alternative frequencies (RDS)

4 activate/deactivate

3 regional mode (REG)

4 activate/deactivate

3 radio-text information (RDTXT)

4 activate/deactivate

2 PLAY MODES

3 album repeat (RPT)

4 activate/deactivate

3 track random play (RDM)

4 activate/deactivate



1 TRIP COMPUTER

2 ENTER DISTANCE TO DESTINATION

2 WARNING LOG

2 STATUS OF FUNCTIONS



1 PERSONALISATION-CONFIGURATION

2 DEFINE THE VEHICLE PARAMETERS*

2 DISPLAY CONFIGURATION

3 video brightness adjustment

4 normal video

4 inverse video

4 brightness (- +) adjustment

3 date and time adjustment

3 day/month/year adjustment

4 hour/minute adjustment

4 choice of 12 h/24 h mode

3 choice of units

4 l/100 km - mpg - km/l

4 °Celsius/°Fahrenheit

2 CHOICE OF LANGUAGE



1 BLUETOOTH TELEPHONE

2 BLUETOOTH CONFIGURATION

3 Connect/Disconnect a device

3 Telephone function

3 Audio Streaming function

4 Consult the paired device

4 Delete a paired device

4 Perform a Bluetooth search

2 CALL

2 Calls list

3 Directory

MANAGE THE TELEPHONE CALL

2 Terminate the current call

3 Activate private mode

* The parameters vary according to vehicle.

FREQUENTLY ASKED QUESTIONS

QUESTION	ANSWER	SOLUTION
There is a difference in sound quality between the different audio sources (radio, CD...).	For optimum sound quality, the audio settings (Volume, Bass, Treble, Ambience, Loudness) can be adapted to the different sound sources, which may result in audible differences when changing source (radio, CD...).	Check that the audio settings (Volume, Bass, Treble, Ambience, Loudness) are adapted to the sources listened to. It is advisable to set the AUDIO functions (Bass, Treble, Front-Rear Balance, Left-Right Balance) to the middle position, select the musical ambience "None" and set the loudness correction to the "Active" position in CD mode or to the "Inactive" position in radio mode.
The CD is ejected automatically or is not played by the player.	The CD is inserted upside down, is unplayable, does not contain any audio data or contains an audio format which the player cannot play. The CD is protected by an anti-pirating protection system which is not recognised by the audio equipment.	<ul style="list-style-type: none"> - Check that the CD is inserted in the player the right way up. - Check the condition of the CD: the CD cannot be played if it is too damaged. - Check the content in the case of a recorded CD: consult the advice in the "Audio" section. - The audio equipment's CD player does not play DVDs. - Due to their quality level, certain writeable CDs will not be played by the audio system.
The message "USB peripheral error" is displayed on the screen.	<p>The Bluetooth connection is cut. The battery of the peripheral may not be sufficiently charged.</p> <p>The memory stick may be corrupt.</p>	<p>Recharge the battery of the peripheral device. The USB memory stick is not recognised.</p> <p>Reformat the memory stick.</p>
The CD player sound is poor.	<p>The CD used is scratched or of poor quality.</p> <p>The audio equipment settings (bass, treble, ambiances) are unsuitable.</p>	<p>Insert good quality CDs and store them in suitable conditions.</p> <p>Set the treble or bass level to 0, without selecting an ambience.</p>

QUESTION	ANSWER	SOLUTION
The stored stations do not function (no sound, 87.5 Mhz is displayed...).	An incorrect waveband is selected.	Press the BAND AST button to return to the waveband (AM, FM1, FM2, FMAST) on which the stations are stored.
The traffic announcement (TA) is displayed. I do not receive any traffic information.	The radio station is not part of the regional traffic information network.	Tune to a radio station which broadcasts traffic information.
The quality of reception of the radio station listened to gradually deteriorates or the stored stations do not function (no sound, 87.5 Mhz is displayed...).	The vehicle is too far from the transmitter used by the station listened to or there is no transmitter in the geographical area through which the vehicle is travelling.	Activate the RDS function to enable the system to check whether there is a more powerful transmitter in the geographical area.
	The environment (hills, buildings, tunnels, basement car parks...) block reception, including in RDS mode.	This phenomenon is normal and does not indicate a failure of the audio equipment.
	The aerial is absent or has been damaged (for example when going through a car wash or into an underground car park).	Have the aerial checked by a PEUGEOT dealer.
Sound cut-outs of 1 to 2 seconds in radio mode.	During this brief sound cut-out, the RDS searches for any frequency permitting better reception of the station.	Deactivate the RDS function if the phenomenon is too frequent and always on the same route.
With the engine off, the audio equipment switches off after a few minutes of use.	When the engine is switched off, the audio equipment operating time depends on the battery charge. The switch-off is normal: the audio equipment switches to economy mode and switches off to prevent discharging of the vehicle's battery.	Start the vehicle's engine to increase the battery charge.
The message "the audio system is overheated" appears on the display.	In order to protect the installation if the surrounding temperature is too high, the audio equipment switches to an automatic thermal protection mode leading to a reduction of the volume or stopping of the playing of the CD.	Switch the audio system off for a few minutes to allow the system to cool.