# Owner's Manual

**2022 HR-V** 



## **AWARNING**

## **California Proposition 65 Warning**

Operating, servicing and maintaining a passenger vehicle or off-highway motor vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information go to www.P65Warnings.ca.gov/passengervehicle.

#### **Event Data Recorders**

This vehicle is equipped with an event data recorder (EDR). The main purpose of an EDR is to record, in certain crash or near crash-like situations, such as an air bag deployment or hitting a road obstacle, data that will assist in understanding how a vehicle's systems performed. The EDR is designed to record data related to vehicle dynamics and safety systems for a short period of time, typically 30 seconds or less. The EDR in this vehicle is designed to record such data as:

- How various systems in your vehicle were operating;
- Whether or not the driver and passenger safety belts were buckled/fastened;
- How far (if at all) the driver was depressing the accelerator and/or brake pedal; and,
- How fast the vehicle was traveling.

These data can help provide a better understanding of the circumstances in which crashes and injuries occur. NOTE: EDR data are recorded by your vehicle only if a non-trivial crash situation occurs; no data are recorded by the EDR under normal driving conditions and no personal data (e.g., name, gender, age, and crash location) are recorded. However, other parties, such as law enforcement, could combine the EDR data with the type of personally identifying data routinely acquired during a crash investigation.

To read data recorded by an EDR, special equipment is required, and access to the vehicle or the EDR is needed. In addition to the vehicle manufacturer, other parties, such as law enforcement, that have the special equipment, can read the information if they have access to the vehicle or the EDR

The data belongs to the vehicle owner and may not be accessed by anyone else except as legally required or with the permission of the vehicle owner.

## **Service Diagnostic Recorders**

This vehicle is equipped with service-related devices that record information about powertrain performance. The data can be used to verify emissions law requirements and/or help technicians diagnose and solve service problems. It may also be combined with data from other sources for research purposes, but it remains confidential. Some diagnostic and maintenance information is uploaded to Honda upon vehicle start up.

#### **California Perchlorate Contamination Prevention Act**

The airbags, seat belt tensioners, and CR type batteries in this vehicle may contain perchlorate materials - special handling may apply. See <a href="https://www.dtsc.ca.gov/hazardouswaste/perchlorate/">www.dtsc.ca.gov/hazardouswaste/perchlorate/</a>

As you read this manual, you will find information that is preceded by a **NOTICE** symbol. This information is intended to help you avoid damage to your vehicle, other property, or the environment.

## **Software End User License Agreement**

Your vehicle comes equipped with software, which is governed by the End User License Agreement in Owner's Manual, and which contains a binding arbitration clause. Please refer to the End User License Agreement for the terms and conditions governing your use of the installed software, as well as the applications, services, functions, and content provided through the software. Your use of the installed software will serve as your consent to the terms and conditions of the End User License Agreement.

You may opt out within 30 days of your initial use of the Software by sending a signed, written notice to HONDA at American Honda Motor Co., Inc., Honda Automobile Customer Service Mail Stop CHI-5, 1919 Torrance Blvd., Torrance, CA 90501-2746.

## **Privacy Notice**

This vehicle may share location and usage information. To manage this setting, visit www.hondalink.com/vehicle-data-choices.

To learn more about how we collect and use Personal Information, please read our Privacy Policy, accessible at www.honda.com.

## A Few Words About Safety

Your safety, and the safety of others, is very important. And operating this vehicle safely is an important responsibility.

To help you make informed decisions about safety, we have provided operating procedures and other information on labels and in this manual. This information alerts you to potential hazards that could hurt you or others.

Of course, it is not practical or possible to warn you about all the hazards associated with operating or maintaining your vehicle. You must use your own good judgment.

You will find this important safety information in a variety of forms, including:

- Safety Labels on the vehicle.
- Safety Messages preceded by a safety alert symbol and one of three signal words: DANGER, WARNING, or CAUTION.
  These signal words mean:

**ADANGER** 

You WILL be KILLED or SERIOUSLY HURT if you don't follow instructions.

**AWARNING** 


You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.

**ACAUTION** 

You CAN be HURT if you don't follow instructions.

- Safety Headings such as Important Safety Precautions.
- Safety Section such as Safe Driving.
- **Instructions** how to use this vehicle correctly and safely.

This entire book is filled with important safety information - please read it carefully.



This owner's manual should be considered a permanent part of the vehicle and should remain with the vehicle when it is sold

This owner's manual covers all models of your vehicle. You may find descriptions of equipment and features that are not on your particular model.

Images throughout this owner's manual (including the front cover) represent features and equipment that are available on some, but not all, models. Your particular model may not have some of these features

This owner's manual is for vehicles sold in the United States and Canada.

The information and specifications included in this publication were in effect at the time of approval for printing. Honda Motor Co., Ltd. reserves the right, however, to discontinue or change specifications or design at any time without notice and without incurring any obligation.

### **≥** Safe Driving P. 35

For Safe Driving P. 36 Seat Belts P. 42

#### **▶** Instrument Panel P. 83

Indicators P. 84 Gauges and Displays P. 117

#### Controls P. 137

Clock P. 138 Locking and Unlocking the Doors P. 140

Opening and Closing the Windows P. 166 Moonroof\* P. 168

Adjusting the Seats P. 194 Climate Control System\* P. 220

#### Features P. 231

Audio System P. 232 Audio System Basic Operation P. 238, 259

Customized Features P. 349, 356 HomeLink® Universal Transceiver\* P. 371

Airbags P. 52

#### Driving P. 427

Before Driving P. 428 Towing a Trailer P. 433
Braking P. 507 Parking Your Vehicle P. 514

#### ■ Maintenance P 521

Before Performing Maintenance P. 522 Maintenance Minder™ P. 525

Checking and Maintaining Wiper Blades P. 555

Heating and Cooling System\*/Climate Control System\* Maintenance P. 574

#### Handling the Unexpected P. 583

Tools P. 584 If a Tire Goes Flat P. 586

Overheating P. 601 Indicator, Coming On/Blinking P. 603 Fuses P. 608

#### **▶** Information P. 617

Specifications P. 618 Identification Numbers P. 620
Emissions Testing P. 623 Warranty Coverages P. 625

				h.
Child Safety P. 6	8	Exhaust Gas Hazard P. 81	Safety Labels P. 82	
				W. 70
				1
				), '(),
	witches Around the Steeri terior Convenience Items	=	Adjusting the Mirrors P. 191 Heating and Cooling System* P. 216	
				llis.
Audio Error Mes Bluetooth® Hand	sages P. 327 dsFreeLink® P. 374, 397	General Information on the Audio System	n P. 333	
Off-Highway Dri Multi-View Rear	ving Guidelines P. 434 Camera P. 515	When Driving P. 436 Refueling P. 517	Honda Sensing®* P. 464 Fuel Economy and CO <sub>2</sub> Emissions P. 520	
	der the Hood P. 533 laintaining Tires P. 559	Replacing Light Bulbs P. 545 Battery P. 570 Accessories and Modifications P. 580	Remote Transmitter Care P. 572	.11111
				الرازا
Engine Does Not Emergency Towi		If the Battery Is Dead P. 598 If You Cannot Open the Tailgate P. 614	Shift Lever Does Not Move P. 600	
Devices that Emi	t Radio Waves P. 621	Reporting Safety Defects P. 622		)'
Authorized Man		Customer Service Information P. 629		_ 1

## Contents

Quick Reference Guide P. 6

Safe Driving P. 35

Instrument Panel P. 83

Controls P. 137

Features P. 231

Driving P. 427


Maintenance P. 521

Handling the Unexpected P. 583


Information P. 617

Index P. 631


## **Visual Index**

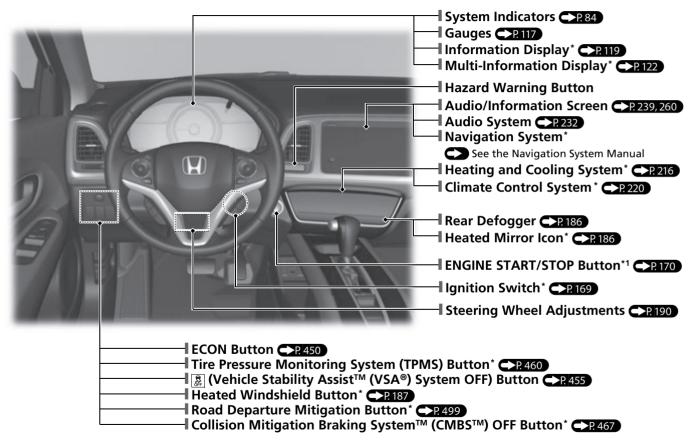


<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

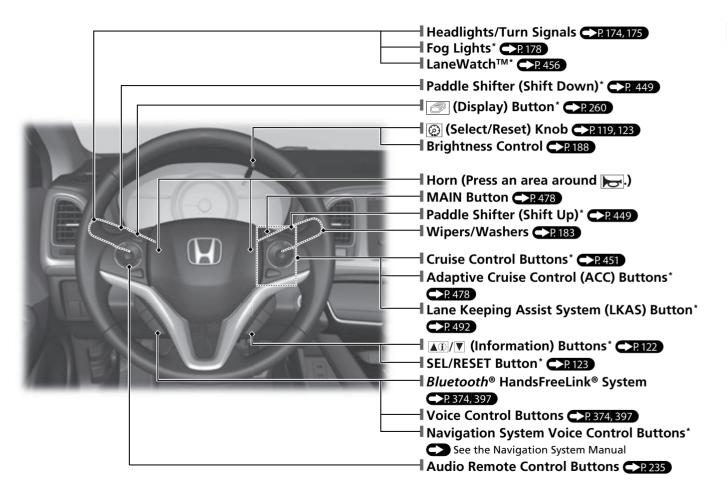


# **Visual Index**

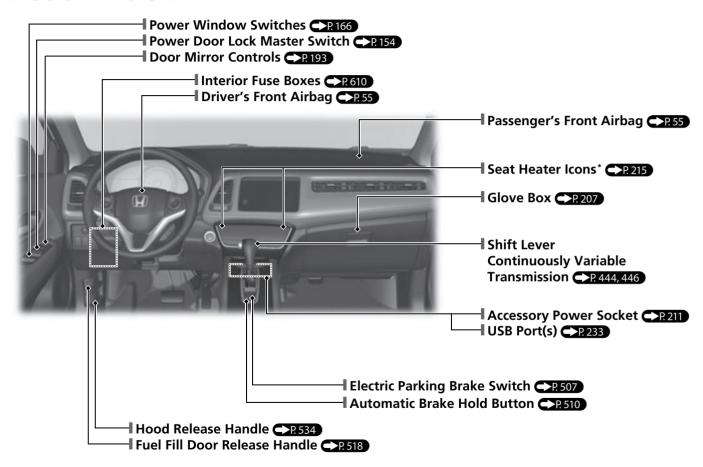

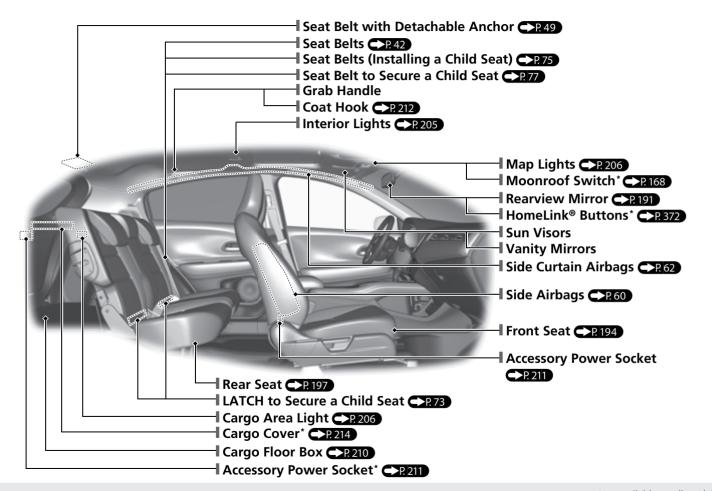

# **Visual Index**



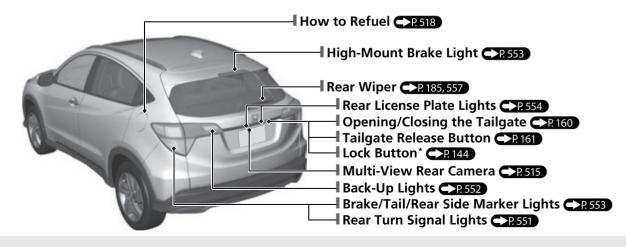

# **Eco Assist® System**

## Models with multi-information display

The message is displayed for a few seconds when the **ECON** button is pressed.



#### **Ambient Meter**

The color of the ambient meter changes to green to indicate that the vehicle is being driven in a fuel efficient manner.

ECON Mode Indicator P.97

Comes on when **ECON** button is pressed.



ECON Button →P. 450

Helps maximize fuel economy.






# Safe Driving

## Airbags (\$7.52)

 Your vehicle is fitted with airbags to help protect you and your passengers during a moderate-to-severe collision.

## 

- All children 12 and younger should be seated in the rear seat.
- Smaller children should be properly restrained in a forward-facing child seat.
- Infants must be properly restrained in a rear-facing child seat.



## -Exhaust Gas Hazard ←∑RED

 Your vehicle emits dangerous exhaust gases that contain carbon monoxide. Do not run the engine in confined spaces where carbon monoxide gas can accumulate.

## Seat Belts R42

- Fasten your seat belt and sit upright well back in the seat.
- Check that your passengers are wearing their seat belts correctly.



Fasten your lap belt as low as possible.

## **Before Driving Checklist** →P.40

 Before driving, check that the front seats, head restraints, steering wheel, and mirrors have been properly adjusted.

## Instrument Panel


# Indicators (CARSA)/Gauges (CARTITO)/Information Display\* (CARTITO)/Multi-Information Display\* (CARTITO)

#### Models with information display

### **System Indicators**








~**!** 

High Temperature Indicator (Red)/Low Temperature Indicator (Blue)



₹ VSA® OFF Indicator


Electric Power Steering (EPS) System Indicator

Automatic Brake Hold
System Indicator


Automatic Brake Hold Indicator

Electric Parking Brake
System Indicator


PARK Electric Parking Brake Indicator

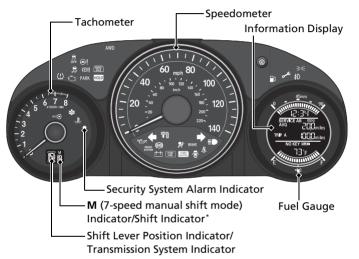

## **System Indicators**







## **System Indicators**

CRUISE

CRUISE MAIN Indicator

CRUISE CONTROL
Indicator

Low Tire Pressure/ TPMS Indicator

AWD All-Wheel Drive (AWD)
System Indicator\*

## **Lights Indicators**

Fog Light Indicator\*

High Beam Indicator

00 Lights On Indicator

## **System Indicators**

Supplemental Restraint
System Indicator

Immobilizer System Indicator

Seat Belt Reminder Indicator

Door and Tailgate
Open Indicator

Anti-lock Brake System (ABS) Indicator

BRAKE Brake System Indicator (Red)

BRAKE System Indicator SYSTEM (Amber)

Low Fuel Indicator



#### **System Indicators**



Malfunction Indicator Lamp



Low Oil Pressure Indicator



Charging System Indicator



Anti-lock Brake System (ABS) Indicator



Vehicle Stability Assist™ (VSA®) System Indicator



VSA® OFF Indicator

#### **BRAKE**

U.S. **Brake System Indicator** (1) (Red)





**Brake System Indicator** (Amber)



Automatic Brake Hold System Indicator



Automatic Brake Hold Indicator




**Electric Parking Brake System Indicator** 



Canada

**Electric Parking Brake** Indicator

Shift Lever Position Indicator/ Transmission System Indicator

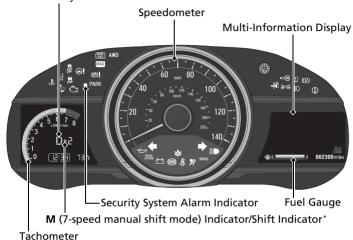

### **System Indicators**



High Temperature Indicator (Red)/Low Temperature Indicator (Blue)



**Keyless Access System** Indicator\*



**ECON Mode Indicator** 



System Message Indicator



Low Tire Pressure/TPMS Indicator\*

## **Lights Indicators**

Lights On Indicator



**High Beam Indicator** 



Fog Light Indicator\*

## **System Indicators**



Turn Signal and Hazard Warning Indicators



Flectric Power Steering (EPS) System Indicator




Immobilizer System Indicator




Seat Belt Reminder Indicator



Supplemental Restraint System Indicator



Control (ACC)





Road Departure Mitigation (RDM) Indicator



**Collision Mitigation** Braking System™ (CMBS™) Indicator Lane Keeping Assist



System (LKAS) Indicator (Amber/ Green)



Auto High-Beam Indicator

AWD

All-Wheel Drive (AWD) System Indicator\*

# Controls CRIED

## Clock CXP1B8

#### Models with navigation system

The navigation system receives signals from GPS satellites, updating the clock automatically.

#### Models without navigation system

The clock in the multi-information display\*/ information display\* is automatically updated along with the audio system's clock display.

#### Models with display audio system



- Select the (HOME) icon, then select Settings.
- Select Clock/Info, then Clock Adjustment.
- Adjust the hours and minutes by selecting ▲ / ▼.
- 4 Select OK.

#### Models with color audio system



- Press and hold the MENU/CLOCK button.
- **2** Rotate ⊘ to change hour, then press ⊗.
- **3** Rotate ⊘ to change minute, then press ፩.
- **4** Select **SET**, then press ⊗.

These indications are used to show how to operate the **LIST/SELECT** (List/Selector) knob.

- Rotate 🗇 to select.

# ENGINE START/STOP Button\* CRITO

Press the button to change the vehicle's power mode.




## Turn Signals RIVA

Turn Signal Control Lever




## Lights CP.175

Light Control Switches
U.S. models



#### Canadian models




## **Wipers and Washers**

**◯** P. 183

Wiper/Washer Control Lever

Adjustment Ring\*

- : Low Sensitivity\*1
- ☐ **4**: Lower speed, fewer sweeps\*2
- +: High Sensitivity\*1
- + 4: Higher speed, more sweeps\*2



 $\textbf{AUTO}^{*1} \hbox{: Wiper speed varies automatically}$ 

 $\mbox{INT}^{\mbox{\tiny +2}}\mbox{: Low speed with intermittent}$ 

**LO**: Low speed wipe **HI**: High speed wipe

- \*1: Models with automatic intermittent wipers
- \*2: Models without automatic intermittent wipers

## Steering Wheel R190

To adjust, pull the adjustment lever towards you, adjust to the desired position, then lock the lever back in place.



# Unlocking the Front Doors from the Inside

## **◯** P. 153

 Pull either front door inner handle to unlock and open it in one motion.



 Unlocking and opening the driver's door from the inner handle unlocks all the other doors.

## Tailgate →P.160



#### Models without keyless access system

 With all the doors unlocked, press the tailgate release button and lift open the tailgate.


#### Models with keyless access system

 Press the tailgate release button to unlock and open the tailgate when you carry the keyless remote.

## **Power Door Mirrors**

## →P. 193


- With the ignition switch in ON [II]\*1, move the selector switch to L or R.
- Push the appropriate edge of the adjustment switch to adjust the mirror.



## Power Windows (>P.166)

- With the ignition switch in ON [II]\*1, open and close the power windows.
- If the power window lock button is in the off position, each passenger's window can be opened and closed with its own switch.
- If the power window lock button is in the on position (indicator on), each passenger's window switch is disabled.






<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

## Heating and Cooling System\* **→P.216**


- Rotate the fan control dial to adjust the fan speed.
- Rotate the mode control dial ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( ) | ( )
- Rotate the temperature control dial to adjust the temperature.
- Rotate the fan control dial to **OFF** to turn the system off.
- Rotate the mode control dial to to defrost the windshield.

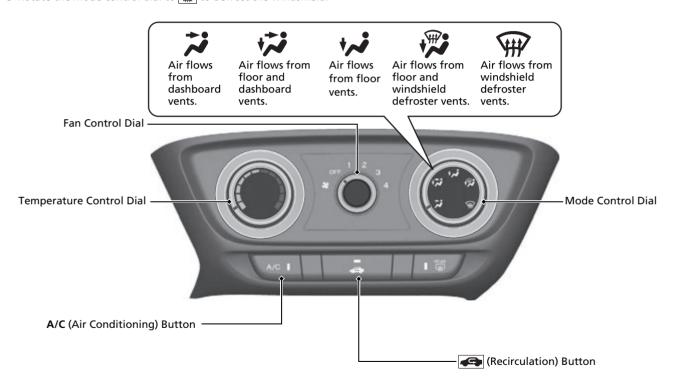


## Climate Control System\* → P.220

- Select the **AUTO** icon to activate the climate control system.
- Select the sold icon to turn the system on or off.
- Select the windshield.

#### Models without SYNC icon

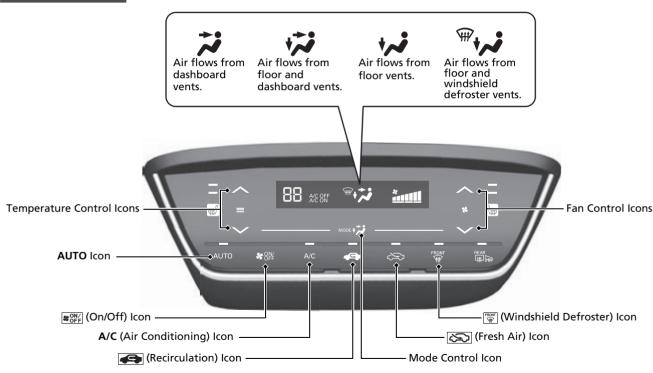


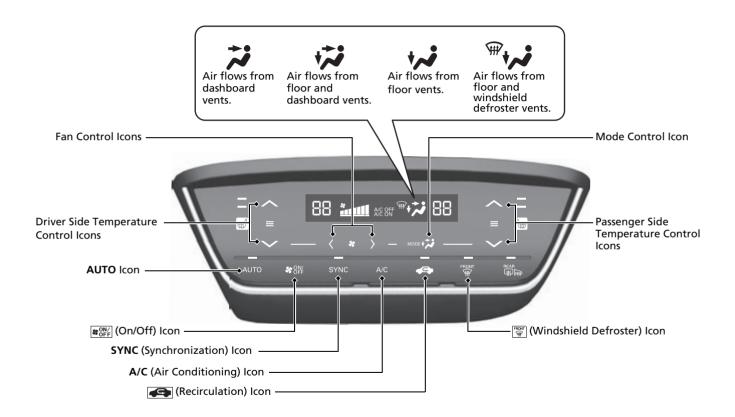

## Features CREED

## **Audio Remote Controls**

P. 235



- SOURCE BULLOR
- + / Button
  Press to adjust the volume up/down.
- SOURCE Button

#### Models with color audio system

Press to change the audio mode: FM/AM/CD/USB/iPod/Bluetooth® Audio.

#### Models with display audio system

Press to change the audio mode: FM/AM/ SiriusXM®\*/USB/iPod/Bluetooth® Audio/ Pandora®\*/Apps/Apple CarPlay/Android Auto.

#### ● <a> / <a> Button</a>

Radio: Press to change the preset station.

Press and hold to select the next or
previous strong station.

### CD\*/USB device:


Press to skip to the beginning of the next song or return to the beginning of the current song. Press and hold to change a folder.


## 

For navigation system operation See the Navigation System Manual

Models with color audio system 

→ P. 238

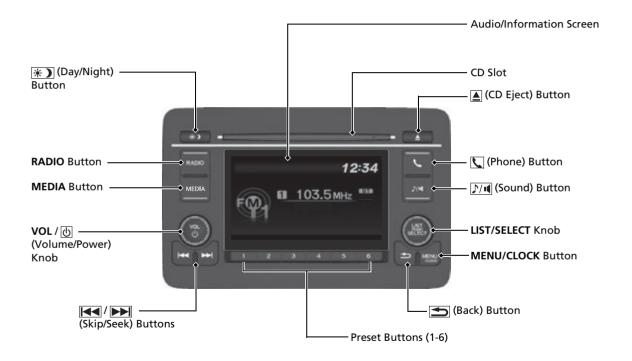

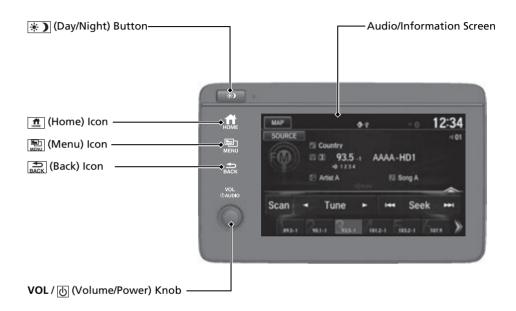

# Driving CP2427

## **Continuously Variable Transmission**

#### C>P 444, 446


• Shift to P and depress the brake pedal when starting the engine.

## Shifting

#### Models with paddle shifters

#### Models without paddle shifters








Depress the brake pedal and press the release button to move out of P.

Move the shift lever without pressing the release button.

Press the release button to move the shift lever.



## 7-Speed Manual Shift Mode\* P. 448


• Allows you to manually shift the transmission up or down without removing your hands from the steering wheel.

### When the shift lever is in S

- Pulling a paddle shifter changes the mode from continuously variable transmission to 7-speed manual shift mode.
- The M indicator and the selected speed number are displayed in the shift indicator.

## When the shift lever is in D

• Pulling a paddle shifter temporarily changes the mode from continuously variable transmission to 7-speed manual shift mode. The selected speed number is displayed in the shift indicator.













Reverse

Used when reversing.

Turn off or start the engine. Transmission is locked.

Drive

Normal driving. On models with paddle shifters. 7-speed mode can be used temporarily.

Models with paddle shifters Drive (S)

> 7-speed manual shift mode can be used.

## Models without paddle shifters

#### Drive (S)

- Better acceleration
- Used to increase engine braking
- Used when going up or down hills

### Models without paddle shifters

#### Low

- Used to further increase engine braking
- Used when going up or down hills



## VSA<sup>®</sup> On and Off ←>P.455

- The Vehicle Stability Assist™ (VSA®) system helps stabilize the vehicle during cornering, and helps maintain traction while accelerating on loose or slippery road surfaces.
- VSA® comes on automatically every time you start the engine.
- To partially disable or fully restore VSA® function, press and hold the button until you hear a beep.

## Cruise Control\*

- Cruise control allows you to maintain a set speed without keeping your foot on the accelerator pedal.
- To use cruise control, press the CRUISE button, then press the -/SET button once you have achieved the desired speed (above 25 mph or 40 km/h).

#### U.S. models only

# Tire Pressure Monitoring System (TPMS) → P.459

- Detects a change in tire conditions and overall dimensions due to decrease in tire pressures.
- TPMS is turned on automatically every time you start the engine.
- A calibration procedure must be performed when certain conditions arise.

## CMBS™ On and Off\*

### **→**P. 470

- When a possible frontal collision is likely unavoidable, the CMBS™ can help you to reduce the vehicle speed and the severity of the collision.
- The CMBS<sup>TM</sup> is turned on every time you start the engine.
- To turn the CMBS<sup>™</sup> on or off, press and hold the button until you hear a beep.

## Refueling P.517

Fuel recommendation: Unleaded gasoline, pump octane number 87 or higher

Fuel tank capacity: 13.2 US gal (50 L)

Pull the fuel fill door release handle.



- 2 Turn the fuel fill cap slowly to remove the cap.
- Place the cap in the holder on the fuel fill door.




4 After refueling, screw the cap back on until it clicks at least once.

# Honda Sensing®\*

**◯** P. 464

Honda Sensing® is a driver support system which employs the use of two distinctly different kinds of sensors, a radar sensor located in the front grille and a front sensor camera mounted to the interior side of the windshield, behind the rearview mirror.

The camera is located behind the rearview mirror.



The radar sensor is in the front grille.

## Collision Mitigation Braking System™ (CMBS™) →P. 467

The system can assist you when it determines there is a possibility of your vehicle colliding with a vehicle or a pedestrian detected in front of your vehicle. The CMBS™ is designed to alert you when the potential for a collision is determined, as well as to reduce your vehicle speed to help minimize collision severity when a collision is deemed unavoidable.

# Adaptive Cruise Control (ACC) (ACC)

Helps maintain a constant vehicle speed and a set following-interval behind a vehicle detected ahead of yours, without you having to keep your foot on the brake or the accelerator.

# Lane Keeping Assist System (LKAS) <-> 490</br>

Provides steering input to help keep the vehicle in the middle of a detected lane and provides tactile and visual alerts if the vehicle is detected drifting out of its lane.

## Road Departure Mitigation (RDM) System

**→**P. 499

Alerts and helps to assist you when the system detects a possibility of your vehicle unintentionally crossing over detected lane markings and/or leaving the roadway altogether.

# Maintenance Case

## Under the Hood


- Check engine oil, engine coolant, and windshield washer fluid. Add when necessary.
- Check brake fluid.
- Check the battery condition monthly.
- Pull the hood release handle under the corner of the dashboard.



2 Locate the hood latch lever, push it to the side, and then raise the hood. Once you have raised the hood slightly, you can release the lever.



When finished, close the hood and make sure it is firmly locked in place.

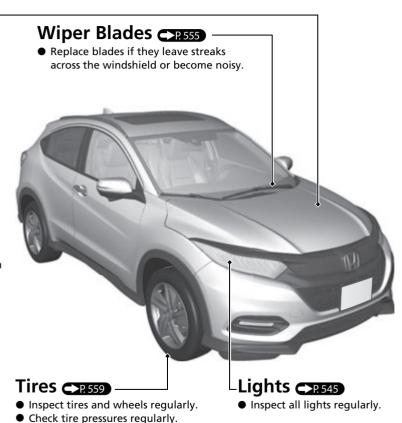

Install snow tires for winter driving.

# Handling the Unexpected Cassa

## Flat Tire R.586

 Park in a safe location and replace the flat tire with the compact spare tire in the cargo area.



## **Indicators Come On**

#### →P. 603

 Identify the indicator and consult the owner's manual.




## Engine Won't Start 7.595

• If the battery is dead, jump start using a booster battery.



## Blown Fuse (>P.608)

 Check for a blown fuse if an electrical device does not operate.



## Overheating P.601

 Park in a safe location. If you do not see steam under the hood, open the hood, and let the engine cool down.



## Emergency Towing (>P.613)

 Call a professional towing service if you need to tow your vehicle.




## What to Do If



Models without keyless access system

The ignition switch does not turn from 0 to 1. Why?



The power mode does not change from VEHICLE OFF (LOCK) to ACCESSORY. Why?



• The steering wheel may be locked.

#### Models without keyless access system

 Try to turn the steering wheel left and right while turning the ignition key.

#### Models with keyless access system

 Move the steering wheel left and right after pressing the ENGINE START/STOP button.



Models without keyless access system

The ignition switch does not turn from 1 to 0 and I cannot remove the key.
Why?


#### Models with keyless access system

The power mode does not change from ACCESSORY to VEHICLE OFF (LOCK). Why?



The shift lever should be moved to P.








This can occur when the ABS activates and does not indicate a problem. Apply firm, steady pressure on the brake pedal. Never pump the brake pedal.

**Anti-lock Brake System (ABS)** → P. 512





Check if the childproof lock is in the lock position. If so, open the rear door with the outside door handle.


To cancel this function, push the lever to the unlock position.



Why do the doors lock after I unlocked the doors?



If you do not open the doors within 30 seconds, the doors are relocked automatically for security.





The beeper sounds when:


• The exterior lights are left on.

## Models without keyless access system

• The key is left in the ignition switch.

#### Models with keyless access system

The power mode is in ACCESSORY.





The beeper sounds if you move outside the walk away auto lock operating range before the door completely closes.


Locking the doors and tailgate (Walk away auto lock®) \(\infty\)? 146



Why does the beeper sound when I start driving?




The beeper sounds when the driver and/or front passenger are not wearing their seat belts.





The brake pads may need to be replaced. Have your vehicle inspected by a dealer.





Press the electric parking brake switch with the brake pedal depressed.



Depressing the accelerator pedal does not release the parking brake automatically. Why?



- Fasten the driver's seat belt.
- Check if the transmission is in P or N. If so, select any other position.



U.S. models only

I'm seeing an amber indicator of a tire with an exclamation point. What is that?



The Tire Pressure Monitoring System (TPMS) needs attention. If you recently inflated or changed a tire, you have to recalibrate the system.

**→** Tire Pressure Monitoring System (TPMS) → P. 459

# Safe Driving

You can find many safety recommendations throughout this chapter, and throughout this manual.

For Safe Driving	
Important Safety Precautions	36
Important Handling Information	38
Your Vehicle's Safety Features	39
Safety Checklist	40
Seat Belts	
About Your Seat Belts	42
Fastening a Seat Belt	4
Seat Belt Inspection	5
Airbags	
Airbag System Components	52
Types of Airbags	

	Front Airbags (SRS)	55		
	Side Airbags	60		
	Side Curtain Airbags	62		
	Airbag System Indicators	64		
	Airbag Care	67		
Cł	hild Safety			
	Protecting Child Passengers	68		
	Safety of Infants and Small Children	70		
	Safety of Larger Children	79		
Exhaust Gas Hazard				
	Carbon Monoxide Gas	81		

<b>afety Labels</b> Label Locations	5	 82

# For Safe Driving

The following pages explain your vehicle's safety features and how to use them properly. The safety precautions below are ones that we consider to be among the most important.

# **Important Safety Precautions**

### ■ Always wear your seat belt

A seat belt is your best protection in all types of collisions. Airbags are designed to supplement seat belts, not replace them. So even though your vehicle is equipped with airbags, make sure you and your passengers always wear your seat belts, and wear them properly.

#### ■ Restrain all children

Children ages 12 and under should ride properly restrained in a back seat, not the front seat. Infants and small children should be restrained in a child seat. Larger children should use a booster seat and a lap/shoulder seat belt until they can use the belt properly without a booster seat.

### ■ Be aware of airbag hazards

While airbags can save lives, they can cause serious or fatal injuries to occupants who sit too close to them, or are not properly restrained. Infants, young children, and short adults are at the greatest risk. Be sure to follow all instructions and warnings in this manual.

#### ■ Don't drink and drive

Alcohol and driving don't mix. Even one drink can reduce your ability to respond to changing conditions, and your reaction time gets worse with every additional drink. So don't drink and drive, and don't let your friends drink and drive, either.

#### **∑**Important Safety Precautions

Some states, provinces and territories prohibit the use of cell phones other than hands-free devices by the driver while driving.

### ■ Pay appropriate attention to the task of driving safely

Engaging in cell phone conversation or other activities that keep you from paying close attention to the road, other vehicles, and pedestrians could lead to a crash. Remember, situations can change quickly, and only you can decide when it is safe to divert some attention away from driving.

### **■** Control your speed

Excessive speed is a major factor in crash injuries and deaths. Generally, the higher the speed, the greater the risk, but serious injuries can also occur at lower speeds. Never drive faster than is safe for current conditions, regardless of the maximum speed posted.

### ■ Keep your vehicle in safe condition

Having a tire blowout or a mechanical failure can be extremely hazardous. To reduce the possibility of such problems, check your tire pressures and condition frequently, and perform all regularly scheduled maintenance.

### ■ Do not leave children unattended in the vehicle

Children, pets and people needing assistance left unattended in the vehicle may be injured if they activate one or more of the vehicle controls. They may also cause the vehicle to move, resulting in a crash in which they and/or another person(s) can be injured or killed. Also, depending on the ambient temperature, the temperature of the interior may reach extreme levels, which can result in harm or death. Even if the heating and cooling system\*/climate control system\* is on, never leave them in the vehicle unattended as the heating and cooling system\*/climate control system\* can shut off at any time.

\* Not available on all models

# **Important Handling Information**

Your vehicle has higher ground clearance than a passenger vehicle designed for use only on pavement. Higher ground clearance has many advantages for off-highway driving. It allows you to travel over bumps, obstacles, and rough terrain. It also provides good visibility so you can anticipate problems earlier.


These advantages come at some cost. Because your vehicle is taller and rides higher off the ground, it has a higher center gravity making it more susceptible to tipping or rollover if you make abrupt turns. Utility vehicles have a significantly higher rollover rate than other types of vehicles. In a rollover crash, an unbelted person is significantly more likely to die than a person wearing a seat belt. As a reminder, make sure you and your passengers always wear seat belts.

### 

For information on how to reduce the risk of rollover, read:

- Driving Guidelines for Your Utility Vehicle
  P. 442
- **▶** Off-Highway Driving Guidelines P. 434 Failure to operate your vehicle correctly might result in a crash or a rollover.

# **Your Vehicle's Safety Features**

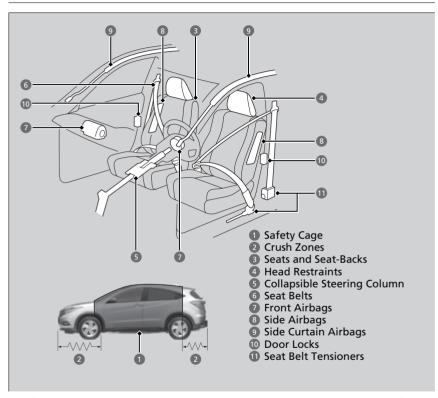

The following checklist will help you take an active role in protecting yourself and your passengers.

### ∑Your Vehicle's Safety Features

Your vehicle is equipped with many features that work together to help protect you and your passengers during a crash.

Some features do not require any action on your part. These include a strong steel framework that forms a safety cage around the passenger compartment, front and rear crush zones, a collapsible steering column, and tensioners that tighten the front seat belts in a sufficient crash.

However, you and your passengers cannot take full advantage of these features unless you remain seated in the correct position and always wear your seat belts. In fact, some safety features can contribute to injuries if they are not used properly.

# **Safety Checklist**

For the safety of you and your passengers, make a habit of checking these items each time before you drive.

 After everyone has entered the vehicle, be sure all doors and the tailgate are closed and locked. Locking the doors and the tailgate helps prevent an occupant from being ejected and an outsider from unexpectedly opening a door or the tailgate.

### Locking/Unlocking the Doors from the Inside P. 152

Adjust your seat to a position suitable for driving. Be sure the front seats are
adjusted as far to the rear as possible while allowing the driver to control the
vehicle. Sitting too close to a front airbag can result in serious or fatal injury in a
crash

### Adjusting the Seats P. 194

Adjust head restraints to the proper position. Head restraints are most effective
when the center of the head restraint aligns with the center of your head. Taller
persons should adjust their head restraint to the highest position.

### ■ Adjusting the front head restraint positions P. 201

Always wear your seat belt, and make sure you wear it properly. Confirm that any
passengers are properly belted as well.

### Fastening a Seat Belt P. 46

 Protect children by using seat belts or child seats according to a child's age, height and weight.


Child Safety P. 68

### Safety Checklist

### Models with information display

If the door and tailgate open indicator is on, a door and/or the tailgate is not completely closed. Close all doors and the tailgate tightly until the indicator goes off.

**Door and Tailgate Open Indicator**\* P. 93



41

### Safety Checklist

### Models with multi-information display

If the door and/or tailgate open message appears on the multi-information display, a door and/or the tailgate is not completely closed. Close all doors and the tailgate tightly until the message disappears.

■ Multi-Information Display Warning and Information Messages\* P. 104



\* Not available on all models

### **About Your Seat Belts**

Seat belts are the single most effective safety device because they keep you connected to the vehicle so that you can take advantage of many built-in safety features. They also help keep you from being thrown against the inside of the vehicle, against any passengers, or out of the vehicle. When worn properly, seat belts also keep your body properly positioned in a crash so that you can take full advantage of the additional protection provided by the airbags.

In addition, seat belts help protect you in almost every type of crash, including:

- frontal impacts
- side impacts
- rear impacts
- rollovers

### **■** Lap/shoulder seat belts

All five seating positions are equipped with lap/shoulder seat belts with emergency locking retractors. In normal driving, the retractor lets you move freely while keeping some tension on the belt. During a collision or sudden stop, the retractor locks to restrain your body. The front passenger's and rear seat belts also have a lockable retractor for use with child seats.

Installing a Child Seat with a Lap/Shoulder Seat Belt P. 75

■ About Your Seat Belts

# **AWARNING**

Not wearing a seat belt properly increases the chance of serious injury or death in a crash, even though your vehicle has airbags.

Be sure you and your passengers always wear seat belts and wear them properly.

If you extend the seat belt too quickly, it will lock in place. If this happens, slightly retract the seat belt, then extend it slowly.

Seat belts cannot completely protect you in every crash. But in most cases, seat belts can reduce your risk of serious injury.

Most states and all Canadian provinces and territories require you to wear seat belts.

### ■ Proper use of seat belts

Follow these guidelines for proper use:


- All occupants should sit upright, well back in the seat, and remain in that position for the duration of the trip. Slouching and leaning reduce the effectiveness of the belt and can increase the chance of serious injury in a crash.
- Never place the shoulder part of a lap/shoulder seat belt under your arm or behind your back. This could cause very serious injuries in a crash.
- Two people should never use the same seat belt. If they do, they could be very seriously injured in a crash.
- Do not put any accessories on the seat belts. Devices intended to improve comfort or reposition the shoulder part of a seat belt can reduce the protective capability and increase the chance of serious injury in a crash.

#### ■ About Your Seat Belts

If a rear seat passenger moves around and extends the seat belt, the lockable retractor may activate. If this happens, release the retractor by unfastening the seat belt and allow the belt to retract completely. Then, refasten the belt.

Continued 43

### ■ Seat Belt Reminder



The seat belt system includes an indicator on the instrument panel to remind the driver or a front passenger or both to fasten their seat belts.

If the ignition switch is turned to ON  $\boxed{II}^{*1}$  and a seat belt is not fastened, a beeper will sound and the indicator will blink. After a few seconds, the beeper will stop and the indicator will come on and remain illuminated until the seat belt is fastened.

The beeper will periodically sound and the indicator will blink while the vehicle is moving until the seat belt is fastened.

#### Seat Belt Reminder

The indicator will also come on if a front passenger does not fasten their seat belt within six seconds after the ignition switch is turned to ON  $[\Pi]^{*1}$ .

When no one is sitting in the front passenger's seat, the indicator will not come on and the beeper will not sound.

The indicator also may not come on and the beeper may not sound when the occupant is not heavy enough to trigger the weight sensor. Such occupants (e.g., infants and smaller children) should be moved to the rear seat as a deploying front airbag likely will injure or kill them.


Protecting Child Passengers P. 68

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

### Automatic Seat Belt Tensioners

The front seats are equipped with automatic seat belt tensioners to enhance safety.

The tensioners automatically tighten the front seat belts during a moderate-tosevere frontal collision, sometimes even if the collision is not severe enough to inflate the front airbags.



#### ■ Automatic Seat Belt Tensioners


The seat belt tensioners can only operate once. If a tensioner is activated, the SRS indicator will come on. Have a dealer replace the tensioner and thoroughly inspect the seat belt system as it may not offer protection in a subsequent crash.

During a moderate-to-severe side impact, the tensioner on that side of the vehicle also activates.


# **Fastening a Seat Belt**

After adjusting a front seat to the proper position, and while sitting upright and well back in the seat:

Adjusting the Seats P. 194



**1.** Pull the seat belt out slowly.



- Insert the latch plate into the buckle, then tug on the belt to make sure the buckle is secure.
  - ► Make sure that the belt is not twisted or caught on anything.

### ■ Fastening a Seat Belt

No one should sit in a seat with an inoperative seat belt or one that does not appear to be working correctly. Using a seat belt that is not working properly may not protect the occupant in a crash. Have a dealer check the belt as soon as possible.

Never insert any foreign objects into the buckle or retractor mechanism.

If the seat belt appears to be locked in a fully retracted position, firmly pull out on the shoulder belt once, then push it back in.

Then, smoothly pull it out of the retractor and fasten. If you are unable to release the seat belt from a fully retracted position, do not allow anyone to sit in the seat, and take your vehicle to a dealer for repair.

- About Your Seat Belts P. 42
- Seat Belt Inspection P. 51



- **3.** Position the lap part of the belt as low as possible across your hips, then pull up on the shoulder part of the belt so the lap part fits snugly. This lets your strong pelvic bones take the force of a crash and reduces the chance of internal injuries.
- **4.** If necessary, pull up on the belt again to remove any slack, then check that the belt rests across the center of your chest and over your shoulder. This spreads the forces of a crash over the strongest bones in your upper body.

>> Fastening a Seat Belt

# **AWARNING**

Improperly positioning the seat belts can cause serious injury or death in a crash.

Make sure all seat belts are properly positioned before driving.


To release the belt, push the red **PRESS** button and then guide the belt by hand until it has retracted completely.

When exiting the vehicle, be sure the belt is properly stowed so that it will not get caught in the closing door.

Continued 47

# ■ Adjusting the Shoulder Anchor

The front seats have adjustable shoulder anchors to accommodate taller and shorter occupants.




- **1.** Move the anchor up and down while pulling the shoulder anchor outward.
- **2.** Position the anchor so that the belt rests across the center of your chest and over your shoulder.

### → Adjusting the Shoulder Anchor


The shoulder anchor height can be adjusted to four levels. If the belt contacts your neck, lower the height one level at a time.

After an adjustment, make sure that the shoulder anchor position is secure.


### Seat Belt with Detachable Anchor



**1.** Pull out the seat belt's small latch plate and the latch plate from each holding slot in the ceiling.



**2.** Line up the triangle marks on the small latch plate and anchor buckle. Make sure the seat belt is not twisted. Attach the belt to the anchor buckle.



**3.** Insert the latch plate into the buckle. Properly fasten the seat belt the same way you fasten the lap/shoulder seat belt.


Seat Belt with Detachable Anchor

# **AWARNING**

Using the seat belt with the detachable anchor unlatched increases the chance of serious injury or death in a crash.

Before using the seat belt, make sure the detachable anchor is correctly latched.

To unlatch the detachable anchor, insert the latch plate into the slot on the side of the anchor buckle.



Continued 49

# ■ Advice for Pregnant Women

If you are pregnant, the best way to protect yourself and your unborn child when driving or riding in a vehicle is to always wear a seat belt and keep the lap part of the belt as low as possible across the hips.



### ■ Advice for Pregnant Women

Each time you have a checkup, ask your doctor if it is okay for you to drive.

To reduce the risk of injuries to both you and your unborn child that can be caused by an inflating front airbag:

- When driving, sit upright and adjust the seat as far back as possible while allowing full control of the vehicle.
- When sitting in the front passenger's seat, adjust the seat as far back as possible.

# **Seat Belt Inspection**

Regularly check the condition of your seat belts as follows:

- Pull each belt out fully, and look for frays, cuts, burns, and wear.
- Check that the latch plates and buckles work smoothly and the belts retract easily.
  - ▶ If a belt does not retract easily, cleaning the belt may correct the problem. Only use a mild soap and warm water. Do not use bleach or cleaning solvents. Make sure the belt is completely dry before allowing it to retract.

Any belt that is not in good condition or working properly will not provide proper protection and should be replaced as soon as possible.

A belt that has been worn during a crash may not provide the same level of protection in a subsequent crash. Have your seat belts inspected by a dealer after any collision.


Seat Belt Inspection

# **AWARNING**

Not checking or maintaining seat belts can result in serious injury or death if the seat belts do not work properly when needed.

Check your seat belts regularly and have any problem corrected as soon as possible.

# **Airbag System Components**

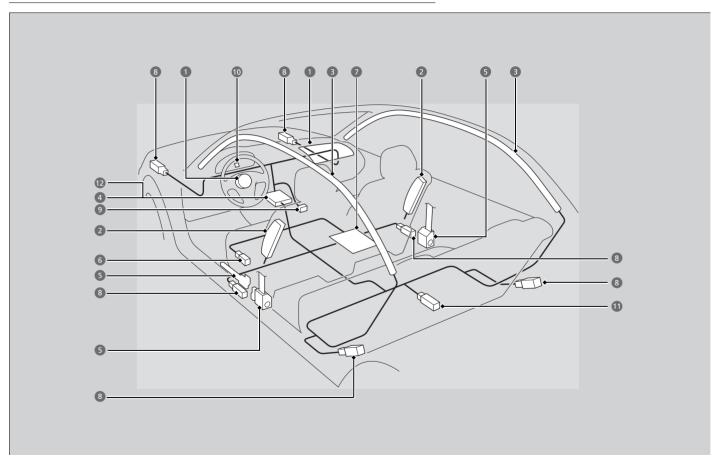

The front, side, and side curtain airbags are deployed according to the direction and severity of impact. Both side curtain airbags are deployed in a rollover. The airbag system includes:

- Two SRS (Supplemental Restraint System) front airbags. The driver's airbag is stored in the center of the steering wheel; the front passenger's airbag is stored in the dashboard. Both are marked SRS AIRBAG
- Two side airbags, one for the driver and one for the front passenger. The airbags are stored in the outer edges of the seatbacks. Both are marked SIDE AIRBAG.
- 3 Two side curtain airbags, one for each side of the vehicle. The airbags are stored in the ceiling, above the side windows. The front and rear pillars are marked SIDE CURTAIN AIRBAG.

- An electronic control unit that, when the vehicle is on, continually monitors information about the various impact sensors, seat and buckle sensors, rollover sensor, airbag activators, seat belt tensioners, and other vehicle information. During a crash event the unit can record such information.
- Automatic front seat belt tensioners. In addition, the driver's and front passenger's seat belt buckles incorporate sensors that detect whether or not the belts are fastened.
- Oriver's seat position sensor. This sensor detects the driver's seat slide position to help determine the optimal deployment of the driver's airbag.
- Weight sensors in the front passenger's seat. The sensors are used for occupant classification to activate or deactivate the front passenger's airbag.

- Impact sensors that can detect a moderate-to-severe front or side impact.
- An indicator near the shift lever that alerts you that the front passenger's front airbag has been turned off.
- An indicator on the instrument panel that alerts you to a possible problem with your airbag system or seat belt tensioners.
- Safing Sensor
- A rollover sensor that can detect if your vehicle is about to roll over and signal the control unit to deploy both side curtain airbags.

### ■ Important Facts About Your Airbags

Airbags can pose serious hazards. To do their job, airbags must inflate with tremendous force. So, while airbags help save lives, they can cause burns, bruises, and other minor injuries, sometimes even fatal ones if occupants are not wearing their seat belts properly and sitting correctly.

**What you should do:** Always wear your seat belt properly and sit upright and as far back from the steering wheel as possible while allowing full control of the vehicle. A front passenger should move their seat as far back from the dashboard as possible.

Remember, however, that no safety system can prevent all injuries or deaths that can occur in a severe crash, even when seat belts are properly worn and the airbags deploy.

**Do not place hard or sharp objects between yourself and a front airbag.** Carrying hard or sharp objects on your lap, or driving with a pipe or other sharp object in your mouth, can result in injuries if your front airbag inflates.

**Do not attach or place objects on the front airbag covers.** Objects on the covers marked **SRS AIRBAG** could interfere with the proper operation of the airbags or be propelled inside the vehicle and hurt someone if the airbags inflate.

### 

Do not attempt to deactivate your airbags. Together, airbags and seat belts provide the best protection.

When driving, keep hands and arms out of the deployment path of the front airbag by holding each side of the steering wheel. Do not cross an arm over the airbag cover.

# **Types of Airbags**

Your vehicle is equipped with three types of airbags:

- Front airbags: Airbags in front of the driver's and front passenger's seats.
- **Side airbags:** Airbags in the driver's and front passenger's seat-backs.
- **Side curtain airbags:** Airbags above the side windows.

Each is discussed in the following pages.

# Front Airbags (SRS)

The front SRS airbags inflate in a moderate-to-severe frontal collision to help protect the head and chest of the driver and/or front passenger.

**SRS** (Supplemental Restraint System) indicates that the airbags are designed to supplement seat belts, not replace them. Seat belts are the occupant's primary restraint system.

# Housing Locations

The front airbags are housed in the center of the steering wheel for the driver, and in the dashboard for the front passenger. Both airbags are marked **SRS AIRBAG**.

# \*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

### ∑Types of Airbags

The airbags can inflate whenever the ignition switch is in ON  $[II]^{*1}$ .

After an airbag inflates in a crash, you may see a small amount of smoke. This is from the combustion process of the inflator material and is not harmful. People with respiratory problems may experience some temporary discomfort. If this occurs, get out of the vehicle as soon as it is safe to do so.

### ∑Front Airbags (SRS)

During a frontal crash severe enough to cause one or both front airbags to deploy, the airbags can inflate at different rates, depending on the severity of the crash, whether or not the seat belts are latched, and/ or other factors. Frontal airbags are designed to supplement the seat belts to help reduce the likelihood of head and chest injuries in frontal crashes.


Continued 55

# Operation

Front airbags are designed to inflate during moderate-to-severe frontal collisions. When the vehicle decelerates suddenly, the sensors send information to the control unit which signals one or both front airbags to inflate.

A frontal collision can be either head-on or angled between two vehicles, or when a vehicle crashes into a stationary object, such as a concrete wall.

### ■ How the Front Airbags Work



While your seat belt restrains your torso, the front airbag provides supplemental protection for your head and chest.

The front airbags deflate immediately so that they won't interfere with the driver's visibility or the ability to steer or operate other controls.

The total time for inflation and deflation is so fast that most occupants are not aware that the airbags deployed until they see them lying in front of them.

### 

Although the driver's and front passenger's airbags normally inflate within a split second of each other, it is possible for only one airbag to deploy. This can happen if the severity of a collision is at the margin, or threshold, that determines whether or not the airbags will deploy. In such cases, the seat belt will provide sufficient protection, and the supplemental protection offered by the airbag would be minimal.

### ■ When front airbags should not deploy

**Minor frontal crashes:** Front airbags were designed to supplement seat belts and help save lives, not to prevent minor scrapes, or even broken bones that might occur during a less than moderate-to-severe frontal crash.

**Side impacts:** Front airbags can provide protection when a sudden deceleration causes a driver or front passenger to move toward the front of the vehicle. Side airbags and side curtain airbags have been specifically designed to help reduce the severity of injuries that can occur during a moderate-to-severe side impact which can cause the driver or passenger to move toward the side of the vehicle.

**Rear impacts:** Head restraints and seat belts are your best protection during a rear impact. Front airbags cannot provide any significant protection and are not designed to deploy in such collisions.

**Rollovers:** In a rollover, your best form of protection is a seat belt or, if your vehicle is equipped with a rollover sensor, both a seat belt and a side curtain airbag. Front airbags, however, are not designed to deploy in a rollover as they would provide little if any protection.

### ■ When front airbags deploy with little or no visible damage


Because the airbag system senses sudden deceleration, a strong impact to the vehicle framework or suspension might cause one or more of the airbags to deploy. Examples include running into a curb, the edge of a hole, or other low fixed object that causes a sudden deceleration in the vehicle chassis. Since the impact is underneath the vehicle, damage may not be readily apparent.

# ■ When front airbags may not deploy, even though exterior damage appears severe

Since crushable body parts absorb crash energy during an impact, the amount of visible damage does not always indicate proper airbag operation. In fact, some collisions can result in severe damage but no airbag deployment because the airbags would not have been needed or would not have provided protection even if they had deployed.


# Advanced Airbags

The airbags have advanced features to help reduce the likelihood of airbag related injuries to smaller occupants.



The driver's advanced airbag system includes a seat position sensor.

Based on information from this sensor and the severity of the impact, the advanced airbag system determines the optimal deployment of the driver's airbag.



The front passenger's advanced airbag system has weight sensors. The sensors are used for occupant classification to activate or deactivate the front passenger's airbag.

For adult size occupants, the system will automatically activate the front passenger's airbag. If a small adult sits in the front passenger seat and the system does not recognize him/her as an adult, see

Passenger Airbag Off Indicator P. 65

### 

If there is a problem with the driver's seat position sensor or the passenger's seat weight sensors, the SRS indicator will come on, and in the event of a crash, the airbag will deploy (regardless of the driver's seating position or passenger's occupant classification) with a force corresponding to the severity of the impact.

# Supplemental Restraint System (SRS) Indicator P. 64

For the advanced front airbags to work properly, confirm that:

- The occupant is sitting in an upright position, wearing the seat belt properly and the seat back is not excessively reclined.
- The occupant is not leaning against the door or center console.
- The occupant's feet are placed on the floor in front of them.
- There are no objects hanging from the front passenger's seat.
- Only small, lightweight objects are in the seat back pocket.
- The steering wheel and passenger's side dashboard are not obstructed by any object.
- No liquid has been spilled on or under the seat.
- There is no child seat or other object pressing against the rear of the seat or seat back.
- There is no rear passenger pushing or pulling on the back of the front passenger's seat.

We advise against allowing a child age 12 or under to ride in the front passenger's seat.

However, if you do allow a small child or infant to ride in the front passenger's seat, the system is designed to automatically deactivate the front passenger's airbag. Do not let a small child or infant ride in the front passenger's seat if the airbag does not automatically deactivate.

### 

- There are no objects placed under or beside the front passenger's seat. Improperly positioned objects can interfere with the advanced airbag sensors.
- The head restraint is not contacting the roof.

  ▶ Passenger Airbag Off Indicator P. 65
- The floor mat behind the front passenger's seat is set in the correct position evenly on the floor. An improperly placed mat can interfere with the advanced airbag sensors.
  - Floor Mats P. 576

# **Side Airbags**

The side airbags help protect the torso and pelvis of the driver or a front passenger during a moderate-to-severe side impact.


# Housing Locations



The side airbags are housed in the outside edge of the driver's and passenger's seat-backs.

Both are marked **SIDE AIRBAG**.

### Operation



When the sensors detect a moderate-tosevere side impact, the control unit signals the side airbag on the impact side to immediately inflate

### Side Airbags

Make sure you and your front seat passenger always sit upright. Leaning into the path of a side airbag can prevent the airbag from deploying properly and increases your risk of serious injury.

Do not attach accessories on or near the side airbags. They can interfere with the proper operation of the airbags, or hurt someone if an airbag inflates.

Do not cover or replace the front seat-back covers without consulting a dealer. Improperly replacing or covering front seat-back covers can prevent your side airbags from properly deploying during a side impact.

### ■ When a side airbag deploys with little or no visible damage

Because the airbag system senses sudden acceleration, a strong impact to the side of the vehicle's framework can cause a side airbag to deploy. In such cases, there may be little or no damage, but the side impact sensors detected a severe enough impact to deploy the airbag.


# ■ When a side airbag may not deploy, even though visible damage appears severe

It is possible for a side airbag not to deploy during an impact that results in apparently severe damage. This can occur when the point of impact was toward the far front or rear of the vehicle, or when the vehicle's crushable body parts absorbed most of the crash energy. In either case, the side airbag would not have been needed nor provided protection even if it had deployed.

# **Side Curtain Airbags**


The side curtain airbags help protect the heads of the driver and passengers in the outer seating positions during a moderate-to-severe side impact. The side curtain airbags equipped in this vehicle are also designed to help reduce the likelihood of partial and complete ejection of vehicle occupants through side windows in crashes, particularly rollover crashes.

### ■ Housing Locations



The side curtain airbags are located in the ceiling above the side windows on both sides of the vehicle.

# Operation



The side curtain airbag is designed to deploy in a rollover or a moderate-to-severe side impact.

### Side Curtain Airbags

If the SRS control unit senses that your vehicle is about to rollover, it immediately deploys both side curtain airbags and activates both front seat belt tensioners.

If the impact is on the passenger's side, the passenger's side curtain airbag deploys even if there are no occupants on that side of the vehicle.

To get the best protection from the side curtain airbags, occupants should wear their seat belts properly and sit upright and well back in their seats.

Do not attach any objects to the side windows or roof pillars as they can interfere with the proper operation of the side curtain airbags.


# ■ When side curtain airbags deploy in a frontal collision

One or both side curtain airbags may also inflate in a moderate-to-severe angled frontal collision.

# **Airbag System Indicators**

If a problem occurs in the airbag system, the SRS indicator will come on and a message appears on the multi-information display\*.

# Supplemental Restraint System (SRS) Indicator



# ■ When the ignition switch is turned to ON III\*1

The indicator comes on for a few seconds, then goes off. This tells you the system is working properly.

If the indicator comes on at any other time, or does not come on at all, have the system checked by a dealer as soon as possible. If you don't, your airbags and seat belt tensioners may not work properly when they are needed. Supplemental Restraint System (SRS) Indicator

# **AWARNING**


Ignoring the SRS indicator can result in serious injury or death if the airbag systems or tensioners do not work properly.

Have your vehicle checked by a dealer as soon as possible if the SRS indicator alerts you to a possible problem.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

<sup>\*</sup> Not available on all models

### Passenger Airbag Off Indicator



# ■ When the passenger airbag off indicator comes on

The indicator comes on to alert you that the passenger's airbag has been turned off. This occurs when the weight sensors determine that a small child or infant is on the passenger seat.



Children age 12 or under should always ride properly restrained in a back seat. ▶ Child Safety P. 68

Objects placed on the seat can also cause the indicator to come on. If the indicator is on in the event of a crash, the passenger's airbag will not deploy.

If the passenger's seat is empty, the passenger's airbag will not deploy and the indicator will not come on.

### ▶ Passenger Airbag Off Indicator

To ensure the passenger is detected properly, confirm that:

- The occupant is sitting in an upright position, wearing the seat belt properly and the seat back is not excessively reclined.
- The occupant is not leaning against the door or center console.
- The occupant's feet are placed on the floor in front of them.
- There are no objects hanging from the front passenger's seat.
- Only small, lightweight objects are in the seat back pocket.
- No liquid has been spilled on or under the seat.
- There is no child seat or other object pressing against the rear of the seat or seat back.
- There is no rear passenger pushing or pulling on the back of the front passenger's seat.
- There are no objects placed under or beside the front passenger's seat. Improperly positioned objects can interfere with the advanced airbag sensors.
- The floor mat behind the front passenger's seat is set in the correct position evenly on the floor. An improperly placed mat can interfere with the advanced airbag sensors.
- The head restraint is not contacting the roof.

Continued 65

### 

The passenger airbag off indicator may come on and go off periodically if the total weight on the seat is near the airbag cutoff threshold. For a small adult, depending on physique and posture, the system may not recognize him/her as an adult and thus deactivate the passenger's airbag.

If this occurs, please confirm that the conditions set forth in the above bullet points on the previous page are met.

Have your vehicle checked by a dealer as soon as possible if:

- All of the above conditions are met, and the indicator comes on with an adult seated in the front passenger seat.
- The seat is empty and the indicator is on.

Do not allow an adult passenger to ride in the front seat when the indicator is on.

# **Airbag Care**

You do not need to, and should not, perform any maintenance on or replace any airbag system components yourself. However, you should have your vehicle inspected by a dealer in the following situations:

### ■ When the airbags have deployed

If an airbag has inflated, the control unit and other related parts must be replaced. Similarly, once an automatic seat belt tensioner has been activated, it must be replaced.

■ When the vehicle has been in a moderate-to-severe collision

Even if the airbags did not inflate, have your dealer inspect the following: the driver's seat position sensor, weight sensors in the passenger's seat, front seat belt tensioners, and each seat belt that was worn during the crash.

■ Do not remove or modify a front seat without consulting a dealer This would likely disable or affect the proper operation of the driver's seat position

sensor or the weight sensors in the passenger's seat. If it is necessary to remove or modify a front seat to accommodate a person with disabilities, contact a Honda dealer, or for U.S. vehicles, American Honda Automobile Customer Service at 1-800-999-1009 and for Canadian vehicles, Honda Canada Customer Relations at 1-888-9-HONDA-9.

### 

We recommend against the use of salvaged airbag system components, including the airbag, tensioners, sensors, and control unit.

# **Child Safety**

# **Protecting Child Passengers**

Each year, many children are injured or killed in vehicle crashes because they are either unrestrained or not properly restrained. In fact, vehicle crashes are the number one cause of death of children ages 12 and under.

To reduce the number of child deaths and injuries, every state, Canadian province and territory requires that infants and children be properly restrained when they ride in a vehicle.

Children should sit properly restrained in a rear seat. This is because:



- An inflating front airbag can injure or kill a child sitting in the front seat.
- A child in the front seat is more likely to interfere with the driver's ability to safely control the vehicle.
- Statistics show that children of all sizes and ages are safer when they are properly restrained in a rear seat.

# **AWARNING**

Children who are unrestrained or improperly restrained can be seriously injured or killed in a crash.

Any child too small for a seat belt should be properly restrained in a child seat. A larger child should be properly restrained with a seat belt, using a booster seat if necessary.

The National Highway Traffic Safety Administration and Transport Canada recommend that all children ages 12 and under be properly restrained in a rear seat. Some states or provinces/territories have laws restricting where children may ride.

- Never hold a child on your lap because it is impossible to protect them in the event of a collision.
- Never put a seat belt over yourself and a child. During a crash, the belt would likely press deep into the child and cause serious or fatal injuries.
- Never let two children use the same seat belt. Both children could be very seriously injured in a crash.
- Any child who is too small to wear a seat belt correctly must be restrained in an approved child seat that is properly secured to the vehicle using either the seat belt or the lower anchors of the LATCH system.
- Do not allow children to operate the doors, windows or seat adjustments.
- Do not leave children in the vehicle unattended, especially in hot weather when the inside of the vehicle can get hot enough to kill them. They could also activate vehicle controls causing it to move unexpectedly.

# **AWARNING**

Allowing a child to play with a seat belt or wrap one around their neck can result in serious injury or death.

Instruct children not to play with any seat belt and make sure any unused seat belt a child can reach is buckled, fully retracted, and locked.

To deactivate a lockable retractor, release the buckle and allow the seat belt to wind up all the way.

To remind you of the passenger's front airbag hazards and child safety, your vehicle has warning labels on the dashboard (U.S. models) and on the front visors. Please read and follow the instructions on these labels.

Safety Labels P. 82

# **Safety of Infants and Small Children**

### Protecting Infants

An infant must be properly restrained in a rear-facing child seat until the infant reaches the seat manufacturer's weight or height limit for the seat.



■ Positioning a rear-facing child seat Child seats must be placed and secured in a rear seating position.

When properly installed, a rear-facing child seat may prevent the driver or a front passenger from moving their seat all the way back, or from locking their seat-back in the desired position. Make sure that there is no contact between the child seat and the seat in front of it.

It can also interfere with proper operation of the passenger's advanced front airbag system.

Airbags P. 52

If this occurs, we recommend that you install the child seat directly behind the front passenger's seat, move the seat as far forward as needed, and leave it unoccupied. Or, you may wish to get a smaller rear-facing child seat.

■Protecting Infants

# **AWARNING**

Placing a rear-facing child seat in the front seat can result in serious injury or death during a crash.

Always place a rear-facing child seat in the rear seat, not the front.

Experts recommend use of a rear-facing seat for a child so long as the child's height and weight are appropriate for a rear-facing seat.

Infants should never be seated in a forward-facing position.

Always refer to the child seat manufacturer's instructions before installation.

Do not allow a front seat to rest against a child seat installed in a rear seating position.

The weight sensor in the front seat may not correctly detect the actual weight of the occupant.

## ■ Protecting Smaller Children

If a child has exceeded the weight and height limitations of a rear-facing child seat, the child should be properly restrained in a firmly secured forward-facing child seat until they exceed the weight and height limitations for the forward-facing child seat.



■ Forward-facing child seat placement We strongly recommend placing a forward-facing child seat in a rear seating position.

Placing a forward-facing child seat in the front seat can be hazardous, even with advanced front airbags that automatically turn the passenger's front airbag off. A rear seat is the safest place for a child.

## **AWARNING**

Placing a forward-facing child seat in the front seat can result in serious injury or death if the front airbag inflates.

If you must place a forward-facing child seat in front, move the vehicle seat as far back as possible, and properly restrain the child.

Educate yourself about the laws and regulations regarding child seat use where you are driving, and follow the child seat manufacturer's instructions.

Continued 71

## Selecting a Child Seat

Most child seats are LATCH-compatible (Lower Anchors and Tethers for Children). Some have a rigid-type connector while others have a flexible-type connector. Both are equally easy to use. Some existing and previously owned child seats can only be installed using the seat belt. Whichever type you choose, follow the child seat manufacturer's use and care instructions including recommended expiration dates as well as the instructions in this manual. Proper installation is key to maximizing your child's safety.

In seating positions and vehicles not equipped with LATCH, a LATCH-compatible child seat can be installed using the seat belt and a top tether for added security. This is because all child seats are required to be designed so that they can be secured with a lap belt or the lap part of a lap/shoulder belt. In addition, the child seat manufacturer may advise that a seat belt be used to attach a LATCH-compatible seat once a child reaches a specified weight. Please read the child seat owner's manual for proper installation instructions.

#### ■ Important consideration when selecting a child seat

Make sure the child seat meets the following three requirements:

- The child seat is the correct type and size for the child.
- The child seat is the correct type for the seating position.
- The child seat is compliant with Federal Motor Vehicle Safety Standard 213 or Canadian Motor Vehicle Safety Standard 213.


#### Selecting a Child Seat

Installation of a LATCH-compatible child seat is simple.


LATCH-compatible child seats have been developed to simplify the installation process and reduce the likelihood of injuries caused by incorrect installation.

#### ■ Installing a LATCH-Compatible Child Seat

A LATCH-compatible child seat can be installed in either of the two outer rear seats. A child seat is attached to the lower anchors with either the rigid or flexible type of connectors.



- 1. Locate the lower anchors under the marks.
- **2.** Raise the head restraint to its highest position.




- **3.** Place the child seat on the vehicle seat, then attach the child seat to the lower anchors according to the instructions that came with the child seat.
  - ➤ When installing the child seat, make sure that the lower anchors are not obstructed by the seat belt or any other object.


## **AWARNING**

Never attach two child seats to the same anchor. In a collision, one anchor may not be strong enough to hold two child seat attachments and may break, causing serious injury or death.

For your child's safety, when using a child seat installed using the LATCH system, make sure that the child seat is properly secured to the vehicle. A child seat that is not properly secured will not adequately protect a child in a crash and may cause injury to the child or other vehicle occupants.

Continued 73





**4.** Remove the cargo cover\*.

#### Cargo Cover P. 214

- **5.** Route the tether strap between the head restraint legs, and secure the tether strap hook to the anchor.
  - Make sure the strap is not twisted.
- **6.** Tighten the tether strap as instructed by the child seat manufacturer.
- **7.** Make sure the child seat is firmly secured by rocking it forward and back and side to side; little movement should be felt.
- **8.** Make sure any unused seat belt that a child can reach is buckled, the lockable retractor is activated, and the belt is fully retracted and locked.
- **9.** Reinstall the cargo cover\*.

## **AWARNING**

Do not use the lower inner anchors of the outer rear seats to secure a LATCH-compatible child seat to the rear center seat, unless the manufacturer's instructions for that system permit the use of inner anchors with the stated spacing.

# Installing a LATCH-compatible child seat in the rear center seat

Each outer rear seat is equipped with a pair of lower anchors which are used to secure a LATCH-compatible child seat. The rear center seat, however, is not equipped with anchors of any kind. The inner and outer anchors are spaced apart at a standard distance of 11 inches (280 mm). The distance between the two inner anchors is 14.1 inches (357.8 mm).

LATCH-compatible restraint systems that are fitted with rigid-type attachments cannot be installed in the rear center seat. However, a system fitted with flexible-type attachments can be installed in the center seat, provided that the manufacturer's instructions for that system permit the use of the inner anchors with the stated spacing.

Before seating a child, make sure that the system is properly attached to both the lower anchors and tether anchors.

#### ■ Installing a Child Seat with a Lap/Shoulder Seat Belt

A child seat can be installed with a lap/shoulder belt in any rear seat or, if absolutely necessary, the front passenger seat.



- **1.** Raise the head restraint to its highest position.
- 2. Place the child seat on the vehicle seat.
- **3.** Route the seat belt through the child seat according to the seat manufacturer's instructions, and insert the latch plate into the buckle.
  - Insert the latch plate fully until it clicks.



- **4.** Slowly pull the shoulder part of the belt all the way out until it stops. This activates the lockable retractor.
- **5.** Let the seat belt completely wind up into the retractor, then try to pull it out to make sure the retractor is locked.
  - ▶ If you are able to pull the shoulder belt out, the lockable retractor is not activated. Pull the seat belt all the way out, and repeat steps 4 – 5.

A child seat that is not properly secured will not adequately protect a child in a crash and may cause injury to the child or other vehicle occupants.






- **6.** Grab the shoulder part of the seat belt near the buckle, and pull up to remove any slack from the lap part of the belt.
  - ► When doing this, place your weight on the child seat and push it into the vehicle seat.
- **7.** Make sure the child seat is firmly secured by rocking it forward and back and side to side; less than one inch of movement should occur near the seat belt.
- **8.** Make sure any unused seat belt that a child can reach is buckled, the lockable retractor is activated, and the belt is fully retracted and locked

#### ≥ Installing a Child Seat with a Lap/Shoulder Seat Belt


To deactivate a lockable retractor, release the buckle and allow the seat belt to wind up all the way.

## ■ Adding Security with a Tether

Tether Anchor Point




A tether anchor point is provided behind the rear outer seating positions and in the ceiling for the rear center. If you have a child seat that comes with a tether but can be installed with a seat belt, the tether may be used for additional security.



#### ■ Adding Security with a Tether


Always use a tether for forward-facing child seats whether using the seat belt or lower anchors.

Continued 77



#### ■ Using an outer anchor

- **1.** Remove the cargo cover\*.
  - Cargo Cover P. 214
- **2.** Put the outer head restraint to its upper most position, then route the tether strap through the head restraint legs, and secure the tether strap hook to the anchor. Make sure the strap is not twisted.
- **3.** Tighten the tether strap as instructed by the child seat manufacturer.
- **4.** Reinstall the cargo cover\*.



#### ■ Using the center anchor

- **1.** Lower the head restraint to its lowest position.
- **2.** Open the anchor cover.
- **3.** Route the tether strap over the head restraint.
  - Make sure the strap is not twisted.
- **4.** Secure the tether strap hook to the anchor.
- **5.** Tighten the tether strap as instructed by the child seat manufacturer.

# **Safety of Larger Children**

#### ■ Protecting Larger Children

The following pages give instructions on how to check proper seat belt fit, what kind of booster seat to use if one is needed, and important precautions for a child who must sit in front

#### Checking Seat Belt Fit

When a child is too big for a child seat, secure the child in a rear seat using the lap/ shoulder seat belt. Have the child sit upright and all the way back, then answer the following questions.



#### ■ Checklist

- Do the child's knees bend comfortably over the edge of the seat?
- Does the shoulder belt cross between the child's neck and arm?
- Is the lap part of the seat belt as low as possible, touching the child's thighs?
- Will the child be able to stay seated like this for the whole trip?

If you answer yes to all these questions, the child is ready to wear the lap/shoulder seat belt correctly. If you answer no to any question, the child needs to ride on a booster seat until the seat belt fits properly without a booster seat.

Safety of Larger Children

## **AWARNING**

Allowing a child age 12 or under to sit in front can result in injury or death if the passenger's front airbag inflates.

If a larger child must ride in front, move the vehicle seat as far to the rear as possible, have the child sit up properly and wear the seat belt properly, using a booster seat if needed

#### Booster Seats



If a lap/shoulder seat belt cannot be used properly, position the child in a booster seat in a rear seat. For the child's safety, check that the child meets the booster seat manufacturer's recommendations.

## Protecting Larger Children - Final Checks

Your vehicle has a rear seat where children can be properly restrained. If you ever have to carry a group of children, and a child must ride in front:

- Make sure you read and fully understand the instructions and safety information in this manual.
- Move the front passenger seat as far back as possible.
- Have the child sit upright and well back in the seat.
- Check that the seat belt is properly positioned so that the child is secure in the seat.

#### ■ Monitoring child passengers

We strongly recommend that you keep an eye on child passengers. Even older, more mature children sometimes need to be reminded to fasten their seat belts and sit up properly.

#### **≫** Booster Seats

When installing a booster seat, make sure to read the instructions that came with it, and install the seat accordingly.

There are high- and low-type booster seats. Choose a booster seat that allows the child to wear the seat belt correctly.

Some U.S. states, and Canadian provinces and territories require children to use a booster seat until they reach a given age or weight (e.g. 6 years or 60 lbs). Be sure to check current laws in the state or province, or territory where you intend to drive.

## **Exhaust Gas Hazard**

#### **Carbon Monoxide Gas**

The engine exhaust from this vehicle contains carbon monoxide, a colorless, odorless, and highly toxic gas. As long as you properly maintain your vehicle, carbon monoxide gas will not get into the interior.

#### ■ Have the exhaust system inspected for leaks whenever

- The exhaust system is making an unusual noise.
- The exhaust system may have been damaged.
- The vehicle is raised for an oil change.

When you operate a vehicle with the tailgate open, airflow can pull exhaust gas into the interior and create a hazardous condition. If you must drive with the tailgate open, open all the windows and set the heating and cooling system\*/climate control system\* as shown below.

- **1.** Select the fresh air mode.
- 2. Select the mode.
- **3.** Set the fan speed to high.
- **4.** Set the temperature control to a comfortable setting.

Adjust the heating and cooling system\*/climate control system\* in the same manner if you sit in your parked vehicle with the engine running.

Carbon Monoxide Gas

## **AWARNING**

Carbon monoxide gas is toxic.

Breathing it can cause unconsciousness and even kill you.

Avoid any enclosed areas or activities that expose you to carbon monoxide.

An enclosed area such as a garage can quickly fill up with carbon monoxide gas.

Do not run the engine with the garage door closed. Even when the garage door is open, drive out of the garage immediately after starting the engine.


\* Not available on all models

## Safety Labels

#### **Label Locations**

These labels are in the locations shown. They warn you of potential hazards that can cause serious injury or death. Read these labels carefully.

If a label comes off or becomes hard to read (except for the U.S. dashboard label which may be removed by the owner), contact a dealer for a replacement.

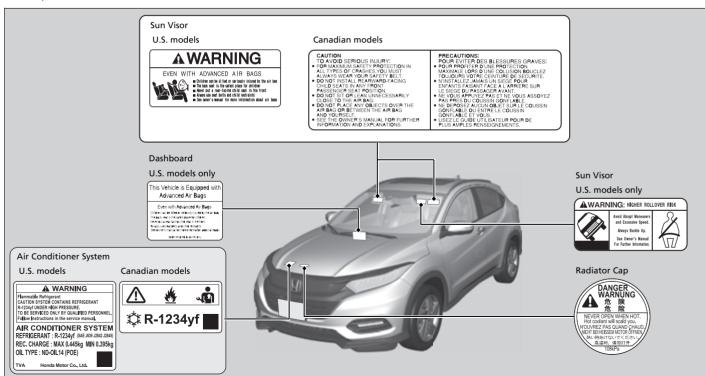

# **Instrument Panel**

This chapter describes the buttons, indicators, and gauges that are used while driving.

Indicators	84
Information Display Warning and	
Information Messages*	103
Multi-Information Display Warning a	ınd
Information Messages*	104
Gauges and Displays	
Gauges	117
Information Display*	119
Multi-Information Display*	122

83

\* Not available on all models

Indicator	Name	On/Blinking	Explanation	Message*
U.S.  BRAKE  Canada  (Red)	Brake System Indicator (Red)	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off.</li> <li>Comes on when the brake fluid level is low.</li> <li>Comes on if there is a problem with the brake system.</li> </ul>	<ul> <li>Comes on while driving - Check the brake fluid level.</li> <li>What to do when the indicator comes on while driving P. 605</li> <li>Comes on along with the ABS indicator - Have your vehicle checked by a dealer.</li> <li>If the Brake System Indicator (Red) Comes On P. 605</li> </ul>	WARNING: Brake Fluid Low Brake System Problem

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
Canada	Brake System Indicator (Amber)	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON III *1, then goes off.</li> <li>Comes on if there is a problem with a system related to braking other than the conventional brake system.</li> <li>Comes on if there is a problem with an automatic brake hold system.</li> </ul>	Stays on constantly - Have your vehicle checked by a dealer.	Brake System Problem  Brake Hold System Problem  Canada  Brake System Problem  (1)  Brake Hold System Problem  (1)

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
U.S. PARK Canada	Electric Parking Brake Indicator	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off if the parking brake has been released.</li> <li>Comes on when the parking brake is applied, and goes off when it is released.</li> <li>Comes on for about 15 seconds when you pull the electric parking brake switch while the ignition switch is in LOCK [0]*1.</li> <li>Stays on for about 15 seconds when you turn the ignition switch to LOCK [0]*1 while the electric parking brake is set.</li> </ul>	Blinks and the electric parking brake system indicator comes on at the same time - There is a problem with the electric parking brake system. The parking brake may not be set.	Release Parking Brake
(P)!	Electric Parking Brake System Indicator	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off.</li> <li>Comes on if there is a problem with the electric parking brake system.</li> </ul>	Comes on while driving - Avoid using the parking brake and have your vehicle checked by a dealer immediately.     ☐ If the Electric Parking Brake System Indicator Comes On P. 606	U.S.  Share in value frame from the frame

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

<sup>\*</sup> Not available on all models

Indicator	Name	On/Blinking	Explanation	Message*
BRAKE HOLD	Automatic Brake Hold System Indicator	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off.</li> <li>Comes on when the automatic brake hold system is on.</li> </ul>	<b>▶ Automatic Brake Hold</b> P. 510	Brake Hold System Standby BRAKE HOLD
HOLD  Canada	Automatic Brake Hold Indicator	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off.</li> <li>Comes on when the automatic brake hold is activated.</li> </ul>	<b>▶ Automatic Brake Hold</b> P. 510	_

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
	Brake	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off.</li> <li>Electric Parking Brake System</li> <li>Comes on when the electric parking brake switch is pressed without depressing the brake pedal while the electric parking brake is in operation.</li> </ul>	• Comes on while driving - Press the electric parking brake switch with the brake pedal depressed.  ▶ Parking Brake P. 507	_
<b>*</b> W	Depressing Indicator*	<ul> <li>Automatic Brake Hold System</li> <li>Comes on when the automatic brake hold button is pressed without depressing the brake pedal while the automatic brake hold is in operation.</li> <li>Blinks if the automatic brake hold is automatically canceled while it is in operation. The beeper sounds.</li> </ul>	<ul> <li>Comes on while driving - Press the automatic brake hold button with the brake pedal depressed.</li> <li>Automatic Brake Hold P. 510</li> <li>Immediately depress the brake pedal.</li> </ul>	-

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
7	Low Oil Pressure Indicator	<ul> <li>Comes on when you turn the ignition switch to ON [II]*1, and goes off when the engine starts.</li> <li>Comes on when the engine oil pressure is low.</li> </ul>	• Comes on while driving - Immediately stop in a safe place.  ☑ If the Low Oil Pressure Indicator Comes On P. 603	Engine Oil Low
	Malfunction Indicator Lamp	<ul> <li>Comes on when you turn the ignition switch to ON II *1, and goes off either when the engine starts or after several seconds if the engine did not start. If "readiness codes" have not been set, it blinks five times before it goes off.</li> <li>Comes on if there is a problem with the emissions control system.</li> <li>Blinks when a misfire in the engine's cylinders is detected.</li> </ul>	<ul> <li>Readiness codes are part of the on board diagnostics for the emissions control systems.</li> <li>Testing of Readiness Codes P. 623</li> <li>Comes on while driving - Have your vehicle checked by a dealer.</li> <li>Blinks while driving - Stop in a safe place where there are no flammable objects. Stop the engine for 10 minutes or more, and wait for it to cool down. Then, take your vehicle to a dealer.</li> <li>If the Malfunction Indicator Lamp Comes On or Blinks P. 604</li> </ul>	Emissions System Problem
≞	Charging System Indicator	<ul> <li>Comes on when you turn the ignition switch to ON [II]*1, and goes off when the engine starts.</li> <li>Comes on when the battery is not charging.</li> </ul>	• Comes on while driving - Turn off the heating and cooling system*/climate control system* and rear defogger in order to reduce electricity consumption.  ■ If the Charging System Indicator Comes On P. 603	12 Volt Battery Charging System Problem

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
	Shift Lever Position Indicator	<ul> <li>Indicates the current shift lever position.</li> </ul>	<b>▶ Shifting</b> P. 444, 446	_
	Transmission System Indicator	Blinks if the transmission system has a problem.	Blinks while driving - Avoid sudden starts and acceleration and have your vehicle checked by a dealer immediately.	Transmission System Problem
M	M (7-speed manual shift mode) Indicator/Shift Indicator*	• Comes on when 7-speed manual shift mode is applied.	<b>▶ 7-Speed Manual Shift Mode</b> P. 448	_
	Seat Belt Reminder Indicator	<ul> <li>Comes on and the beeper sounds if you are not wearing a seat belt when you turn the ignition switch to ON [II]*1.</li> <li>If the front passenger is not wearing a seat belt, the indicator comes on a few seconds later.</li> <li>Blinks while driving if either you or the front passenger has not fastened a seat belt. The beeper sounds and the indicator blinks at regular intervals.</li> </ul>	<ul> <li>The beeper stops and the indicator goes off when you and the front passenger fasten their seat belts.</li> <li>Stays on after you or the front passenger has fastened the seat belt         <ul> <li>A detection error may have occurred in the sensor. Have your vehicle checked by a dealer.</li> </ul> </li> <li>Seat Belt Reminder P. 44</li> </ul>	Fasten Seat Belt  Fasten  Fasten  Passenger's  Seat Sett

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

<sup>\*</sup> Not available on all models

Indicator	Name	On/Blinking	Explanation	Message*
	Low Fuel Indicator*	<ul> <li>Comes on when the fuel reserve is running low (approximately 1.98 U.S. gal./7.5 Liter left).</li> <li>Blinks if there is a problem with the fuel gauge.</li> </ul>	<ul> <li>Comes on - Refuel your vehicle as soon as possible.</li> <li>Blinks - Have your vehicle checked by a dealer.</li> </ul>	-
(ABS)	Anti-lock Brake System ( <b>ABS</b> ) Indicator	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON III *1, then goes off.</li> <li>If it comes on at any other time, there is a problem with the ABS.</li> </ul>	• Stays on constantly - Have your vehicle checked by a dealer. With this indicator on, your vehicle still has normal braking ability but no anti-lock function.  ■ Anti-lock Brake System (ABS) P. 512	Arti-Lock Brake System Problem
	Supplemental Restraint System Indicator	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON III *1, then goes off.</li> <li>Comes on if a problem with any of the following is detected:         <ul> <li>Supplemental restraint system</li> <li>Side airbag system</li> <li>Side curtain airbag system</li> <li>Seat belt tensioner</li> </ul> </li> </ul>	Stays on constantly or does not come on at all - Have your vehicle checked by a dealer.	Airbag System (SRS) Problem

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
~ <del>[</del> _	High Temperature Indicator (Red)	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON II *1, then goes off.</li> <li>Blinks when the engine coolant temperature goes up, and stays on if the temperature continues to rise.</li> </ul>	<ul> <li>Goes off, then comes on in blue when the engine coolant temperature is low.</li> <li>Blinks while driving - Drive slowly to prevent overheating.</li> <li>Stays on while driving - Immediately stop in a safe place and allow the engine to cool.</li> <li>Overheating P. 601</li> </ul>	Acod Acceptation and Map Served Engine Francis California Served Engine Francis California Served Cali
~ <del>!</del>	Low Temperature Indicator (Blue)	Comes on while the engine coolant temperature is low, then goes off once the engine reaches normal operating temperature.	• If the indicator stays on after the engine has reached normal operating temperature, there may be a problem with the temperature sensors. Have your vehicle inspected by a dealer.	_
<b>≣</b> (A)	Auto High- Beam Indicator*	• Comes on when all the operating conditions of the auto high-beam are met.	<b>▶ Auto High-Beam*</b> P. 180	-

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
<b>A</b>	Vehicle Stability Assist™ (VSA®) System Indicator	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off.</li> <li>Blinks when VSA® is active.</li> <li>Comes on if there is a problem with the VSA® system or hill start assist system.</li> </ul>	• Stays on constantly - Have your vehicle checked by a dealer.  ☑ Vehicle Stability Assist™ (VSA®), aka Electronic Stability Control (ESC), System P. 454	Vehicle Stability Assist (VSA) Problem  Hill Start Assist Problem
OFF	Vehicle Stability Assist™ (VSA®) <b>OFF</b> Indicator	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off.</li> <li>Comes on when you deactivate VSA®.</li> </ul>	<b>▶ VSA® On and Off</b> P. 455	_
	Door and Tailgate Open Indicator*	<ul> <li>Comes on for a few seconds if you turn the ignition switch to ON         III *1, then goes off.     </li> <li>Comes on if any door or the tailgate is not completely closed.</li> <li>The beeper sounds and the indicator comes on if any door or the tailgate is opened while driving.</li> </ul>	Goes off when all doors and the tailgate are closed.	_

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

93

Indicator	Name	On/Blinking	Explanation	Message*
<b>⊕!</b>	Electric Power Steering (EPS) System Indicator	<ul> <li>Comes on when you turn the ignition switch to ON [II]*1, and goes off when the engine starts.</li> <li>Comes on if there is a problem with the EPS system.</li> </ul>	• Stays on constantly or does not come on at all - Have your vehicle checked by a dealer.  ■ If the Electric Power Steering (EPS) System Indicator Comes On P. 605	Power Steering System (EPS) Problem
U.S. models only	Low Tire Pressure/TPMS Indicator	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON II *1, then goes off.</li> <li>May come on briefly if the ignition switch is turned to ON II *1 and the vehicle is not moved within 45 seconds, to indicate the calibration process is not yet complete.</li> <li>Comes on and stays on when:         <ul> <li>One or more tires' pressures are determined to be significantly low.</li> <li>The system has not been calibrated.</li> </ul> </li> </ul>	<ul> <li>Comes on while driving - Stop in a safe place, check tire pressures, and inflate the tire(s) if necessary.</li> <li>Stays on after the tires are inflated to the recommended pressures - The system needs to be calibrated.</li> <li>TPMS Calibration P. 460</li> </ul>	Tire Pressures Low (1)
		<ul> <li>Blinks for about one minute, and then stays on if there is a problem with the TPMS, or when a compact spare tire is temporarily installed.</li> </ul>	• Blinks and remains on - Have your vehicle checked by a dealer. If the vehicle is fitted with a compact spare, get your regular tire repaired or replaced and put back on your vehicle as soon as you can.	Tire Pressure Monitor Problem

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
٦įĝ	Keyless Access System Indicator*	<ul> <li>Comes on for a few seconds when you set the power mode to ON, then goes off.</li> <li>Comes on as soon as a problem is detected in the keyless access system or push button starting system.</li> </ul>	Stays on constantly or does not come on at all - Have your vehicle checked by a dealer.	Keyless Start System Problem
$\hat{\mathbf{j}}$	System Message Indicator*	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON II *1, then goes off.</li> <li>Comes on along with a beep when a problem is detected. A system message on the multi-information display appears at the same time.</li> </ul>	<ul> <li>While the indicator is on, press the         ▲①/▼ (information) button to see the message again.     </li> <li>Refer to the Indicators information in this chapter when a system message appears on the multi-information display. Take the appropriate action for the message.</li> <li>The multi-information display does not return to the normal screen unless the warning is canceled, or the</li></ul>	_
<b>++</b>	Turn Signal and Hazard Warning Indicators	<ul> <li>Blinks when you operate the turn signal lever.</li> <li>Blink if you press the hazard warning button.</li> </ul>	<ul> <li>Does not blink or blinks rapidly - A turn signal light bulb has blown. Change the bulb immediately.</li> <li>▶ Replacing Light Bulbs P. 547, 550, 551</li> </ul>	-
	High Beam Indicator	• Comes on when the high beam headlights are on.	_	

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

<sup>\*</sup> Not available on all models Continued

Indicator	Name	On/Blinking	Explanation	Message*
<del>-</del> 00 <del>-</del>	Lights On Indicator	<ul> <li>Comes on whenever the light switch is on, or in AUTO* when the exterior lights are on.</li> </ul>	<ul> <li>If you remove the key from the ignition switch*, or set the power mode* to VEHICLE OFF (LOCK) while the exterior lights are on, a chime sounds when the driver's door is opened.</li> </ul>	Headights ON ED 0E
钓	Fog Light Indicator*	• Comes on when the fog lights are on.	_	-
c== <b>(#</b> )	Immobilizer System Indicator	<ul> <li>Comes on briefly when you turn the ignition switch to ON II *1, then goes off.</li> <li>Comes on if the immobilizer system cannot recognize the key information.</li> </ul>	• Blinks -  Models without keyless access system You cannot start the engine. Turn the ignition switch to LOCK [0], pull the key out, and then insert the key and turn it to ON [II] again.  Models with keyless access system You cannot start the engine. Set the power mode to VEHICLE OFF (LOCK), then select the ON mode again.  • Repeatedly blinks - The system may be malfunctioning. Have your vehicle checked by a dealer.  • Do not attempt to alter this system or add other devices to it. Electrical problems can occur.	_

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

<sup>\*</sup> Not available on all models

Indicator	Name	On/Blinking	Explanation	Message*
<b>\$</b>	ECON Mode Indicator	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off.</li> <li>Comes on when you press the ECON button.</li> </ul>	<b>₽ ECON Button</b> P. 450	ECON ON
Indicator	Security System Alarm Indicator	Blinks when the security system alarm has been set.	<b>▶ Security System Alarm</b> P. 163	_
CRUISE MAIN	CRUISE MAIN Indicator*	Comes on when you press the CRUISE button.	☐ Cruise Control* P. 451	_
CRUISE	CRUISE CONTROL Indicator*	• Comes on if you have set a speed for cruise control.	☐ Cruise Control* P. 451	_
مر	Maintenance Minder Indicator*	Comes on when the scheduled maintenance is due soon.	<b>▶ Maintenance Minder™</b> P. 525	-

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
AWD	All-Wheel Drive ( <b>AWD</b> ) System Indicator*	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON II *1, then goes off.</li> <li>Comes on if there is a problem with the AWD.</li> <li>Blinks when the AWD system is overheated. The system is inactive.</li> </ul>	<ul> <li>Stays on constantly - the engine drives only the front wheels in this state. Have your vehicle checked by a dealer.</li> <li>Blinks while driving - the engine drives only the front wheels in this state. Stop in a safe place, shift to P, and idle the engine until the indicator goes off. If the indicator does not stop blinking, take your vehicle to a dealer.</li> <li>Real Time AWD with Intelligent Control System™* P. 458</li> </ul>	All Wheel Drive System Problem  TWD  She Driving Mont See A state Desparation 2 to 4st

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
		<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off.</li> <li>Comes on if there is a problem with the RDM system.</li> </ul>	• Stays on constantly - Have your vehicle checked by a dealer.	Road Deserture Mitigation System Problem
	Road	ion	• Stays on - The temperature inside the camera is too high. Use the climate control system to cool down the camera. The system activates when the temperature inside the camera cools down.  Front Sensor Camera P. 504	Some Share Accord Statem Connect Constitution Coamer's Transcription Coamer's Transcription Coa II
	Departure Mitigation (RDM) Indicator*		<ul> <li>Stays on - The area around the camera is blocked by dirt, mud, etc. Stop your vehicle in a safe place, and wipe it off with a soft cloth.</li> <li>Have your vehicle checked by a dealer if the indicator and message come back on after you cleaned the area around the camera.</li> <li>Front Sensor Camera P. 504</li> </ul>	Spine Orbor Accord Striptins Cashall Cash Rhost Minished Cash Rhost Minished
		<ul> <li>Comes on if anything covers the radar sensor cover and prevents the sensor from detecting a vehicle in front.</li> <li>May come on when driving in bad weather (rain, snow, fog, etc.)</li> </ul>	<ul> <li>When the radar sensor gets dirty, stop your vehicle in a safe place, and wipe off dirt using a soft cloth. Indicator may take some time to go off after the radar sensor is cleaned.</li> <li>Have your vehicle checked by a dealer if the indicator does not go off even after you clean the sensor cover.</li> <li>Radar Sensor P. 506</li> </ul>	Same Other Assort Systems Cannel Case der Rader Ostrockel

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

99

<sup>\*</sup> Not available on all models

Indicator	Name	On/Blinking	Explanation	Message*
ACC	Adaptive Cruise Control ( <b>ACC</b> ) Indicator (Amber)*	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off.</li> <li>Comes on if there is a problem with ACC.</li> </ul>	Comes on while driving - Have your vehicle checked by a dealer.	Adaptive Cruise Control Problem
ACC	Adaptive Cruise Control ( <b>ACC</b> ) Indicator (Green)*	Comes on when you press the MAIN button.	Adaptive Cruise Control (ACC) P. 477	-
LKAS	Lane Keeping Assist System ( <b>LKAS</b> ) Indicator (Amber)*	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON [II]*1, then goes off.</li> <li>Comes on if there is a problem with the LKAS.</li> </ul>	Stays on constantly - Have your vehicle checked by a dealer.	Lane Keeping Assist Problem
LKAS	Lane Keeping Assist System ( <b>LKAS</b> ) Indicator (Green)*	Comes on when you press the MAIN button.	<b>► Lane Keeping Assist System (LKAS)</b> P. 490	_

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
****	Collision Mitigation Braking System™ (CMBS™) Indicator*	<ul> <li>Comes on for a few seconds when you turn the ignition switch to ON II ¹¹¹, then goes off.</li> <li>Comes on when you deactivate the CMBS™. A multi-information display message appears for five seconds.</li> <li>Comes on if there is a problem with the CMBS™.</li> </ul>	• Stays on constantly without the CMBS™ off - Have your vehicle checked by a dealer.  Electric Collision Mitigation Braking System™ (CMBS™) P. 467	Collision  Collision  Mitgation System  Collision  Mitgation  System Problem

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Indicator	Name	On/Blinking	Explanation	Message*
		system shuts itself off.	• Stays on - The area around the camera is blocked by dirt, mud, etc. Stop your vehicle in a safe place, and wipe it off with a soft cloth.  ▶ Front Sensor Camera P. 504	Sons Sheer Asset Sentent Cannol Counties Class Report Residuals
<b>3</b> ₹	Collision Mitigation Braking System™ (CMBS™) Indicator*		<ul> <li>When the radar sensor gets dirty, stop your vehicle in a safe place, and wipe off dirt using a soft cloth. Indicator may take some time to go off after the radar sensor is cleaned.</li> <li>Have your vehicle checked by a dealer if the message does not disappear even after you clean the sensor cover.</li> <li>Collision Mitigation Braking System™ (CMBS™) P. 467</li> <li>Radar Sensor P. 506</li> </ul>	System Associa Service Cyanual Company Radar Costructed
			• Stays on - The temperature inside the camera is too high. Use the climate control system to cool down the camera. The system activates when the temperature inside the camera cools down.  ■ Front Sensor Camera P. 504	Same Driver Assett Testams Cennol Conselle Connel Sample Conselle

<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

## **Information Display Warning and Information Messages\***

The following messages appear only on the information display.

Message	Condition	Explanation
CHECK   CHECK	Appears when the fuel fill cap is loose or is not installed.	☐ Check/Tighten Fuel Cap Message P. 604
CHECK  CHECK  CHECK  CHECK  CHECK  CHAPGE  SYSTEH  13:F	Appears when there is a problem with the sensor on the battery.	Stays on constantly - Have your vehicle checked by a dealer.

\* Not available on all models

# **Multi-Information Display Warning and Information Messages\***

The following messages appear only on the multi-information display. Press the  $\boxed{4}$  (information) button to see the message again with the system message indicator on.

Message	Condition	Explanation
Tighten Fuel Cap Pag	Appears when the fuel fill cap is loose or is not installed.	☐ Check/Tighten Fuel Cap Message P. 604
A123456 Maintenance Due Soon	<ul> <li>Appears when the scheduled maintenance is due soon.</li> <li>Consequently, Maintenance Due Now and Maintenance Past Due follow.</li> </ul>	Maintenance Minder Messages on the Multi- Information Display P. 530
Canadian models  Washer Fluid  Low	Appears when the washer fluid is low.	<ul> <li>Refill the washer fluid.</li> <li>▶ Refilling Window Washer Fluid P. 544</li> </ul>
West Staw And South To Park To Change Settings	Appears while you are customizing the settings and the shift lever is moved out of P.	<b>■ Customized Features</b> P. 127

Message	Condition	Explanation
Broke Hold Dradeled Region Broke Psoul	Appears if the automatic brake hold is automatically canceled while it is in operation.	Immediately depress the brake pedal.
Brake Hold System OFF	Appears when the automatic brake hold system is turned off.	<b>▶ Automatic Brake Hold</b> P. 510
To Enable Brake Hold: Seat Selt + Puth ATT + MANA HOLD	Appears when the automatic brake hold button is pressed without wearing the driver's seat belt.	• Fasten the driver's seat belt.  ▶ Automatic Brake Hold P. 510
To Disable Brake Hold: Brake + Posh ####################################	Appears when the automatic brake hold button is pressed without depressing the brake pedal while the automatic brake hold is in operation.	<ul> <li>Press the automatic brake hold button with the brake pedal depressed.</li> <li>Automatic Brake Hold P. 510</li> </ul>

Message	Condition	Explanation
Parking Brake Engaged On Interest	<ul> <li>Appears when the parking brake is applied automatically while it is in operation.</li> </ul>	<b>D</b> Automatic Brake Hold P. 510 <b>D</b> Parking Brake P. 507
To Release Parking Brake: Brake + Push	<ul> <li>Appears when the electric parking brake switch is pressed without depressing the brake pedal while the electric parking brake is in operation.</li> </ul>	<ul> <li>Press the electric parking brake switch with the brake pedal depressed.</li> <li>▶ Parking Brake P. 507</li> </ul>

### Models without keyless access system

Message	Condition	Explanation
Accessory (I) Position	Appears when the ignition key is turned to ACCESSORY	_
Return ignition Switch To Lock (0) Position (0-4) P	Appears when you open the driver's door while the ignition key is in ACCESSORY      I.	• Turn the ignition switch to LOCK 0, then remove the key.
Remove Key From Ignition	Appears when you open the driver's door while the ignition key is in LOCK	Remove the key from the ignition switch.

### Models with keyless access system

Message	Condition	Explanation
To Start Engine: Brake + Puth	Appears after you unlock and open the driver's door.	<b>▶ Starting the Engine</b> P. 439
Canadian models  To Unlock  Medic  Push - Rotate  (a) + ((	Appears when the steering wheel is locked.	Move the steering wheel left and right while pressing the <b>ENGINE START/STOP</b> button.
Shift To Park	• Appears if you push the <b>ENGINE START/STOP</b> button to turn the engine off without the shift lever in P.	Move the shift lever to P. The power mode changes to VEHICLE OFF.
Accessory Mode	Appears when the power mode is in ACCESSORY.	_

### Models with keyless access system

Message	Condition	Explanation
To Switch Vehicle OFF: Push Twice	Appears after the driver's door is opened when the power mode is in ACCESSORY.	• Change the power mode to VEHICLE OFF.  ■ ENGINE START/STOP Button P. 170
Keyless Remote Not Detected	Appears when you close the door with the power mode in ON without the keyless remote inside the vehicle.	<ul> <li>Goes off when you bring the keyless remote back inside the vehicle and close the door.</li> <li>★ Keyless Remote Reminder P. 172</li> </ul>
Keyless Renote Battery Low	Appears when the keyless remote battery becomes weak.	<ul> <li>Replace the battery as soon as possible.</li> <li>▶ Replacing the Remote Battery P. 572</li> </ul>
To Stand, Hotel Connection So and	Appears if the keyless remote battery is too weak to start the engine or the key is not within operating range to start the engine. A beeper sounds six times.	Bring the keyless remote in front of the ENGINE START/STOP button to be touched with.

Message	Condition	Explanation
Charging System Problem	Appears when there is a problem with the sensor on the battery.	<ul> <li>Have your vehicle checked by a dealer.</li> <li>☑ Checking the Battery P. 570</li> </ul>
U.S. models  Starter System Problem  Canadian models  Starter System Problem	Appears when the starter system has a problem.	<ul> <li>As a temporary measure, press and hold the ENGINE START/STOP button for up to 15 seconds while pressing the brake pedal, and manually start the engine.</li> <li>Have your vehicle checked by a dealer.</li> </ul>

Message	Condition	Explanation
ACC OFF	Appears for about three seconds when ACC has been automatically canceled.	<ul> <li>You can resume the set speed after the condition that caused ACC to cancel improves. Press the RES/+ button.</li> <li>■ Adaptive Cruise Control (ACC) P. 477</li> </ul>
BRAKE	Flashes when the system senses a likely collision with a vehicle in front of you.	<ul> <li>Take appropriate action to prevent a collision (apply the brakes, change lanes, etc.).</li> <li>➡ Adaptive Cruise Control (ACC) P. 477</li> <li>➡ Collision Mitigation Braking System™ (CMBS™)         P. 467     </li> </ul>
Lane Keeping Assist Cannot Operate Lxas dra	<ul> <li>Appears when the LKAS is in operation, or the LKAS button is pressed, but there is a problem with a system related to the LKAS. The LKAS cancels automatically. The beeper sounds simultaneously.</li> </ul>	• If any other system indicators come on, such as the VSA®, ABS and brake system, take appropriate action.  ▶ Indicators P. 84
Lane Keeping Assist is Now Available	Appears when the camera has been cooled down and LKAS is available.	<ul> <li>Pressing the MAIN/LKAS button can resume the system.</li> <li>▶ Front Sensor Camera P. 504</li> </ul>

Message	Condition	Explanation
Auto High-Beam Problem	Appears if there is a problem with the auto high- beam.	<ul> <li>Manually operate the headlight switch.</li> <li>If you are driving with the high beam headlights when this happens, the headlights are changed to low beams.</li> </ul>
Some Driver Assoll Stretons Central Radio Costricted	<ul> <li>Appears if anything covers the radar sensor cover and prevents the sensor from detecting a vehicle in front.</li> <li>May appear when driving in bad weather (rain, snow, fog, etc.)</li> </ul>	<ul> <li>When the radar sensor gets dirty, stop your vehicle in a safe place, and wipe off dirt using a soft cloth. The message may take some time to go off.</li> <li>Have your vehicle checked by a dealer if the message does not disappear even after you clean the sensor cover.</li> <li>▶ Radar Sensor P. 506</li> <li>▶ Honda Sensing®* P. 464</li> </ul>
Some Driver Asself Testant Central Condition Control Imperiality Control Imperiality Control C	Appears if the temperature inside the front sensor camera is too high and some driver assist systems cannot be activated.	<ul> <li>Use the climate control system to cool down the camera.</li> <li>Disappears - The camera has been cooled down and the systems are activated normally.</li> <li>▶ Front Sensor Camera P. 504</li> <li>▶ Honda Sensing®* P. 464</li> </ul>
Some Oracl Asset Section Counts Countie Class host ministrate()	<ul> <li>Appears if the area around the front sensor camera is blocked by dirt, mud, etc. and be prevented from detecting a vehicle in front.</li> <li>May appear when driving in bad weather (rain, snow, fog, etc.)</li> </ul>	<ul> <li>When the front window gets dirty, stop your vehicle in a safe place, and wipe it off with a soft cloth.</li> <li>Have your vehicle checked by a dealer if the message does not disappear even after you cleaned the area around the camera.</li> <li>Front Sensor Camera P. 504</li> <li>Honda Sensing®* P. 464</li> </ul>

Message	Condition	Explanation
	Lane Keeping Assist System (LKAS)     Appears when the vehicle is driving out of a detected lane. The steering wheel vibrates rapidly.	• Keep the vehicle within the lane you are driving. <b>► Lane Keeping Assist System (LKAS)</b> P. 490
Lane Departure	Appears when the vehicle is driving out of a detected lane.      When you selected Warning Only     The steering wheel vibrates rapidly when the vehicle is drifting out of a detected lane.      When you selected Narrow, Normal or Wide     The steering wheel vibrates rapidly when the vehicle is drifting out of a detected lane.      The steering wheel vibrates rapidly when the vehicle is drifting out of a detected lane. The system also steers the vehicle to help you remain within your driving lane.	<ul> <li>Keep the vehicle within the lane you are driving.</li> <li>▶ Road Departure Mitigation (RDM) System P. 499</li> <li>You can change the setting for the road departure mitigation system. Narrow, Normal, Wide, and Warning Only can be selected.</li> <li>▶ Customized Features P. 127</li> </ul>
Road Departure Mitigation Activated	Road Departure Mitigation (RDM) System  When you selected Narrow  Appears when the vehicle is likely to drive out of a detected lane.  The system steers the vehicle to help you remain within your driving lane.	_
Steering Resulted	Blinks when you fail to steer the vehicle. The beeper sounds simultaneously.	Operate the steering wheel to resume the LKAS.

Message	Condition	Explanation
Fasten Seat Belt	<ul> <li>Appears if not wearing a seat belt when you set the power mode to ON.</li> </ul>	Goes off after you or the front passenger or both of you have fastened your seat belts.
Fuel Gauge System Problem	Appears if there is a problem with the fuel gauge.	Blinks - Have your vehicle checked by a dealer.
Fuel Low	<ul> <li>Appears when the fuel reserve is running low (approximately 1.98 U.S. gal./7.5 Liter left).</li> </ul>	• Appears - Refuel your vehicle as soon as possible.  ▶ Fuel Gauge P. 121

Message	Condition	Explanation
Door Open	<ul> <li>Appears if any door is not completely closed.</li> <li>The beeper sounds and the message appears on if any door or the tailgate is opened while driving.</li> </ul>	Goes off when all doors are closed.
Taligate Open	Appears if the tailgate is not completely closed.	Goes off when the tailgate is closed.
Door And Tailgate Open	Appears if any door or the tailgate is not completely closed.	Goes off when all doors and the tailgate are closed.

Message	Condition	Explanation
ECON OFF	Appears when ECON mode is turned off by pressing ECON button.	<b>E</b> ECON Button P. 450
Main St.	Models with navigation system     Appears when approaching a intersection during route guidance.	■ Refer to the Navigation System Manual  ■ Property of the P
Pressing Bullion Agent 20 Or Instern side Court Special SPT & Press Court Pres	Appears when set the power mode to ON while driving.	<b>₽ Emergency Engine Stop</b> P. 597
Check System	Appears if there is a problem with the automatic lighting control system.	Appears while driving - Manually turn the lights on, and have your vehicle checked by a dealer.
Headlight Problem	<ul> <li>Models with LED headlights</li> <li>Appears if there is a problem with the headlights.</li> </ul>	• Appears while driving - The headlights may not be on. When conditions allow you to drive safety, have your vehicle checked by a dealer as soon as possible.

# Gauges and Displays

# Gauges

Gauges include the speedometer, tachometer and related indicators. They are displayed when the ignition switch is in ON  $[II]^{*1}$ .

### **■** Changing the color of the meter

Models with information display

You can change the color of the meter.

Press the (select/reset) knob when the ignition switch is in ACCESSORY I or LOCK (0)\*1 and the ambient meter is lit up. Each time you press the knob, the color changes.

The colors change in the following order:

white  $\rightarrow$  blue  $\rightarrow$  purple  $\rightarrow$  pink  $\rightarrow$  red  $\rightarrow$  amber  $\rightarrow$  yellow

#### Models with multi-information display

You can change the color of the meter.

Customized Features P 127

Continued 117

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

# ■ Speedometer

Displays your driving speed in mph and km/h.

### **■** Tachometer

Shows the number of engine revolutions per minute.

# Outside Temperature

Shows the outside temperature in Fahrenheit (U.S.) or Celsius (Canada).

### ■ Adjusting the outside temperature display

Adjust the temperature reading up to  $\pm 5^{\circ}F$  or  $\pm 3^{\circ}C$  if the temperature reading seems incorrect.

#### **≥** Outside Temperature

The temperature sensor is in the front bumper. Road heat and exhaust from another vehicle can affect the temperature reading when your vehicle speed is less than 19 mph (30 km/h).

It may take several minutes for the display to be updated after the temperature reading has stabilized.

Use the multi-information display's customized features to correct the temperature.

Customized Features P 127

# **Information Display\***

The information display shows the fuel gauge, odometer, trip meter, engine oil life and maintenance service item codes, and other gauges.


# Switching the Display

Press the (a) (select/reset) knob to change the display. Each time you press the (a) (select/reset) knob, the information display changes as follows:

#### Switching the Display

#### Models with display audio system

Some of the items on the information display also appear on the audio/information screen. They also change along with the information display changes while the fuel consumption is shown.

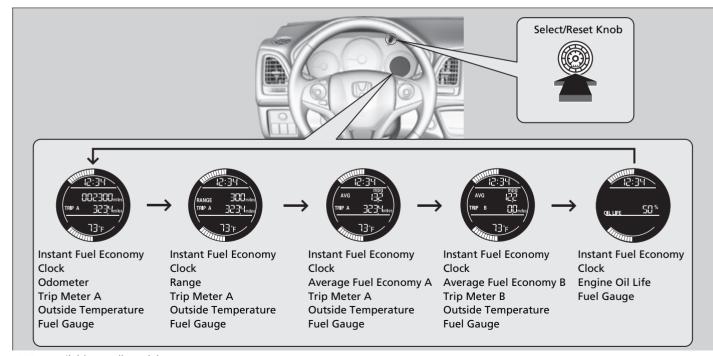

### Instant Fuel Economy

Shows the instant fuel economy as a bar graph in mpg.

### Odometer

Shows the total number of miles that your vehicle has accumulated.

# Trip Meter

Shows the total number of miles driven since the last reset. TRIP A and B can be used to measure two separate trips.

### ■ Resetting a trip meter

To reset a trip meter, display it, then press and hold the knob. The trip meter is reset to **0.0**.

# Range

Shows the estimated distance you can travel on the remaining fuel. This distance is estimated from the fuel economy of your trips in the past.

# Average Fuel Economy

Shows the estimated average fuel economy of each trip meter in mpg. The display is updated at set intervals. When a trip meter is reset, the average fuel economy is also reset.

#### ∑Trip Meter

Switch between trip meter A and trip meter B by pressing the A knob.

### Outside Temperature

Shows the outside temperature in Fahrenheit.

### ■ Adjusting the outside temperature indicator

Adjust the temperature reading up to  $\pm$  5°F if the temperature reading seems incorrect.

- **1.** Turn the ignition switch to ON III.
- 2. Press and hold the (select/reset) knob for 10 seconds or more while the outside temperature is shown on the information display.
  - ► The information display goes into temperature adjustment mode. The display starts showing from -5°F to +5°F.
- **3.** Release the knob when the right adjustment amount is shown.
  - ► The adjustment is complete.

### ■ Engine Oil Life and Maintenance Items

Shows the remaining oil life and Maintenance Minder™.

Maintenance Minder™ P. 525

# Fuel Gauge

Displays the amount of fuel left in the fuel tank.

#### Outside Temperature

The temperature sensor is in the front bumper. Road heat and exhaust from another vehicle can affect the temperature reading when your vehicle speed is less than 19 mph (30 km/h).

It may take several minutes for the display to be updated after the temperature reading has stabilized.

When the engine oil life is shown on the information display, you cannot adjust the outside temperature. Push the 🔯 knob to select the other display.

#### ∑Fuel Gauge

#### NOTICE

You should refuel when the reading approaches **E**. Running out of fuel can cause the engine to misfire, damaging the catalytic converter.

The actual amount of remaining fuel may differ from the fuel gauge reading.


# **Multi-Information Display\***

The multi-information display shows the odometer, trip meter, and other gauges. It also displays important messages such as warnings and other helpful information.

# ■ Switching the Display


### ■ Main displays

Press the ▲①/▼ (information) button to change the display.

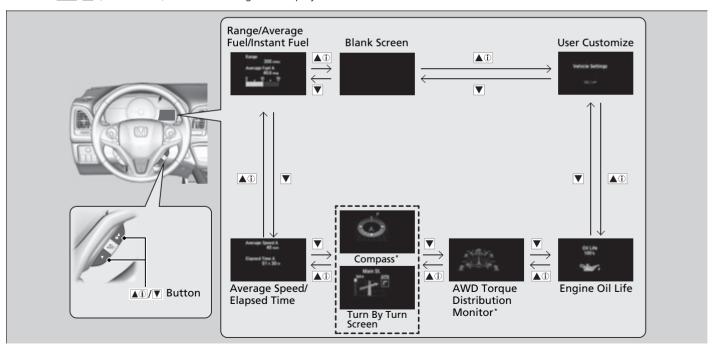

### **■** Lower displays

Press the **SEL/RESET** button or (select/reset) knob to change the display.

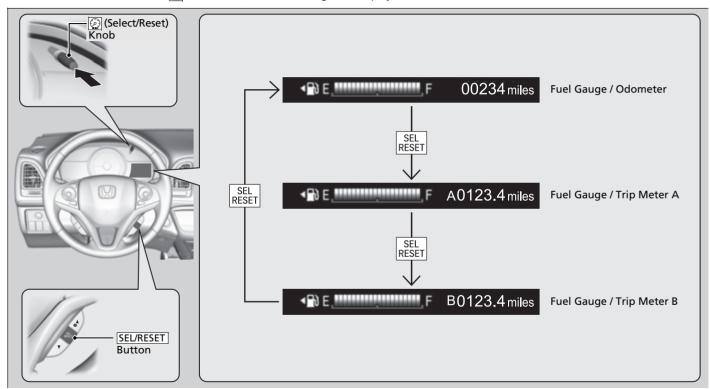

### Odometer

Shows the total number of miles (U.S.) or kilometers (Canada) that your vehicle has accumulated.

# ■ Trip Meter


Shows the total number of miles (U.S.) or kilometers (Canada) driven since the last reset. Meters A and B can be used to measure two separate trips.

### ■ Resetting a trip meter

To reset a trip meter, display it, then press and hold the **SEL/RESET** button. The trip meter is reset to **0.0**.

### ■ Fuel Gauge

Displays the amount of fuel left in the fuel tank.



### **■** Fuel Low warning

When the remaining fuel is running low, the display color will change to orange and warns you to refuel as soon as possible.

The icon will start to blink when the fuel gauge is malfunctioning.

► Multi-Information Display Warning and Information Messages\* P. 104

#### ∑Trip Meter

Switch between trip meter A and trip meter B by pressing the **SEL/RESET** button.

#### ∑Fuel Gauge

#### NOTICE

You should refuel when the reading approaches **E**. Running out of fuel can cause the engine to misfire, damaging the catalytic converter.

The actual amount of remaining fuel may differ from the fuel gauge reading.

# Average Fuel Economy

Shows the estimated average fuel economy of each trip meter in mpg (U.S.) or I/100 km (Canada). The display is updated at set intervals. When a trip meter is reset, the average fuel economy is also reset.

# Range

Shows the estimated distance you can travel on the remaining fuel. This distance is estimated from the fuel economy of your previous trips.

# Elapsed Time

Shows the time elapsed since Trip A or Trip B was reset.

# Average Speed

Shows the average speed in mph (U.S.) or km/h (Canada) since Trip A or Trip B was reset.

# ■ Instant Fuel Economy

Shows the instant fuel economy as a bar graph in mpg (U.S.) or I/100 km (Canada).

# Engine Oil Life

Shows the remaining oil life and Maintenance Minder™.

Maintenance Minder™ P. 525

#### ■ Average Fuel Economy

You can change when to reset the average fuel economy.

Customized Features P. 127

#### 

You can change when to reset the elapsed time.

Customized Features P. 127

#### ■ Average Speed

You can change when to reset the average speed.

Customized Features P 127

# ■ Navigation

### ■ Compass\*


Shows the compass screen.

### **■** Turn-by-Turn Directions

When driving guidance is provided by the navigation system\* or Android Auto, turn-by-turn directions to your destination appear.

- Refer to the Navigation System Manual
- Android Auto P. 320

# ■ AWD Torque Distribution Monitor\*



The indicators on the display show the amount of torque being transferred to the right front, left front, right rear, and left rear wheels.

**■ Real Time AWD with Intelligent Control**System<sup>™\*</sup> P. 458

#### Navigation

You can select whether to have the turn-by-turn display come on or not during the route guidance.


Customized Features P. 127

### Customized Features

Use the multi-information display to customize certain features.

#### ■ How to customize

Select the **Vehicle Settings** screen by pressing the  $\blacktriangle \textcircled{1}/\blacktriangledown$  button while the ignition switch is in ON  $\textcircled{II}^{*1}$ , the vehicle is at a complete stop, and the shift lever is in P. Press the **SEL/RESET** button to enter the customizing mode.

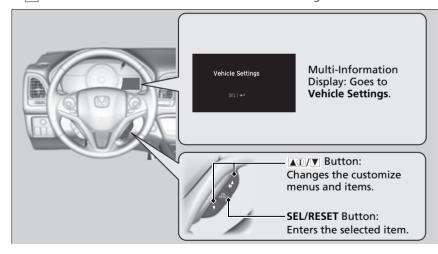

# ○ Customized Features

To customize other features, press the ▲①/▼ button.

List of customizable options P. 130

**Example of customization settings** P. 134


When you customize settings, shift to  $\boxed{P}$ .

Continued 127


<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

#### ■ Customization flow

Press the ▲①/▼ button.

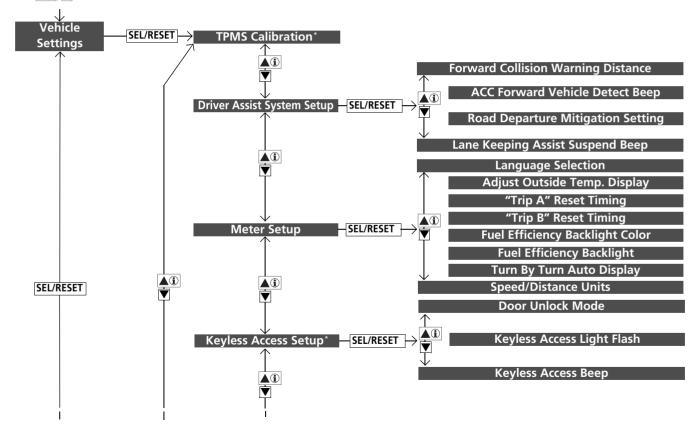

<sup>\*</sup> Not available on all models

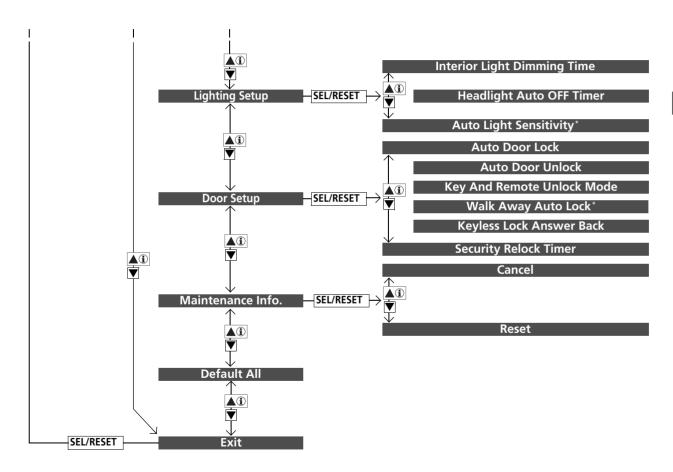

# **■** List of customizable options

Setup Group	Customizable Features	Description	Selectable Settings
TPMS Calibration*	-	Calibrates the TPMS.	Cancel/Calibrate
Driver Assist System Setup	Forward Collision Warning Distance	Changes at which distance the CMBS™ alerts.	Long/Normal*1/Short
	ACC Forward Vehicle Detect Beep	Causes the system to beep when the system detects a vehicle, or when the vehicle goes out of ACC range.	ON/OFF*1
	Road Departure Mitigation Setting	Changes the setting for the road departure mitigation system.	Narrow/Normal*1/Wide/ Warning Only
	Lane Keeping Assist Suspend Beep	Causes the system to beep when the LKAS is suspended.	ON/OFF*1

<sup>\*1:</sup> Default Setting

Setup Group	Customizable Features	Description	Selectable Settings
Meter Setup	Language Selection	Changes the displayed language.	English*1/Français/Español
	Adjust Outside Temp. Display	Adjusts the temperature reading by a few degrees.	-5°F ~ ±0°F*1 ~ +5°F (U.S.) -3°C ~ ±0°C*1 ~ +3°C (Canada)
	"Trip A" Reset Timing	Changes the setting of how to reset trip meter A, average fuel economy A, average speed A, and elapsed time A.	When Refueled/IGN OFF/ Manually Reset*1
	"Trip B" Reset Timing	Changes the setting of how to reset trip meter B, average fuel economy B, average speed B, and elapsed time B.	When Refueled/IGN OFF/ Manually Reset*1
	Fuel Efficiency Backlight Color	Changes the ambient meter color.	White*1/Blue/Violet/Pink/ Red/Amber/Yellow/Random
	Fuel Efficiency Backlight	Turns the ambient meter feature on and off.	ON*1/OFF
	Turn By Turn Auto Display	Selects whether the turn-by-turn display comes on during the route guidance.	ON*1/OFF
	Speed/Distance Units	Selects the trip computer units.	mph·miles*1/km/h·km (U.S.) mph·miles/km/h·km*1 (Canada)

<sup>\*1:</sup>Default Setting

Setup Group	Customizable Features	Description	Selectable Settings
Keyless Access Setup*	Door Unlock Mode	Changes which doors unlock when you grab the driver's door handle.	Driver Door Only*1/All Doors
	Keyless Access Light Flash	Causes some exterior lights to flash when you unlock/lock the doors.	ON*1/OFF
	Keyless Access Beep	Causes the beeper to sound when you unlock/lock the doors.	ON*1/OFF
Lighting Setup	Interior Light Dimming Time	Changes the length of time the interior lights stay on after you close the doors.	60sec/30sec*1/15sec
	Headlight Auto OFF Timer	Changes the length of time the exterior lights stay on after you close the driver's door.	60sec/30sec/15sec*1/0sec
	Auto Light Sensitivity*	Changes the timing for the headlights to come on.	Max/High/Mid*1/Low/Min

<sup>\*1:</sup>Default Setting


Setup Group	Customizable Features	Description	Selectable Settings
Door Setup	Auto Door Lock	Changes the setting for when the doors automatically lock.	With Vehicle Speed*1/ Shift From P/OFF
	Auto Door Unlock	Changes the setting for when the doors automatically unlock.	All Doors When Driver's Door Opens*1/ All Doors When Shifted To Park/ All Doors When Ignition Switched OFF/ OFF
	Key And Remote Unlock Mode	Sets up either the driver's door or all doors to unlock on the first operation of the remote or built-in key.	Driver Door*1/All Doors
	Walk Away Auto Lock*	Changes the settings for the auto lock function when you walk away from the vehicle.	ON/OFF*1
	Keyless Lock Answer Back	LOCK/UNLOCK- The exterior lights flash. LOCK (2nd push)- The beeper sounds.	ON*1/OFF
	Security Relock Timer	Changes the time it takes for the doors to relock and the security system to set after you unlock the vehicle without opening any door.	90sec/60sec/30sec*1
Maintenance Info.	_	Resets or cancels the engine oil life display when you have performed the maintenance service.	Cancel/Reset
Default All	_	Cancels/Resets all the customized settings as default.	Cancel/Set

<sup>\*1:</sup>Default Setting

<sup>\*</sup> Not available on all models

### **■** Example of customization settings

The steps for changing the **"Trip A" Reset Timing** setting to **When Refueled** are shown below. The default setting for **"Trip A" Reset Timing** is **Manually Reset**.



1. Press the ▲①/▼ button until Vehicle Settings appears on the display, then press the SEL/RESET button.



- 2. Press the ▲③/▼ button until **Meter**Setup appears on the display.
- **3.** Press the **SEL/RESET** button.





Manually Reset, or Exit.



- **5.** Press the ▲①/▼ button and select **When Refueled**, then press the **SEL/RESET** button.
  - ► The When Refueled Setup screen appears, then the display returns to the customization menu screen.



- Press the ▲③/▼ button until Exit appears on the display, then press the SEL/RESET button.
- **7.** Repeat Step 6 until you return to the normal screen.

This page intentionally left blank.

# Controls

This chapter explains how to operate the various controls necessary for driving.

Clock	138
Locking and Unlocking the Doors	
Key	140
Low Keyless Remote Signal Strength*	
Locking/Unlocking the Doors from the Outside	
Locking/Unlocking the Doors from the Inside	
Childproof Door Locks	
Auto Door Locking/Unlocking	
Customizing the Auto Door Locking/Unlocking	
Setting*	
Tailgate	
Opening/Closing the Tailgate	161
Security System	
Immobilizer System	163
Security System Alarm	
Opening and Closing the Windows	
Moonroof*	168

perauling the switches Around the steering
Wheel
Models without keyless access system
Ignition Switch
Models with keyless access system
ENGINE START/STOP Button 170
Ignition Switch and Power Mode Comparison173
Turn Signals 174
Light Switches
Fog Lights*178
Daytime Running Lights179
Auto High-Beam*180
Wipers and Washers
Defogger/Heated Door Mirror*/Heated Windshield* 186
Brightness Control
Adjusting the Steering Wheel 190

djusting the Mirrors	
Interior Rearview Mirror	
Power Door Mirrors	. 193
djusting the Seats	
Front Seats	. 194
Rear Seats	. 197
Maintain a Proper Sitting Position	200
Head Restraints	. 201
Armrest	204
terior Lights/Interior Convenience Items	
Interior Lights	. 205
Interior Convenience Items	. 207
eating and Cooling System*	
Using Vents, Heating and A/C	216
limate Control System*	
Using Automatic Climate Control	. 220
Automatic Climate Control Sensors	. 229

\* Not available on all models

# **Adjusting the Clock**

#### Models without navigation system

You can adjust the time in the clock display with the ignition switch is in ON III<sup>\*1</sup>.

# Adjusting the Time

#### Models with display audio system

■ Using the Settings menu on the audio/information screen



- **1.** Select the (HOME) icon, then select **Settings**.
- **2.** Select **Clock/Info**, then **Clock Adjustment**.
- **4.** Select **OK** to set the time.

### ■ Adjusting the Time

The clock in the multi-information display\*/ information display\* is automatically adjusted along with the audio system's clock display.

#### Models with navigation system

The clock is automatically updated through the navigation system, so the time does not need to be adjusted.

#### Models without navigation system

You can customize the clock display to show the 12 hour clock or 24 hour clock.

**Customized Features** P. 356

#### Models with display audio system

You can turn the clock display on and off.

Customized Features P. 356

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

### Models with color audio system

### ■ Using the MENU/CLOCK button



- Press and hold the MENU/CLOCK button.
   Adjust Clock is selected.
- **2.** Rotate ♥ to change hour, then press ८.
- **3.** Rotate ♂ to change minute, then press ♂.
- **4.** To enter the selection, rotate '♥ and select **Set**, then press &.

### ■ Adjusting the Time

#### Models with color audio system

These indications are used to show how to operate the **LIST/SELECT** (List/Selector) knob.

Rotate 😙 to select.

Press 🛎 to enter.


You can also select **Adjust Clock** by pressing the **MENU/CLOCK** button.

Rotate 😙 to select **Adjust Clock**, then press 💍.

# Locking and Unlocking the Doors


# Key

This vehicle comes with the following keys:



Use the keys to start and stop the engine, and to lock and unlock all the doors and tailgate.

# ■ Built-in Key\*



The built-in key can be used to lock/unlock the doors when the keyless remote battery becomes weak and the power door lock/unlock operation is disabled.

To remove the built-in key, slide the release knob and then pull out the key. To reinstall the built-in key, push the built-in key into the keyless remote until it clicks.

#### 

All the keys have an immobilizer system. The immobilizer system helps to protect against vehicle theft.

Immobilizer System P. 163

Follow the advice below to prevent damage to the keys:

- Do not leave the keys in direct sunlight, or in locations with high temperature or high humidity.
- Do not drop the keys or set heavy objects on them.
- Keep the keys away from liquids, dust and sand.
- Do not take the keys apart except for replacing the battery.

If the circuits in the keys are damaged, the engine may not start, and the remote transmitter/keyless access system\* may not work.

If the keys do not work properly, have them inspected by a dealer.

# ■ Key Number Tag



Contains a number that you will need if you purchase a replacement key.

### 

Keep the key number tag separate from the key in a safe place outside of your vehicle.

If you wish to purchase an additional key, contact a dealer.

If you lose your key and you cannot start the engine, contact a dealer.

# Low Keyless Remote Signal Strength\*

The vehicle transmits radio waves to locate the keyless remote when locking/unlocking the doors and tailgate, or to start the engine.

In the following cases, locking/unlocking the doors and tailgate, or starting the engine may be inhibited or operation may be unstable:

- Strong radio waves are being transmitted by nearby equipment.
- You are carrying the keyless remote together with telecommunications equipment, laptop computers, cell phones, or wireless devices.
- A metallic object is touching or covering the keyless remote.


#### ∑Low Keyless Remote Signal Strength\*

Communication between the keyless remote and the vehicle consumes the keyless remote's battery. Battery life is about two years, but this varies depending on regularity of use.

The battery is consumed whenever the keyless remote is receiving strong radio waves. Avoid placing it near electrical appliances such as televisions and personal computers.

# **Locking/Unlocking the Doors from the Outside**

# Using the Keyless Access System\*



When you carry the keyless remote, you can lock/unlock the doors and the tailgate. You can lock/unlock the doors and the tailgate within a radius of about 32 inches (80 cm) of the outside door or tailgate outer handle.

#### ■ Locking/Unlocking the Doors from the Outside

If the interior light switch is in the door activated position, the interior light comes on when you unlock the doors and tailgate.

No doors opened: The light fades out after 30 seconds.

Doors and tailgate relocked: The light goes off immediately.


Interior Lights P. 205

#### ■Using the Keyless Access System\*

If you do not open a door or the tailgate within 30 seconds of unlocking the vehicle with the keyless access system, the doors and tailgate will automatically relock.

You can lock or unlock doors using the keyless access system only when the power mode is in VEHICLE OFF.

- Do not leave the keyless remote in the vehicle when you get out. Carry it with you.
- Even if you are not carrying the keyless remote, you can lock/unlock the doors and the tailgate while someone else with the remote is within range.
- The door may be unlocked if the door handle is covered with water in heavy rain or in a car wash if the keyless remote is within range.





## ■ Locking the doors and tailgate

Press the door lock button on the front door or the tailgate.

➤ Some exterior lights flash; the beeper sounds; all the doors and tailgate lock; and the security system sets.

### ■ Using the Keyless Access System\*

- If you grip a front door handle wearing gloves, the door sensor may be slow to respond or may not respond by unlocking the doors.
- After locking the door, wait at least two seconds before unlocking it by gripping the handle.
- The door might not open if you pull it immediately after gripping the door handle. Grip the handle again and confirm that the door is unlocked before pulling the handle.
- Even within the 32 inches (80 cm) radius, you may not be able to lock/unlock the doors and the tailgate with the keyless remote if it is above or below the outside handle.
- The keyless remote may not operate if it is too close to the door and door glass.

The light flash, beep, and door unlock mode settings can be customized using the multi-information display.

**■ Customized Features** P. 127





### ■ Unlocking the doors and tailgate

Grab the driver's door handle:


- ► The driver's door unlocks.
- Some exterior lights flash twice and the beeper sounds twice.


Grab the front passenger's door handle:

- ► All the doors and the tailgate unlock.
- Some exterior lights flash twice and the beeper sounds twice.

Press the tailgate release button:

- ► The tailgate unlocks.
- Some exterior lights flash twice and the beeper sounds twice.
  - **☑** Opening/Closing the Tailgate P. 161





# ■ Locking the doors and tailgate (Walk away auto lock®)

When you walk away from the vehicle with all doors and tailgate closed while carrying the keyless remote, the doors and tailgate will automatically lock.

The auto lock function activates when all doors and tailgate are closed, and the keyless remote is within about 5 feet (1.5 m) radius of the outside door handle or tailgate outer handle

Exit vehicle while carrying keyless remote and close door(s) and tailgate.

- **1.** While within about 5 feet (1.5 m) radius of the vehicle.
  - ► The beeper sounds; the auto lock function will be activated.
- **2.** Carry the keyless remote beyond about 5 feet (1.5 m) from the vehicle and remain outside this range for 2 or more seconds.
  - Some exterior lights flash; the beeper sounds; all doors and tailgate will then lock.

■Locking the doors and tailgate (Walk away auto lock®)

The auto lock function is set to OFF as the factory default setting. The auto lock function can be set to ON using the multi-information display. If you set the auto lock function to ON using the multi-information display, only the remote transmitter that was used to unlock the driver's door prior to the setting change can activate auto lock.

#### Customized Features P. 127

After the auto lock function has been activated, when you stay within the locking/unlocking operation range, the indicator on the keyless remote will continue to flash until the doors and tailgate are locked.

When you stay beside the vehicle within the operation range, the doors and tailgate will automatically lock approximately 30 seconds after the auto lock function activating beeper sounds.

When you open a door or tailgate after the auto lock function activating beeper sounds, the auto lock function will be delayed until all doors and tailgate are closed.

Under the following circumstances, the auto-lock function will not activate:

- The keyless remote is inside the vehicle.
- The beeper will not sound.
- The keyless remote is taken out of its operational range before all the doors are closed.
- ►The beeper will sound.

To temporarily deactivate the function:

- 1. Set the power mode to OFF.
- 2. Open the driver's door.
- **3.** Using the master door lock switch, operate the lock as follows:

Lock→Unlock→Lock→Unlock.

► The beeper sounds and the function is deactivated.

To restore the function:

- Set the power mode to ON.
- Lock the vehicle without using the auto lock function
- With the keyless remote on you, move out of the auto lock function operation range.
- Open any door.

#### ■Locking the doors and tailgate (Walk away auto lock®)

The auto lock function does not operate when any of the following conditions are met.

- The keyless remote is inside the vehicle.
- A door, tailgate or the hood is not closed.
- The power mode is set to any mode other than OFF.
- The keyless remote is not located within a radius of about 5 feet (1.5 m) from the vehicle when you get out of the vehicle and close the doors and tailgate.


#### Auto lock function operation stop beeper

After the auto lock function has been activated, the auto lock operation stop beeper sounds for approximately two seconds in the following cases.

- The keyless remote is put inside the vehicle through a window
- You are located too close to the vehicle.
- The keyless remote is put inside the tailgate. If the warning beeper sounds, check that you are carrying the keyless remote. Then, open/close a door and confirm the auto lock activation beeper sounds once

Continued 147

# Using the Remote Transmitter



### **■** Locking the doors

Press the lock button.

#### Once:

Some exterior lights flash, all the doors and tailgate lock, and the security system sets.

# Twice (within five seconds after the first push):

A beeper sounds and verifies the security system is set.

#### Substitute States St

If you do not open a door within 30 seconds of unlocking the vehicle with the remote transmitter, the doors will automatically relock.

#### Models with multi-information display

You can change the relock timer setting.

**≧** Customized Features P. 127

The remote transmitter uses low-power signals, so the operating range may vary depending on the surroundings.

The remote transmitter will not lock the vehicle when a door is open.

#### Models without keyless access system

The remote transmitter will not work when the key is in the ignition switch.

#### Models with keyless access system

You can lock or unlock doors using the remote transmitter or keyless access system only when the power mode is in VEHICLE OFF.

## ■ Unlocking the doors

Press the unlock button.

#### Once:

► Some exterior lights flash twice, and the driver's door unlocks.

#### Twice:

► The remaining doors and the tailgate unlock.

### **>** Using the Remote Transmitter

If the distance at which the remote transmitter works varies, the battery is probably low.

If the LED does not come on when you press a button, the battery is dead.

Replacing the Remote Battery P. 572

#### Models with multi-information display

You can customize the door unlock mode setting.

Customized Features P. 127

Continued 149

# ■ Locking/Unlocking the Doors Using a Key

If the lock or unlock button of the remote does not work, use the key instead.



If the lock or unlock button of the remote does not work, use the key instead. Fully insert the key and turn it.

### **≥** Locking/Unlocking the Doors Using a Key

If you unlock the doors with the key, the alarm activates when you open the hood or move the shift lever out of  $\boxed{\textbf{P}}$ .

When you lock the driver's door with a key, all the other doors and tailgate lock at the same time. When unlocking, the driver's door unlocks first. Turn the key a second time within a few seconds to unlock the remaining doors and the tailgate.

#### Models with multi-information display

You can customize the door unlock mode setting.

Customized Features P. 127

# ■ Locking a Door Without Using a Key

If you do not have the key on you, or if for some reason you cannot lock a door using the key, you can lock the door without it.



### ■ Locking the driver's door

Push the lock tab forward ① or push the master door lock switch in the lock direction ②, and close the door.

### ■ Locking the passengers' doors

Push the lock tab forward and close the door.

### **■** Lockout prevention system

### Models without keyless access system

The doors and the tailgate cannot be locked when the key is in the ignition switch.

### Models with keyless access system

The doors and the tailgate cannot be locked when the keyless remote is inside the vehicle.


#### ■Locking a Door Without Using a Key

When you lock the driver's door, all the other doors and tailgate lock at the same time.

Before locking a door, make sure that the key is not inside the vehicle.

# **Locking/Unlocking the Doors from the Inside**

# ■ Using the Lock Tab



# ■ Locking a door

Push the lock tab forward.

# ■ Unlocking a door


Pull the lock tab rearward.

### **≥** Using the Lock Tab

When you lock the door using the lock tab on the driver's door, all of the other doors and the tailgate lock at the same time.

When you unlock the door using the lock tab on the driver's door, only the driver's door will unlock.

# Unlocking Using the Front Door Inner Handle



Pull the front door inner handle.

The door unlocks and opens in one motion.

Unlocking and opening the driver's door from the inner handle unlocks all the other doors.

To avoid all the doors unlocking use the lock tab on the driver's door to unlock, then lock again before opening the door.

► This setting works for one time only.

#### Models with multi-information display

If you do not want all the doors to unlock all the time, customize the **Auto Door Unlock** setting to **OFF** using the multi-information display.

**≧** Customized Features P. 127

#### Models without multi-information display

If you do not want all the doors to unlock all the time, customize the Auto Door Unlock setting to Off using the master door lock switch.

**☑** Customizing the Auto Door Locking/Unlocking Setting\* P. 157


#### ■Unlocking Using the Front Door Inner Handle

The front door inner handles are designed to allow front seat occupants to open the door in one motion. However, this feature requires that front seat occupants never pull a front door inner handle while the vehicle is in motion.

Children should always ride in a rear seat where childproof door locks are provided.

**Childproof Door Locks** P. 155

# ■ Using the Master Door Lock Switch



Press the master door lock switch in as shown to lock or unlock all the doors and the tailgate.


### **≥**Using the Master Door Lock Switch

When you lock/unlock the driver's door using the master door lock switch, all the other doors and the tailgate lock/unlock at the same time.

# **Childproof Door Locks**

The childproof door locks prevent the rear doors from being opened from the inside regardless of the position of the lock tab.

# ■ Setting the Childproof Door Locks



Slide the lever in the rear door to the lock position, and close the door.

# ■ When opening the door

Open the door using the outside door handle.

#### ○ Childproof Door Locks

To open the door from the inside when the childproof door lock is on, put the lock tab in the unlock position, lower the rear window, put your hand out of the window, and pull the outside door handle.

# **Auto Door Locking/Unlocking**

Your vehicle locks and unlocks all doors automatically when a certain condition is met.

# Auto Door Locking

#### ■ Drive lock mode

All doors lock when the vehicle's speed reaches about 10 mph (15 km/h).

# ■ Auto Door Unlocking

### ■ Driver's door open mode

All doors and the tailgate unlock when the driver's door is opened.

#### 

You can turn off or change to another auto door locking/unlocking setting using the master door lock switch.

■ Customizing the Auto Door Locking/ Unlocking Setting\* P. 157

#### Models with multi-information display

You can turn off or change to another auto door locking/unlocking setting using the multi-information display.

Customized Features P. 127

# Customizing the Auto Door Locking/Unlocking Setting\*

You can customize the auto door locking/unlocking setting to your liking using the master door lock switch.

# ■ List of the Auto Door Locking/Unlocking Customizable Options

# ■ Auto door locking

Mode	Description
Drive Lock Mode*1	All doors lock when the vehicle's speed reaches about 10 mph (15 km/h).
Off	The auto door locking is deactivated all the time.

### ■ Auto door unlocking

Mode	Description
Driver's Door Open Mode*1	All doors and the tailgate unlock when the driver's door is opened.
Park Unlock Mode	All doors unlock when the transmission is put into P with the brake pedal depressed.
Off	The auto door unlocking is deactivated all the time.

<sup>\*1:</sup>Default setting

\* Not available on all models

# **■** Customizing Flow for Auto Door Locking Options

Steps	Drive Lock Mode*1	Off			
1	Apply the parking brake.				
2	The driver's door must be closed at this stage.	Open the driver's door.			
3	Turn the ignition switch to ON III *2.				
4	Press and hold the front of the master door lock switch on the driver's door. You will hear a click more than five seconds elapsed. Release the switch.				
5	Turn the ignition switch to OFF 0 within 20 seconds*2.  ➤ Customization is completed.  ➤ All doors unlock and all turn signals blink three times.				

<sup>\*1:</sup>Default setting

<sup>\*2:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

# ■ Customizing Flow for Auto Door Unlocking Options

Steps	Driver Door Open Unlock Mode*1	Park Unlock Mode	Off					
1	Apply the parking brake.  Move the shift lever out of P with the brake pedal depressed.	Apply the parking brake.  Move the shift lever to P.	Apply the parking brake.  Move the shift lever to P.					
2	The driver's door must be closed at this stage.		Open the driver's door.					
3	Turn the ignition switch to ON [II]*2.							
4	Press and hold the rear of the master door lock switch on the driver's door. You will hear a click more than five seconds elapsed. Release the switch.							
5	Turn the ignition switch to OFF 0 within  ► Customization is completed.  ► All doors lock and all turn signals blir							

<sup>\*1:</sup>Default setting
\*2:Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

# **Tailgate**

# **Precautions for Opening/Closing the Tailgate**

Always make sure individuals and objects are clear of the tailgate before opening or closing it.

- Open the tailgate all the way.
  - If it is not fully opened, the tailgate may begin to close under its own weight.
- Be careful when it is windy. The wind may cause the tailgate to close.

Keep the tailgate closed while driving to:

- Avoid possible damage.
- ▶ Prevent exhaust gas from leaking into the vehicle.

Carbon Monoxide Gas P. 81

# **AWARNING**

Anyone caught in the path of a tailgate that is being opened or closed can be seriously injured.

Make sure that all people are clear of the tailgate before opening or closing it.

Be careful not to hit your head on the tailgate or to put your hands between the tailgate and the cargo area when closing the tailgate.

When you are storing or picking up luggage from the cargo area while the engine is idling, do not stand in front of the exhaust pipe. You may get burned.

Do not allow any passenger in the cargo space. They may get hurt during hard braking, a sudden acceleration, or a crash.

# **Opening/Closing the Tailgate**



When all the doors are unlocked or you press the tailgate unlock button on the remote transmitter, the tailgate is unlocked. Press the tailgate release button and lift open the tailgate.



To close the tailgate, grab the inner handle, pull the tailgate down, and push it closed from outside

If you close the tailgate when all the doors are locked, the tailgate locks automatically.

► Some exterior lights flash.


#### ∑Opening/Closing the Tailgate

#### Models with keyless access system

- Do not leave the keyless remote in the vehicle when you get out. Carry it with you.
- Even if you are not carrying the keyless remote, you can unlock the tailgate while someone else with the remote is within range.
- Do not leave the keyless remote inside the cargo area and close the tailgate. The beeper sounds and the tailgate cannot be closed.

If you are carrying the keyless remote, you do not have to unlock the tailgate before opening it.

# **■** Using the Remote Transmitter



Press the tailgate unlock button to unlock the tailgate.

### **>>**Using the Remote Transmitter

If you have unlocked and opened the tailgate using the remote transmitter or keyless remote, when closing, the tailgate locks automatically.

# **Security System**

# **Immobilizer System**

The immobilizer system prevents a key that has not been pre-registered from starting the engine. Each key contains electronic transmitters that use electronic signals to verify the key.

Pay attention to the following when inserting the key into the ignition switch or pressing the **ENGINE START/STOP** button:

- Do not allow objects that emit strong radio waves near the ignition switch or the **ENGINE START/STOP** button.
- Make sure the key is not covered by or touching a metal object.
- Do not bring a key from another vehicle's immobilizer system near the ignition switch or the ENGINE START/STOP button.
- Do not put the key near magnetic items. Electronic device, such as televisions and audio systems emit strong magnetic fields. Note that even a key chain can become magnetic.

# **Security System Alarm**

The security system alarm activates when the tailgate, hood or doors are forcibly opened. The alarm does not activate if the tailgate or doors are opened with the key, remote transmitter or keyless access system\*.

However, the alarm activates if a door is opened with the key and then the transmission is taken out of  $\boxed{\mathbf{P}}$  or the hood is opened before the ignition switch is turned to ON  $\boxed{\mathbf{II}}^{*1}$ .

### ■ When the security system alarm activates

The horn sounds intermittently and all of the exterior lights flash.

\*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

# \* Not available on all models

#### 

#### NOTICE

Leaving the key in the vehicle can result in theft or accidental movement of the vehicle.

Always take the key with you whenever you leave the vehicle unattended.

Do not alter the system or add other devices to it. Doing so may damage the system and make your vehicle inoperable.

#### Security System Alarm

The security alarm continues for a maximum of two minutes until the security system alarm deactivates.

### ■ To deactivate the security system alarm

Unlock the vehicle using the remote transmitter or keyless remote\*, or turn the ignition switch to ON III \*1. The system, along with the horn and flashing lights, is deactivated

### ■ Setting the security system alarm

The security system alarm automatically sets when the following conditions have been met:

- The ignition switch is in LOCK  $0^{*1}$ .
- The hood is closed
- All doors and the tailgate are locked from outside with the key, remote transmitter, or keyless access system\*.

#### Models without keyless access system

• The key has been removed from the ignition switch.

### ■ When the security system alarm sets

The security system alarm indicator in the instrument panel blinks. When the blinking interval changes after about 15 seconds, the security system alarm is set.

### ■ To cancel the security system alarm

The security system alarm is canceled when the vehicle is unlocked using the remote transmitter or keyless access system\*, or when the ignition switch is turned to ON II \*1. The security system alarm indicator goes off at the same time.

### Security System Alarm

Do not set the security system alarm when someone is in the vehicle or a window is open. The system can accidentally activate when:


- Unlocking the door with the lock tab.
- Opening the hood with the hood release handle.
- Moving the shift lever out of P.

If the battery goes dead after you have set the security system alarm, the security alarm may activate once the battery is recharged or replaced. If this occurs, deactivate the security system alarm by unlocking a door using the key, remote transmitter, or kevless access system\*.

Do not alter the system or add other devices to it. Doing so may damage the system and make your vehicle inoperable.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

# Panic Mode



# ■ The panic button on the remote transmitter

If you press the panic button for approximately one second, the following will occur for about 30 seconds:

- The horn sounds.
- Some exterior lights flash.

### ■ Canceling panic mode

- Press any button on the remote transmitter.
- Turn the ignition switch to ON III \*1.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

# **Opening and Closing the Windows**


# **Opening/Closing the Power Windows**

The power windows can be opened and closed when the ignition switch is in ON  $\boxed{II}^{*1}$ , using the switches on the doors. The driver's side switches can be used to open and close all of the windows.

The power window lock button on the driver's side must be switched off (not pushed in, indicator off) to open and close the windows from anywhere other than the driver's seat.

When the power window lock button is pushed in, the indicator comes on and you can only operate the driver's window. Turn the power window lock button on if a child is in the vehicle.

# ■ Opening/Closing Windows with Auto-Open/Close Function



### ■ Automatic operation

**To open:** Push the switch down firmly. **To close:** Pull the switch up firmly.

The window opens or closes completely. To stop the window at any time, push or pull the switch briefly.

# ■ Manual operation

**To open:** Push the switch down lightly, and hold it until the desired position is reached. **To close:** Pull the switch up lightly, and hold it until the desired position is reached.

■Opening/Closing the Power Windows

# **AWARNING**

Closing a power window on someone's hands or fingers can cause serious injury.

Make sure your passengers are away from the windows before closing them.

The power windows can be operated for up to 10 minutes after you turn the ignition switch to LOCK  $\boxed{\mathbf{0}}$ <sup>\*1</sup>. Opening either front door cancels this function.

#### **Auto Reverse**


If a power window senses resistance when closing automatically, it will stop closing and reverse direction.

The driver's window auto reverse function is disabled when you continuously pull up the switch.

The auto reverse function stops sensing when the window is almost closed to ensure that it fully closes.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

# Opening/Closing Windows without Auto-Open/Close Function



**To open:** Push the switch down. **To close:** Pull the switch up.

Release the switch when the window reaches the desired position.

#### ■Opening/Closing the Power Windows

While driving with any of the windows open, you may hear a booming, throbbing, or helicopter-type noise or pressure. This is called wind buffeting. This is a normal occurrence that can be minimized.


If you hear a wind buffeting noise with any of the windows open, lower all of the other windows slightly or open the moonroof\*.

\* Not available on all models

# **Opening/Closing the Moonroof**

You can only operate the moonroof when the power mode is in ON. Use the switch in the front of the ceiling to open and close the moonroof.

# Using the Moonroof Switch



## **■** Automatic operation

**To open:** Pull the switch back firmly. **To close:** Push the switch forward firmly.

The moonroof will automatically open or close all the way. To stop the moonroof midway, touch the switch briefly.

# ■ Manual operation

**To open:** Pull the switch back lightly, and hold it until the desired position is reached. **To close:** Push the switch forward lightly, and hold it until the desired position is reached.

### ■ Tilting the moonroof up

**To tilt:** Push on the center of the moonroof switch.

**To close:** Push the switch forward firmly, then release.

**≫**Opening/Closing the Moonroof

# **AWARNING**

Opening or closing the moonroof on someone's hands or fingers can cause serious injury.

Make sure all hands and fingers are clear of the moonroof before opening or closing it.

#### NOTICE

Opening the moonroof in below freezing temperature or when it is covered with snow or ice can damage the moonroof panel or motor.

The moonroof can be operated for up to 10 minutes after you set the power mode to VEHICLE OFF.


Opening either front door cancels this function.

When resistance is detected, the auto reverse function causes the moonroof to change directions, then stop. Auto reverse stops sensing when the moonroof is almost closed to ensure that it fully closes. Make sure that all objects, including fingers, are clear of the moonroof.

# Operating the Switches Around the Steering Wheel

#### Models without keyless access system

# **Ignition Switch**



- O LOCK: Insert and remove the key in this position.
- ACCESSORY: Operate the audio system and other accessories in this position.
- II ON: This is the position when driving.
- [III] START: This position is for starting the engine. The switch returns to ON [II] when you let go of the key.

### Ignition Switch

You cannot take the key out unless the shift lever is in  $\boxed{\textbf{P}}$ .

If you open the driver's door when the key is in LOCK O or ACCESSORY I, a warning buzzer will sound to remind you to take the key out.

#### Models with multi-information display

When the warning buzzer sounds, the following messages appear on the multi-information display:


- In LOCK 0: the symbol with an **Remove Key From Ignition**
- In ACCESSORY 1: the symbol [at with a Return Ignition Switch To Lock (0) Position

If the key won't turn from LOCK ① to ACCESSORY ①, turn the key while moving the steering wheel left and right. The steering wheel will unlock, allowing the key to turn.

#### Models with keyless access system

# **ENGINE START/STOP Button**

# Changing the Power Mode

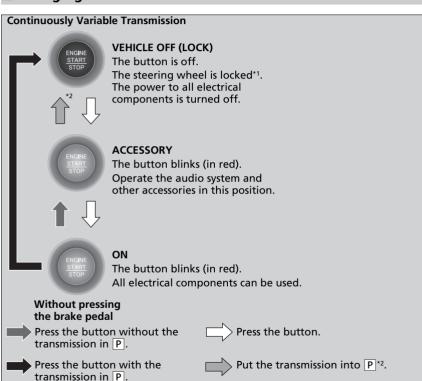


- \*1: Canadian models
- \*2: U.S. models

#### **≫ENGINE START/STOP Button**

#### **ENGINE START/STOP Button Operating Range**

You can start the engine when the keyless remote is inside the vehicle.



If the battery of the keyless remote is getting low, the engine may not start when you push the **ENGINE START/STOP** button. If the engine does not start, refer to the following link.

# ■ If the Keyless Remote Battery is Weak P. 596

The engine may also run if the keyless remote is close to the door or window, even if it is outside the vehicle.

#### ON mode:

The **ENGINE START/STOP** button is on (in red), if the engine is running.

Do not leave the power mode in ACCESSORY or ON when you get out.

### Automatic Power Off

If you leave the vehicle for 30 to 60 minutes with the transmission in  $\boxed{\textbf{P}}$  and the power mode in ACCESSORY, the vehicle automatically goes into the mode similar to VEHICLE OFF (LOCK) to avoid draining the battery.

When in this mode:

#### Canadian models

The steering wheel does not lock.

#### All models

You cannot lock or unlock doors with the remote transmitter or the keyless access system.

Press the **ENGINE START/STOP** button to switch the mode to VEHICLE OFF (LOCK). Changing the Power Mode P. 170

#### ∑Changing the Power Mode

#### Canadian models

If the power mode does not change from VEHICLE OFF to ACCESSORY, press the **ENGINE START/STOP** button while moving the steering wheel left and right. The steering wheel will unlock, allowing the mode to change.

Continued 171

## ■ Power Mode Reminder

If you open the driver's door when the power mode is in ACCESSORY, a warning buzzer sounds.

# Keyless Remote Reminder



When the power mode is set to any mode other than OFF and you remove the keyless remote from the vehicle and shut the door, an alarm will sound. If the alarm continues to sound, place the keyless remote in another location.

# ■ When the power mode is in ACCESSORY

The alarm will sound from outside the vehicle.

### ■ When the power mode is in ON

An alarm will sound both inside and outside the vehicle. In addition, a warning indicator will appear on the instrument panel.

### X Keyless Remote Reminder X Seyless Remote Remote Reminder X Seyless Remote Remote Remote Remote Reminder X Seyless Remote Rem

When the keyless remote is within the system's operational range, and all the doors are closed, the warning function cancels.

If the keyless remote is taken out of the vehicle after the engine has been started, you can no longer change the **ENGINE START/STOP** button mode or restart the engine. Always make sure if the remote is in your vehicle when you operate the **ENGINE START/STOP** button.

Removing the keyless remote from the vehicle through a window does not activate the warning buzzer.


Do not put the keyless remote on the dashboard or in the glove box. It may cause the warning buzzer to activate. Under some other conditions that can prevent the vehicle from locating the remote, the warning buzzer may also activate even if the remote is within the system's operational range.

# **Ignition Switch and Power Mode Comparison**

Ignition Switch Position	LOCK 0 (with/without the key)	ACCESSORY I	ON III	START III
Without Keyless Access System	<ul> <li>Engine is turned off and power is shut down.</li> <li>The steering wheel is locked.</li> <li>No electrical components can be used.</li> </ul>	<ul> <li>Engine is turned off.</li> <li>Some electrical components such as the audio system and the accessory power socket can be operated.</li> </ul>	<ul> <li>Normal key position while driving.</li> <li>All electrical components can be used.</li> </ul>	<ul> <li>Use this position to start the engine.</li> <li>The ignition switch returns to the ON II position when you release the key.</li> </ul>
Power Mode	VEHICLE OFF (LOCK)	ACCESSORY	ON  Button is: Blinking On	START (BOOM)
With Keyless Access System and <b>ENGINE</b> <b>START/STOP</b> Button	<ul> <li>Button-Off</li> <li>Engine is turned off and power is shut down.</li> <li>The steering wheel is locked*1.</li> <li>No electrical components can be used.</li> </ul>	<ul> <li>Button-Blinking</li> <li>Engine is turned off.</li> <li>Some electrical components such as the audio system and the accessory power socket can be operated.</li> </ul>	Button- Blinking (engine is turned off) On (engine is running) • All electrical components can be used.	<ul> <li>Button-On</li> <li>The mode automatically returns to ON after the engine starts.</li> </ul>

<sup>\*1:</sup> Canadian models

# **Turn Signals**



The turn signals can be used when the ignition switch is in ON  $\overline{II}$ <sup>\*1</sup>.

# ■ (A): Turn signal

When turning the car, push the lever up or down based on the direction you want to turn, and the turn signal will blink.

# ■ (B): One-touch turn signal

When you lightly push the lever up or down and release it, the turn signal will blink 3 times.

#### ∑Turn Signals


The turn signal indicator on the instrument panel will blink when the external turn signal blinks.

Indicators P. 84


<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

# **Light Switches**

# ■ Manual Operation



Canadian models



Low Beams

Turns on parking lights, side marker, tail, and rear license plate lights

Turns on headlights, side marker, parking lights, tail, and rear license plate lights

Rotating the light switch turns the lights on and off, regardless of the power mode setting or position of the ignition switch.

### **■** High beams

Push the lever forward until you hear a click.

#### **■** Low beams

When in high beams, pull the lever back to return to low beams.

### **■** Flashing the high beams

Pull the lever back, and release it.

#### Canadian models

## **■** Lights off

Turn the lever to **OFF** either when:

- The shift lever is in **P**.
- The parking brake is applied.

To turn the lights on again, turn the lever to **OFF** to cancel the lights off mode. Even if you do not cancel the lights off mode, the lights come on automatically when:

- The transmission is moved out of **P** and the parking brake is released.
- The vehicle starts to move.

### ∑Light Switches

#### Models without keyless access system

If you remove the key from the ignition switch while the lights are on, a chime sounds when the driver's door is opened.

#### Models with keyless access system

If you leave the power mode in VEHICLE OFF (LOCK) while the lights are on, a chime sounds when the driver's door is opened.

When the lights are on, the lights on indicator in the instrument panel will be on.

Lights On Indicator P. 96

If you sense that the level of the headlights is abnormal, have your vehicle inspected by a dealer.

Do not leave the lights on when the engine is off because it will cause the battery to discharge.

Continued 175

# Automatic Operation (automatic lighting control)\*




Canadian models

Automatic lighting control can be used when the ignition switch is in ON  $[II]^{*1}$ .

#### U.S. models

When you turn the light switch to **AUTO**, the headlights and other exterior lights will switch on and off automatically depending on the ambient brightness.

#### Canadian models




The headlights come on when you unlock a door in dark areas with the headlight switch in **AUTO**.


Once you lock the door, the headlights will go off.

#### ■ Automatic Operation (automatic lighting control)\*

We recommend that you turn on the lights manually when driving at night, in a dense fog, or in dark areas such as long tunnels or parking facilities.

The light sensor is in the location shown below. Do not cover this light sensor with anything; otherwise, the automatic lighting system may not work properly.





\*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

\* Not available on all models

# Headlight Integration with Wipers\*

The headlights automatically come on when the wipers are used several times within a number of certain intervals with the headlight switch in **AUTO**.

The headlights automatically go off a few minutes later if the wipers are stopped.

# Automatic Lighting Off Feature

The headlights, all other exterior lights, and the instrument panel lights turn off 15 seconds after you remove the key or set the power mode to VEHICLE OFF (LOCK), take the remote with you, and close the driver's door.


If you turn the ignition switch to LOCK  $0^{*1}$  with the headlight switch on, but do not open the door, the lights turn off after 10 minutes (3 minutes, if the switch is in the **AUTO**\* position).

The lights turn on again when you unlock or open the driver's door. If you unlock the door, but do not open it within 15 seconds, the lights go off. If you open the driver's door, you will hear a lights on reminder chime.

#### ■ Automatic Operation (automatic lighting control)\*

#### U.S. models

You can adjust the auto light sensitivity as follow:



Customized Features P. 127

#### 

This feature activates while the headlights are off in AUTO

The instrument panel brightness does not change when the headlights come on.

At dark ambient light levels, the automatic lighting control feature turns on the headlights, regardless of the number of wiper sweeps.

### 

#### Models with multi-information display

You can change the headlight auto off timer setting.

Customized Features P 127

<sup>\*1:</sup> Models with the keyless access system have an ENGINE START/STOP button instead of an ignition switch.

<sup>\*</sup> Not available on all models

# Fog Lights\*



When the low beam headlights are on, turn the fog light switch on to use the fog lights.

### ∑Fog Lights\*

When the fog lights are on, the indicator in the instrument panel will be on.

They go off when the headlights turn off, or when the daytime running lights are on.

**▶** Fog Light Indicator\* P. 96

### **Daytime Running Lights**

The parking/daytime running lights come on when the following conditions have been met:

• The ignition switch is in ON II \*1.

#### U.S. models

• The headlight switch is **OFF**.

#### Canadian models

• The headlight switch is **AUTO**.

#### All models

• The parking brake is released.

The lights remain on even if you set the parking brake. Turning off the ignition switch or setting the power mode to VEHICLE OFF will turn off the daytime running lights.

The daytime running lights are off once the headlight switch is turned on, or when the head light switch is in **AUTO**\* and it is getting darker outside.

#### Daytime Running Lights


The daytime running lights come on dimmer when the headlight switch is in [204] than when it is in **AUTO**\*. In **AUTO**\*, if the ambient brightness is dark, the low beam headlights come on.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

<sup>\*</sup> Not available on all models

### Auto High-Beam\*

The front sensor camera detects the light sources ahead of the vehicle such as the lights of a preceding or oncoming vehicle, or street lights. When you are driving at night, the system automatically switches the headlights between low beam and high beam depending on the situation.

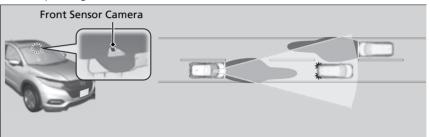

### ■ How to Use the Auto High-Beam

Auto High-

Indicator

Beam

When all of the following conditions have been met, the auto high-beam indicator comes on and the auto high-beam is activated.

- The ignition switch is in ON II \*1.
- The light switch is in **AUTO**.
- The lever is in the low beam position.
- The headlights have been automatically activated.
- It is dark outside the vehicle.

If the auto high-beam indicator does not come on even when all the conditions have been met, carry out the following procedure and the indicator will come on.

• Pull the lever toward you for flashing the high beams then release it while driving. \*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

#### 

The auto high-beam system does not always operate in every situation. This system is just for assisting the driver. Always observe your surroundings and switch the headlights between high beam and low beam manually if necessary.

If you find the timing of beam changes inconvenient for driving, change the headlight beams manually.

The range and the distance at which the camera can recognize varies depending on conditions surrounding your vehicle.

Regarding the handling of the camera mounted to the inside of the windshield, refer to the following.

Front Sensor Camera P. 504

For the auto high-beam to work properly:

- Do not place an object that reflects light on the dashboard.
- Keep the windshield around the camera clean.
   When cleaning the windshield, be careful not to apply the windshield cleanser to the camera lens.
- Do not attach an object, sticker or film to the area around the camera.
- Do not touch the camera lens.

If the camera receives a strong impact, or repairing of the area near the camera is required, consult a dealer.

Light Switch

### ■ Automatic switching between high-beam and low-beam

When auto-high beam is active, the headlights switch between high beam and low beam based on the following conditions.

### Switching to high beam:

All of the following conditions must be met before the high beams turn on.

- Your vehicle speed is 45 mph (72 km/h) or more.
- There are no preceding or oncoming vehicle with headlights or taillights turned on.
- There are few street lights on the road ahead.

### Switching to low beam:

One of the following conditions must be met before the low beams turn on.



- Your vehicle speed is 30 mph (48 km/h) or less.
- There is a preceding or oncoming vehicle with headlights or taillights turned on.
- There are many street lights on the road ahead.

### ■ Manual switching between high-beam and low-beam

If you want to manually switch the headlights between high beam and low beam, follow either of the procedures below. Note that when you do this, the auto high-beam indicator will turn off and the auto high-beam will be deactivated.

#### Using the lever:

Pull the lever toward you for flashing the high beams then release it within about one second while driving.

▶ To reactivate the auto high-beam, pull the lever toward you for flashing the high beams then release it while driving. The auto high-beam indicator will come on.

### Using the light switch:

Turn the light switch to

▶ To reactivate the auto high-beam, turn the light switch to **AUTO** when the lever is in the low beam position, the auto high-beam indicator will come on.

#### ∑How to Use the Auto High-Beam

In the following cases, the auto high-beam system may not switch the headlights properly or the switching timing may be changed. In case of the automatic switching operation does not fit for your driving habits, please switch the headlights manually.

- The brightness of the lights from the preceding or oncoming vehicle is intense or poor.
- Visibility is poor due to the weather (rain, snow, fog, windshield frost, etc.).
- Surrounding light sources, such as street lights, electric billboards and traffic lights are illuminating the road ahead.
- The brightness level of the road ahead constantly changes.
- The road is bumpy or has many curves.
- A vehicle suddenly appears in front of you, or a vehicle in front of you is not in the preceding or oncoming direction.
- Your vehicle is tilted with a heavy load in the rear.
- A traffic sign, mirror, or other reflective object ahead is reflecting strong light toward the vehicle.
- The oncoming vehicle frequently disappears under roadside trees or behind median barriers.
- The preceding or oncoming vehicle is a motorcycle, bicycle, mobility scooter, or other small vehicle.

The auto high-beam system keeps the headlight low beam when:

- Windshield wipers are operating.
- The camera has been detected a dense fog.

### ■ How to Turn Off the Auto High-Beam

You can turn the auto high-beam system off. If you want to turn the system off or on, turn the ignition switch to ON  $\boxed{II}^{*1}$ , then carry out the following procedures while the vehicle is stationary.



#### To turn the system off:

With the light switch is in **AUTO**, pull the lever toward you and hold it for at least 40 seconds. After the auto high-beam indicator light blinks twice, release the lever.

### To turn the system on:

With the light switch is in **AUTO**, pull the lever toward you and hold it for at least 30 seconds. After the auto high-beam indicator light blinks once, release the lever.

#### 

## If the Some Driver Assist Systems Cannot Operate: Camera Temperature Too High message appears:

- Use the climate control system to cool down the interior and, if necessary, also use defroster mode with the airflow directed toward the camera.
- Start driving the vehicle to lower the windshield temperature, which cools down the area around the camera.

# If the Some Driver Assist Systems Cannot Operate: Clean Front Windshield message appears:

 Park your vehicle in a safe place, and clean the windshield. If the message does not disappear after you have cleaned the windshield and driven for a while, have your vehicle checked by a dealer.

#### 

If you turn the auto high-beam system off, the system does not operate until you turn the system on.

Park in a safe place before turning the system off or on.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

**™**Wipers and Washers

blades will get damaged.


NOTICE

NOTICE

windshield.

### **Wipers and Washers**

### Windshield Wiper/Washer



MIST

OFF

INT\*2/AUTO\*3

LO: Low speed wipe

**6** HI: High speed wipe

The windshield wipers and washers can be used when the ignition switch is in ON III \*1.

#### ■ MIST

The wipers run at high speed until you release the lever

### ■ Wiper switch (OFF, INT\*2/AUTO\*3, LO, HI)

Change the wiper switch setting according to the amount of rain

### ■ Adjusting wiper operation\*

Turn the adjustment ring to adjust the wiper delay.



Lower speed, fewer sweeps

Higher speed, more sweeps

#### Washer

Sprays while you pull the lever toward you. When you release the lever for more than one second, the spray stops, the wipers sweep two or three more times to clear the windshield, then stop.

#### \*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

- \*2: Models with manual intermittent operation
- \*3: Models with automatic intermittent operation

If the vehicle speeds up while the wipers are operating intermittently, the length of the wipe interval shortens

Models with intermittent time adjustment ring

When the vehicle speeds up, the wiper operation's shortest delay setting (4) and the **LO** setting become the same

Do not use the wipers when the windshield is dry.

The windshield will get scratched, or the rubber

In cold weather, the blades may freeze to the

the wipers. Use the defroster to warm the

windshield, then turn the wipers on.

Operating the wipers in this condition may damage

#### All models

Turn the washers off if no washer fluid comes out The pump may get damaged.

### Automatic Intermittent Wipers\*



When you push the lever down to **AUTO**, the windshield wipers sweep once, and go into the automatic mode.

The wipers operate intermittently, at low speed, or at high speed and stop in accordance with the amount of rainfall the rainfall sensor detects.

### ■ Auto sensitivity adjustment

When in **AUTO**, you can also adjust the rainfall sensor sensitivity using the adjustment ring.

### Sensor sensitivity



Low sensitivity

High sensitivity

#### \* Not available on all models


#### 

If the wiper stops operating due to any obstacle such as the buildup of snow, park the vehicle in a safe place. Rotate the wiper switch to **OFF**, and turn the ignition switch to ACCESSORY I or LOCK 0\*1, then remove the obstacle.

The wiper motor may stop motor operation temporarily to prevent an overload. Wiper operation will return to normal within a few minutes, once the circuit has returned to normal.

#### 

The rainfall sensor is in the location shown below.




#### NOTICE

**AUTO** should always be turned **OFF** before the following situations in order to prevent severe damage to the wiper system:

- Cleaning the windshield
- Driving through a car wash
- No rain present

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

### ■ Rear Wiper/Washer



The rear wiper and washer can be used when the ignition switch is in ON  $[II]^{*1}$ .

### ■ Wiper switch (OFF, INT, ON)

Change the wiper switch setting according to the amount of rain.

### ■ Washer (⑪)

Sprays while you rotate the switch to this position.

Hold it to activate the wiper and to spray the washer. Once released, it stops operating after a few more sweeps.

### ■ Operating in reverse

Washer

When you shift the transmission to  $\boxed{\mathbf{R}}$  with the windshield wiper activated, the rear wiper operates automatically as follows even if its switch is off.

Front Wiper Position	Rear Wiper Operation
INT* (Intermittent) AUTO* (Intermittent)	Intermittent
LO (Low speed wipe) HI (High speed wipe)	Continuous

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

\* Not available on all models

### Defogger/Heated Door Mirror\*/Heated Windshield\*

### ■ Rear Defogger/Heated Door Mirror\* Button



Press the rear defogger button or touch the icon to defog the rear window and mirrors\* when the ignition switch is in ON  $\boxed{II}$ \*1.

#### Models with climate control system

The rear defogger and heated door mirrors\* automatically switch off after 10-30 minutes depending on the outside temperature. However, if the outside temperature is 32°F (0°C) or below, they do not automatically switch off.

#### ■ Rear Defogger/Heated Door Mirror \* Button

This system consumes a lot of power, so turn it off when the window has been defogged. Also, do not use the system for a long time while the engine is idling. This may weaken the battery, making it difficult to start the engine.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

#### Canadian models

### Heated Windshield Button



Press the heated windshield button to deice the windshield when the ignition switch is turned to ON  $\overline{II}$ <sup>\*1</sup>.

The heated windshield automatically switches off after 15 minutes.


#### 

This system consumes a lot of power, so turn it off when the window has been deiced.

Also, do not use the system for a long time while the engine is idling. This may weaken the battery, making it difficult to start the engine.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

### **Brightness Control**



When the ignition switch is in ON III\*1, you can use the (2) (select/reset) knob to adjust instrument panel brightness.

**Brighten:** Turn the knob to the right. **Dim:** Turn the knob to the left

You will hear a beeper when the brightness reaches minimum or maximum. Several seconds after you have adjusted the brightness, you will be returned to the previous screen.

### 

The brightness of the instrument panel will be reduced when the following conditions:

• The ignition switch is in ON II \*1.

#### Models without automatic lighting control

• The parking lights are turned on.


#### Models with automatic lighting control

• The light switch is in any position other than off and it is dark outside.

To cancel the reduced instrument panel brightness when the exterior lights are on, turn the knob to the right until the brightness display is up to max, the beeper sounds.

The brightness can be set differently for when the exterior lights are on, and when they are off.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.




### **■** Brightness level indicator

The brightness level is shown on the information display/multi-information display while you are adjusting it.

### **Adjusting the Steering Wheel**

The steering wheel height and distance from your body can be adjusted so that you can comfortably grip the steering wheel in an appropriate driving posture.



- **1.** While the vehicle is stopped, pull the steering wheel adjustment lever up.
  - ➤ The steering wheel adjustment lever is under the steering column.
- **2.** Move the steering wheel up or down, and in or out.
  - ► Make sure you can see the instrument panel gauges and indicators.
- **3.** Push the steering wheel adjustment lever down to lock the steering wheel in position.
  - ➤ After adjusting the position, make sure you have securely locked the steering wheel in place by trying to move it up, down, in, and out.

∑Adjusting the Steering Wheel

### **AWARNING**

Adjusting the steering wheel position while driving may cause you to lose control of the vehicle and be seriously injured in a crash.


Adjust the steering wheel only when the vehicle is stopped.

## Adjusting the Mirrors

### **Interior Rearview Mirror**

Adjust the angle of the rearview mirror when you are sitting in the correct driving position.

### ■ Rearview Mirror with Day and Night Positions\*



Flip the tab to switch the position.

The night position will help to reduce the glare from headlights behind you when driving after dark.


### ■ Adjusting the Mirrors

Keep the inside and outside mirrors clean and adjusted for best visibility.

Adjust the mirrors before you start driving.

Front Seats P. 194


### Automatic Dimming Rearview Mirror\*



Sensor

**Auto Button** 

When you are driving after dark, the automatic dimming rearview mirror reduces the glare from headlights behind you. Press the auto button to turn this function on and off. When activated, the auto indicator comes on.




#### 

The auto dimming function cancels when the shift position is in R.



### **Power Door Mirrors**



You can adjust the door mirrors when the ignition switch is in ON  $\overline{II}^{*1}$ .

### ■ Mirror position adjustment


**L/R selector switch:** Select the left or right mirror. After adjusting the mirror, return the switch to the center position.

**Mirror position adjustment switch:** Press the switch left, right, up, or down to move the mirror.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

### Adjusting the Seats


### **Front Seats**



Adjust the driver's seat as far back as possible while allowing you to maintain full control of the vehicle. You should be able to sit upright, well back in the seat and be able to adequately press the pedals without leaning forward, and grip the steering wheel comfortably. The passenger's seat should be adjusted in a similar manner, so that it is as far back from the front airbag in the dashboard as possible.

### Adjusting the Seat Positions

### ■ Adjusting the driver's power seat\*

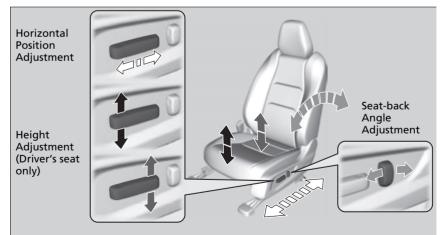

■ Adjusting the Seats

### **AWARNING**

Sitting too close to a front airbag can result in serious injury or death if the front airbags inflate.

Always sit as far back from the front airbags as possible while maintaining control of the vehicle.


The National Highway Traffic Safety Administration and Transport Canada recommend that drivers allow at least 10 inches (25 cm) between the center of the steering wheel and the chest.

Always make seat adjustments before driving.


#### ■ Adjusting the Seat Positions

Once a seat is adjusted correctly, rock it back and forth to make sure it is locked in position.

### ■ Adjusting the front manual seat(s)\*

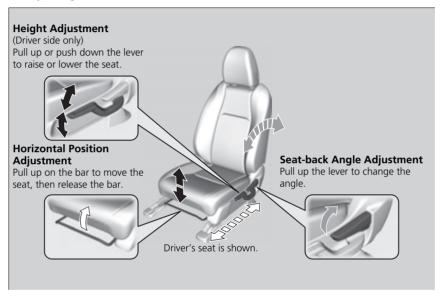

### Adjusting the Seat-Backs



Adjust the driver's seat-back to a comfortable, upright position, leaving ample space between your chest and the airbag cover in the center of the steering wheel.

The front seat passenger should also adjust their seat-back to a comfortable, upright position.

Reclining a seat-back so that the shoulder part of the belt no longer rests against the occupant's chest reduces the protective capability of the belt. It also increases the chance of sliding under the belt in a crash and being seriously injured. The farther a seat-back is reclined, the greater the risk of injury.

■ Adjusting the Seat-Backs

### **AWARNING**

Reclining the seat-back too far can result in serious injury or death in a crash.

Adjust the seat-back to an upright position, and sit well back in the seat.

Do not put a cushion, or other object, between the seat-back and your back.

Doing so may interfere with proper seat belt or airbag operation.

If you cannot get far enough away from the steering wheel and still reach the controls, we recommend that you investigate whether some type of adaptive equipment may help.

### **Rear Seats**


### ■ Adjusting the Rear Seat-Backs



Pull the lever on the right to change the angle of the right half of the seat-back, and left for the left half.

### Folding Down the Rear Seats

The rear seats can be folded down separately to allow for additional storage space.





#### ■ To fold down the seat

- **1.** Store the center seat belt first. Insert the latch plate into the slot on the side of the anchor buckle.
- **2.** Retract the seat belt into the holder on the ceiling.

Seat Belt with Detachable Anchor P. 49

- **3.** Lower the head restraint to its lowest position.
- **4.** Pull the release lever and fold down the seat-back.

To return the seat to the original position, pull up the seat-back in the upright position.

∑Folding Down the Rear Seats

Make sure all items in the cargo area or items extending to the rear seats are properly secured. Loose items can fly forward if you have to brake hard.

Remove any items from the rear seat cushion and floor before you fold down the rear seat.


To lock the seat-back upright, push it backwards until it locks.

Make sure the seat-back, head restraints and seat cushion are securely latched back into place before driving. Also, make sure all rear shoulder belts are positioned in front of the seat-back, and the center shoulder belt is re-positioned in the holding slot.

Make sure that the folded seat-back does not press against the front passenger seat, as this can cause the weight sensors in the front passenger seat to work improperly.

Passenger Airbag Off Indicator P. 65

### ■ Folding the Rear Seat Up



Separately lift up the left and right halves of the rear seat cushions to make room for cargo area.

### ■ Lifting up the seat cushion

- **1.** Make sure the seat belt buckles are in their loops on the seat.
- 2. Pull up the rear seat cushion.
- **3.** Fold the seat leg down while pushing the seat cushion firmly against the seat-back to lock it.




After you fold the seat up, or put it back in the original position, make sure the seat is firmly secured by rocking it forward and back.

Check if there are any items on the seat before you pull the seat cushion up. Check if there are any obstacles around the floor guide before you put the seat back in the original position.



### ■ Putting the seat in the original position

- **1.** Hold the seat cushion in place with one hand, then unlock it by pulling up the seat leg fully with your other hand.
  - ► Hold the seat cushion firmly, as it may abruptly fall when you unlock it.
- **2.** Slowly lower the seat cushion, and set the seat leg in the floor guide until it latches in place.



### **Maintain a Proper Sitting Position**

After all occupants have adjusted their seats and head restraints, and put on their seat belts, it is very important that they continue to sit upright, well back in their seats, with their feet on the floor, until the vehicle is safely parked and the engine is off.

Sitting improperly can increase the chance of injury during a crash. For example, if an occupant slouches, lies down, turns sideways, sits forward, leans forward or sideways, or puts one or both feet up, the chance of injury during a crash is greatly increased.

In addition, an occupant who is out of position in the front seat can be seriously or fatally injured in a crash by striking interior parts of the vehicle or being struck by an inflating front airbag.

Maintain a Proper Sitting Position

### **AWARNING**


Sitting improperly or out of position can result in serious injury or death in a crash.

Always sit upright, well back in the seat, with your feet on the floor.


### **Head Restraints**

Your vehicle is equipped with head restraints in all seating positions.

### Adjusting the front head restraint positions



Head restraints are most effective for protection against whiplash and other rearimpact crash injuries when the center of the back of the occupant's head rests against the center of the restraint. The tops of the occupant's ears should be level with the center height of the restraint.



Pull it upward.

To lower the head restraint:

Push it down while pressing the release button.

∑Adjusting the front head restraint positions


### **AWARNING**

Improperly positioning head restraints reduces their effectiveness and increases the likelihood of serious injury in a crash.

Make sure head restraints are in place and positioned properly before driving.


In order for the head restraint system to work properly:

- Do not hang any items on the head restraints, or from the restraint legs.
- Do not place any objects between an occupant and the seat-back.
- Install each restraint in its proper location.



Continued 201

### ■ Changing the Rear Seat Head Restraint Positions




A passenger sitting in a back seating position should adjust the height of their head restraint to an appropriate position before the vehicle begins moving.

To raise the head restraint:
Pull it upward.

### To lower the head restraint:

Push it down while pressing the release button.



### Removing and Reinstalling the Head Restraints

Head restraints can be removed for cleaning or repair.

#### To remove a head restraint:

Pull the restraint up as far as it will go. Then, push the release button and pull the restraint up and out.

#### To reinstall a head restraint:

Insert the legs back in place, then adjust the head restraint to an appropriate height while pressing the release button. Pull up on the restraint to make sure it is locked in position.

■ Removing and Reinstalling the Head Restraints

### **AWARNING**

Failure to reinstall, or correctly reinstall, the head restraints can result in severe injury during a crash.

Always replace the head restraints before driving.

To remove and install the rear outer head restraint, recline the seat-back slightly forward as the space between the ceiling and the seat-back is limited.

### **Armrest**

### Using the Front Seat Armrest




The console lid can be used as an armrest.

### To adjust:

Slide the armrest to the desired position.

### Using the Rear Seat Armrest\*



Pull down the armrest in the center backrest.

### Interior Lights/Interior Convenience Items

### **Interior Lights**

### ■ Interior Light Switches



#### ON

The interior lights come on regardless of whether the doors are open or closed.

#### ■ Door activated

The interior lights come on in the following situations:

- When any doors are opened.
- You unlock the driver's door.

#### Models without keyless access system

• You remove the key from the ignition switch.

#### Models with keyless access system

• When the power mode is set to VEHICLE OFF (LOCK).

#### **■** OFF

The interior lights remain off regardless of whether the doors are open or closed.

Continued

#### ■Interior Light Switches

In the door activated position, the interior lights fade out and go off about 30 seconds after the doors are closed.

The lights go off after about 30 seconds in the following situations:

• When you unlock the driver's door but do not open it.

#### Models without keyless access system

• When you remove the key from the ignition switch but do not open a door.

#### Models with keyless access system

 When you set the power mode to VEHICLE OFF (LOCK) but do not open a door.

#### Models with multi-information display

You can change the interior lights dimming time.

Customized Features P. 127

The interior lights go off immediately in the following situations:

- When you lock the driver's door.
- ullet When you turn the ignition switch to ON  $[II]^{*1}$ .

#### Models without keyless access system

• When you close the driver's door with the key in the ignition switch.

#### Models with keyless access system

 When you close the driver's door in ACCESSORY mode.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

### ■ Map Lights



The map lights can be turned on and off by pressing the lenses.

#### 

To avoid draining the battery, do not leave the interior light on for an extended length of time when the engine is off.


If you leave any of the doors open in VEHICLE OFF (LOCK) mode, or without the key in the ignition switch, the interior lights go off after about 15 minutes.

#### Map Lights

#### Models with moonroof

When the front interior light switch is in the door activated position and any door is open, the map light will not go off when you press the lens.

### ■ Cargo Area Light



#### ON

The light comes on when you open the tailgate, and goes off when closed.

#### ■ OFF

The light stays off with or without opening the tailgate.

### **Interior Convenience Items**

### ■ Glove Box



Pull the handle to open the glove box.

### **■** Console Compartment



Pull the handle to open the console compartment.

#### Solove Box

### **AWARNING**

An open glove box can cause serious injury to your passenger in a crash, even if the passenger is wearing the seat belt.


Always keep the glove box closed while driving.

Continued 207

### ■ Beverage Holders



■ Front seat beverage holders



■ Center console beverage holders
To put a short-size beverage: Push down the bottom plate.



**To put a tall-size beverage:** Pull up the bottom plate.

#### ■ Beverage Holders

### NOTICE

Spilled liquids can damage the upholstery, carpeting, and electrical components in the interior.

Be careful when you are using the beverage holders. Hot liquid can scald you.






■ Rear seat beverage holders

Continued 209

### ■ Cargo Floor Box



Pull up the cargo area floor lid.



### Accessory Power Sockets

The accessory power socket can be used when the ignition switch is in ACCESSORY  $\Pi$  or ON  $\Pi$ <sup>\*1</sup>.



■ Accessory power socket (console panel)
Open the cover to use it.



■ Accessory power socket (rearward of center console)

Open the cover to use it.

#### NOTICE

Do not insert an automotive type cigarette lighter element.


This can overheat the power socket.

Each accessory power socket is designed to supply power for 12 volt DC accessories that are rated 180 watts (15 amps) or less.

To prevent battery drain, only use the power socket with the engine running.

When both sockets are being used, the combined power rating of the accessories should not exceed 180 watts (15 amps).

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.



### Canadian models

■ Accessory power socket (cargo area) Open the cover to use it.

### ■ Coat Hook




There is a coat hook on the rear left grab handle. Pull it down to use it.

#### Coat Hook

The coat hook is not designed for large or heavy items.

### ■ Tie-down Anchors



The tie-down anchors on the cargo area floor can be used to install a net for securing items.

Continued 213

#### Canadian models

### Cargo Cover



The cargo cover can be used to conceal your items and protect them from direct sunlight.

#### ■ To remove:

Pull out the cargo cover rearwards and remove it.



**1.** Take the opposite sides, fold the cover halfway, then twist into opposite ways.

**2.** Curl to narrow the cover as shown.

### 


Do not let anyone access items in the cargo area while driving. Loose items can cause injury if you have to brake hard.


Do not stack objects higher than the top of the seat in the cargo area. They could block your view and be thrown about the vehicle during a sudden stop.

To prevent cargo cover damage, do not:

- Place items on the cargo cover.
- Put weight on the cargo cover.

When reinstalling the cargo cover, put the tagged side first.





### Seat Heaters\*



The ignition switch must be in ON  $\overline{II}^{*1}$  to use the seat heaters



Touch the seat heater icon.

Once - The HI setting (two indicators on)

Twice - The LO setting

Three times - The OFF setting (no indicator on)

Seat Heaters \*

# **AWARNING**

Heat induced burns are possible when using seat heaters.

Persons with a diminished ability to sense temperature (e.g., persons with diabetes, lower-limb nerve damage, or paralysis) or with sensitive skin should not use seat heaters.

Do not use the seat heaters even in LO when the engine is off. Under such conditions, the battery may be weakened, making the engine difficult to start.


In the LO setting, the heater runs continuously and does not automatically turn off.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

<sup>\*</sup> Not available on all models


# Heating and Cooling System\*

# Using Vents, Heating and A/C

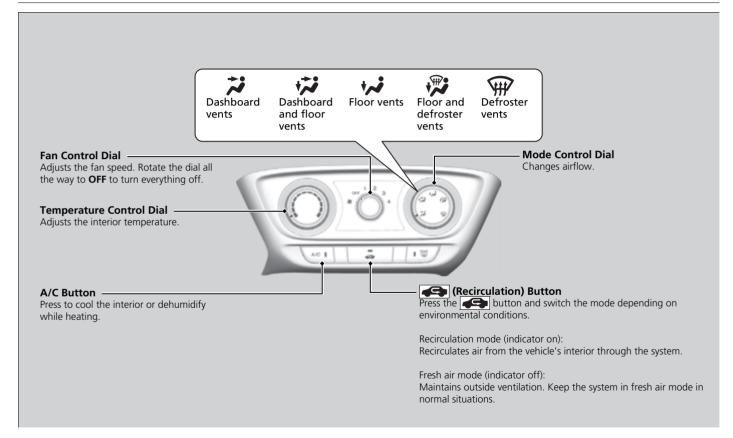


# ■ Passenger Side Vents

Three separate front passenger side air vents allow for different air flow rates through the vehicle. Passengers can separately:



• Adjust each vent to optimize airflow throughout the vehicle.



 Close individual vents to adjust passenger comfort levels.

Continued 217

### Heating



The heater uses heat from the engine coolant to warm the air.

- **1.** Adjust the fan speed using the fan control dial.
- 2. Select ↓ , i.
- **3.** Adjust the temperature using the temperature control dial.

### **■** To rapidly warm up the interior

- 1. Set the fan to the maximum speed.
- نہ با 2. Select
- **3.** Set the temperature to maximum warm.
- **4.** Press the button (the indicator on).

### ■ To dehumidify the interior

When used in combination with the heater, the air conditioning system makes the interior warm and dry and can prevent the windows from fogging up.

- **1.** Turn the fan on.
- 2. Press the A/C button to turn on the air conditioning.

#### 

When you select **J**, the mode automatically switches to fresh air.

### ∑To rapidly warm up the interior

Change to fresh air mode as soon as the interior gets warm enough. The windows may fog up if kept in recirculation mode.

# Cooling




- **1.** Adjust the fan speed using the fan control dial
- 2. Select 7.
- **3.** Adjust the temperature using the temperature control dial.
- **4.** Press the **A/C** button (indicator on).

### ■ To rapidly cool down the interior

- 1. Set the fan to the maximum speed.
- **2.** Set the temperature to maximum cool.
- **3.** Press the button (the indicator on).

# Defrosting the Windshield and Windows



Selecting turns the air conditioning system on and automatically switches the system to fresh air mode.

### ■ To rapidly defrost the windows

- 1. Set the fan to the maximum speed.
- **2.** Select ( ).
- **3.** Press the button.
- **4.** Set the temperature to maximum warm.

### ■To rapidly cool down the interior

If the interior is very warm, you can cool it down more rapidly by partially opening the windows.

While ECON mode is active, the system may have reduced performance.

### Defrosting the Windshield and Windows

# For your safety, make sure you have a clear view through all the windows before driving.

Do not set the temperature near the upper or lower limit.

When cold air hits the windshield, the outside of the windshield may fog up.

If the side windows fog up, adjust the vents so that the air hits the side windows.

### ■To rapidly defrost the windows

After defrosting the windows, switch over to fresh air mode


If you keep the system in recirculation mode, the windows may fog up from humidity. This impedes visibility.

# Climate Control System\*

# **Using Automatic Climate Control**

The automatic climate control system maintains the interior temperature you select. The system also selects the proper mix of heated or cooled air that raises or lowers the interior temperature to your preference as quickly as possible.

### Models without SYNC icon

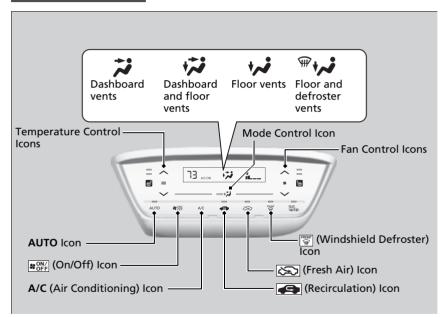

Use the system when the engine is running.

- **1.** Select the **AUTO** icon.
- **2.** Adjust the interior temperature using the temperature control icons.
- **3.** Select the SOFF icon to cancel.

#### ∑Using Automatic Climate Control

If any icons are selected while using the climate control system in auto, the function of the icon that was selected will take priority.


The **AUTO** indicator will go off, but functions unrelated to the icon that was selected will be controlled automatically.

To prevent cold air from blowing in from outside, the fan may not start immediately when the **AUTO** icon is selected.


If the interior is very warm, you can cool it down more rapidly by partially opening the windows, turning the system on auto, and setting the temperature to low. Change the fresh air mode to recirculation mode until the temperature cools down.

When you set the temperature to the lower or upper limit, **Lo** or **Hi** is displayed.

You can raise or lower the temperature or fan speed setting flicking either control icon.



### Models with SYNC icon

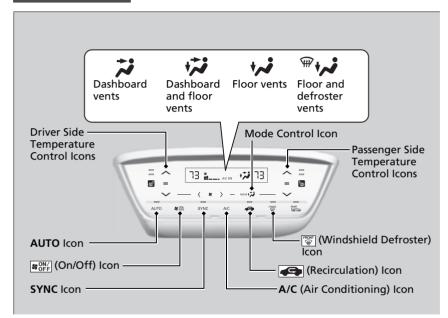

Use the system when the engine is running.

- **1.** Select the **AUTO** icon.
- **2.** Adjust the interior temperature using the driver side temperature control icons.
- **3.** Select the sold icon to cancel.

#### ■Using Automatic Climate Control

Selecting the [80%] icon switches the climate control system between on and off. When turned on, the system returns to your last selection.

While ECON mode is active, the system may have reduced performance.

Continued 221

### ■ Switching between the recirculation and fresh air modes

### Models without SYNC icon

Select the (recirculation) or (fresh air) icon to switch the mode depending on environmental conditions.

Recirculation mode (indicator on): Recirculates air from the vehicle's interior through the system.

Fresh air mode (indicator on): Maintains outside ventilation. Keep the system in fresh air mode in normal situations.

### Models with SYNC icon

Select the recirculation) icon to switch the mode depending on environmental conditions.

Recirculation mode (indicator on): Recirculates air from the vehicle's interior through the system.


Fresh air mode (indicator off): Maintains outside ventilation. Keep the system in fresh air mode in normal situations.

# Defrosting the Windshield and Windows



Select the ricon to turn the air conditioning system on and automatically switch the system to fresh air mode.

Select the returns to the previous settings.




# For your safety, make sure you have a clear view through all the windows before driving.


Do not set the temperature near the upper or lower limit.


When cold air hits the windshield, the outside of the windshield may fog up.

If the side windows fog up, adjust the vents so that the air hits the side windows.



Continued 223





### ■ To rapidly defrost the windows


- **1.** Select the sicon.
- 2. Select the icon.

### ∑To rapidly defrost the windows

After defrosting the windows, switch over to fresh air mode. If you keep the system in recirculation mode, the windows may fog up from humidity. This impedes visibility.

# ■ Turning On and Off the Touch Screen Beep

You hear the beep when operating the climate control system on the touch screen. This can be turned on and off.



Models with SYNC icon

### To turn off the beep:

- **1.** Turn the ignition switch to ON II<sup>\*1</sup>.
- 2. Touch the 
  of the temperature control icon five times while pressing and holding the ...
- **3.** Release the , after -- blinks five times and **OF** is displayed.


### ■ Turning On and Off the Touch Screen Beep


If you touch any other icons during this procedure, the setting may fail. In this case, once you turn the ignition switch to OFF  $\boxed{0}^{*1}$ , then follow this procedure again.



<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Continued 225





### To turn on the beep:

- **1.** Turn the ignition switch to ON II<sup>\*1</sup>.
- 2. Touch the of the temperature control icon five times while pressing and holding the ...
- **3.** Release the **April**, after **OF** blinks five times and -- is displayed.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

# ■ Touch Panel Sensitivity Setting

You can set the level of sensitivity of the touch control panel to high, normal, or low.

- Models without SYNC icon Temperature display area SP ON AUTO Models with SYNC icon Temperature display area
- **1.** Turn the ignition switch to ON  $\Pi$ <sup>\*1</sup>.
- **2.** Press and hold the **AUTO** icon, then press any of the following icons five times to set the level
- \tagh (**Hi**)\*2.
  - Previous setting blinks five times and Hi will be displayed in the temperature display area.
- \$600/S: Normal (--)
  - Previous setting blinks five times and -will be displayed in the temperature display area.
- \ : Low (**Lo**)
  - Previous setting blinks five times and Lo will be displayed in the temperature display area.
- **3.** Release the **AUTO** icon.

\*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.


\*2: Default setting

#### ∑Touch Panel Sensitivity Setting

If you touch any other icons during this procedure, the setting may fail. In this case, once you turn the ignition switch to LOCK [0]\*1, then follow this procedure again.

Continued 227

# ■ Synchronization Mode\*

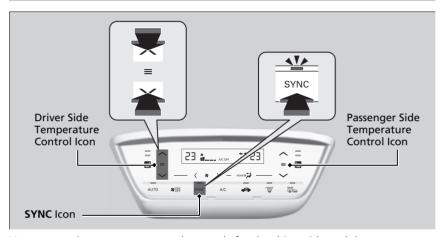

You can set the temperature synchronously for the driver side and the passenger side in synchronization mode.


- 1. Select the **SYNC** icon.
  - ▶ The system switches to synchronization mode.
- **2.** Adjust the temperature using the driver's side temperature control icon.

Select the **SYNC** icon to return to dual mode.


#### Synchronization Mode<sup>⋆</sup>

When the system is in dual mode, the driver side temperature and the passenger side temperature can be set separately.


# **Automatic Climate Control Sensors**



The automatic climate control system is equipped with sensors. Do not cover or spill any liquid on them.



This page intentionally left blank.

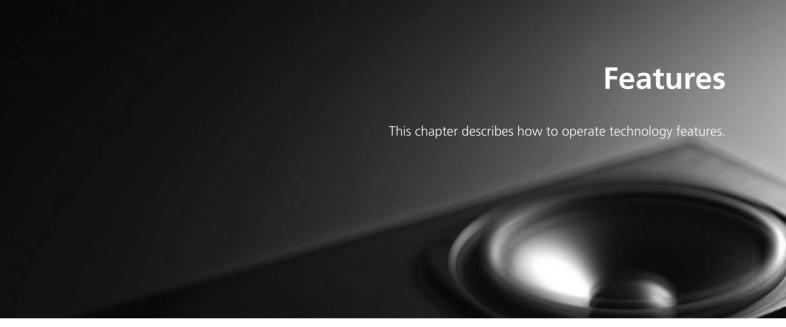

Audio System	
About Your Audio System	232
USB Port(s)	233
Audio System Theft Protection	234
Audio Remote Controls	235
Models with color audio system	
Audio System Basic Operation	238
Audio/Information Screen	239
Adjusting the Sound	243
Display Setup	244
Playing AM/FM Radio	245
Playing a CD	247
Playing an iPod	250
Playing a USB Flash Drive	
Playing Bluetooth® Audio	256

Models with display audio system	
udio System Basic Operation	259
Audio/Information Screen	260
Adjusting the Sound	275
Display Setup	276
Voice Control Operation	278
Playing AM/FM Radio	282
Playing SiriusXM® Radio*	286
Playing an iPod	294
Song By Voice <sup>TM</sup> (SBV)	297
Playing Pandora®	301
Playing a USB Flash Drive	303
Playing Bluetooth® Audio	306
HondaLink®	308

Wi-Fi Connection	
Siri Eyes Free	315
Apple CarPlay	316
Android Auto	
Audio Error Messages	
ieneral Information on the Audio System	
Models with color audio system	
ustomized Features	349
Models with display audio system	
ustomized Features	356
IomeLink® Universal Transceiver*	371
Models with color audio system	
Bluetooth® HandsFreeLink®	374
Models with display audio system	
Bluetooth® HandsFreeLink®	397


<sup>\*</sup> Not available on all models

# Audio System

# **About Your Audio System**

The audio system features AM/FM radio and SiriusXM® Radio service\*. It can also play audio CDs\*, WMA/MP3/AAC files, USB flash drives, iPod, iPhone and *Bluetooth*® devices.

You can operate the audio system from the buttons and switches on the panel, the remote controls on the steering wheel, or the icons on the touchscreen interface\*.

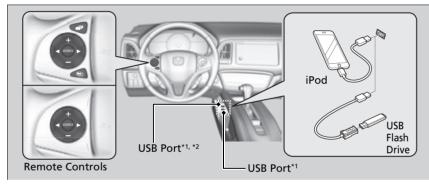

- \*1:Models with display audio system
- \*2:Models with color audio system

### ■ About Your Audio System

Video CDs, DVDs, and 3-inch (8-cm) mini CDs are not supported.

iPod, iPhone and iTunes are trademarks of Apple Inc.

State or local laws may prohibit the operation of handheld electronic devices while operating a vehicle.


SiriusXM® Radio\* is available on a subscription basis only. For more information on SiriusXM® Radio\*, contact a dealer.

**■ General Information on the Audio System** P. 333

SiriusXM® Radio\* is available in the United States and Canada, except Hawaii, Alaska, and Puerto Rico.

SiriusXM®\* is a registered trademark of SiriusXM Radio, Inc.

# **USB Port(s)**



Install the device USB connector or the USB flash drive to the USB port.

The USB port (1.0A) is for playing audio files on a USB flash drive, connecting a cellular phone and charging devices.

### Models with display audio system

The USB port (1.5 A) is for charging devices, playing audio files and connecting compatible phones with Apple CarPlay or Android Auto.

➤ To prevent any potential issues, be sure to use an Apple MFi Certified Lightning Connector for Apple CarPlay, and for Android Auto, the USB cables should be certified by USB-IF to be compliant with USB 2.0 Standard.

### 

- Do not leave the iPod or USB flash drive in the vehicle. Direct sunlight and high temperatures may damage it.
- We recommend that you use a USB cable if you are attaching a USB flash drive to the USB port.
- Do not connect the iPod or USB flash drive using a hub.
- Do not use a device such as a card reader or hard disk drive, as the device or your files may be damaged.
- We recommend backing up your data before using the device in your vehicle.
- Displayed messages may vary depending on the device model and software version.

If the audio system does not recognize the iPod, try reconnecting it a few times or reboot the device. To reboot, follow the manufacturer's instructions provided with the iPod or visit www.apple.com/ipod.

#### USB charge

The USB port can supply up to 1.5A\* of power. It does not output 1.5A unless the device requests. For amperage details, read the operating manual of the device that needs to be charged.

Under certain conditions, a device connected to the port may generate noise to the radio station you are listening to.

# **Audio System Theft Protection**

The audio system is disabled when it is disconnected from the power source, such as when the battery is disconnected or goes dead. In certain conditions, the system may display a code entry screen. If this occurs, reactivate the audio system.


### ■ Reactivating the audio system

- **1.** Turn the ignition switch to ON  $[II]^{*1}$ .
- 2. Turn on the audio system.
- **3.** Press and hold the audio system power button for more than two seconds.
  - ► The audio system is reactivated when the audio control unit establishes a connection with the vehicle control unit. If the control unit fails to recognize the audio unit, you must go to a dealer and have the audio unit checked.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

### **Audio Remote Controls**

Allow you to operate the audio system while driving.



#### **SOURCE Button**

Cycles through the audio modes as follows:

### Models with color audio system

FM→AM→CD→USB→iPod→
Bluetooth® Audio

### Models with display audio system

FM→AM→Sirius XM®\*→USB→iPod→

Bluetooth® Audio→Pandora®\*→Apps/Apple
CarPlay/Android Auto

+ - (Volume) Buttons

**Press** +: To increase the volume.

**Press** —: To decrease the volume.

# **■** Button

• When listening to the radio

**Press** To select the next preset radio station.

**Press** To select the previous preset radio station.

**Press and hold** To select the next strong radio station.

**Press and hold** To select the previous strong radio station.

• When listening to the SiriusXM® radio\*

**Press** To select the next preset radio station.

**Press** To select the previous preset radio station.

**Press and hold** To select the next channel.

**Press and hold** To select the previous channel.

#### 

Some modes appear only when an appropriate device or medium is used.

Depending on the *Bluetooth*® device you connect, some functions may not be available.

- When listening to a CD\*, iPod, USB flash drive, or *Bluetooth*® Audio
  - **Press** To skip to the next song.
  - **Press** To go back to the beginning of the current or previous song.
- When listening to a CD\* or USB flash drive
  - **Press and hold** To skip to the next folder.
  - **Press and hold** To go back to the previous folder.
- When listening to a Bluetooth® Audio
  - **Press and hold** To go to the group up.\*1
  - **Press and hold** To go to the group down.\*1
- When listening to Internet radio\*
  - **Press** To skip to the next song.
  - **Press and hold** To select the next station.
  - **Press and hold** To select the previous station.

<sup>\*1:</sup> Available on specific phones only.

### Models with display audio system

### Steering Wheel 🗐 (Menu) Button

• When listening to the radio

**Press** En: To display the menu items. You can select **Scan**, **Save Preset**, or **Seek**.

• When listening to the SiriusXM® radio\*

Press : To display the menu items. You can select Scan, Save Preset, Channel, or Category.

• When listening to a USB flash drive

**Press** To display the menu items. You can select **Scan**, **Repeat**, or **Random**.

• When listening to an iPod

**Press** To display the menu items. You can select **Repeat** or **Shuffle**.

• When listening to a Bluetooth® Audio

**Press** To display the menu items. You can select **Pause** or **Play**.

• When listening to a Pandora®\*

**Press** To display the menu items. You can select **Bookmark**, or **Play/Pause**.


### 

The putton is available only when the audio mode is FM, AM, USB, iPod, Pandora\*, or Bluetooth\* Audio.

# **Audio System Basic Operation**

### Models with color audio system

To use the audio system, the ignition switch must be in ACCESSORY I or ON III.



Use the selector knob or **MENU/CLOCK** button to access some audio functions.

Press 🗟 to switch between the normal and extended display for some functions.



**MENU/CLOCK button:** Press to select any mode

The available mode includes the wallpaper, display, clock, language setup, and play modes. Play modes can be also selected from scan, random, repeat, and so on.

(Back) button: Press to go back to the previous display.

↑ (Sound) button: Press to select the sound setting mode.

† (Day/Night) button: Press to change the audio/information screen

Press 🛊 🕽, then adjust the brightness using 🛜 .

► Each time you press ※ ), the mode switches between the daytime mode, nighttime mode and **OFF** mode.

### 

These indications are used to show how to operate the selector knob.

Rotate 😙 to select.

Press 🕹 to enter.

Menu Items

Adjust Clock P. 138

**Wallpaper Setup** P. 241

Display Setup P. 244

Scan P. 246, 249, 255

**▶ Play Mode** P. 249, 252, 255

RDS Settings P. 246

**Bluetooth** P. 353, 380

Press the **SOURCE**, +, -, d or b button on the steering wheel to change any audio setting.

**■ Audio Remote Controls** P. 235


One of the operating system used in this unit is eCos. For software license terms and conditions, visit their website (eCos license URL: http://ecos.sourceware.org/license-overview.html)
For source code disclosure and other details regarding eCos, visit: http://www.hondaopensource2.com

brightness.

# **Audio/Information Screen**

Displays the audio status and wallpaper. From this screen, you can go to various setup options.

# **■** Switching the Display

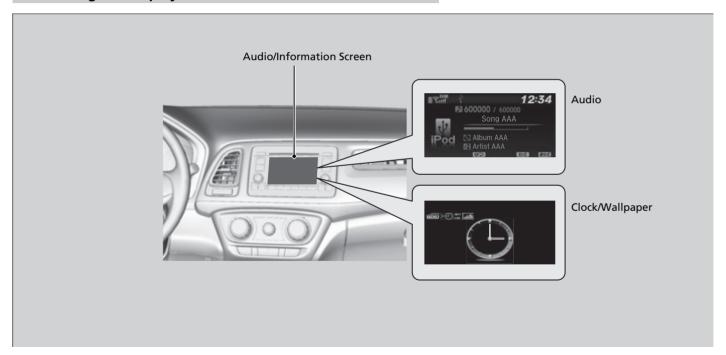

### ■ Audio

Shows the current audio information.

### **■** Clock/Wallpaper

Shows a clock screen or an image you import.

### **■** Change display


- 1. Press the MENU/CLOCK button.
- **2.** Rotate ♥ to select **Settings**, then press ८.
- **3.** Rotate ♥ to select **Display Change**, then press ८.
- **4.** Rotate ♥ to select **Wallpaper**, then press ८.
  - ▶ If you want to return to the audio display, select **Audio**.

# ■ Wallpaper Setup

You can change, store, and delete the wallpaper on the audio/information screen.

### **■** Import wallpaper

You can import up to three images, one at a time, for wallpaper from a USB flash drive.



- **1.** Connect the USB flash drive to the USB port.
  - **USB Port(s)** P. 233
- 2. Press the MENU/CLOCK button.
- **3.** Rotate ♥ to select **Settings**, then press ८.
- **4.** Rotate <sup>♠</sup> to select **Wallpaper**, then press <sup>♠</sup>.
- **5.** Rotate ⑦ to select **Import**, then press ፩. 
  ▶ The picture name is displayed on the list.
- **6.** Rotate ♥ to select a desired picture, then press ♥.
  - ► The selected picture is displayed.
- **7.** Press 🕹 to save the picture.
- 8. Press ♂ to select **OK**.
- **9.** Rotate ♥ to select a location to save the picture, then press ८.
  - ► The display will return to the wallpaper setting screen.

#### Wallpaper Setup

- When importing wallpaper files, the image must be in the USB flash drive's root directory. Images in a folder cannot be imported.
- The file name must be fewer than 64 characters.
- The file format of the image that can be imported is BMP (bmp) or JPEG (jpg).
- The individual file size limit is 2 MB.
- The maximum image size is 1,920 x 936 pixels. If the image size is less than 480 x 234 pixels, the image is displayed in the middle of the screen with the extra area appearing in black.
- Up to 255 files can be selected.
- If the USB flash drive does not have any pictures, the No compatible images were found. See Owner's Manual. message appears.

Continued 241

### ■ Select wallpaper

- 1. Press the MENU/CLOCK button.
- **2.** Rotate ♥ to select **Settings**, then press ८.
- **3.** Rotate ♥ to select **Wallpaper**, then press ८.
- - ► The screen changes to the wallpaper list.

### ■ To view wallpaper once it is set

- 1. Press the MENU/CLOCK button.
- **2.** Rotate ♥ to select **Settings**, then press ८.
- **3.** Rotate ♥ to select **Display Change**, then press ८.
- **4.** Rotate '♥ to select **Wallpaper**, then press ⊗.
  - ▶ The screen changes to the wallpaper list.
- **5.** Rotate ♥ to select a wallpaper that you want to set, then press ८.

### **■** Delete wallpaper


- 1. Press the MENU/CLOCK button.
- **2.** Rotate ♥ to select **Settings**, then press ८.
- **3.** Rotate ♥ to select **Wallpaper**, then press ८.
- **4.** Rotate to select **Delete**, then press .
  - ► The screen changes to the wallpaper list.
- **5.** Rotate 😙 to select a wallpaper that you want to delete, then press ८.
- **6.** Rotate ♥ to select **Yes**, then press ८.
  - ► The display will return to the wallpaper setting screen.

### Wallpaper Setup


To go back to the previous screen, press the (Back) button.


When the file size is large, it takes a while to be previewed.

# **Adjusting the Sound**



Press the (sound) button, and rotate or to scroll through the following choices:





### >> Adjusting the Sound

The SVC has four modes: **Off**, **Low**, **Mid**, and **High**. SVC adjusts the volume level based on the vehicle speed. As you go faster, audio volume increases. As you slow down, audio volume decreases.

# **Display Setup**


You can change the brightness or color theme of the audio/information screen.

# ■ Changing the Screen Brightness



- 1. Press the MENU/CLOCK button
- **2.** Rotate ♂ to select **Settings**, then press ૱.
- **3.** Rotate <sup>(\*)</sup> to select **Display Adjustment**, then press <sup>(\*)</sup> .
- **4.** Rotate ♂ to select **Brightness**, then press ♂.
- **5.** Rotate ♂ to adjust the setting, then press ♂.

# ■ Changing the Screen's Color Theme




- **1.** Press the **MENU/CLOCK** button.
- 2. Rotate ♥ to select **Settings**, then press ⑤.
- **3.** Rotate ۞ to select **Color Theme**, then press ♂.
- **4.** Rotate ۞ to select the setting you want, then press ♂.

### ∑Changing the Screen Brightness

You can change the **Contrast** and **Black Level** settings in the same manner.

# **Playing AM/FM Radio**

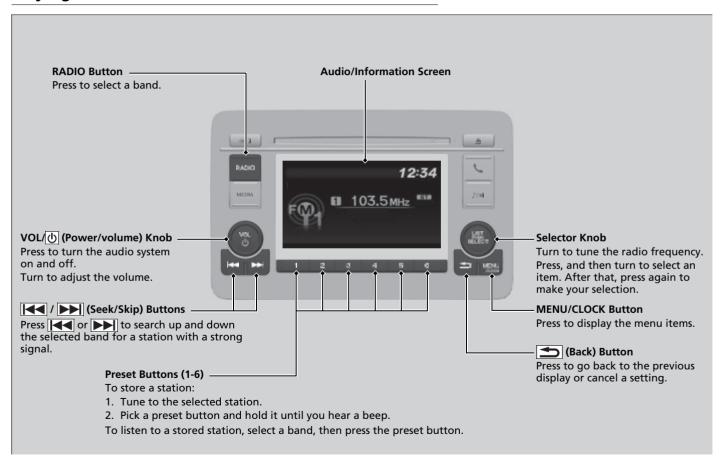

# Radio Data System (RDS)

Provides text data information related to your selected RDS capable FM station.

#### ■ To find an RDS station from Station List

- **1.** Press 🕹 while listening to an FM station.
- **2.** Rotate ♥ to select the station, then press ८.

### **■** Update List

Updates your available station list at any time.

- **1.** Press 🕹 while listening to an FM station.
- **2.** Rotate ♂ to select **Update List**, then press ♂.

#### ■ Radio text

Displays the radio text information of the selected RDS station.

- 1. Press the MENU/CLOCK button.
- **2.** Rotate ♥ to select **Settings**, then press ८.
- **3.** Rotate ♥ to select **RDS Settings**, then press ८.
- **4.** Rotate 😙 to select **Radio Text**, then press 🛎.

#### ■ Scan

Samples each of the strongest stations on the selected band for 10 seconds.

- 1. Press the MENU/CLOCK button.
- **2.** Rotate ♂ to select **Scan**, then press ⊘.

To turn off scan, press ᇫ.

### ≥ Playing AM/FM Radio

The **ST** indicator appears on the display indicating stereo FM broadcasts.

Stereo reproduction in AM is not available.

You can store 6 AM stations and 12 FM stations into the preset memory.

Switching the Audio Mode

Press the **SOURCE** button on the steering wheel.


Audio Remote Controls P. 235

### 

When you select an RDS-capable FM station, the RDS automatically turns on, and the frequency display changes to the station name. However, when the signals of that station become weak, the display changes from the station name to the frequency.


# **Playing a CD**

Your audio system supports audio CDs, CD-Rs, and CD-RWs in either MP3 or WMA, or AAC\*¹ format. With the CD loaded, press the **MEDIA** button.

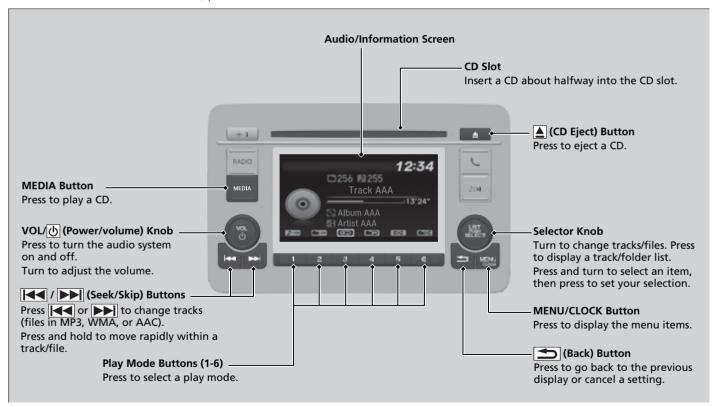

<sup>\*1:</sup>Only AAC format files recorded with iTunes are playable on this unit.

# How to Select a File from a Folder with the Selector Knob (MP3/WMA/AAC)

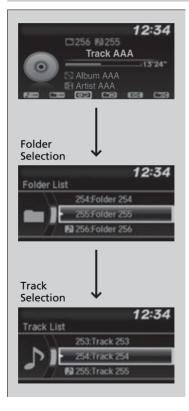

**1.** Press ८ to switch the display to a folder list.

2. Rotate 😙 to select a folder.

- **3.** Press ⊗ to display a list of tracks in that folder.
- **4.** Rotate ♂ to select a track, then press ८.

#### ▶ Playing a CD

### NOTICE

Do not use CDs with adhesive labels. The label can cause the CD to jam in the unit.

WMA files protected by digital rights management (DRM) cannot be played.

The audio system displays **Unplayable File**, then skips to the next file.

Text data appears on the display under the following circumstances:

- When you select a new folder, file, or track.
- When you change the audio mode to CD.
- When you insert a CD.

If you eject the CD but do not remove it from the slot, the system reloads the CD automatically after several seconds.

# How to Select a Play Mode

You can select repeat, random, and scan modes when playing a track or file.



Available mode icons appear above the play mode buttons.

Press the button corresponding to the mode you want to select.

# ■ To turn off a play mode

Press the selected button.

#### 

Play Mode Menu Items

#### Repeat

Repeat One Folder (MP3/WMA/AAC):
Repeats all files in the current folder.

**Repeat One Track:** Repeats the current track/file.

#### Random

Random in Folder (MP3/WMA/AAC): Plays all files in the current folder in random order.

**Random All:** Plays all tracks/files in random order.

#### Scan

Scan Folders (MP3/WMA/AAC): Provides 10-second sampling of the first file in each of the main folders.


Scan Tracks: Provides 10-second sampling of all tracks on the CD (all files in the current folder in MP3, WMA, or AAC).

You can also select a play mode by pressing the **MENU/CLOCK** button.


# Playing an iPod

Connect the iPod using your USB connector to the USB port, then press the **MEDIA** button.

**■ USB Port(s)** P. 233

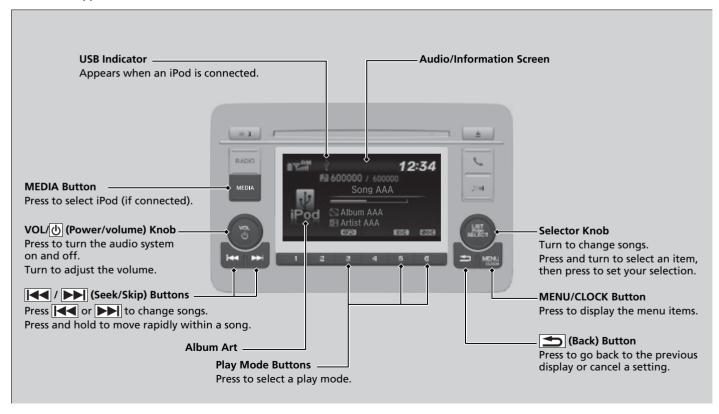

# ■ How to Select a Song from the iPod Music List with the Selector Knob

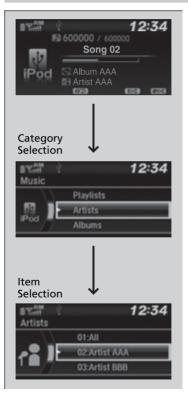

**1.** Press 💍 to display the iPod music list.

**2.** Rotate 😙 to select a category.

- **3.** Press ⊗ to display a list of items in the category.
- **4.** Rotate ♥ to select an item, then press ८.
  - ▶ Press ☑ and rotate ☜ repeatedly until a desired item you want to listen is displayed.

### 

Available operating functions vary on models or versions. Some functions may not be available on the vehicle's audio system.

If there is a problem, you may see an error message on the audio display.

iPod/USB Flash Drive P. 328

Continued 251

# ■ How to Select a Play Mode

You can select repeat and shuffle modes when playing a song.



Available mode icons appear above the play mode buttons.

Press the button corresponding to the mode vou want to select.

# ■ To turn off a play mode

Press the selected button

### 

Play Mode Menu Items

Shuffle Album: Plays all available albums in a selected category (playlists, artists, albums, songs, genres, or composers) in random order.

**Shuffle All:** Plays all available songs in a selected category (playlists, artists, albums, songs, genres, or composers) in random order.

Repeat One Track: Repeats the current song.

You can also select a play mode by pressing the MENU/CLOCK button.

Rotate rotate rotate to select **Play Mode**, then press . To turn it off, rotate or to select **Normal Play**, then

press 💍.


252

# Playing a USB Flash Drive

Your audio system reads and plays sound files on a USB flash drive in either MP3, WMA or AAC\*1 format.

Connect your USB flash drive to the USB port, then press the **MEDIA** button.

**USB Port(s)** P. 233

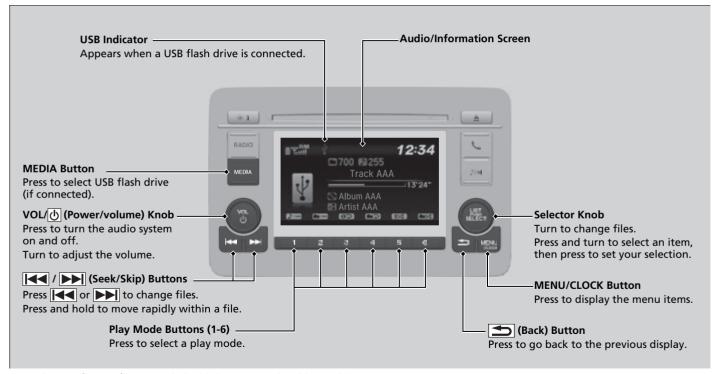

<sup>\*1:</sup>Only AAC format files recorded with iTunes are playable on this unit.

### ■ How to Select a File from a Folder with the Selector Knob



**2.** Rotate roto select a folder.

- **4.** Rotate ♥ to select a file, then press ८.

#### ▶ Playing a USB Flash Drive

Use the recommended USB flash drives.

**☑** General Information on the Audio System P. 333

Files in WMA format protected by digital rights management (DRM) cannot be played. The audio system displays **Unplayable File**, and then skips to the next file.

If there is a problem, you may see an error message on the audio/information screen.

iPod/USB Flash Drive P. 328

# How to Select a Play Mode

You can select repeat, random, and scan modes when playing a file.



Available mode icons appear above the play mode buttons.

Press the button corresponding to the mode you want to select.

# ■ To turn off a play mode

Press the selected button.

### 

Play Mode Menu Items

#### Repeat

**Repeat One Folder:** Repeats all files in the current folder.

**Repeat One Track:** Repeats the current file.

#### Random

**Random in Folder:** Plays all files in the current folder in random order.

**Random All:** Plays all files in random order.

#### Scan

**Scan Folders:** Provides 10-second sampling of the first file in each of the main folders.

Scan Tracks: Provides 10-second sampling of all files in the current folder.

You can also select a play mode by pressing the **MENU/CLOCK** button.

Rotate to select **Play Mode**, then press . Rotate to select a mode, then press . To turn it off, rotate to select **Normal Play**, then


press &.

# Playing Bluetooth® Audio

Your audio system allows you to listen to music from your *Bluetooth*-compatible phone.

This function is available when the phone is paired and connected to the vehicle's *Bluetooth*® HandsFreeLink® (HFL) system.

Phone Setup P. 380

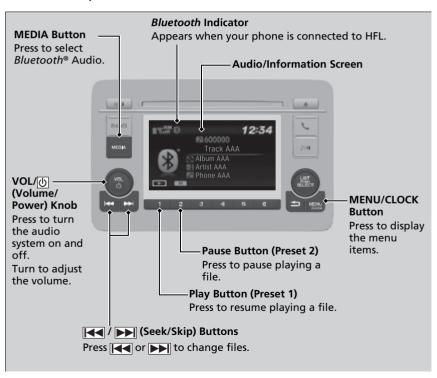

#### 

Not all *Bluetooth*-enabled phones with streaming audio capabilities are compatible with the system. For a list of compatible phones:

- U.S.: Visit automobiles.honda.com/handsfreelink/, or call 1-888-528-7876.
- Canada: For more information on smartphone compatibility, call 1-855-490-7351.

In some states, it may be illegal to perform some data device functions while driving.

Only one phone can be used with HFL at a time. When there are more than two paired phones in the vehicle, the first paired phone the system finds is automatically connected.

If more than one phone is paired to the HFL system, there will be a delay before the system begins to play.

In some cases, the name of the artist, album, or track may not appear correctly.

Some functions may not be available on some devices.

# ■ To Play Bluetooth® Audio Files



- **1.** Make sure that your phone is paired and connected to HFL.
- **2.** Press the **MEDIA** button until the *Bluetooth* Audio Source is selected.

If the phone is not recognized, another HFL-compatible phone, which is not compatible for *Bluetooth*® Audio, may already be connected.

# ■ To pause or resume a file

Press a **Play** or **Pause** button to select a mode.

### **™**To Play *Bluetooth*® Audio Files

To play the audio files, you may need to operate your phone. If so, follow the phone maker's operating instructions.


The pause function may not be available on some phones.

If any audio device is connected to the auxiliary input jack or USB port, you may need to press the **MEDIA** button repeatedly to select the *Bluetooth*® Audio system.

Switching to another mode pauses the music playing from your phone.

Continued 257

# ■ How to Select a Song from the Music Search List with the Selector Knob

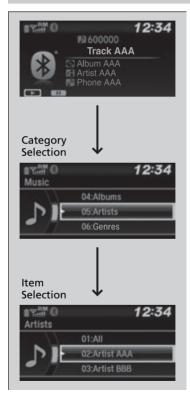

**1.** Press ♂ to display the music search list.

**2.** Rotate 😙 to select a category.

- **3.** Press 💍 to display a list of items in the category.
- **4.** Rotate ♂ to select an item, then press ♂.

  ▶ Press ♂ and rotate ♂ repeatedly until a desired item you want to listen is displayed.


▶ How to Select a Song from the Music Search List with the Selector Knob

Depending on the *Bluetooth*® device you connect, some or all of the categories may not be displayed.

# Audio System Basic Operation

### Models with display audio system

To use the audio system function, the ignition switch must be in ACCESSORY  $\boxed{I}$  or ON  $\boxed{II}^{*1}$ .





- (Home): Select to go to the home screen.
- Switching the Display P. 260
- (Menu): Select to display available options including **Sound**, **View Radio Text**, **Music Search**, and playback modes.
- (Back): Select to go back to the previous display when it is displayed.
- (Day/Night) button: Press to change the audio/information screen brightness.
- Press once and select or to make an adjustment.
  - ► Each time you press ※ ), the mode switches among the daytime mode, nighttime mode and off mode.

#### 

#### Audio Menu Items

- **Station List** P. 283, 284
- Music Search P. 295, 304, 307
- **Scan** P. 284, 285, 293
- How to Select a Play Mode P. 296, 305

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.


# **Audio/Information Screen**

Displays the audio status and wallpaper. From this display, you can go to various setup options.


# ■ Switching the Display

# ■ Using the button

Press the (display) button to change the display.

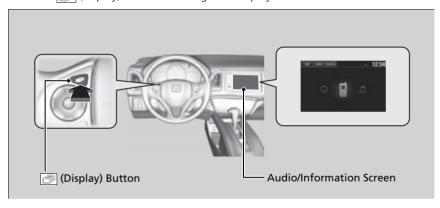

### ■ Using the audio/information screen

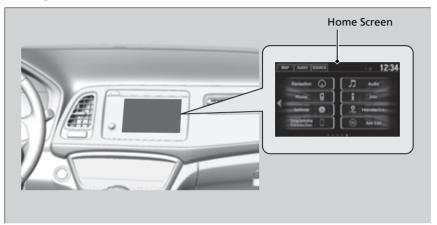

Select to go to the home screen.

Select Audio, Phone, Info, Settings, Smartphone Connection (Apple CarPlay, Android Auto), Navigation\*, HondaLink, or App List.

### ■ Audio

Displays the current audio information.

### **■** Phone

Displays the HFL information.

**Bluetooth® HandsFreeLink®** P. 397

### **■** Info

Displays Trip Computer, Voice Info, Clock/Wallpaper, or System/Device Information. Select on the Info Menu screen to see all available options: Trip Computer, Voice Info, Clock/Wallpaper and System/Device Information.

### **Trip Computer:**

- **Current Drive** tab: Displays the current trip information.
- **History of Trip A** tab: Displays information for the three previous drives. The information is stored every time you reset Trip A.

To delete the history manually, select **Delete History** on the **History of Trip A** tab. The confirmation message appears on the screen, then select **Yes**.

Voice Info: Displays the all commands list.

**Clock/Wallpaper:** Displays the clock and wallpaper.

### **System/Device Information:**

- **System Info**: Displays the software version of the audio system.
- **USB Info**: Displays the memory usage of the USB device.
- **Switch USB Device**: Connects or disconnects USB device to this audio system.

### **■** Settings

Enters the customizing menu screen.

**■ Customized Features** P. 356

### **■** Smartphone Connection

Displays the Apple CarPlay or Android Auto.

Apple CarPlay P. 316

Android Auto P. 320

### 

### **Touchscreen operation**

- Use simple gestures including touching, swiping and scrolling - to operate certain audio functions.
- Some items may be grayed out during driving to reduce the potential for distraction.
- You can select them when the vehicle is stopped or use voice commands.
- Wearing gloves may limit or prevent touchscreen response.

You can change the touch screen sensitivity setting.

Customized Features P. 356

# ■ Navigation\*

Displays the navigation screen.

Refer to the Navigation System Manual

### **■** HondaLink

Displays the HondaLink® screen.

**▶ HondaLink®** P. 308

### ■ App List

Adds or removes apps or widgets on the Home screen.

Home Screen P. 267

# ■ Changing the Home Screen Icon Layout



- 1. Select HOME.
- 2. Select and hold an icon.
  - ► The screen switches to the customization screen.
- **3.** Drag and drop the icon to where you want it to be.
- 4. Select OK.
  - ► The screen will return to the home screen.

265

# ■ Wallpaper Setup

You can change, store, and delete the wallpaper on the audio/information screen.

### **■** Import wallpaper

You can import up to five images, one at a time, for wallpaper from a USB flash drive.



**1.** Connect the USB flash drive to the USB port.


**■ USB Port(s)** P. 233

- 2. Select Settings.
- 3. Select Clock/Info.
- **4.** Select **Clock/Wallpaper Type**, then open the **Wallpaper** tab.
- 5. Select Add New Wallpaper.
  - ► The picture name is displayed on the list.
- **6.** Select a desired picture.
  - ➤ The preview is displayed on the left side on the screen.
- **7.** Select **Start Import** to save the data.
  - ► The display will return to the wallpaper list

### Wallpaper Setup

- When importing wallpaper files, the image must be in the USB flash drive's root directory. Images in a folder cannot be imported.
- The file name must be fewer than 64 characters.
- The file format of the image that can be imported is BMP (bmp) or JPEG (jpg).
- The individual file size limit is 5 MB.
- The maximum image size is  $4,096 \times 4,096$  pixels. If the image size is less than  $800 \times 480$  pixels, the image is displayed in the middle of the screen with the extra area appearing in black.
- If the USB flash drive does not have any pictures, the **No files detected** message appears.

Continued



Add New Wallpaper

12:34

### ■ Select wallpaper

- 1. Select Settings.
- 2. Select Clock/Info.
- **3.** Select **Clock/Wallpaper Type**, then open the **Wallpaper** tab.
  - ► The screen changes to the wallpaper list.
- **4.** Select a desired wallpaper.
  - ▶ The preview is displayed on the left side on the screen.
  - ► The pop-up menu appears on the screen.
- 5. Select Set.
  - ► The display will return to the wallpaper list.

## ■ To view wallpaper once it is set

- 1. Select A
- 2. Select Info.
- 3. Select 🖳
- 4. Select Clock/Wallpaper.

### **■** Delete wallpaper

- 1. Select Settings.
- 2. Select Clock/Info.
- **3.** Select **Clock/Wallpaper Type**, then open the **Wallpaper** tab.
  - ► The screen changes to the wallpaper list.
- 4. Select a wallpaper that you want to delete.
  - ▶ The preview is displayed on the left side on the screen.
  - ► The pop-up menu appears on the screen.
- 5. Select Delete.
  - ► A confirmation message appears on the screen.
- **6.** Select **Yes** to delete completely.
  - ► The display will return to the wallpaper list.

### **≫**Wallpaper Setup

From the pop-up menu, select **Preview** to see a preview at full-size screen.




To go back to the previous screen, select  $\mathbf{OK}$ , or select (Back).

When the file size is large, it takes a while to be previewed.

To delete all wallpapers you add, select **Delete All**, then **Yes**.

# ■ Home Screen

# ■ To change to a next screen

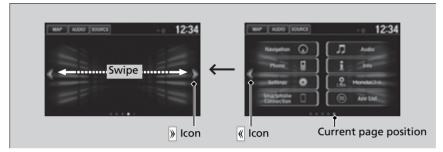

Selecting  $\langle\!\langle\!\langle$  or  $\rangle\!\rangle\!\rangle$ , or swiping the screen left or right changes to the next screen.

### >> Home Screen

The home screen has 5 pages (fixed). You cannot add any more pages.

Continued 267

### ■ To use apps or widgets



- 1. Select A
- 2. Select im or App List.
  - ► The **App/Widget** screen appears.
- **3.** Select the app or widget you want to use.

### Preinstall app list:

- **Browser**: Displays the web browser utilized by smartphone and Wi-Fi connection.
- Calculator: Displays Calculator.
- **Downloads**: Displays the data downloaded from the web browser and so on.
- **App Installer**: Check with a Honda dealer for apps that are available for installation.
- **Search**: Displays various retrieval screens.

### ∑To use apps or widgets

Select and hold a selected app or widget to add that app's or widget's shortcut on the home screen.

Pre-installed apps may not start up normally. If this occurs, you need to reset the system.

Defaulting All the Settings P. 370

If you perform **Factory Data Reset**, it may reset all the settings to their factory default.

Defaulting All the Settings P. 370

In case those apps still do not start up normally even after **Factory Data Reset**, contact your dealer.

If the browser if shut down during use, the screen will revert to the previous screen.

Do not install apps other than those confirmed by a Honda dealer. Installation of unauthorized apps may introduce data corruption risks to your vehicle's information and your privacy.

You can delete user installed apps by the following procedure.

- 1. Select nome.
- 2. Select **Settings**.
- 3. Select System.
- 4. Select the Others tab.
- 5. Select **Detail Information**.
- 6. Select an App that you want to delete.
- 7. Select **Delete**.

Pre-installed apps cannot be deleted.

### ■ To add app or widget icons on the home screen

App or widget icons can be added on the home screen.



- 1. Select .
- **2.** Select **《**.
- **3.** Select and hold empty space on the home screen.
  - ► The pop-up menu appears on the screen.
- 4. Select Add App or Add Widget.
  - ► The **Add app/widget** screen appears.


Continued 269



- **5.** Select and hold an app or widget icon you want to add.
  - ► The screen switches to the customization screen.
- **6.** Drag and drop the icon to where you want it to be.
- 7. Select OK.
  - ► The screen will return to the home screen.

### ■ To move icons on the home screen

You can change location on the home screen.




- **1.** Select and hold an icon.
  - ► The screen switches to the customization screen.
- **2.** Drag and drop the icon to where you want it to be.
- 3. Select OK.
  - ► The screen will return to the home screen.

### ∑To move icons on the home screen

You can also move the Audio, Phone, Info, Settings, Smartphone Connection (Apple CarPlay, Android Auto), Navigation\*, HondaLink, and App List icons in the same manner.

### ■ To remove icons on the home screen

You can delete the icons on the home screen.



- 1. Select and hold an icon.
  - ► The screen switches to the customization screen.
- **2.** Drag and drop the icon you want to remove to the trash icon.
  - ► The icon is removed from the home screen.
- 3. Select OK
  - ► The screen will return to the home screen.

### ∑To remove icons on the home screen

You cannot delete the Audio, Phone, Info, Settings, Smartphone Connection (Apple CarPlay, Android Auto), Navigation\*, HondaLink, and App List icons.

Apps or widgets will not be deleted by deleting the icon on the home screen.

# ■ Status Area



- **1.** Swipe the upper area of the screen.
  - ► The status area appears.
- **2.** Select an item to see the details.
- 3. Select or swipe up the bottom bar to close the area.

Continued 273

# ■ Closing Apps

You can close specific apps running in the background on the system.



- 1. Select and hold ......
- 2. Select the Active tab.
  - ▶ If you select the **Active/History** tab, you can close the apps that are currently running and delete the app activity history simultaneously.
- **3.** Select an app you want to close.
- 4. Select Clear.
  - ► The display will return to the app list.

### ○ Closing Apps ○ Cl

If you leave the apps used open in the background, some apps may stop operating properly next time using them.

If this happens close unused apps.

To close all apps on the system, select  $\mbox{\bf Clear All},$  then  $\mbox{\bf Yes}.$ 

You cannot close the HondaLink® and Garmin\* apps.

# **Adjusting the Sound**





- 1. Select .
- 2. Select Audio.
- 3. Select 🖳
- 4. Select Sound.

Select a tab from the following choices:

- BAS-MID-TRE: Bass, Middle, Treble
- FAD-BAL: Fader, Balance
- **SVC**: Speed Volume Compensation

### ■ Adjusting the Sound

The SVC has four modes: **Off, Low, Mid,** and **High.** SVC adjusts the volume level based on the vehicle speed. As you go faster, audio volume increases. As you slow down, audio volume decreases.


You can also adjust the sound the following procedure.

- 1. Select 👬.
- 2. Select **Settings**.
- 3. Select **Audio**, then the **Common** tab.
- 4. Select Sound.

# **Display Setup**


You can change the brightness or color theme of the audio/information screen.

# ■ Changing the Screen Brightness



- 1. Select .
- 2. Select Settings.
- 3. Select System.
- **4.** Select the **Display** tab.
- 5. Select Display Settings.
- **6.** Select the setting you want.
- 7. Select OK.

# Changing the Screen's Color Theme



- 1. Select A.
- 2. Select Settings.
- 3. Select System.
- 4. Select the **Display** tab.
- 5. Select Background Color.
- **6.** Select the setting you want.
- 7. Select OK.
  - ► A confirmation message appears on the screen. Select **Yes** to reboot the system.

### ○ Changing the Screen Brightness

You can change the **Contrast** and **Black Level** settings in the same manner.


#### ∑Changing the Screen's Color Theme

Reboot may take a few minutes.

If you default the **System** settings when the color theme is changed from its default color, the system reboots.

**■ Customized Features** P. 356

# ■ Selecting an Audio Source

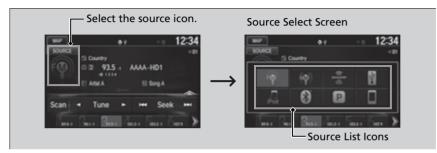

Select the current source icon, then select an icon on the source list to switch the audio source.

# ■ Limitations for Manual Operation

Certain manual functions are disabled or inoperable while the vehicle is in motion. You cannot select a greyed-out option until the vehicle is stopped.

### Selecting an Audio Source

If you start up preinstalled audio apps, is displayed on the lower right of the screen.

These preinstalled apps cannot be displayed on the source select screen.

You can start up those audio apps from Apps.

# **Voice Control Operation**

Your vehicle has a voice control system that allows hands-free operation. The voice control system uses the (Talk) and (hang-up/back) buttons on the steering wheel and a microphone near the map lights on the ceiling.

# ■ Voice Recognition

To achieve optimum voice recognition when using the voice control system:

 Make sure the correct screen is displayed for the voice command that you are using.

The system recognizes only certain commands. Available voice commands.

Noice Portal Screen P. 279

- Class the surfice laws and as a sure of
- Close the windows and moonroof\*.
- Adjust the dashboard and side vents so air does not blow onto the microphone on the ceiling.
- Speak clearly in a natural speaking voice without pausing between words.
- Reduce any background noise if possible. The system may misinterpret your command if more than one person is speaking at the same time.


### 

When you press the £ button, a helpful prompt asks what you would like to do. Press and release the £ button again to bypass this prompt and give a command.

#### **≥** Voice Recognition

The voice control system can only be used from the driver's seat because the microphone unit removes noises from the front passenger's side.

# ■ Voice Portal Screen



When the [6] (Talk) button is pressed, available voice commands appear on the screen.

For a complete list of commands, say "Voice Help" after the beep or select **Voice Help**.

You can also see the list of commands by selecting **Info**, [ and **Voice Info**.

The system only recognizes the commands on the following pages, at certain screens. Free-form voice commands are not recognized.

### **■** Phone Call

This can be only used when the phone is connected. When the system recognizes the *Phone call* command, the screen will change to the voice recognition screen for the phone commands.

- Dial by number
- Call history
- Redial
- Call <Your Contact Name>
- Call <Phone Number>

Phone Call commands are not available if using Apple CarPlay.

### ■ Music Search\*1

This can be only used when the iPod or USB device is connected.

### ■ Audio\*1

When the system recognizes the *Audio* command, the screen will change to the audio voice recognition screen.

- Audio On
- Audio Off
- Radio FM
- Radio AM
- Radio SXM\*
- iPod
- USB

# ■ Navigation\*1

The screen changes to the navigation voice recognition screen.

Refer to the Navigation System Manual

# ■ Voice Settings

The screen changes to the **Voice Recog** tab on the **System settings** screen.

- \*1: Models with navigation system
- \* Not available on all models

### ■ Voice Help

You can see a list of the available commands on the screen.

- Phone Commands
- Audio Commands\*
- On Screen Commands
- Music Search Commands\*
- General Commands\*
- All Commands
- Voice Settings
- Getting Started

# ■ Phone Commands

The system accepts these commands on the dedicated screen for the voice recognition of the phone.

- Dial by Number
- · Call by Name
- Dial <Phone Number>
- Call <Your Contact Name>

### Audio Commands\*1

The system accepts these commands on the dedicated audio voice recognition screen.

### ■ Radio FM Commands

- Radio tune to <87.7-107.9> FM
- Radio tune to <87.7 -107.9> HD <1-8> FM
- Radio FM preset <1-12>

### **■** Radio AM Commands

- Radio tune to <530-1710> AM
- Radio AM preset <1-6>

#### ■ Radio SXM Commands\*

- SXM channel <1-255>
- SXM channel <station name>
- Radio SXM preset <1-12>

### **■** iPod Commands

- iPod play
- iPod play track <1-30>
- Music Search
- What album is this?
- What am I listening to?

### **■ USB Commands**

- USB play
- *USB play track <1-30>*
- Music Search
- What album is this?
- What am I listening to?

<sup>\*1:</sup> Models with navigation system

<sup>\*</sup> Not available on all models

### On Screen Commands

When **On Screen Commands** is selected, the explanation screen is displayed.

# ■ Music Search Commands\*1

The system accepts these commands on the **Music Search** screen.

### ■ Using Song By Voice

Song By Voice<sup>TM</sup> is a feature that allows you to select music from your iPod or USB device using Voice Commands. To activate this mode, you must push the talk switch and say: "Music search".

# ■ Song By Voice Commands

- What am I listening to?
- Who am I listening to?
- Who is this?
- What's playing?
- Who's playing?
- What album is this?

### **■ Play Commands**

- Play artist <Name>
- Play track/song <Name>
- Play album <Name>
- Play genre/category <Name>
- Play playlist <Name>
- Play composer <Name>

### **■ List Commands**

- List artist <Name>
- List album <Name>
- List genre/category <Name>
- List playlist <Name>
- List composer <Name>


# General Commands\*

- What time is it?
- What is today's date?

<sup>\*1:</sup> Models with navigation system

<sup>\*</sup> Not available on all models

# **Playing AM/FM Radio**

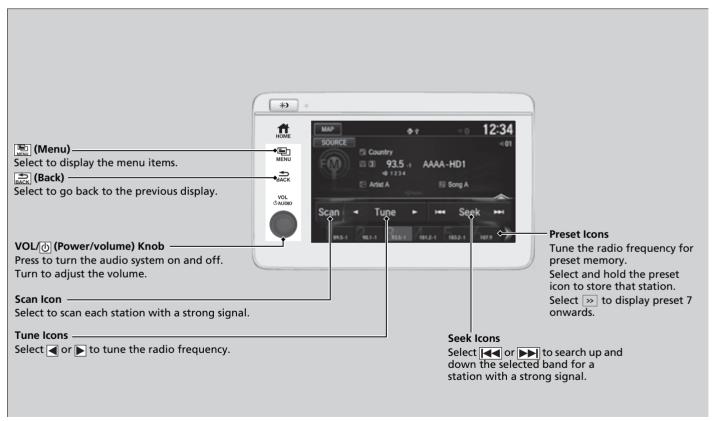

<sup>\*1:</sup>Some or all of the lists may not be displayed.

# ■ Preset Memory

To store a station:

- 1. Tune to the selected station.
- **2.** Select and hold the preset number for the station you want to store.

You can also store a preset station by the following procedure.

- **1.** Tune to the selected station.
- 2. Select the open/close icon to display a list.
- **3.** Select the **Preset** tab.
- **4.** Select and hold the preset number for the station you want to store.

# Station List

Lists the strongest stations on the selected band.

- 1. Select the open/close icon to display a list.
- 2. Select the Station List tab.
- **3.** Select the station

### ■ Manual update

Updates your available station list at any time.

- **1.** Select the open/close icon to display a list.
- 2. Select the Station List tab.
- 3. Select Refresh.

#### ▶ Preset Memory

The **ST** indicator appears on the display indicating stereo FM broadcasts.

Stereo reproduction in AM is not available.

Switching the Audio Mode
Press the **SOURCE** button on the steering wheel or
select **SOURCE** on the screen

Audio Remote Controls P. 235

You can store 6 AM stations and 12 FM stations into preset memory.

#### Models with HD Radio™

HD Radio Technology manufactured under license from iBiquity Digital Corporation. U.S. and Foreign Patents. For patents see <a href="http://dts.com/patents">http://dts.com/patents</a>. HD Radio, Artist Experience, and the HD, HD Radio, and "ARC" logos are registered trademarks or trademarks of iBiquity Digital Corporation in the United States and/or other countries.



### Scan

Samples each of the strongest stations on the selected band for 10 seconds. To turn off scan, select **Cancel** or [3].

### Models with HD Radio™

### HD Subchannel

Displays the subchannel list when an HD Radio™ station is selected while listening to an FM station.

- 1. Select
- 2. Select HD Subchannel.
- 3. Select the channel number.

# ■ Radio Data System (RDS)

Provides text data information related to your selected RDS-capable FM station.

### ■ To find an RDS station from Station List

- **1.** Select the open/close icon to display a list while listening to an FM station.
- 2. Select the Station List tab.
- 3. Select the station.

# ■ Manual update

Updates your available station list at any time.

- **1.** Select the open/close icon to display a list while listening to an FM station.
- 2. Select the Station List tab.
- 3. Select Refresh.

### 

When you select an RDS-capable FM station, the RDS automatically turns on, and the frequency display changes to the station name. However, when the signals of that station become weak, the display changes from the station name to the frequency.

### ■ Radio text

Displays the radio text information of the selected RDS station.


- 1. Select 🖳
- 2. Select View Radio Text.

### ■ Scan

Samples each of the strongest stations on the selected band for 10 seconds.

To turn off scan, select **Cancel** or SACK.

# Playing SiriusXM® Radio\*

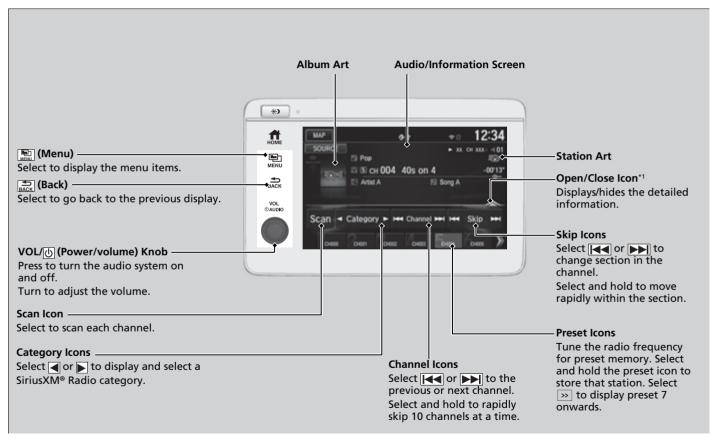

- \*1:Some or all of the lists may not be displayed.
- \* Not available on all models

# ■ To Change the Tune Mode

- 1. Select
- 2. Select Tune Mode.
- 3. Select Channel Mode or Category Mode.

#### ▶ Playing SiriusXM® Radio \*

In the channel mode, all available channels are selectable. In the category mode, you can select a channel within a category (Jazz, Rock, Classical, etc.).

There may be instances when SiriusXM® Radio does not broadcast all the data fields (artist name, title). This does not indicate a problem with your audio system.

SiriusXM® Radio stations load in ascending order, which can take about a minute. Once they have loaded you will be able to scroll up or down to make your selections.

Switching the Audio Mode

Press the **SOURCE** button on the steering wheel or select **SOURCE** on the screen.

**Audio Remote Controls** P. 235

#### Tune Start:

When you change to a preset channel, a song being played on that channel restarts from the beginning with this function. This can be turned on or off from the **Audio Settings** screen.

**⊇** Customized Features P. 356

# ■ Preset Memory

To store a channel:

- 1. Tune to the selected channel.
- **2.** Select to hold the preset number for the station you want to store.
- 3. Select Replace.

You can also store a channel by the following procedure.

- 1. Tune to the selected channel.
- 2. Select the open/close icon to display a list.
- 3. Select the **Preset** tab.
- **4.** Select and hold the preset number for the station you want to store.

### ■ Multi-channel preset (for music channels only)

You can store up to four of your preferred music channels per preset.



- **1.** Tune a station.
- 2. Select the open/close icon to display a list.
- 3. Select the **Preset** tab.
- **4.** Select and hold the preset number you want to add a music channel.
  - A message appears if there are no available presets.
- 5. Select Combine.

#### 

You can store 12 SiriusXM® channels into the preset memory.

# ■ Listening to Featured Channels

Suggested channel listing received from SiriusXM® can be displayed and selected.

- 1. Select the open/close icon to display a channel list.
- 2. Select the Channel List tab.
- **3.** Select the featured channel list title you want to listen to.
  - ▶ The selected channel list of the title is displayed.
- **4.** Select the channel.

#### ∑Listening to Featured Channels

Up to three featured channels by SiriusXM® can be displayed.

Featured channel lists are at the top of the channel list.

# Replay Function

The system can record up to the last 60 minutes of your currently tuned channel's broadcast, as well as the last 30 minutes of your preset channel's broadcast, starting from the moment you turn the vehicle on. If you tuned to preset channel, the system records up to 60 minutes of a broadcast instead of up to 30 minutes. You can rewind and replay the last 30 or 60 minutes of a broadcast.

- 1. Select 🖺
- 2. Select Playback
- **3.** Move the gauge to the position you want to replay.

The following items are available on the pop-up screen:

(Skip Down): Skips to the previously stored channel. Select and hold to fast-rewind the current selection.

[Skip Up): Skips to the next channel. Select and hold to fast-forward the current selection.

(15sec Back): Select to skip back 15 seconds in the current selection. Select and hold to fast-rewind the current selection.

(15sec Skip): Select to skip forward 15 seconds in the current selection. Select and hold to fast-forward the current selection.

► Select **OK** or to close the pop-up menu. Replay in playback mode continues.

To play or pause on playback mode:

- 1. Select 🖳
- 2. Select Play/Pause.

### ■ Returning to real-time broadcast


- 1. Select 🖳
- 2. Select Go to Live.

#### ■ Replay Function

The system starts storing broadcast in memory when the power mode is turned ON. You can go back to the program from that point.

You can no longer replay any program once the power mode is turned off as it erases memory. You can check how long the program has been stored in memory from the audio/information screen.

After 30 or 60 minutes of recording the system will automatically start deleting the oldest data.



(A): Shows how much time the replayed segment is behind the real-time broadcast

(B): Replayed segment

(C): Length stored in memory

# ■ Live Sports Alert

While listening to other channel, you can receive sports alerts such as scores from your favorite teams.

# ■ To set up a favorite team



- 1. Select A
- **2.** Select **Settings**.
- 3. Select Audio.
- **4.** Select the **SXM** tab.
- **5.** Select **SportsFlash Setup**.
- **6.** Select a team.

### ■ To set up a alert message

- 1. Select nome.
- 2. Select Settings.
- 3. Select Audio.
- 4. Select the SXM tab.
- **5.** Select **SportsFlash Setup**.
- **6.** Select **Interrupt**.
- 7. Select On(one time) or On(continue).

#### ∑Live Sports Alert

The sports alert function at SiriusXM® mode only.

### ∑To set up a favorite team

Sports alerts cut in only when SiriusXM® mode is on. Selecting **On(one time)** from the customize settings disables the alert feature next time you turn the power mode to ON.

#### **➤ Customized Features** P. 356

You can also set up a favorite team by the following procedure.

- 1. Select Audio.
- 2. Select 🖭.
- 3. Select **Settings**.
- 4. Select the **SXM** tab.

## ■ To set up a alert beep

- 1. Select A
- 2. Select Settings.
- 3. Select Audio.
- **4.** Select the **SXM** tab.
- 5. Select SportsFlash Setup.
- 6. Select Interrupt Beep.
- 7. Select On.

### ■ Receiving a sports alert

- **1.** A pop-up appears and notifies you of a sports alert.
- 2. Select Listen.
  - ➤ You can use the same items as the playback mode pop-up screen.
    - Replay Function P. 290

To go back to the previous screen, select **Back**.

### ∑To set up a alert beep

You can also set up a alert beep by the following procedure.

- 1. Select **Audio**.
- 2. Select 🖳.
- 3. Select **Settings**.
- 4. Select the **SXM** tab.

### ■ Traffic and Weather Information

You can receive traffic and weather information.

### ■ To set up a traffic & weather information

- 1. Select A
- 2. Select Settings.
- 3. Select Audio.
- 4. Select the **SXM** tab.
- 5. Select Traffic & Weather Setup.
- 6. Select the region.
  - ▶ When you do not want to receive the information, select **Unregistered**.

# ■ Listening to traffic and weather information

- 1. Select 🖳
- 2. Select Traffic & Weather.
  - ▶ Play mode can also use the any items same as playback mode.
    - Replay Function P. 290

To go back to the previous screen, select **OK**.

### Scan

Sample each channel on the selected mode for 10 seconds.

- 1. Select Scan.
- 2. Select Scan Channels.
  - ➤ You can select the desired channel by songs using **Scan Song in Presets**.

To turn off scan, select **Cancel Scan**.

#### ∑Traffic and Weather Information

The traffic and weather information function at SiriusXM® mode only.

You can also set up the traffic and weather information by the following procedure.

- 1. Select **Audio**.
- 2. Select 🖳
- 3. Select **Settings**.
- 4. Select the **SXM** tab.

#### ≫ Scan

The "Scan Songs in Presets" function is based on TuneScan<sup>TM</sup> technology of SiriusXM®.


The "Featured Channels" function is based on Featured Favorites™ technology of SiriusXM®.

TuneScan<sup>™</sup> and Featured Favorites<sup>™</sup> are registered trademarks of SiriusXM® Radio, Inc.

# Playing an iPod

Connect the iPod using your USB connector to the USB port, then select the iPod mode.

**■ USB Port(s)** P. 233

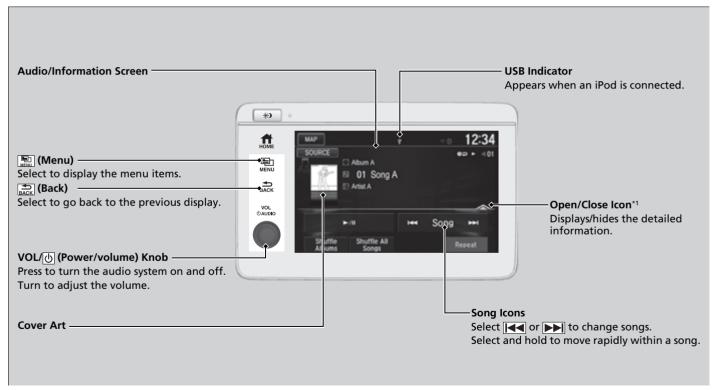

<sup>\*1:</sup>Some or all of the lists may not be displayed.

### ■ How to Select a Song from the Music Search List



**1.** Select and select **Music Search**.

**2.** Select the items on that menu.

#### 

Available operating functions vary on models or versions. Some functions may not be available on the vehicle's audio system.

If there is a problem, you may see an error message on the audio/information screen.

iPod/USB Flash Drive P. 328

If you operate the music app on your iPhone/iPod while the phone is connected to the audio system, you may no longer be able to operate the same app on the audio/information screen.

Reconnect the device if necessary.

Select **Switch USB Device** in the **Audio Menu** screen to switch to another USB device.

If an iPhone is connected via Apple CarPlay, the iPod/ USB source will be unavailable and audio files on the phone will be playable only within Apple CarPlay.

# ■ How to Select a Play Mode

You can select repeat and shuffle modes when playing a file.

Select a mode.



# ■ To turn off a play mode

Select the mode you want to turn off.

### 

Play Mode Menu Items

**Shuffle Albums:** Plays all available albums in a selected list (playlists, artists, albums, songs, podcasts, genres, composers, or audiobooks) in random order.

**Shuffle All Songs:** Plays all available files in a selected list (playlists, artists, albums, songs, podcasts, genres, composers, or audiobooks) in random order.

**Repeat Song:** Repeats the current track.

### Models with navigation system

# Song By Voice™ (SBV)

Use SBV to search for and play music from your USB flash drive or iPod using voice commands.

#### ■ To enable SBV



- 1. Select A
- 2. Select Settings.
- 3. Select System.
- **4.** Select the **Voice Recog** tab.
- **5.** Select **Song by Voice**.
- 6. Select On or Off.

### Song By Voice™ (SBV)

#### Setting options:

- On (factory default): Song By Voice™ commands are available.
- Off: Disable the feature.

## ■ Searching for music using SBV



- **1.** Set the **Song by Voice** setting to **On**.
- 2. Press the (Talk) button and say "Music Search" to activate the SBV feature for the USB flash drive and iPod.
- **3.** Press the button and say a command.
  - ► Example 1: Say "(List) 'Artist A'" to view a list of songs by that artist. Select the desired song to start playing.
  - Example 2: Say "Play 'Artist A'" to start playing songs by that artist.
- **4.** To cancel SBV, press the (hang-up/back) button on the steering wheel. The selected song continues playing.

Once you have canceled this mode, you need to press the 😥 button and say "Music Search" again to re-activate this mode.

#### Searching for music using SBV

Song By Voice™ Commands List

Song By Voice Commands P. 281

#### NOTE:

Song By Voice™ commands are available for tracks stored on the USB flash drive or iPod.

You can add phonetic modifications of difficult words so that it is easier for SBV to recognize artists, songs, albums, and composers in voice commands.

**▶ Phonetic Modification** P. 299

# Phonetic Modification

Add phonetic modifications of difficult or foreign words so that it is easier for SBV to recognize artists, songs, albums, and composers in voice commands when searching for music on the USB flash drive or iPod.




- 1. Select A
- 2. Select Settings.
- 3. Select System.
- **4.** Select the **Voice Recog** tab.
- 5. Select Song by Voice Phonetic Modification.
- 6. Select New Modification.
- 7. Select **USB** or **iPod**.

#### >> Phonetic Modification

**Song by Voice Phonetic Modification** is grayed out when **Song By Voice** is set to **Off**.

You can store up to 2,000 phonetic modification items.

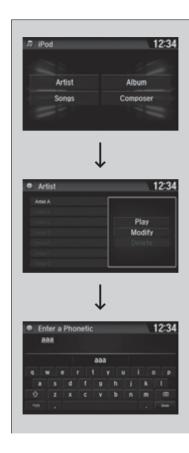

- 8. Select the item to modify (e.g., Artist).
  - ► The list of the selected item appears on the screen.
- **9.** Select an entry to modify.
  - ► The pop-up menu appears on the screen.
  - ➤ The listen to the current phonetic modification, select **Play**.
  - To delete the current phonetic modification, select **Delete**.

### **10.**Select **Modify**.

**11.**Select the phonetic spelling you want to use (e.g., "Artist A") when prompted.

### 12.Select OK.

► The artist "No Name" is phonetically modified to "Artist A." When in the SBV mode, you can press the [6] (Talk) button and use the voice command "Play 'Artist A'" to play songs by the artist "No Name."


#### U.S. models

# Playing Pandora®

Your audio system allows you to listen to music from the Pandora® app on a compatible smartphone.

This function is available when the phone is paired and connected to the vehicle's *Bluetooth*® HandsFreeLink® (HFL) system, or with an iPhone, you can connect using your USB cable to the USB port.

- **Phone Setup** P. 404
- **USB Port(s)** P. 233

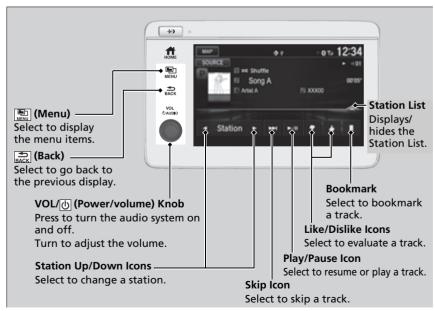

### \*1:Some or all of the lists may not be displayed.

### ▶ Playing Pandora®

Pandora®, the Pandora logo, and the Pandora trade dress are trademarks or registered trademarks of Pandora Media, Inc., used with permission. Pandora is only available in certain countries. Visit the Pandora website for more information.

To find out if your phone is compatible with this feature, visit *automobiles.honda.com/handsfreelink/*, or call 1-888-528-7876.

To use this service in your vehicle, the Pandora® app must first be installed on your phone. Visit www.pandora.com. for more information.

Find the music you love and let the music you love find you. Pandora® gives you a personalized music experience that continually evolves with your tastes. Create personalized stations from songs, artists or genres. Not sure where to start? Use our voice search to easily find stations that match your mood or activity.

If you cannot operate Pandora® through the audio system, it may be streaming through *Bluetooth*® Audio. Make sure Pandora® mode on your audio system is selected.

If your phone is connected to Android Auto, Pandora is only available through the Android Auto interface. Visit the Android Auto website to check compatibility.

### ■ Pandora® Menu

You can operate some of the Pandora® menu items from your vehicle's audio system. The available items are:

- Station List
- Manage Station
- Sound
- Setting

### ■ Operating a menu item



- 1. Select 🖳
- 2. Select an item.

#### ≥ Pandora® Menu

Manage Station Items

**Genre**: Add the selected genre to the station list. **Current Artist**: Add the current artist to station list. **Current Track**: Add the current track to station list. **Delete**: Delete the selected Station from the Station list.

Available operating functions vary on software versions. Some functions may not be available on the vehicle's audio system.

If there is a problem, you may see an error message on the audio/information screen.

**Pandora®** P. 330

Pandora® may limit the total number of skips allowed on the service. If you dislike a track after the skip limit has been reached, your feedback will be saved but the current track will continue to play.


To change stations, activate the Pandora® menu, select **Station List**, and then select a new station. It also changes stations on the main Pandora® screen.

# Playing a USB Flash Drive

Your audio system reads and plays sound and video files on a USB flash drive in either MP3, WMA, or AAC\*1 format.

Connect your USB flash drive to the USB port, then select the USB mode.

**■ USB Port(s)** P. 233

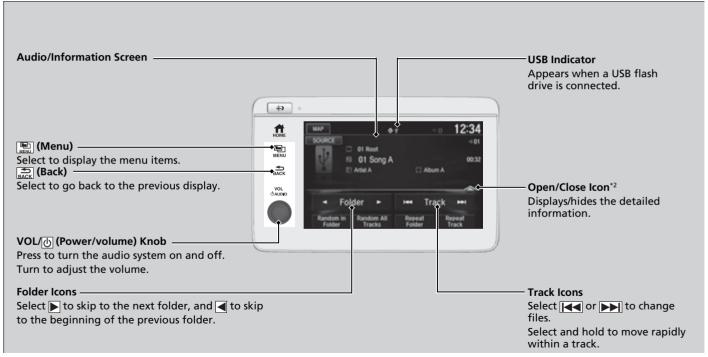

- \*1:Only AAC format files recorded with iTunes are playable on this unit.
- \*2:Some or all of the lists may not be displayed.

303

### ■ How to Select a File from the Music Search List



**1.** Select and select **Music Search**.

**2.** Select a folder.

3. Select a track.

#### ▶ Playing a USB Flash Drive

Use the recommended USB flash drives.

**■ General Information on the Audio System**P. 333

WMA files protected by digital rights management (DRM) cannot be played.

The audio system displays **Unplayable File**, then skips to the next file.


If there is a problem, you may see an error message on the audio/information screen.

**₽ iPod/USB Flash Drive** P. 328

Select **Switch USB Device** in the **Audio Menu** screen to switch to another USB device.

# ■ How to Select a Play Mode

You can select scan, repeat, and random modes when playing a file.



- 1. Select 🖳.
- 2. Select Scan.
- 3. Select a mode.



■ Random/Repeat

Select a play mode.

# ■ To turn off a play mode

To turn off Scan, select or **Cancel Scan**.

To turn off **Random/Repeat**, select the mode again.

#### 

Play Mode Menu Items

Scan

**Scan Folders:** Provides 10-second sampling of the first file in each of the main folders.

**Scan Tracks:** Provides 10-second sampling of all files in the current folder.

Random/Repeat

Repeat Folder: Repeats all files in the current folder.

**Repeat Track:** Repeats the current file.

Random in Folder: Plays all files in the current

folder in random order.


Random All Tracks: Plays all files in random order.

# Playing Bluetooth® Audio

Your audio system allows you to listen to music from your *Bluetooth*-compatible phone.

This function is available when the phone is paired and connected to the vehicle's *Bluetooth*® HandsFreeLink® (HFL) System.

Phone Setup P. 404

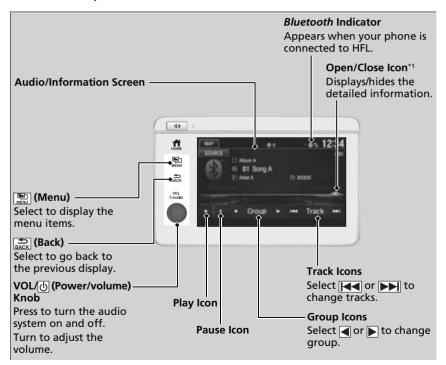

\*1: Depending on the Bluetooth® device you connect, some or all of the lists may not be displayed.

#### 

Not all *Bluetooth*-enabled phones with streaming audio capabilities are compatible with the system. To check if your phone is compatible, visit *automobiles.honda.com/handsfreelink/*.

It may be illegal to perform some data device functions while driving.

Only one phone can be used with HFL at a time. When there are more than two paired phones in the vehicle, the first paired phone the system finds is automatically connected.

If more than one phone is paired to the HFL system, there may be a delay before the system begins to play.

In some cases, the name of the artist, album, or track may not appear correctly.

Some functions may not be available on some devices.

If a phone is currently connected via Apple CarPlay or Android Auto, *Bluetooth*® Audio from that phone is unavailable. However, a second previously paired phone can stream *Bluetooth*® Audio by selecting

Connect: ☐ from Bluetooth Device List.

Phone Setup P. 404

# ■ To Play Bluetooth® Audio Files




- **1.** Make sure that your phone is paired and connected to the system.
  - Phone Setup P. 404
- 2. Select the *Bluetooth*® Audio mode.

If the phone is not recognized, another HFL-compatible phone, which is not compatible for *Bluetooth*® Audio, may already be connected.

# ■ To pause or resume a file

Select the play icon or pause icon.

# ■ Searching for Music



- 1. Select 🖳
- 2. Select Music Search.
- **3.** Select a search category (e.g., Albums).
- **4.** Select an item.
  - ► The selection begins playing.

#### ∑To Play Bluetooth® Audio Files

To play the audio files, you may need to operate your phone. If so, follow the phone maker's operating instructions.

Switching to another mode pauses the music playing from your phone.

You can change the connected phone in the *Bluetooth®* settings on the **Audio Menu** screen by the following procedure.

- 1. Select 🖭.
- 2. Select **Setting**.

### Searching for Music

Depending on the *Bluetooth*® device you connect, some or all of the lists may not be displayed.

# HondaLink®

HondaLink® connects you to the latest information from Honda. You can connect your phone wirelessly through Wi-Fi or *Bluetooth*®.

**₩i-Fi Connection** P. 313

Phone Setup P. 404

### ■ HondaLink® Menu



#### ■ Places\*

Displays restaurants, gas stations, Honda dealer, and so on. You can also navigate to the found locations via the navigation.

#### ■ Vehicle

Displays instruction messages when the vehicle needs service.

### ■ Help & Support

Displays tips for vehicle usage, and get support via roadside or customer service center

#### >> HondaLink®

The HondaLink® connect app is compatible with most iPhone and Android phones.

Some cell phone carriers charge for tethering and smartphone data use. Check your phone's data subscription package.

If there is an active connection to Apple CarPlay or Android Auto, HondaLink® can only be connected through Wi-Fi.

## **■** Messages from Honda

Displays helpful and important information from Honda.

#### ■ Weather\*

Displays a weekly five-day weather forecast for any location you want. You can change the ZIP Code at any time.

# ■ To Set Up to Connect HondaLink® Service

Use the following procedure to connect to HondaLink® service.

### ■ To enable the HondaLink® service



- 1. Select A
- 2. Select Settings.
- 3. Select Clock/Info.
- 4. Select the HondaLink tab.
- 5. Select Diagnostics & Location Data.
- 6. Select On.

You must consent to location sharing to enable the HondaLink® service.




**Enable once**: Allows only one time. (Prompt shows again next time.)

**Always Enable**: Allows anytime. (Prompt

does not show again.)

Cancel: Does not allow this consent.

### ■ To link with HondaLink®



You can see the **Connection Guide** screen after launching HondaLink®. If you do not need this guide, select check-box and select **OK**.

# ■ Vehicle Information and Message from Honda Tips

You can check the messages that are received quickly in the shortcut operation.



- **1.** A message appears and notifies you of a new message on the header area.
  - ► When the message is received, a notification ring can be heard.

**2.** A message icon is continuously displayed in the header area until the new message is read.



**3.** From the top of the screen, swipe down to see the messages.

- **4.** Select a new message to open.
  - ▶ If you have selected the update option for HondaLink®, follow the directions on the screen to complete the process.

■ Vehicle Information and Message from Honda Tips

When you update HondaLink®, you must keep the engine running and maintain a constant connection with HondaLink®.

If the update is interrupted, the system will automatically resume the process. If, however, a week has elapsed since the process was first interrupted, you must repeat the process from the beginning.

You can update HondaLink® by selecting **Message from Honda** on the HondaLink® menu.

# **Wi-Fi Connection**

You can connect the display audio system to the Internet using Wi-Fi and browse websites or use online services on the audio/information screen. If your phone has wireless hotspot capabilities, the system can be tethered to your phone. Use the following steps to set up.

# ■ Wi-Fi mode (setting for the first time)



- 1. Select from .
- 2. Select Settings.
- 3. Select Bluetooth / Wi-Fi.
- 4. Select the Wi-Fi tab.
- 5. Select Wi-Fi On/Off Status, then On.
- 6. Select Wi-Fi Device List.
  - ► Make sure your phone's Wi-Fi setting is in access point (tethering) mode.
  - Select the phone you want to connect to the system.
  - If you do not find the phone you want to connect in the list, select **Scan**.

### 

You cannot go through the setting procedure while a vehicle is moving. Park in a safe place to set the audio system in Wi-Fi mode.

Some cell phone carriers charge for tethering and smartphone data use. Check your phone's data subscription package.

Check your phone manual to find out if the phone has Wi-Fi connectivity.

You can confirm whether Wi-Fi connection is on or off with the icon on **Wi-Fi Device List**. Transmission speed and others will not be displayed on this screen.



### 7. Select Connect.

- ► Enter a password for your phone, and select **Done**.
- ➤ When the connection is successful, the icon is displayed on the list.
- **8.** Select to go back to the home screen.

### **≥** Wi-Fi mode (after the initial setting has been made)

### iPhone users

You may need to go through an initial setup for Wi-Fi connection again after you boot your phone.

# ■ Wi-Fi mode (after the initial setting has been made)


Make sure your phone's Wi-Fi setting is in access point (tethering) mode.

# **Siri Eyes Free**

You can talk to Siri using the [w] (Talk) button on the steering wheel when your iPhone is paired to the *Bluetooth*® HandsFreeLink® (HFL) System.

Phone Setup P. 404

# Using Siri Eyes Free

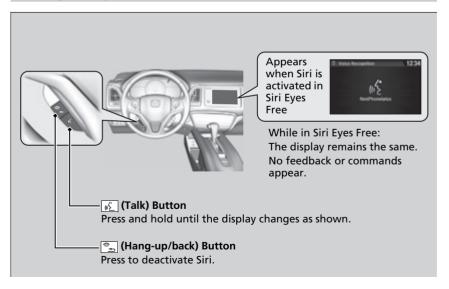

### Siri Eyes Free

Siri is a trademark of Apple Inc.

Check Apple Inc. website for features available for Siri.

We recommend against using Siri other than in Siri Eyes Free while operating a vehicle.

### ■Using Siri Eyes Free

Some commands work only on specific phone features or apps.

# **Apple CarPlay**

If you connect an Apple CarPlay-compatible iPhone to the system via the 1.5A USB port, you can use the audio/information touch screen, instead of the iPhone display, to make a phone call, listen to music, view maps (navigation), and access messages.

**USB Port(s)** P. 233

### 

Only iPhone5 or newer versions with iOS 8.4 or later are compatible with Apple CarPlay.

Park in a safe place before connecting your iPhone to Apple CarPlay and when launching any compatible apps.

To use Apple CarPlay, connect the USB cable to the 1.5A USB port. Other USB ports will not enable Apple CarPlay operation.

**■ USB Port(s)** P. 233

To directly access the Apple CarPlay phone function, select **Phone** on the home screen. While connected to Apple CarPlay, calls are only made through Apple CarPlay. If you want to make a call with *Bluetooth*<sup>®</sup> HandsFreeLink<sup>®</sup>, turn Apple CarPlay OFF or detach the USB cable from your iPhone.


Setting Up Apple CarPlay P. 318

When your iPhone is connected to Apple CarPlay, it is not possible to use the *Bluetooth*® Audio or *Bluetooth*® HandsFreeLink®. However, other previously paired phones can stream audio via *Bluetooth*® while Apple CarPlay is connected.

Phone Setup P. 404

For details on countries and regions where Apple CarPlay is available, as well as information pertaining to function, refer to the Apple homepage.

# Apple CarPlay Menu

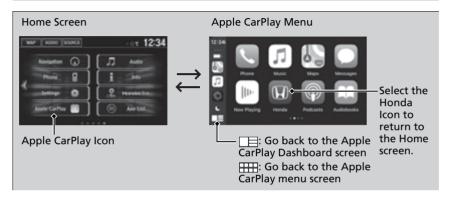

#### ■ Phone

Access the contact list, make phone calls, or listen to voicemail.

### ■ Messages

Check and reply to text messages, or have messages read to you.

#### ■ Music

Play music stored on your iPhone.

#### ■ Apple CarPlay

# Apple CarPlay Operating Requirements & Limitations

Apple CarPlay requires a compatible iPhone with an active cellular connection and data plan. Your carrier's rate plans will apply.

Changes in operating systems, hardware, software, and other technology integral to providing Apple CarPlay functionality, as well as new or revised governmental regulations, may result in a decrease or cessation of Apple CarPlay functionality and services. Honda cannot and does not provide any warranty or guarantee of future Apple CarPlay performance or functionality.

It is possible to use 3rd party apps if they are compatible with Apple CarPlay. Refer to the Apple homepage for information on compatible apps.

## **■** Maps

Display Apple Maps and use the navigation function just as you would on your iPhone.

#### Models with navigation system

Only one navigation system (pre-installed navigation or Apple CarPlay map) can give directions at a time. When you are using one system, directions to any prior destination set on the other system will be canceled, and the system you are currently using will direct you to your destination.

# Setting Up Apple CarPlay

After you have connected your iPhone to the system via USB, use the following procedure to set up Apple CarPlay. Use of Apple CarPlay will result in the transmission of certain user and vehicle information (such as vehicle location, speed, and status) to your iPhone to enhance the Apple CarPlay experience. You will need to consent to the sharing of this information on the audio/information touch screen.

### **■** Enabling Apple CarPlay



- **Enable once**: Allows only once. (Prompt shows again next time.)
- **Always Enable**: Allows anytime. (Prompt does not show again.)
- Cancel: Does not allow this consent.

You may change the consent settings under the **Smartphone** settings menu.

### Setting Up Apple CarPlay

You can also use the method below to set up Apple CarPlay:

Select HOME→Settings→Smartphone→Apple CarPlay.

#### Use of user and vehicle information

The use and handling of user and vehicle information transmitted to/from your iPhone by Apple CarPlay is governed by the Apple iOS terms and conditions and Apple's Privacy Policy.

# ■ Operating Apple CarPlay with Siri

Press and hold the talk button to activate Siri.



### ■Operating Apple CarPlay with Siri

Below are examples of questions and commands for Siri.

- What movies are playing today?
- Call dad at work.
- What song is this?
- How's the weather tomorrow?
- Read my latest email.
- Find a table for four tonight in Chicago.

For more information, please visit www.apple.com/ios/siri.

# **Android Auto**

When you connect an Android phone to the Display Audio system via the 1.5A USB port, Android Auto is automatically initiated. When connected via Android Auto, you can use the audio/information touch screen to access the Phone, Google Maps (Navigation), Google Play Music, and Google Now functions. When you first use Android Auto, a tutorial will appear on the screen. We recommend that you complete this tutorial while safely parked before using Android Auto.

- **USB Port(s)** P. 233
- **▶ Auto Pairing Connection** P. 322

#### 

To use Android Auto, you need to download the Android Auto app from Google Play to your smartphone.

Only Android 5.0 (Lollipop) or later versions are compatible with Android Auto. *Bluetooth* A2DP cannot be used while your phone is connected to Android Auto.

Park in a safe place before connecting your Android phone to Android Auto and when launching any compatible apps.

To use Android Auto, connect the USB cable to the 1.5A USB port. Other USB ports will not enable Android Auto operation.

**USB Port(s)** P. 233


To directly access the Android Auto phone function, select **Phone** on the home screen. While connected to Android Auto, calls are only made through Android Auto. If you want to make a call with *Bluetooth*® HandsFreeLink®, turn Android Auto OFF or detach the USB cable from your Android phone.

**Auto Pairing Connection** P. 322

When your Android phone is connected to Android Auto, it is not possible to use *Bluetooth*® Audio or *Bluetooth*® HandsFreeLink®. However, other previously paired phones can stream audio via *Bluetooth*® while Android Auto is connected.

Phone Setup P. 404

### Android Auto Menu

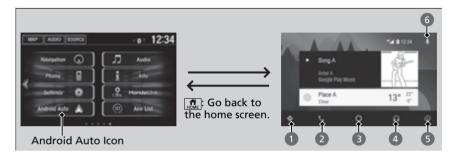

Maps (Navigation)

Display Google Maps and use the navigation function just as you would with your Android phone. When the vehicle is in motion, it is not possible to make keyboard entries. Stop the vehicle in a safe location to undertake a search or provide other inputs.

### Models with navigation system

Only one navigation system (pre-installed navigation or Android Auto) can give directions at a time. When you are using one system, directions to any prior destination set on the other system will be canceled, and the system you are currently using will direct you to your destination.

The audio/Information screen shows you turn-by-turn driving directions to your destination.

### Phone (Communication)

Make and receive phone calls as well as listen to voicemail.

### **3** Google Now (Home screen)

Display useful information organized by Android Auto into simple cards that appear just when they're needed.

### Music and audio

Play Google Play Music and music apps that are compatible with Android Auto. To switch between music apps, press this icon.

### **6** Go back to the home screen

### **6** Voice

Operate Android Auto with your voice.

#### 

For details on countries and regions where Android Auto is available, as well as information pertaining to function, refer to the Android Auto homepage.

Screens may differ depending on the version of the Android Auto app you are using.

# Android Auto Operating Requirements & Limitations

Android Auto requires a compatible Android phone with an active cellular connection and data plan. Your carrier's rate plans will apply.


Changes in operating systems, hardware, software, and other technology integral to providing Android Auto functionality, as well as new or revised governmental regulations, may result in a decrease or cessation of Android Auto functionality and services. Honda cannot and does not provide any warranty or guarantee of future Android Auto performance or functionality.

It is possible to use 3rd party apps if they are compatible with Android Auto. Refer to the Android Auto homepage for information on compatible apps.

# Auto Pairing Connection

When you connect an Android phone to the unit via USB, Android Auto is automatically initiated.

### **■** Enabling Android Auto



- **Enable once**: Allows only once. (Prompt shows again next time.)
- **Always Enable**: Allows anytime. (Prompt does not show again.)
- Cancel: Does not allow this consent.

You may change the consent settings under the **Smartphone** settings menu.

#### Enabling Android Auto

Only initialize Android Auto when you are safely parked. When Android Auto first detects your phone, you will need to set up your phone so that auto pairing is possible. Refer to the instruction manual that came with your phone.

You can use the method below to change Android Auto settings after you have completed the initial setup:

Select HOME→Settings→Smartphone→Android Auto.

#### Use of user and vehicle information

The use and handling of user and vehicle information transmitted to/from your phone by Android Auto is governed by Google's Privacy Policy.

## Operating Android Auto with Voice Recognition

Press and hold the talk button to operate Android Auto with your voice.



### ■Operating Android Auto with Voice Recognition

Below are examples of commands you can give with voice recognition:

- Reply to text.
- Call my wife.
- Navigate to Honda.
- Play my music.
- Send a text message to my wife.
- Call flower shop.

For more information, please refer to the Android Auto homepage.

You can also activate the voice recognition function by pressing the  $\boxed{\textcircled{4}}$  icon in the upper-right corner of the screen.

# **Legal Information on Apple CarPlay/Android Auto**

## OWNER'S MANUAL LICENSE/LIABILITY STATEMENTS

USE OF APPLE CARPLAY IS SUBJECT TO YOUR AGREEMENT TO THE CARPLAY TERMS OF USE, WHICH ARE INCLUDED AS PART OF THE APPLE IOS TERMS OF USE. IN SUMMARY, THE CARPLAY TERMS OF USE DISCLAIM APPLE AND ITS SERVICE PROVIDERS' LIABILITY IF THE SERVICES FAIL TO PERFORM CORRECTLY OR ARE DISCONTINUED, STRICTLY LIMIT APPLE AND ITS SERVICE PROVIDERS' OTHER LIABILITIES, DESCRIBE THE KINDS OF USER INFORMATION (INCLUDING, FOR EXAMPLE, VEHICLE LOCATION, VEHICLE SPEED, AND VEHICLE STATUS) BEING GATHERED AND STORED BY APPLE AND ITS SERVICE PROVIDERS, AND DISCLOSE CERTAIN POSSIBLE RISKS ASSOCIATED WITH THE USE OF CARPLAY, INCLUDING THE POTENTIAL FOR DRIVER DISTRACTION. SEE APPLE'S PRIVACY POLICY FOR DETAILS REGARDING APPLE'S USE AND HANDLING OF DATA UPLOADED BY CARPLAY.

USE OF ANDROID AUTO IS SUBJECT TO YOUR AGREEMENT TO THE ANDROID AUTO TERMS OF USE WHICH MUST BE AGREED TO WHEN THE ANDROID AUTO APPLICATION IS DOWNLOADED TO YOUR ANDROID PHONE. IN SUMMARY, THE ANDROID AUTO TERMS OF USE DISCLAIM GOOGLE AND ITS SERVICE PROVIDERS' LIABILITY IF THE SERVICES FAIL TO PERFORM CORRECTLY OR ARE DISCONTINUED, STRICTLY LIMIT GOOGLE AND ITS SERVICE PROVIDERS' OTHER LIABILITIES, DESCRIBE THE KINDS OF USER INFORMATION (INCLUDING, FOR EXAMPLE, VEHICLE LOCATION, VEHICLE SPEED, AND VEHICLE STATUS) BEING GATHERED AND STORED BY GOOGLE AND ITS SERVICE PROVIDERS, AND DISCLOSE CERTAIN POSSIBLE RISKS ASSOCIATED WITH THE USE OF ANDROID AUTO, INCLUDING THE POTENTIAL FOR DRIVER DISTRACTION. SEE GOOGLE'S PRIVACY POLICY FOR DETAILS REGARDING GOOGLE'S USE AND HANDLING OF DATA UPLOADED BY ANDROID AUTO.

## ■ DISCLAIMER OF WARRANTIES; LIMITATION ON LIABILITY

YOU EXPRESSLY ACKNOWLEDGE AND AGREE THAT USE OF APPLE CARPLAY OR ANDROID AUTO ("THE APPLICATIONS") IS AT YOUR SOLE RISK AND THAT THE ENTIRE RISK AS TO SATISFACTORY QUALITY, PERFORMANCE, ACCURACY AND EFFORT IS WITH YOU TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW. AND THAT THE APPLICATIONS AND INFORMATION ON THE APPLICATIONS IS PROVIDED "AS IS" AND "AS AVAILABLE," WITH ALL FAULTS AND WITHOUT WARRANTY OF ANY KIND, AND HONDA HEREBY DISCLAIMS ALL WARRANTIES AND CONDITIONS WITH RESPECT TO THE APPLICATIONS AND INFORMATION ON THE APPLICATIONS, EITHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES AND/OR CONDITIONS OF MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY, QUIET ENJOYMENT, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS. NO ORAL OR WRITTEN INFORMATION OR ADVICE GIVEN BY HONDA OR AN AUTHORIZED. REPRESENTATIVE SHALL CREATE A WARRANTY. AS EXAMPLES, AND WITHOUT LIMITATION, HONDA DISCLAIMS ANY WARRANTY REGARDING THE ACCURACY OF DATA PROVIDED BY THE APPLICATIONS, SUCH AS THE ACCURACY OF DIRECTIONS, ESTIMATED TRAVEL TIME, SPEED LIMITS, ROAD CONDITIONS, NEWS, WEATHER, TRAFFIC, OR OTHER CONTENT PROVIDED BY APPLE, GOOGLE, THEIR AFFILIATES. OR THIRD PARTY PROVIDERS: HONDA DOES NOT GUARANTEE AGAINST LOSS OF APPLICATION DATA. WHICH MAY BE LOST AT ANY TIME; HONDA DOES NOT GUARANTEE THAT THE APPLICATIONS OR ANY SERVICES PROVIDED THROUGH THEM WILL BE PROVIDED AT ALL TIMES OR THAT ANY OR ALL SERVICES WILL BE AVAILABLE AT ANY PARTICULAR TIME OR LOCATION. FOR EXAMPLE. SERVICES MAY BE SUSPENDED OR INTERRUPTED WITHOUT NOTICE FOR REPAIR. MAINTENANCE, SECURITY FIXES, UPDATES, ETC., SERVICES MAY BE UNAVAILABLE IN YOUR AREA OR LOCATION, ETC. IN ADDITION, YOU UNDERSTAND THAT CHANGES IN THIRD PARTY TECHNOLOGY OR GOVERNMENT REGULATION MAY RENDER THE SERVICES AND/OR APPLICATIONS OBSOLETE AND/OR UNUSABLE.

TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT SHALL HONDA OR ITS AFFILIATES BE LIABLE FOR PERSONAL INJURY, OR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES WHATSOEVER, INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, CORRUPTION OR LOSS OF DATA, FAILURE TO TRANSMIT OR RECEIVE ANY DATA, BUSINESS INTERRUPTION OR ANY OTHER COMMERCIAL DAMAGES OR LOSSES, ARISING OUT OF OR RELATED TO THE APPLICATIONS OR YOUR USE OF OR INABILITY TO USE THE APPLICATIONS OR INFORMATION ON THE APPLICATIONS, HOWEVER CAUSED, REGARDLESS OF THE THEORY OF LIABILITY (CONTRACT, TORT OR OTHERWISE) AND EVEN IF HONDA WERE ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. SOME STATES AND JURISDICTIONS DISALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR DAMAGES, SO THESE LIMITATIONS AND EXCLUSIONS MAY NOT APPLY TO YOU. IN NO EVENT SHALL HONDA'S TOTAL LIABILITY TO YOU FOR ALL DAMAGES (OTHER THAN AS MAY BE REQUIRED BY APPLICABLE LAW IN CASES INVOLVING PERSONAL INJURY) EXCEED THE AMOUNT OF FIVE DOLLARS (\$5.00). THE FOREGOING LIMITATIONS WILL APPLY EVEN IF THE ABOVE STATED REMEDY FAILS OF ITS ESSENTIAL PURPOSE.

# **About Open Source Licenses**

To see the open source license information, follow these steps.

- 1. Select A
- 2. Select Settings.
- 3. Select System.
- 4. Select the Others tab.
- 5. Select **Detail Info**.
- 6. Select About device.
- 7. Select Legal information.
- 8. Select Open source licenses.

### 

LICENCE: Copyright © 2001 Bob Trower, Trantor Standard Systems Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

# **Audio Error Messages**

# **CD Player\***

If a disc error occurs, you may see the following error messages.

Error Message	Cause	Solution	
Unplayable File	Track/file format not supported	<ul> <li>Current track/file will be skipped. The next supported track/file plays automatically.</li> </ul>	
Bad Disc Please check owners manual. Push Eject	Mechanical error	<ul> <li>Press the ▲ (eject) button and remove the disc, and check that the error message is cleared.</li> <li>Check that the disc is not damaged or deformed, and insert the disc again.</li> <li>Protecting CDs P. 335</li> <li>If the error message reappears, press the ▲ button, and pull out the disc.</li> </ul>	
Mecha Error			
Bad Disc Please check owners manual.	Servo error	<ul> <li>the disc.</li> <li>Insert a different disc.</li> <li>If the new disc plays, there is a problem with the first disc.</li> <li>If the error message repeats, or the disc cannot be removed, contact a dealer.</li> <li>Do not try to force the disc out of the player.</li> </ul>	
Check Disc	Disc error	• Check that the disc is not damaged or deformed.  ▶ Protecting CDs P. 335	
Heat Error	High temperature	• Turn the audio system off and allow the player to cool down until the error message is cleared.	

\* Not available on all models 327

# iPod/USB Flash Drive

If an error occurs while playing an iPod or USB flash drive, you may see the following error messages. If you cannot clear the error message, contact a dealer.

Error Message	Solution
USB Error	Appears when there is a problem with the USB adapter unit. Check if the device is compatible with the USB adapter unit.
A charging error has occurred with the connected USB device. When safe please check the compatibility of the device and USB cable and try again <sup>*1</sup> Bad USB Device <sup>*2</sup>	Appears when an incompatible device is connected. Disconnect the device. Then, turn the audio system off and turn it on again. Do not reconnect the device that caused the error.
Unsupported Version*1 Unsupported Ver*2	Appears when an unsupported iPod is connected. If it appears when a supported iPod is connected, update the iPod software to the newer version.
Connect Retry*1 Retry Connection*2	Appears when the system does not acknowledge the iPod. Reconnect the iPod.
Unplayable File	Appears when the files in the USB flash drive are DRM or an unsupported format. This error message appears for about 3 seconds, then plays the next song.

<sup>\*1:</sup>Display audio system \*2:Color audio system

Error Message	Solution
	iPod Appears when the iPod is empty.
No Data*1,*2 USB No Song*2 iPod No Song*2	USB flash drive Appears when the USB flash drive is empty or there are no MP3, WMA, or AAC files in the USB flash drive.
	iPod and USB flash drive Check that compatible files are stored on the device.
Unsupported	Appears when an unsupported device is connected. If it appears when a supported device is connected, reconnect the device.

<sup>\*1:</sup>Display audio system \*2:Color audio system

U.S. models

Models with display audio system

# Pandora®

If an error occurs while playing Pandora®, you may see the following error messages.

If you cannot clear the error message, contact a dealer.

Error Message	Solution	
No active station. Please select one.	Appears when there is no station list on the device. Use the	
Unable to rate this track. Please try again. You've reached your skip limit.	device to create a station.	
Oops! Your station list is full. Please delete an existing station in order to add more.	<ul> <li>Appears when the number of stations that can be created is exceeded. Follow the message.</li> </ul>	
Unable to create new station. Please try again.		
Unable to play Pandora. Please try again later.	Appears when the commanded operation is failed. Try again	
Unable to save bookmark. Try again later.	later.	
This Pandora station is currently not available. Please select another station.	• Appears when the station you selected is not available. Change a station, or try again later.	
Unable to play Pandora. When stopped, log-in to Pandora.	• Appears when you have not logged into Pandora®. Follow the message.	

Error Message	Solution	
Unable to connect to Pandora. When stopped, check your mobile phone.	Joidholl	
No Internet Connection. Pandora will automatically resume when the connection is restored.	Appears when failed to connect. Check your device and try again.	
Unable to play Pandora. Please try again later.		
Connect Retry		
Unable to play Pandora in this country.	<ul> <li>Appears when you travel outside the Pandora® service coverage areas. Pandora® can only be played in U.S. and will not work in other countries.</li> </ul>	
Unsupported	• Appears when the device is not supported. Use another device.	
Unsupported Version	Annoyer when Dandoya® version is not supported Hadata	
Pandora app version is unsupported. When stopped, please update the app.	<ul> <li>Appears when Pandora® version is not supported. Update Pandora® to the latest version.</li> </ul>	
Unable to connect to the device. Please make sure the phone's Bluetooth setting is ON and try again.	<ul> <li>Appears when Pandora® is unable to play music. Check the Bluetooth status on your device.</li> </ul>	
No Data	<ul> <li>Appears when no data is available with Pandora® activated.</li> <li>Reboot the app and reconnect the device.</li> </ul>	
A charging error has occurred with the connected USB device. When safe please check the compatibility of the device and USB cable and try again.	Appears when an incompatible device is connected. Disconnect the device. Then, turn the audio system off, and turn it again. Do not reconnect the device that caused the error.	

Models with display audio system

# **Android/Apps**

If an error occurs while using the audio system or apps, you may see the following error messages. If you cannot clear the error message, contact a dealer.

Error Message*1	Solution
Unfortunately, **** has stopped.	Error has occurred within app, select <b>OK</b> on the screen to close the app. Unless it is a fatal error, it would return to normal if you start up the app.  If it does not return to normal even after starting up the app, press and hold the (power) button to perform the forced reset. If it still does not get back to normal, you need <b>Factory Data Reset</b> .  Defaulting All the Settings P. 370
**** is not responding. Would you like to close it?	App is in a busy state.  Select <b>Wait</b> if you can wait for a response from app a little longer. If it does not respond even if you keep waiting, select <b>OK</b> to close the app and start it up. When it does not return to normal, press and hold the opening (power) button to perform the forced reset. You also need <b>Factory Data Reset</b> .  Defaulting All the Settings P. 370

<sup>\*1:\*\*\*\*</sup>part is variable characters, and will change depending upon where an error occurs.

# General Information on the Audio System

## SiriusXM® Radio Service\*

## Subscribing to SiriusXM® Radio

- **1.** You need your radio ID ready before registering for subscription. To see the ID in the display: Select **Channel 000**.
- 2. Have your radio ID and credit card number ready, and either call or visit the SiriusXM® website to subscribe.

## Receiving SiriusXM® Radio

Switch to the SiriusXM® mode by using the **SOURCE** button on the steering wheel, or through the audio/informations screen, and stay in this mode for about 30 minutes until the service is activated. Make sure your vehicle is in an open area with good reception.

## SiriusXM® Radio Display Messages

#### Check antenna:

The SiriusXM® antenna is disconnected or shorted. Contact a dealer.

## No Signal:

The signal is too weak in the current location.

#### **Channel Not Subscribed:**

You are not subscribed to the channel selected.

## **Subscription Updated:**

SiriusXM® radio is receiving information update from the network.

## **Replay Memory Almost Full:**

The recording memory is nearly full.

## **Replay Memory Full:**

The recording memory is full.

## Subscribing to SiriusXM® Radio

Contact Information for SiriusXM® Radio:

- U.S.: SiriusXM® Radio at www.siriusxm.com/ subscribenow, or 1-866-635-2349
- Canada: SiriusXM® Canada at www.siriusxm.ca/ subscribe-now, or 1-877-209-0079

### ■ Receiving SiriusXM® Radio

The SiriusXM® satellites are in orbit over the equator; therefore, objects south of the vehicle may cause satellite reception interruptions. Satellite signals are more likely to be blocked by tall buildings and mountains the farther north you travel from the equator.

You may experience reception problems under the following circumstances:

- In a location with an obstruction to the south of your vehicle.
- In tunnels
- On the lower level of a multi-tiered road
- Large items carried on the roof rack

\* Not available on all models

## **Recommended CDs\***

- Use only high-quality CD-R or CD-RW discs labeled for audio use.
- Use only CD-R or CD-RW discs on which the recordings are closed.
- Play only standard round-shaped CDs.

The CD packages or jackets should have one of these marks.











## CDs with MP3, WMA, or AAC files

- Some software files may not allow for audio play or text data display.
- Some versions of MP3, WMA, or AAC formats may be unsupported.

#### ■ Recommended CDs \*

A Dual-disc cannot play on this audio unit. If recorded under certain conditions, a CD-R or CD-RW may not play either.

## **■** Protecting CDs


Follow these precautions when handling or storing CDs:

- Store a CD in its case when it is not being played.
- When wiping a CD, use a soft clean cloth from the center to the outside edge.
- Handle a CD by its edge. Never touch either surface.
- Never insert foreign objects into the CD player.
- Keep CDs out of direct sunlight and extreme heat.
- Do not place stabilizer rings or labels on the CD.
- Avoid fingerprints, liquids, and felt-tip pens on the CD.

### ■ Protecting CDs

## NOTICE

Do not insert a damaged CD. It may be stuck inside and damage the audio unit.



# Compatible iPod, iPhone, and USB Flash Drives

## ■ iPod and iPhone Model Compatibility

#### Model

iPod (5th generation)

iPod classic 80GB/160GB (launch in 2007)

iPod classic 120GB (launch in 2008)

iPod classic 160GB (launch in 2009)

iPod nano (1st to 7th generation) released between 2005 and 2012

iPod touch (1st to 5th generation) released between 2007 and 2012

iPhone 3G/iPhone 3GS/iPhone 4/iPhone 4S/iPhone 5s\*1/iPhone 5c\*1/iPhone 6s\*1/iPhone 6s\*1/iP

### USB Flash Drives

- A USB flash drive of 256 MB or higher is recommended.
- Some digital audio players may not be compatible.
- Some USB flash drives (e.g., a device with security lockout) may not work.
- Some software files may not allow for audio play or text data display.
- Some versions of MP3, WMA, or AAC formats may be unsupported.

#### 

This system may not work with all software versions of these devices.

### **≥** USB Flash Drives

Files on the USB flash drive are played in their stored order. This order may be different from the order displayed on your PC or device.

<sup>\*1:</sup>Display audio system

# **Honda App License Agreement**

## ■ END USER LICENSE AGREEMENT

PLEASE CAREFULLY READ THIS END USER LICENSE AGREEMENT (THIS "AGREEMENT") WHICH GOVERNS YOUR USE OF THE SOFTWARE INSTALLED ON YOUR HONDA OR ACURA VEHICLE (YOUR "VEHICLE") AS WELL AS THE APPLICATIONS, SERVICES, FUNCTIONS, AND CONTENT PROVIDED THROUGH THE SOFTWARE (COLLECTIVELY, THE "SERVICES"). YOUR USE OF THE SOFTWARE OR SERVICES WILL SERVE AS YOUR CONSENT TO THE TERMS OF THIS AGREEMENT. THE SOFTWARE IS OWNED (OR LICENSED), PROVIDED, AND/OR OPERATED BY AMERICAN HONDA MOTOR CO. INC., ("HONDA," "US," "WE," OR "OUR"), WITH ITS BUSINESS ADDRESS AT 1919 TORRANCE BLVD., TORRANCE, CA 90501. REFERENCE TO "HONDA" IN THIS AGREEMENT INCLUDES HONDA'S PARENT COMPANY AND ITS AFFILIATES AND DESIGNATED AGENTS. THE SERVICES ARE OWNED (OR LICENSED), PROVIDED, AND/OR OPERATED BY HONDA OR A THIRD-PARTY SERVICE PROVIDER (A "PROVIDER"). REFERENCE TO A "PROVIDER" IN THIS AGREEMENT INCLUDES SUCH PROVIDER'S PARENT COMPANY, AFFILIATES, AND DESIGNATED AGENTS.

**A. Description of the Software.** The SOFTWARE includes the software, firmware and the like, installed and executing on your VEHICLE during manufacture, and thereafter updated from time to time by HONDA, you or an authorized HONDA dealer (a "DEALER"). The SOFTWARE allows you to access and use a variety of SERVICES, including but not limited to: (a) HONDA applications, services, and content provided through the SOFTWARE (together, "HONDA SERVICES"); and (b) PROVIDER applications, services, and content provided through the SOFTWARE (together, "PROVIDER SERVICES"), each of which may provide access to various information, media, content, and services.

## **B. SOFTWARE Licensing and Intellectual Property.**

- **1. SOFTWARE.** This AGREEMENT grants you a non-exclusive, limited, and revocable license to use the SOFTWARE and SERVICES solely (a) as installed on your VEHICLE by HONDA, (b) as updated on your Vehicle by HONDA, you (but only as and when directed by HONDA), or a DEALER and (c) as permitted under the terms of this AGREEMENT.
- **2. HONDA Services.** The SOFTWARE may provide you with access to various HONDA SERVICES. Installation, activation, or use of HONDA SERVICES may require your consent to additional terms, conditions, and privacy policies applicable to those HONDA SERVICES (the "HONDA TERMS"). You acknowledge and agree that any collection, use, sharing of data generated by your VEHICLE or your use of your VEHICLE, and your use of the HONDA SERVICES shall be subject to this AGREEMENT and any additional HONDA TERMS that may be specifically applicable to such HONDA SERVICES or data generation. The HONDA SERVICES may collect, use, and share such data while you are using the SOFTWARE.

- **3. Open-Source Software.** The SOFTWARE and SERVICES may incorporate software licensed to HONDA under free or open-source licenses which govern HONDA's distribution and your use of such software. HONDA and the third-party authors, licensors, and distributors of such software disclaim all warranties and all liability arising from any and all use or distribution of the software. To the extent such software is provided under terms that differ from the applicable free or open-source licenses, those terms are offered by HONDA alone. Additional information regarding free and open-source software incorporated in the SOFTWARE and SERVICES is available in this manual or within the SOFTWARE.
- **4. Provider Services.** The SOFTWARE may provide you with access to various PROVIDER SERVICES. Installation or use of such PROVIDER SERVICES may require your consent to additional terms, conditions, and privacy policies of the applicable PROVIDER (the "PROVIDER TERMS"). This AGREEMENT restricts the manner in which you can install and use PROVIDER SERVICES but does not grant you a license or permission to use such PROVIDER SERVICES. Your permission to use PROVIDER SERVICES is limited and subject to any license grants, conditions, and limitations included in the PROVIDER TERMS. You acknowledge that any collection, use, sharing of your information, targeted advertising practices by PROVIDERS, and your use of the PROVIDER SERVICES shall be subject to both this AGREEMENT and any applicable PROVIDER TERMS. The PROVIDER SERVICES may collect, use, and share such information while you are using the SOFTWARE.

#### 5. License Limitations and Restrictions on Use.

(a) <u>Limited License</u>. You understand and agree that the SOFTWARE and SERVICES are licensed, not sold, to you solely for use in accordance with this AGREEMENT and any applicable PROVIDER TERMS, and any documentation for the VEHICLE made available to you by HONDA (any "DOCUMENTATION"). HONDA and its licensors reserve all rights in the SOFTWARE and HONDA SERVICES not expressly granted to you under this AGREEMENT. PROVIDERS and their licensors reserve all rights in the PROVIDER SERVICES not expressly granted to you under the applicable PROVIDER TERMS.

- (b) <u>Restrictions on Use.</u> The licenses granted under this AGREEMENT do not permit you to use the SOFTWARE or SERVICES on a device other than your VEHICLE. As a condition of using the SOFTWARE and SERVICES, you agree that you may not and will not:
  - (1) copy, download, distribute, modify, publish, sell, rent, lease, lend, license, sublicense, reuse, or create derivative works of the SOFTWARE or SERVICES or any of the content or other material within the SOFTWARE or SERVICES, including without limitation, HONDA or PROVIDER names, logos, or any other trademarks of HONDA or PROVIDERS or used in association with the SOFTWARE or any SERVICES, except as required to use the SOFTWARE or SERVICES in accordance with this AGREEMENT, any applicable PROVIDER TERMS, and the DOCUMENTATION;
  - (2) access or use the SOFTWARE or SERVICES in any manner intended to damage or impair the operation of the SOFTWARE or SERVICES or interfere with anyone else's use and enjoyment of the SOFTWARE or SERVICES;
  - (3) access or attempt to access any system or server on which the SOFTWARE or SERVICES is hosted or modify or alter the SOFTWARE or SERVICES in any way;
  - (4) use the SOFTWARE or SERVICES for any unlawful purpose, or in violation of any third party rights;
  - (5) use the SOFTWARE or SERVICES in violation of any applicable traffic regulations, rules or laws, including but not limited to any driver distraction laws, rules or regulations;
  - (6) violate the terms of this AGREEMENT, any HONDA TERMS, any PROVIDER TERMS or other applicable third-party terms, conditions, and privacy policies; or
  - (7) reverse engineer, decompile, disassemble, attempt to derive the source code of, nor permit others to reverse engineer, decompile, or disassemble, or attempt to derive the source code of the SOFTWARE or SERVICES, except and only to the extent that such activity is expressly permitted (a) by applicable law notwithstanding this limitation or (b) the terms of applicable free or opensource software licenses.
- **6. Intellectual Property Rights.** All title and intellectual property rights in and to the SOFTWARE and SERVICES, the accompanying DOCUMENTATION, and all copies of the SOFTWARE or SERVICES are owned by HONDA, PROVIDERS, or their suppliers or licensors. This AGREEMENT does not grant you any rights in connection with any trademarks or service marks of HONDA, PROVIDERS, or their licensors, affiliates, or suppliers.

**7. Export Restrictions:** You acknowledge that the SOFTWARE and SERVICES are subject to U.S., European Union, and other export jurisdictions. You agree to comply with all applicable international and national laws that apply to the SOFTWARE and SERVICES, including the U.S. Export Administration Regulations, as well as end-user, end-use, and destination restrictions issued by the U.S. and other governments.

## C. SOFTWARE Operation

- **1.** HONDA reserves the right to suspend or terminate your access to and use of the SOFTWARE or SERVICES if you are found to be in violation of this AGREEMENT or as reasonably deemed necessary by HONDA.
- 2. <u>Eligibility/Registration/Activation</u>. The SOFTWARE is intended for and available to individuals who (a) are of legal age of majority in their jurisdiction of residence (and at least 18 years of age), or are younger than 18 years of age and possess a valid driver's license issued by their jurisdiction of residence, and (b) own or have permissive access to a compatible VEHICLE. We do not knowingly collect any information, including personal information, from children under 13. If we learn or are notified that we have collected personal information of a child under 13, we will immediately take steps to delete such information.
- 3. <u>Use of PROVIDER SERVICES through the SOFTWARE.</u> Certain PROVIDER SERVICES made available through the SOFTWARE may require that you register or otherwise have an account with the PROVIDER and agree to PROVIDER TERMS. Any use of any of such PROVIDER SERVICES within the SOFTWARE is subject to this AGREEMENT and the applicable PROVIDER TERMS. HONDA does not exercise control over such PROVIDER SERVICES and is not responsible or liable for the availability, security, or content of such PROVIDER SERVICES, and the inclusion of any PROVIDER SERVICES does not imply a referral from, the approval of, or the endorsement by HONDA of such PROVIDER SERVICES. HONDA is not responsible or liable, directly or indirectly, for any damage relating to or resulting from your use of the PROVIDER SERVICES.
- **4.** <u>Links to Third Party Sites:</u> The SOFTWARE may provide you with the ability to access third-party sites and content through the use of the SOFTWARE or SERVICES. The third-party sites and content are not under the control of HONDA. HONDA is not responsible or liable, directly or indirectly, for such third-party websites and their content or for any damage relating to or resulting from your access or use of such websites and content.

- **5.** <u>Unauthorized Use and Abuse.</u> You are responsible for ensuring your (and any authorized third parties') use of the SOFTWARE and SERVICES remains in compliance with this AGREEMENT and all other applicable HONDA TERMS and PROVIDER TERMS. You acknowledge and agree that any use of the SOFTWARE or SERVICES occurring through your VEHICLE will be deemed your actions and that HONDA and PROVIDERS may rely upon such actions. You agree to immediately notify us if you suspect fraudulent or abusive activity involving the SOFTWARE or SERVICES. If you so notify us or if we otherwise suspect fraudulent or abusive activity, you agree to cooperate with us in any fraud investigation and to use any fraud prevention measures we prescribe. Your failure to immediately notify us or cooperate to use such measures will result in your liability for all fraudulent usage or abusive activity associated with your VEHICLE.
- **6.** <u>SOFTWARE Updates.</u> The SOFTWARE and SERVICES may be updated when your VEHICLE is serviced by a DEALER or remotely, over-the-air, by HONDA from time to time; such updates may occur with or without further notice or your future consent. The SOFTWARE may be updated at HONDA's discretion and for any purpose including, without limitation, to patch or otherwise improve the SOFTWARE or SERVICES functionality, security, or stability. All updates to the SOFTWARE and SERVICES are subject to this AGREEMENT and any other applicable HONDA TERMS and PROVIDER TERMS.
- **7.** <u>Uninstalling, Removing, and Replacing the SOFTWARE.</u> Replacing SOFTWARE or HONDA SERVICES with software or firmware not provided and installed by HONDA or a DEALER will render all representations and warranties for the SOFTWARE, HONDA SERVICES, and VEHICLE functionality reliant upon the SOFTWARE or HONDA SERVICES null and void.

## **D. SOFTWARE Operational Notices and Warnings**

1. Vehicle Geolocation Information. You acknowledge that your VEHICLE may be equipped with certain traffic and map features. The traffic feature will automatically collect and transmit, through GPS technology, your Vehicle's current location (longitude and latitude), travel direction and speed ("VEHICLE GEOLOCATION INFORMATION") to HONDA and PROVIDERS. The VEHICLE GEOLOCATION INFORMATION is used by HONDA and PROVIDERS to provide traffic and navigation-related information to you, but may also be used to provide other SERVICES or offers to you. HONDA will not use such VEHICLE GEOLOCATION INFORMATION for its own marketing efforts, or provide such information to unaffiliated third parties for their own purposes, without your express consent.

- 2. Potential Map Inaccuracy and Route Safety. Maps used by this system may be inaccurate because of changes in roads, traffic controls, routing, or driving conditions. Always use good judgment and common sense when following suggested routes. Do not follow the route suggestions if doing so would result in an unsafe or illegal driving maneuver, if you would be placed in an unsafe situation, or if you would be directed into an area that you consider unsafe. Do not rely on any navigation features included in the system to route you to emergency services. Not all emergency services such as police, fire stations, hospitals, or clinics are likely to be contained in the map database for such navigation features. Ask local authorities or an emergency services operator for such locations and routes. The driver is ultimately responsible for the safe operation of the vehicle and therefore, must evaluate whether it is safe to follow the suggested directions. Any navigation features are provided only as an aid. Make your driving decisions based on your observations of local conditions and existing traffic regulations. Navigation features are not a substitute for your personal judgment. Any route suggestions made by the SOFTWARE or SERVICES should never replace any local traffic regulations or your personal judgment or knowledge of safe driving practices.
- **3.** <u>Speech Recognition</u>: You acknowledge and understand that HONDA and PROVIDERS may record, retain, and use voices commands when you use the speech recognition components of the SOFTWARE or SERVICES. You and all VEHICLE operators and passengers (a) consent to the recording and retention of voice commands in support of providing speech recognition components and (b) release HONDA and PROVIDERS from all claims, liabilities, and losses that may result from any use of such recorded voice commands. Recognition errors are inherent in speech recognition. It is your responsibility to monitor any speech recognition functions included in the system and address any errors. Neither HONDA nor PROVIDERS will be liable for any damages arising out of errors in the speech recognition process.
- **4.** <u>Distraction Hazards.</u> Navigation features may require manual (non-verbal) input or setup. Attempting to perform such set-up or insert data while driving can seriously distract your attention and could cause a crash or other serious consequences; the ability to undertake such interactions may also be limited by state or local law, which laws you are responsible to know and follow. Even occasional short scans of the screen may be hazardous if your attention has been diverted away from your driving at a critical time. Pull over and stop the vehicle in a safe and legal manner before attempting to access a function of the system requiring prolonged attention. Do not raise the volume excessively. Keep the volume at a level where you can still hear outside traffic and emergency signals while driving. Driving while unable to hear these sounds could result in a crash.

## E. Information Collection and Storage

- 1. Information Collection, Use, Transmission and Storage of Data. Consent to Use of Data: You agree that HONDA and PROVIDERS may collect and use your information gathered in any manner as part of product support services related to the SOFTWARE or related services. HONDA may share such information with third parties, including, without limitation, PROVIDERS, third party software and services suppliers, their affiliates and/or their designated agents, solely to improve their products or to provide services or technologies to you. HONDA, third party software and systems suppliers, their affiliates and/or their designated agent may disclose this information to others, but not in a form that personally identifies you.
- **2.** <u>Information Storage.</u> Depending on the type of multimedia system you have in your VEHICLE, certain information may be stored for ease of use of the SOFTWARE including, without limitation, search history, location history in certain applications, previous and saved destinations, map locations within certain applications, and device numbers and contact information.
- (a) <u>Vehicle Health Information</u>. Your VEHICLE may remotely transmit information regarding the status and health of your VEHICLE ("VEHICLE INFORMATION") to HONDA without notification to you. VEHICLE INFORMATION may contain VEHICLE maintenance and malfunction status that is derived from VEHICLE diagnostic data and includes, but is not limited to, status of powered doors and windows, battery life data, battery charging data, VEHICLE speed, coolant temperature, air compressor revolution, output power, warning codes, diagnostic trouble codes, fuel injection volume, and engine rotations per minute. VEHICLE HEALTH INFORMATION may be used by HONDA for research and development, to deliver HONDA SERVICES and information to you, and to contact you, and is retained only for a period of time necessary to fulfill these goals.
- (b) <u>VEHICLE Geolocation Data (non-navigation/map based).</u> If you opt-in to geolocation-based SERVICES, your vehicle's geolocation data (latitude and longitude) will be automatically sent from your VEHICLE to HONDA and PROVIDERS.
- (c) You understand that the inputting or uploading of information to your VEHICLE's multimedia system or the SOFTWARE or SERVICES is at your own risk and that HONDA is not responsible for unauthorized access to or use of any personal or other information. All information uploaded to the SOFTWARE and SERVICES may be stored on your VEHICLES's multimedia system and you understand that the security and safety of your VEHICLE's multimedia system is your sole responsibility.

F. NO WARRANTY. You understand and agree that your use of the SOFTWARE and SERVICES are solely at your own risk and that you will be solely responsible for any damage to your VEHICLE's multimedia system or any other equipment or any loss of data that may result from your use of the SOFTWARE or SERVICES. THE SOFTWARE AND SERVICES ARE PROVIDED ON AN "AS IS" AND "AS AVAILABLE" BASIS WITHOUT ANY WARRANTY OF ANY KIND. EXPRESSED. IMPLIED OR STATUTORY. WE SPECIFICALLY DISCLAIM ANY IMPLIED WARRANTIES. OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT. HONDA makes no warranties that the SOFTWARE or SERVICES will meet your requirements, or that the SOFTWARE or SERVICES will be uninterrupted, timely, secure, noninfringing or error free. You understand and agree that you are responsible for any and all charges, costs or expenses associated with your use of the SOFTWARE or SERVICES. Advice or information, whether oral or written, obtained by you from us or through the SOFTWARE or SERVICES are provided for informational purposes only and will not create any warranty not expressly made herein. You should not rely on any such information or advice. We assume no liability or responsibility for any errors or omissions in the SOFTWARE or SERVICES. We do not make any warranty or representation that your use of the material displayed on, or obtained through, the SOFTWARE or SERVICES is non-infringing of any rights of any third party. Any decision or action taken by you on the basis of information or content provided via the application is at your sole discretion and risk. HONDA and PROVIDERS are not responsible or liable for any such decision, or for the accuracy, completeness, usefulness, or availability of any content or information displayed, transmitted, or otherwise made available via the SOFTWARE or SERVICES. To the extent jurisdictions do not allow the exclusion of certain warranties, some of the above exclusions may not apply to you.

## **G. LIMITATIONS ON LIABILITY.** You and HONDA are each waiving important rights.

1. <u>Limitations on YOUR liability.</u> HONDA cannot recover from you any consequential, indirect, incidental, or special damages, or attorney's fees in connection with your use of the SOFTWARE or HONDA SERVICES. HONDA WAIVES TO THE FULLEST EXTENT ALLOWED BY LAW ANY CLAIM FOR DAMAGES OTHER THAN DIRECT, COMPENSATORY DAMAGES AS LIMITED IN THIS AGREEMENT.

- 2. Limitation on HONDA and PROVIDER liability. Neither HONDA nor PROVIDERS will be liable to you or any other party for consequential, indirect, incidental, special, or punitive damages (including without limitation lost profits) in connection with your use of the SOFTWARE or SERVICES, even if HONDA or PROVIDERS are aware of the possibility of such damages. These limitations apply to all claims, including, without limitation, claims in contract and tort (such as negligence, product liability and strict liability). To the extent that a jurisdiction does not permit the exclusion or limitation of liability as set forth herein our liability is limited to the maximum extent permitted by law in such states. If HONDA or PROVIDERS are found liable to you for any reason, you agree that the aggregate liability of all these parties to you for any claim is limited to ten U.S. dollars (US \$10.00). Neither HONDA nor any PROVIDER would have agreed to provide the SOFTWARE or SERVICES to you if you did not agree to this limitation. This amount is the sole and exclusive liability of HONDA and PROVIDERS to you, and is payable as liquidated damages and not as a penalty. Except where prohibited by law, you may not bring any claim against HONDA or any third-party beneficiary more than two (2) years after the claim arises. We do not have any liability for SOFTWARE or SERVICES interruptions of any length.
- (a) Release of HONDA and PROVIDERS For yourself and anyone else claiming under you, you agree to release and discharge HONDA, PROVIDERS, their respective officers, directors, and employees, and each third-party beneficiary from all claims, liabilities and losses in connection with the SOFTWARE or SERVICES, including, but not limited to claims for personal injury or property damage arising from the total or partial failure of performance of the SOFTWARE or SERVICES, even if caused by or based upon the negligence, gross negligence, strict products liability, Deceptive Trade Practices Act violations, bad faith, or breach of warranty of us or the malfunction of the SOFTWARE or SOFTWARE SERVICES. YOU AGREE TO WAIVE TO THE FULLEST EXTENT ALLOWED BY LAW, ANY CLAIM FOR DAMAGES OTHER THAN DIRECT, COMPENSATORY DAMAGES AS LIMITED IN THIS AGREEMENT. YOU HEREBY RELEASE AND DISCHARGE HONDA AND ITS LICENSORS AND CONTRACTORS (INCLUDING ANY THIRD PARTIES PROVIDING ALL OR PART OF THE SOFTWARE OR SERVICES) FROM AND AGAINST ANY CLAIMS, DAMAGES, EXPENSES AND LIABILITY ARISING FROM OR RELATED TO ANY INJURIES, DAMAGES, OR LOSSES TO ANY PERSON (INCLUDING DEATH) OR PROPERTY OF ANY KIND RESULTING IN WHOLE OR PART, DIRECTLY OR INDIRECTLY, FROM YOUR USE OF THE SOFTWARE OR SERVICES.
- **H. Survival.** You agree that the limitations of liability and indemnities in this AGREEMENT will survive even after the AGREEMENT has ended. These limitations of liability apply not only to you, but to anyone using the SOFTWARE or SERVICES via your VEHICLE, to anyone making a claim on your behalf, and to any claims made by your family, employees, customers, or others arising out of or relating to your VEHICLE, the SOFTWARE, or SERVICES.

- I. Availability/Interruption. The SOFTWARE and certain SERVICES are made available through your VEHICLE's compatible multimedia system when the VEHICLE is turned on. Certain SERVICES may be available only through your compatible mobile device when it is within the operating range of the VEHICLE and a wireless carrier. The availability of the SOFTWARE and SERVICES may be subject to transmission limitation or interruption, including but not limited to technical obsolesce or sunsetting of the hardware, software or firmware, inside of or external to the Vehicle, required for data transmission or receipt. HONDA does not guarantee that the SOFTWARE, SERVICES, or any portion thereof will be available at all times or in all areas. You acknowledge and agree that HONDA is not responsible for performance degradation, interruption or delays. You acknowledge that HONDA shall not be liable to you if the SOFTWARE or SERVICES in a given location are not available. If the SOFTWARE or SERVICES are not available within your intended location, you agree that your sole remedy shall be to cease using the SOFTWARE and SERVICES.
- **J. PRODUCT SUPPORT:** Product support for the SOFTWARE is provided by HONDA. For product support, please refer to HONDA instructions provided in the DOCUMENTATION. Should you have any questions concerning this AGREEMENT, or if you desire to contact HONDA for any other reason, please refer to the HONDA contact information provided in the DOCUMENTATION.

### K. Termination and Transfer.

- **1. Termination.** This AGREEMENT is effective until terminated by you or US. WE may terminate this AGREEMENT for any or no reason, and with or without notice to you. Your rights under this AGREEMENT will terminate automatically without notice from US if you fail to comply with any term of this AGREEMENT. Upon termination of this AGREEMENT, you shall cease all use of the SOFTWARE and SERVICES.
- **2. Transfer:** You may permanently transfer your rights under this AGREEMENT only as part of a sale or transfer of the VEHICLE, provided you retain no copies, you transfer all of the SOFTWARE and HONDA SERVICES (including all component parts, the media and printed materials, and any upgrades), and the recipient agrees to the terms of this AGREEMENT. You agree to notify HONDA upon the sale or transfer of the VEHICLE. To contact HONDA, please refer to the HONDA contact information provided in the DOCUMENTATION.

L. Changes to the SOFTWARE or SERVICES. WE may change, modify, or update the SOFTWARE or SERVICES from time to time. Unless explicitly stated otherwise, any new features or services that augment or enhance the SOFTWARE or SERVICES in the future shall respectively be considered part of the SOFTWARE or SERVICES and subject to this AGREEMENT. WE reserve the right at any time and from time to time to interrupt, restrict, modify, suspend, discontinue, temporarily or permanently, the SOFTWARE or SERVICES (or any portion thereof), with or without notice to you, and you agree that HONDA shall not be liable to you or to any third party for any modification, suspension or discontinuance of the SOFTWARE or SERVICES.

#### M. ARBITRATION:

PLEASE READ THIS ARBITRATION PROVISION CAREFULLY TO UNDERSTAND YOUR RIGHTS. YOU AGREE THAT ANY CLAIM THAT YOU MAY HAVE IN THE FUTURE MUST BE RESOLVED THROUGH BINDING ARBITRATION. YOU WAIVE THE RIGHT TO HAVE YOUR DISPUTE HEARD IN COURT AND WAIVE THE RIGHT TO BRING CLASS CLAIMS. YOU UNDERSTAND THAT DISCOVERY AND APPEAL RIGHTS ARE MORE LIMITED IN ARBITRATION.

Arbitration is a method of resolving a claim, dispute or controversy without filing a lawsuit. By agreeing to arbitrate, the right to go to court is waived and instead claims, disputes or controversies are submitted to binding arbitration. This provision sets forth the terms and conditions of our agreement. YOU and HONDA agree and acknowledge that this Agreement affects interstate commerce and the Federal Arbitration Act ("FAA") applies. By using the Software, Vehicle, or Services, YOU elect to have disputes resolved by arbitration. YOU, HONDA or any involved third party may pursue a Claim. "Claim" means any dispute between YOU, HONDA, or any involved third party relating to your use of the Software, the Vehicle, or the Services, this Agreement, or our relationship, including any representations, omissions or warranties. "Claim" does not include personal injury or wrongful death claims. YOU or HONDA may seek remedies in small claims court or provisional judicial remedies without arbitrating. In addition, notwithstanding anything herein to the contrary, YOU or HONDA may seek equitable relief in a court of competent jurisdiction.

YOU or HONDA may select arbitration with American Arbitration Association, JAMS or National Arbitration and Mediation. Contact these sponsors for their rules. The hearing will be in the federal district where YOU reside. If agreed, it may be by telephone or written submissions. Filing and arbitrator fees to be paid per the sponsor rules. You may contact the sponsor for a fee waiver. If no fee waivers, HONDA will pay filing and arbitrator fees up to \$5,000, unless law requires more. Each party is responsible for other fees. Arbitrator may award costs or fees to prevailing party, if permitted by law. HONDA will not seek fees, unless the claims are frivolous.

Arbitrator shall be an attorney or current or retired judge familiar with automotive or consumer software. The arbitrator shall follow substantive law, statute of limitations and decide all issues relating to the interpretation, construction, enforceability and applicability of this provision. The arbitrator may order relief permitted by law. This provision is governed and enforceable by the FAA. An award shall include a written opinion and be final, subject to appeal by the FAA.

This provision survives termination of this Agreement or relationship, bankruptcy, assignment or transfer. If part of this provision is unenforceable, the remainder remains in effect. If unenforceability allows arbitration as a class action, then this provision is entirely unenforceable. YOU may opt out within 30 days of your initial use of the Software by sending a signed, written notice to HONDA at Honda Financial Services, P.O. Box 165007, Irving, TX 75016. HONDA reserves the right to make changes to this provision after providing written notice and an opportunity to opt out.

**N. Miscellaneous:** You may not assign this AGREEMENT without HONDA's prior written consent. This AGREEMENT and any additional HONDA TERMS and PROVIDER TERMS represents the entire agreement between you and US. HONDA may amend the terms of this AGREEMENT by providing you with notices of such updated terms. If you do not consent to be bound by the updated terms, your sole remedy will be to cease using the SOFTWARE and SERVICES. If any part of this AGREEMENT is found invalid, void, or unenforceable, the balance of the AGREEMENT will remain valid and enforceable according to its terms. To the fullest extent permitted by law, and except as explicitly provided otherwise, this AGREEMENT and any disputes arising out of or relating to it will be governed by the laws of the State of California, except that California laws concerning choice of law or conflicts shall not apply if they would cause the substantive law of another jurisdiction to apply. Notwithstanding the foregoing, Section M shall be governed by the Federal Arbitration Act and the laws of the State of California, as applicable, as set forth therein. The failure to enforce any term of this AGREEMENT on one occasion shall not prevent enforcement on any other occasion or the enforcement of any other term. Headings and captions shall not be considered included for purposes of interpretation or application hereof, but are for convenience only.


## **Customized Features**

### Models with color audio system

Use the audio/information screen to customize certain features.

#### **■** How to customize

While the vehicle is at a complete stop with the ignition switch in ON III, press the **MENU/CLOCK** button, then select **Settings**. To customize the phone settings, press the **\(\mathbb{L}\)** button, then select **Phone Setup**.

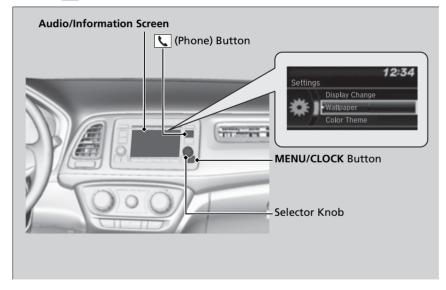

### ∑Customized Features

When you customize settings:

- Make sure that the vehicle is at a complete stop.
- Shift to P.

#### 

These indications are used to show how to operate the selector knob.

Rotate 😙 to select.


Press 💍 to enter.


**■ List of customizable options** P. 353


Continued 349

## **■** Customization flow

Press the MENU/CLOCK button.

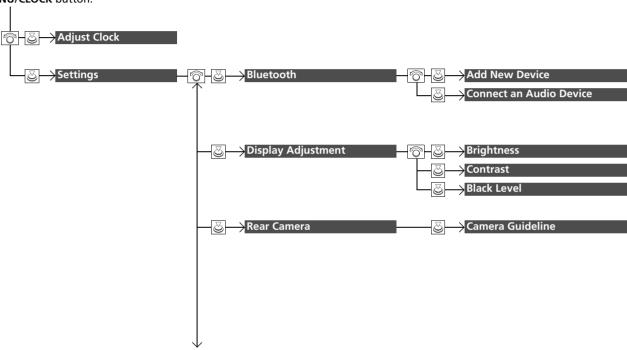

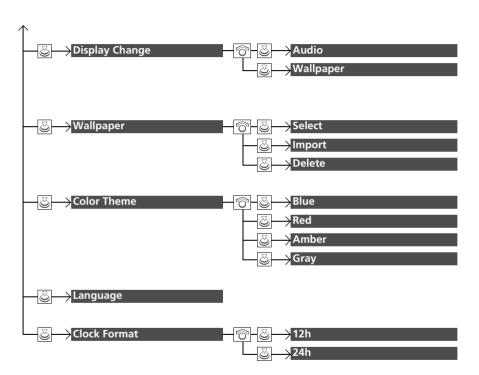

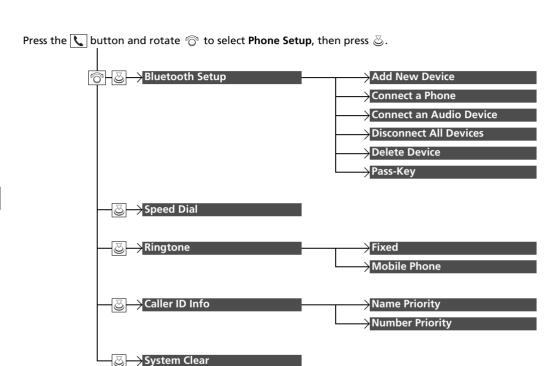

## ■ List of customizable options

Setup Group	Custo	omizable Features	Description	Selectable Settings
Adjust Clock			Adjusts the clock. <b>Discrete</b> Clock P. 138	_
	Bluetooth	Add New Device	Pairs a new phone to HFL, edits and deletes a paired phone, and create a code for a paired phone.  Phone Setup P. 380	_
		Connect an Audio Device	Connects, disconnects or pairs a <i>Bluetooth</i> ® Audio device to HFL.	_
Settings	Display Adjustment	Brightness	Changes the brightness of the audio/ information screen.	_
		Contrast	Changes the contrast of the audio/ information screen.	_
		Black Level	Changes the black level of the audio/ information screen.	_
	Rear Camera	Camera Guideline	Selects whether the guidelines come on the audio/information screen.	On*1/Off

<sup>\*1:</sup>Default Setting

Setup Group	Cust	comizable Features	Description	Selectable Settings
	Display Change		Changes the display type.	Audio*1/Wallpaper
Settings	Wallpaper	Select	Changes the wallpaper type.	Clock*1/Image1/Image2/ Image3
		Import	Imports an image file for a new wallpaper.  ☑ Wallpaper Setup P. 241	_
		Delete	Deletes an image file for a wallpaper.	lmage1*1/lmage2/lmage3
	Color Theme		Changes the background color of the audio/ information screen.	Blue*1/Red/Amber/Gray
	Language		Changes the display language.	English*1/Français/Español
	Clock Format		Selects the digital clock display from 12H to 24H.	12h*1/24h

<sup>\*1:</sup>Default Setting

Setup Group	Customizable Features		Description	Selectable Settings
	Bluetooth Setup	Add New Device	Pairs a new phone to HFL.  → Phone Setup P. 380	_
		Connect a Phone	Pairs a new phone or connects a paired phone to HFL.  Phone Setup P. 380	-
		Connect an Audio Device	Connects a <i>Bluetooth</i> ® Audio device to HFL.	_
D.		Disconnect All Devices	Disconnects a paired phone from HFL.	_
Phone Setup		Delete Device	Deletes a paired phone.	_
		Pass-Key	Inputs and changes a code for a paired phone.	_
	Speed Dial		Edits, adds or deletes a speed dial entry.  Speed Dial P. 387	-
	Ringtone		Selects the ring tone.	Fixed*1/Mobile Phone
	Caller ID Info		Prioritizes the caller's name or phone number as the caller ID.	Name Priority*1/Number Priority
	System Clear	r	Cancels/Resets all customized items in the <b>Phone Setup</b> group as default.	_

<sup>\*1:</sup>Default Setting


# **Customized Features**

## Models with display audio system

Use the audio/information screen to customize certain features.

### ■ How to customize

With the ignition switch in ON  $\overline{II}^{*1}$ , select **Settings**, then select a setting item.

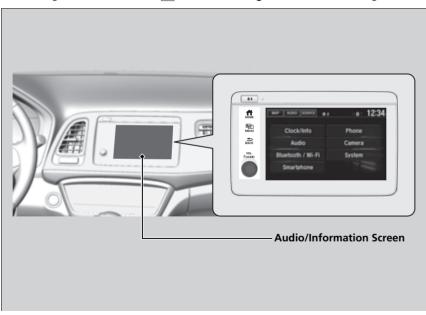

### Customized Features


When you customize settings:


- Make sure that the vehicle is at a complete stop.
- Shift to P.

To customize other features, select **Settings**.


List of customizable options P. 362


\*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

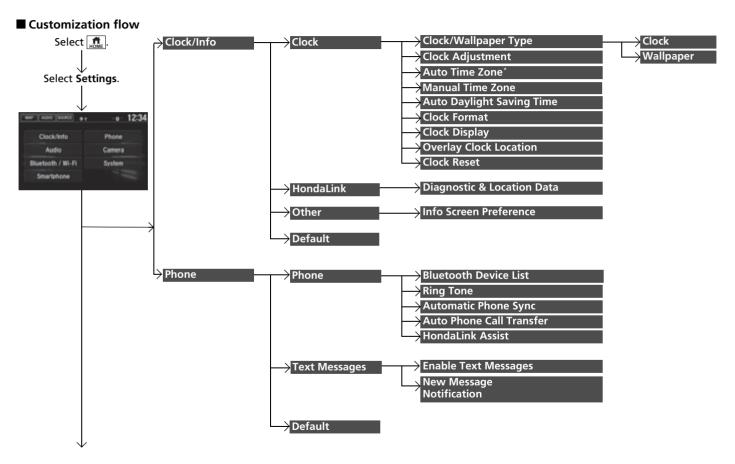


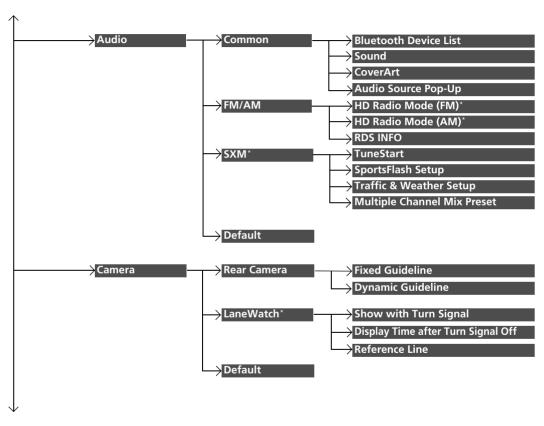

<sup>\*1:</sup> May change depending on your currently selected source.

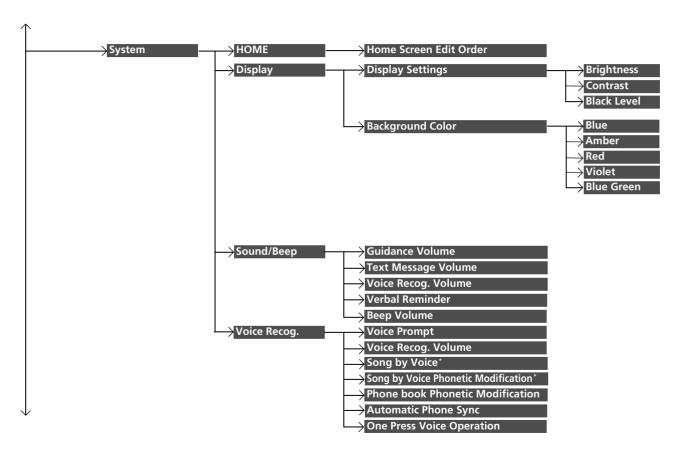

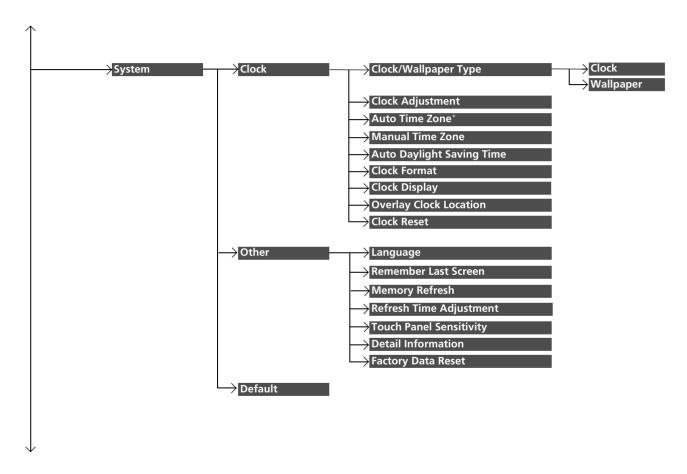

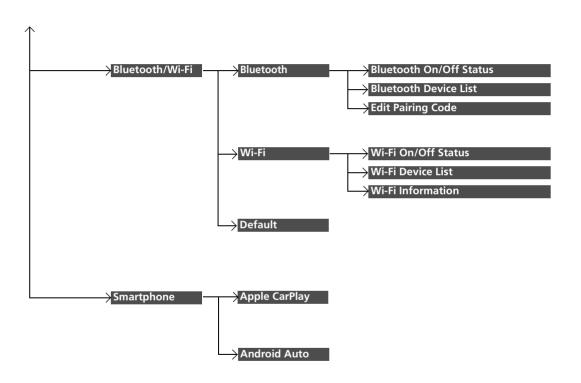

# ■ List of customizable options

Setup Group	Custom	izable Features	Description		Selectable Settings
	Clock	Clock/Wallpaper Type	Clock	Changes the clock display type.	Analog/Digital*1/Small Digital/Off
			Wallpaper	<ul> <li>Changes the wallpaper type.</li> <li>Imports an image file for a new wallpaper.</li> <li>Deletes an image file for a wallpaper.</li> </ul>	Galaxy* <sup>1</sup> /Metallic/Time Zone/Blank
		Clock Adjustment	Adjusts cloc <b>■ Adjust</b>	k. <b>ing the Clock</b> P. 138	_
		Auto Time Zone*	Automatically adjusts the clock when driving through different time zones.		On*1/Off
Clock/Info		Manual Time Zone	Changes the time zone manually.		_
		Auto Daylight Saving Time		have the GPS automatically adjust the dight savings time. Select <b>Off</b> to cancel n.	On*1/Off
		Clock Format	Selects the o	digital clock display from 12H to 24H.	12H*1/24H
		Clock Display	Selects whe	ther the clock display comes on.	On*1/Off
		Overlay Clock Location	Changes the	e clock display layout.	Upper Right*1/Upper Left/ Lower Right/Lower Left/Off
		Clock Reset	Resets the c	lock settings to the factory default.	Yes/No
	HondaLink	Diagnostic & Location Data	Turns Honda	aLink® on and off.	On/Off*1

<sup>\*1:</sup>Default Setting

Setup Group	Customizable Features		Description	Selectable Settings
Clock/Info	Other Info Screen Preference		Selects the top menu when the (a) button is pressed.  Info Top- A brief menu pops up.  Info Menu- A full menu pops up.  Off- A menu does not pop up.	Info Top/Info Menu/Off*1
	Default		Cancels/Resets all customized items in the <b>Clock/ Info</b> settings group as default.	Yes/No
	Phone	Bluetooth Device List	Pairs a new phone to HFL, connects or disconnects a paired phone.  Phone Setup P. 404	_
		Ring Tone	Selects the ring tone.	Fixed/Mobile Phone*1
		Automatic Phone Sync	Sets a phonebook and call history data to be automatically imported when a phone is paired to HFL.	On*1/Off
Phone		Auto Phone Call Transfer	Sets calls to automatically transfer from your phone to HFL when you enter the vehicle.	On*1/Off
		HondaLink Assist	Turns HondaLink Assist on and off.	On/Off*1
	Text Messages	Enable Text Messages	Turns the text message function on and off.	On*1/Off
		New Message Notification	Selects whether a pop-up alert comes on the screen when HFL receives a new text message.	On/Off
	Default		Cancels/Resets all customized items in the <b>Phone</b> settings group as default.	Yes/No

<sup>\*1:</sup>Default Setting

Setup Group	Customizable Features		Description	Selectable Settings
		Bluetooth Device List	Pairs a new phone to HFL, edits or deletes a paired phone.  Phone Setup P. 404	-
Audio	Common	Sound	Adjusts the settings of the audio speaker's sound.  Adjusting the Sound P. 275	-6 ~ 0*1 ~ +6 (BASS, MIDDLE, and TREBLE), RR9~0*1~FR9 (FADER), L9~0*1~R9 (BALANCE), Off/ Low/Mid*1/High (SVC)
		iPod, USB mode [Your selected media] Cover Art	Turns the cover art display on and off.	On*1/Off
		Audio Source Pop-Up	Selects whether the list of selectable audio source comes on when <b>Audio</b> is selected on the home screen.	On/Off*1
	FM/AM mode	HD Radio Mode (FM)*	Selects whether the FM radio automatically switches to the digital radio waves or receives the analog waves only.	Auto* <sup>1</sup> /Analog Only
	FM/AM	HD Radio Mode (AM)*	Selects whether the AM radio automatically switches to the digital radio waves or receives the analog waves only.	Auto*1/Analog Only
		RDS Info	Turns on and off the RDS information.	On/Off*1

<sup>\*1:</sup>Default Setting

Setup Group	Custom	izable Features	Description		Selectable Settings
	SiriusXM® mode SXM*	TuneStart		d off, starts the song from the beginning age preset stations.	On*1/Off
Audio		SportsFlash Setup	Interrupt	Turns on and off the sports alert function.	Off/On(one time)/ On(continue)*1
			Favorite Team	Selects your favorite sports teams.  Live Sports Alert P. 291	_
			Interrupt Beep	Causes the system to beep when the sports alert is notified.	On*1/Off
		Traffic & Weather Setup	Selects the region you want to receive the information.		_
		Multiple Channel Mix Preset	Turns multiple channel mix preset on and off.		On/Off*1
	Default		Cancels/Resets all customized items in the <b>Audio</b> settings group as default.		Yes/No
	Rear Camera	Fixed Guideline	camera moi	ther the fixed guidelines come on the rear nitor. <b>View Rear Camera</b> P. 515	On*1/Off
Camera		Dynamic Guideline	movement	ther the guidelines adjust to the of the steering wheel.  View Rear Camera P. 515	On*1/Off
	Default		Cancels/Resets all customized items in the <b>Rear Camera</b> setting group as default.		Yes/No

<sup>\*1:</sup>Default Setting

\* Not available on all models

Setup Group	Customi	zable Features		Description	Selectable Settings
	LaneWatch*	Show with Turn Signal		ther the LaneWatch display comes on nove the turn signal lever to indicate a	On*1/Off
Camera		Display Time after Turn Signal Off	Changes the length of time the LaneWatch display stays on after the turn signal lever returns to the center.		0 second*1/2 seconds
		Reference Line	Selects whether the reference lines come on the LaneWatch monitor.		On*1/Off
	Default		Cancels/Resets all customized items in the <b>LaneWatch</b> group as default.		Yes/No
	НОМЕ	Home Screen Edit Order	Changes the <b>HOME</b> screen icon layout.		_
	Display	Display Settings C	Brightness	Changes the brightness of the audio/information screen.	_
System			Contrast	Changes the contrast of the audio/ information screen.	_
			Black Level	Changes the black level of the audio/information screen.	_
		Background Color	Changes the information	e background color of the audio/ screen.	Blue*1/Amber/Red/Violet/ BlueGreen

<sup>\*1:</sup>Default Setting

Setup Group	Customizable Features		Description	Selectable Settings	
		Guidance Volume	Changes the sound volume. Adjusts the guidance volume of the navigation system.	1~6*1~11	
	Sound/	Text Message Volume	Changes the text message reading volume.	1~6*1~11	
	Beep	Voice Recog. Volume	Changes the volume of the voice prompt.	1~6*1~11	
		Verbal Reminder	Turns the verbal reminders on and off.	On*1/Off	
		Beep Volume	Changes the beep volume.	Off/1/2*1/3	
		Voice Prompt	Turns the voice prompt on and off.	On*1/Off	
System	Voice Recog.	Voice Recog. Volume	Changes the volume of the voice prompt.	1~6*1~11	
		Song by Voice*	Turns the Song By Voice™ on and off.	On*1/Off	
		Song by Voice Phonetic Modification*	Modifies a voice command for music stored in the system or an iPod/iPhone.  Phonetic Modification P. 299	_	
		Phone book Phonetic Modification	Modifies a voice command for the phonebook.  ▶ Phonebook Phonetic Modification P. 413	_	
		Automatic Phone Sync	Sets phonebook and call history data to be automatically imported when a phone is paired to HFL.	On*1/Off	
		One Press Voice Operation	Changes the setting of the [6] (Talk) button operation when using the voice operation.	On*1/Off	

<sup>\*1:</sup>Default Setting

\* Not available on all models

Setup Group	Custo	omizable Features		Description	Selectable Settings
		Clock/Wallpaper Type	Clock Wallpaper		
		Clock Adjustment			
		Auto Time Zone*			
		Manual Time Zone			
	Clock	Auto Daylight		See <b>Clock/Info</b> o	n D 262
	CIOCK	Saving Time		See Clock/IIIIO 0	II F. 302
		Clock Format			
		Clock Display			
		Overlay Clock			
		Location			
System		Clock Reset			
	Other	Language	Change the	display language.	English*1/Francais/Espanol
		Remember Last Screen	Selects whet screen.	her the device remembers the last	On/Off*1
		Memory Refresh		audio system automatically and restores tation of a memory when the ignition CK $0^{*2}$ .	On*1/Off
		Refresh Time Adjustment	Sets the time	e for <b>Memory Refresh</b> .	_
		Touch Panel Sensitivity	Sets the sens	sitivity of the touch panel screen.	High/Low*1
		Detail Information	Displays the system infor	details of the head unit and operating mation.	_


<sup>\*1:</sup>Default Setting
\*2:Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

Setup Group	Customizable Features		Description	Selectable Settings
System	Other	Factory Data Reset	Resets all the settings to their factory default.  Defaulting All the Settings P. 370	Yes/No
System	Default		Cancels/Resets all customized items in the <b>System</b> group as default.	Yes/No
	Bluetooth	Bluetooth On/Off Status	Changes the <i>Bluetooth</i> ® status.	On*1/Off
		Bluetooth Device List	Pairs a new phone to HFL, edits or deletes a paired phone.  Phone Setup P. 404	_
Bluetooth/		<b>Edit Pairing Code</b>	Edits a pairing code.  To change the pairing code setting P. 405	Random/Fixed*1
Wi-Fi	Wi-Fi	Wi-Fi On/Off Status	Changes the Wi-Fi mode.	On/Off*1
		Wi-Fi Device List	Connects, disconnects, or deletes the Wi-Fi device.	<del>_</del>
		Wi-Fi Information	Shows the Wi-Fi information of the head unit.	<del>_</del>
	Default		Cancels/Resets all customized items in the <b>Bluetooth/Wi-Fi</b> group as default.	Yes/No
Consutudos	Apple CarPlay		Sets up the Apple CarPlay connection.	_
Smartphone	Android Auto		Sets up the Android Auto connection.	_

<sup>\*1:</sup>Default Setting

# **Defaulting All the Settings**

Reset all the menu and customized settings as the factory defaults.



- 1. Select A
- 2. Select Settings.
- 3. Select System.
- 4. Select the Others tab.
- **5.** Select **Factory Data Reset**.
  - ► A confirmation message appears on the screen.
- **6.** Select **Yes** to reset the settings.
- 7. Select **Yes** again to reset the settings.
  - ► A confirmation message appears on the screen. Select **OK**.
  - After selecting **OK**, the system will reboot.

### Defaulting All the Settings

When you transfer the vehicle to a third party, reset all settings to default and delete all personal data.

If you perform **Factory Data Reset**, it will reset the preinstalled apps to their factory default.

If you perform **Factory Data Reset**, you cannot use the HondaLink® because it becomes off line.

HondaLink® P. 308

371

# HomeLink® Universal Transceiver\*

The HomeLink® Universal Transceiver can be programmed to operate up to three remote controlled devices around your home, such as garage doors, lighting, or home security systems.

# Important Safety Precautions

Refer to the safety information that came with your garage door opener to test that the safety features are functioning properly. If you do not have the safety information, contact the manufacturer.

Before programming HomeLink, make sure that people and objects are out of the way of the garage or gate to prevent potential injury or damage.

When programming a garage door opener, park just outside the garage door's path.

#### 


Before programming HomeLink to operate a garage door opener, confirm that the opener has an external entrapment protection system, such as an "electronic eye," or other safety and reverse stop features. If it does not, HomeLink may not be able to operate it.

#### NOTE:

Some LED lightbulbs installed in the garage door opener can interfere with the training and consistent operation of your HomeLink device. Please consider use of Low RF interference bulbs in your garage door opener.

\* Not available on all models

# **Training HomeLink**



If it is necessary to erase a previously entered learned code:

- Press and hold the I and III HomeLink buttons for about 10 seconds, until the green indicator blinks. Release the buttons, and proceed to step 1.
- If you are training the second or third button, go directly to step 1.

The instructions on the next page should work for most gate or garage openers, but may not work for all. For detailed instructions about your specific remote opener, visit <a href="http://www.homelink.com">http://www.homelink.com</a> or call (800) 355-3515.

# ■ Programming a Button

- 1. Position the remote transmitter you wish to link 1 to 3 inches (3 8 cm) from the HomeLink® button you want to program.
- 2. Press and hold the desired HomeLink button. Is the HomeLink indicator (LED) slowly flashing orange?

YES

- **3a.** Hold the button on the remote transmitter. Does HomeLink indicator (LED) change from slowly flashing orange to rapidly flashing green or continuously on green? The process should take less than 60 seconds.
- 4. Press and hold the programmed HomeLink button for about a second. Does the device (garage door opener) work?

**3b.** Canadian Garage Door Opener
A. Press and release the HomeLink
button. Press, hold and release the
button on the remote every 2 secs.
Does the HomeLink indicator (LED)
change from slowly flashing orange to
rapidly flashing or continuously on

green? The process should take less than 60 seconds.

YES



5. Press and hold the HomeLink button again.

Training Complete

HomeLink LED is continuously on green.

- **6.** Press and hold the HomeLink button again.
  - The remote-controlled device should operate.

**Training Complete** 

HomeLink indicator rapidly flashes green.

- **5a.** The remote has a rolling code. Press the "learn" button on the remote-controlled device (e.g. garage door opener).
- **5b.** Within 30 secs, press and hold the programmed HomeLink button for 2 secs.

### ∑Training HomeLink

Reprogramming a Button

If you want to retrain a programmed button for a new device, you do not have to erase all button memory. You can replace the existing memory code using this procedure:

- 1. Press and hold the desired HomeLink button until the HomeLink indicator begins to *slowly flash orange*. This should take about 20 seconds.
- 2. Release the HomeLink button and position the remote transmitter you wish to link 1 3 inches (3 8 cm) from the HomeLink button you want to program, then follow steps 3 6 under "programming a button."

Erasing Button Memory

To erase programming from the buttons, press and hold the two outside HomeLink buttons until the HomeLink indicator changes from *orange to rapidly flashing green*. This should take about 10 seconds. You should erase all programming before selling the vehicle.

Operating

To operate, simply press and release the programmed HomeLink button. Activation will now occur for the trained device.

Questions

For questions or comments, visit www.HomeLink.com, www.youtube.com/ HomeLinkGentex, or by calling the HomeLink Hotline (North America only) at (800) 355-3515.


HomeLink® is a registered trademark of Gentex Corporation.

### Models with color audio system

*Bluetooth*® HandsFreeLink® (HFL) allows you to place and receive phone calls using your vehicle's audio system, without handling your cell phone.

# **Using HFL**

### **■ HFL Buttons**

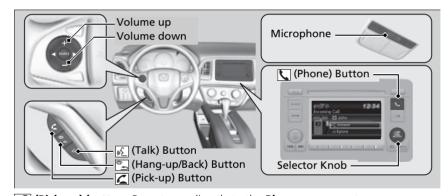

- (Pick-up) button: Press to go directly to the Phone screen or to answer an incoming call.
- (Hang-up/Back) button: Press to end a call or to cancel a command.
- (Talk) button: Press to call a number with a stored voice tag.
- (Phone) button: Press to go directly to the Phone screen.

#### **>>** Bluetooth® HandsFreeLink®

To use HFL, you need a *Bluetooth*-compatible cell phone. For a list of compatible phones, pairing procedures, and special feature capabilities:

- U.S.: Visit automobiles.honda.com/handsfreelink/, or call 1-888-528-7876.
- Canada: For more information on smartphone compatibility, call 1-855-490-7351.

#### Voice control tips

- Aim the vents away from the ceiling and close the windows, as noise coming from them may interfere with the microphone.
- Press and release the [15] button when you want to call a number using a stored voice tag. Speak clearly and naturally after a beep.
- If the microphone picks up voices other than yours, the command may be misinterpreted.
- To change the volume level, use the audio system's volume knob or the remote audio controls on the steering wheel.

State or local laws may prohibit the operation of handheld electronic devices while operating a vehicle.


If you receive a call while using the audio system, the system resumes its operation after ending the call.

Up to 20 speed dial entries can be stored. If there is no entry in the system, Speed Dial is disabled.

Speed Dial P. 387

Up to 20 call histories can be stored. If there is no call history, Call History is disabled.

# HFL Status Display



The audio/information screen notifies you when there is an incoming call.

# Limitations for Manual Operation

Certain manual functions are disabled or inoperable while the vehicle is in motion. You cannot select a grayed-out option until the vehicle is stopped.

Only previously stored speed dial entries can be called using voice commands while the vehicle is in motion.

**Speed Dial** P. 387

#### **>>** Bluetooth® HandsFreeLink®

Bluetooth® Wireless Technology

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Honda Motor Co., Ltd., is under license. Other trademarks and trade names are those of their respective owners.

**HFL Limitations** 

An incoming call on HFL will interrupt the audio system when it is playing. It will resume when the call is ended.

### ► MFL Status Display

The information that appears on the audio/ information screen varies between phone models.


You can change the system language to English, French, or Spanish.

**Customized Features** P. 349


## **HFL Menus**

>> HFL Menus The ignition switch must be in ACCESSORY or ON to use HFL. To use HFL, you must first pair your Bluetoothcompatible cell phone to the system while the vehicle C or C is parked. Phone Add New Some functions are limited while driving. A message Speed Dial\*1 appears on the screen when the vehicle is moving and the operation is canceled. Select a phone number from the call history to Call History store as a speed dial number. Select a phone number from the phonebook to Phonebook store as a speed dial number. Enter a phone number to store as a speed dial (Existing entry list) Phone Number number. Call History\*1 Dialed Calls Display the last 20 outgoing calls. **Received Calls** Display the last 20 incoming calls. Missed Calls Display the last 20 missed calls. Phonebook\*1 Display the paired phones's phonebook. Dial\*1 Enter a phone number to dial.


<sup>\*1:</sup> Appears only when a phone is connected to HFL.

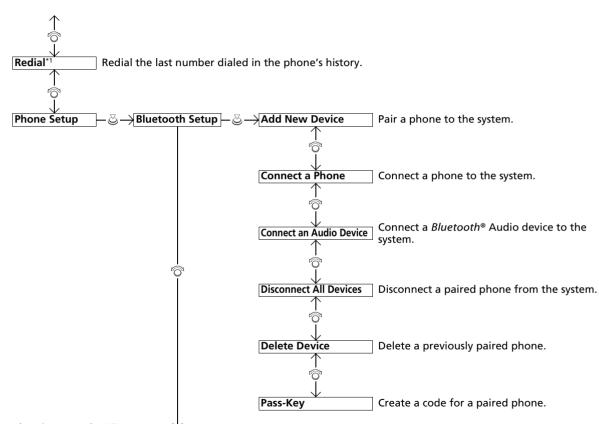


<sup>\*1:</sup> Appears only when a phone is connected to HFL.

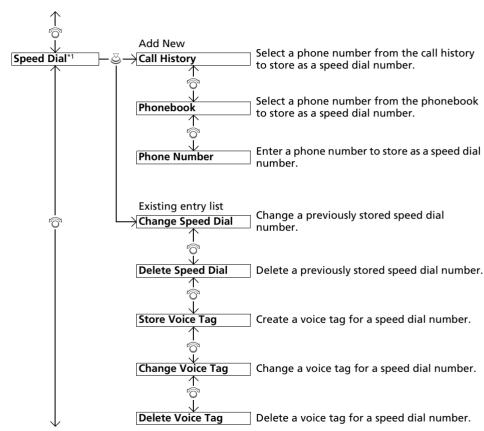

<sup>\*1:</sup> Appears only when a phone is connected to HFL.

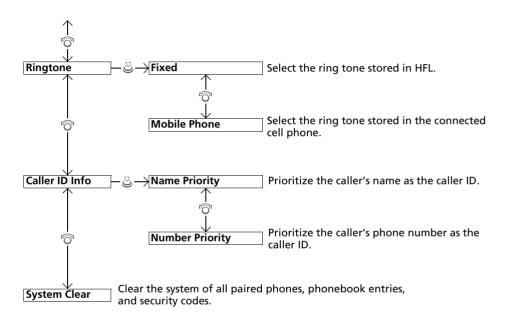

# ■ Phone Setup

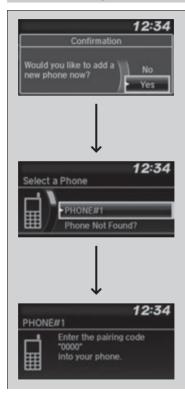

# ■ To pair a cell phone (No phone has been paired to the system)

- **1.** Press the button or the button.
- **3.** Make sure your phone is in search or discoverable mode, then press *᠖*.
  - ► HFL automatically searches for a Bluetooth® device.
- **4.** When your phone appears on the list, select it by pressing *⋈*.
  - If your phone doesn't appear, select Phone Not Found? and search for Bluetooth® devices using your phone. From your phone, select HandsFreeLink.

- **5.** The system gives you a pairing code on the audio/information screen.
  - Confirm if the pairing code on the screen and your phone match.
     This may vary by phone.
- **6.** A notification appears on the screen if pairing is successful.

#### ▶ Phone Setup

Your *Bluetooth*-compatible phone must be paired to HFL before you can make and receive hands-free calls.

### Phone Pairing Tips:


- You cannot pair your phone while the vehicle is moving.
- Up to six phones can be paired.
- Your phone's battery may drain faster when it is connected to HFI
- If your phone is not ready for pairing or not found by the system within three minutes, the system will time out and returns to idle.

Once you have paired a phone, you can see it displayed on the screen with one or two icons on the right side.

These icons indicate the following:

: The phone can be used with HFL.

: The phone is compatible with *Bluetooth®* Audio.

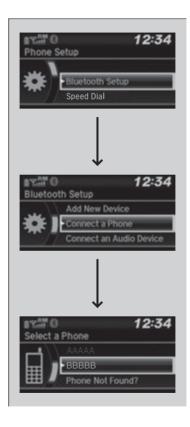

### ■ To Change the currently paired phone

- **1.** Press the button or the button.
- **2.** Rotate ♥ to select **Phone Setup**, then press ⑤.
- **3.** Rotate ♥ to select **Bluetooth Setup**, then press ♥.
- **4.** Rotate ♥ to select **Connect a Phone**, then press ८.
  - ▶ The screen changes to a device list.

- **5.** Rotate <sup>♠</sup> to select a desired device name, then press <sup>♠</sup>.
  - ► HFL disconnects the connected phone and starts searching for another paired phone.

#### ∑Phone Setup


You can pair a phone in the following steps.

Phone Setup → Bluetooth Setup → Add New

Device → confirmation message → Yes →

confirmation message → OK → Select a Phone →


pairing code.

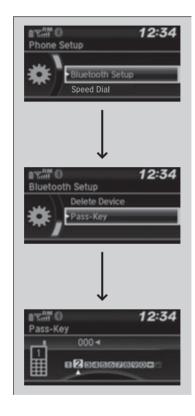

# ■ To change the pairing code setting

- **1.** Press the **\( \)** button or the **\( \)** button.
- 2. Rotate ♂ to select **Phone Setup**, then press ♂.
- **3.** Rotate ♥ to select **Bluetooth Setup**, then press ♥.
- **4.** Rotate ♂ to select **Pass-Key**, then press <a>⊗</a>.

**5.** Input a new pairing code, then press 🕹.

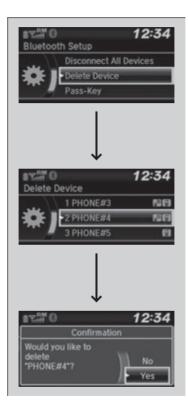

### ■ To delete a paired phone

- 1. Press the button or the button.
- **2.** Rotate <sup>♠</sup> to select **Phone Setup**, then press <sup>♠</sup>.
- **3.** Rotate '♥' to select **Bluetooth Setup**, then press ८.
- **4.** Rotate <sup>\*</sup>○ to select **Delete Device**, then press <sup>\*</sup>⊘.
  - ▶ The screen changes to a device list.
- **5.** Rotate ♂ to select a phone you want to delete, then press ८.

**6.** A confirmation message appears on the screen. Rotate '♥' to select **Yes**, then press ...

# Ring Tone


You can change the ring tone setting.



- **1.** Press the **\( \)** button or the **\( \)** button.
- 2. Rotate ♥ to select **Phone Setup**, then press ♥.
- **3.** Rotate ♂ to select **Ringtone**, then press る.
- **4.** Rotate ⊘ to select **Fixed** or **Mobile Phone**, then press ⊗.

## Caller's ID Information

You can select a caller's information to be displayed when you have an incoming call.



- **1.** Press the **\( \)** button or the **\( \)** button.
- **2.** Rotate ♥ to select **Phone Setup**, then press ♥.
- **3.** Rotate ♥ to select **Caller ID Info**, then press ♥.
- **4.** Rotate 🎅 to select a mode you want, then press 💆.

#### Ring Tone

**Fixed:** The fixed ring tone sounds from the speakers. **Mobile Phone:** For certain connected phones, the ring tone stored in the phone sounds from the speakers.

#### Caller's ID Information

**Name Priority:** A caller's name is displayed if it is stored in the phonebook.

**Number Priority:** A caller's phone number is displayed.

# **■** To Clear the System

Pairing codes, paired phones, all stored voice tags, all speed dial entries, all call history data, and all imported phonebook data are erased.



- 1. Press the button or the button.
- **2.** Rotate <sup>♠</sup> to select **Phone Setup**, then press <sup>♠</sup>.
- **3.** Rotate ♥ to select **System Clear**, then press ♥.
- **4.** Rotate 🎓 to select **Yes**, then press 🍮.
- **5.** A confirmation message appears on the screen. Rotate <sup>(□)</sup> to select **Yes**, then press <sup>(□)</sup>.

**6.** A notification appears on the screen. Press 💍 .

# ■ Automatic Import of Cellular Phonebook and Call History

When your phone is paired, the contents of its phonebook and call history are automatically imported to HFL.



#### Matter Automatic Import of Cellular Phonebook and Call History

When you select a person from the list in the cellular phonebook, you can see up to three category icons. The icons indicate what types of numbers are stored for that name.



If a name has four or more numbers, ... appears instead of category icons.


On some phones, it may not be possible to import the category icons to HFL.

The phonebook is updated after every connection. Call history is updated after every connection or call.

# ■ Speed Dial

Up to 20 speed dial numbers can be stored per phone.





To store a speed dial number:

- 1. Press the button or the button.
- 2. Rotate ♂ to select **Speed Dial**, then press る.
- 3. Rotate 😚 to select **Add New**, then press 💍.
- **4.** Rotate 🎅 to select a place to choose a number from, then press 💆.

# From **Call History**:

► Select a number from the call history.

### From **Phonebook**:

Select a number from the connected cell phone's imported phonebook.

#### From **Phone Number**:


- ▶ Input the number manually.
- **5.** When the speed dial is successfully stored, you are asked to create a voice tag for the number. Rotate ♂ to select **Yes** or **No**, then press ♂.
- **6.** Using the button, follow the prompts to say the name for the speed dial entry.

### **Speed Dial**

You can use the audio preset buttons during a call to store a speed dial number:


- 1. Press and hold the desired audio preset button during a call.
- 2. The contact information for the active call will be stored for the corresponding speed dial.

When a voice tag is stored, you can press the & button and call the number using voice commands.



### ■ To edit a speed dial

- **1.** Press the **\( \)** button or the **\( \)** button.
- 2. Rotate ♂ to select **Phone Setup**, then press ♂.
- **3.** Rotate ۞ to select **Speed Dial**, then press ⑤.
- **4.** Select an existing speed dial entry.
- **6.** Select a new speed dial number, then press 💍 .



Speed Dial

12:34

Press the TALK button and

after the beep, say the

name you would like to

# ■ To add a voice tag to a stored speed dial number

- **1.** Press the **\( \)** button or the **\( \)** button.
- **2.** Rotate '⑦' to select **Phone Setup**, then press ⊗.
- 3. Rotate 😙 to select **Speed Dial**, then press 💍.
- **4.** Select an existing speed dial entry.
- **5.** Rotate ♥ to select **Store Voice Tag**, then press ♥.
- **6.** Using the 😥 button, follow the prompts to complete the voice tag.

### ■ To change a voice tag

- **1.** Press the **\( \)** button or the **\( \)** button.
- **3.** Rotate ♥ to select **Speed Dial**, then press ♥.
- **4.** Select an existing speed dial entry.
- **5.** Rotate '⑦' to select **Change Voice Tag**, then press ③.
- **6.** Using the <u>©</u> button, follow the prompts to complete the voice tag.

### **Speed Dial**

Avoid using duplicate voice tags. Avoid using "home" as a voice tag. It is easier for HFL to recognize a longer name. For example, use "John Smith" instead of "John."







### ■ To delete a voice tag


- **1.** Press the **\( \)** button or the **\( \)** button.
- **2.** Rotate 🎅 to select **Phone Setup**, then press ℧.
- 3. Rotate 😙 to select **Speed Dial**, then press 💍.
- **4.** Select an existing speed dial entry.
- **5.** Rotate ♥ to select **Delete Voice Tag**, then press ☒.
  - ► A confirmation message appears on the screen. Rotate 😙 to select **Yes**, then press 🕹.

### ■ To delete a speed dial number

- **1.** Press the **\( \)** button or the **\( \)** button.
- **2.** Rotate ♥ to select **Phone Setup**, then press ♥.
- 3. Rotate 🗇 to select **Speed Dial**, then press 💍.
- **4.** Select an existing speed dial entry.
- **5.** Rotate ♥ to select **Delete Speed Dial**, then press ♥.
  - ► A confirmation message appears on the screen. Rotate 🎓 to select **Yes**, then press 🕹.

# ■ Making a Call

You can make calls by inputting any phone number, or by using the imported phonebook, call history, speed dial entries, or redial.



#### 

Any voice-tagged speed dial entry can be dialed by voice from any screen.

Press the button and follow the prompts.

The maximum range between your phone and vehicles is 30 feet (10 meters).

Once a call is connected, you can hear the voice of the person you are calling through the audio speakers.





# ■ To make a call using the imported phonebook

When your phone is paired, the contents of its phonebook are automatically imported to HFI

- **1.** Press the **\( \)** button or the **\( \)** button.
- **2.** Rotate ⊘ to select **Phonebook**, then press ⊗.
- **3.** The phonebook is stored alphabetically. Rotate ७ to select the initial, then press ு.
- **4.** Rotate ⑦ to select a name, then press ♂.
- **5.** Rotate ♥ to select a number, then press ♣.
  - ▶ Dialing starts automatically.

### ■ To make a call using a phone number

- **1.** Press the **\( \)** button or the **\( \)** button.
- **2.** Rotate ♥ to select **Dial**, then press ८.
- **3.** Rotate ♥ to select a number, then press ८.
- **4.** Rotate ۞ to select **∠**, then press ⊗. **▶** Dialing starts automatically.

#### ∑To make a call using the imported phonebook

This function is disabled while the vehicle is moving. However, you can call a stored voice-tagged speed dial number using voice commands.

Limitations for Manual Operation P. 375

Speed Dial P. 387

### ∑To make a call using a phone number

This function is disabled while the vehicle is moving. However, you can call a stored voice-tagged speed dial number using voice commands.

- **Limitations for Manual Operation** P. 375
- Speed Dial P. 387





### ■ To make a call using redial

- **1.** Press the button or the button.
- 2. Rotate ۞ to select **Redial**, then press ⊗.

  ▶ Dialing starts automatically.

# ■ To make a call using the call history Call history is stored by Dialed Calls, Received Calls, and Missed Calls.


- 1. Press the \(\mathbb{L}\) button or the \(\mathbb{Z}\) button.
- **2.** Rotate ۞ to select **Call History**, then press ፩.
- 3. Rotate ♥ to select Dialed Calls, Received Calls, or Missed Calls, then press ८.
- **4.** Rotate ♥ to select a number, then press ७.
  - ▶ Dialing starts automatically.

### ∑To make a call using redial

Press and hold the **\( \)** button to redial the last number dialed in your phone's call history.

#### ∑To make a call using the call history

The call history appears only when a phone is connected to HFL, and displays the last 20 dialed, received, or missed calls.



### ■ To make a call using a speed dial entry

- **1.** Press the **\( \)** button or the **\( \)** button.
- 2. Rotate or to select **Speed Dial**, then press &.
- **3.** Rotate ♥ to select a number, then press ८.
  - ▶ Dialing starts automatically.

### ∑To make a call using a speed dial entry

On the **Phone** screen, the first six speed dials on the list can be directly selected by pressing the corresponding audio preset buttons (1-6).


Select **Others** to view another paired phone's speed dial list.

When a voice tag is stored, press the <u>\(\bigcep\)</u> button and call the number using voice commands.

Speed Dial P. 387

Any voice-tagged speed dial entry can be dialed by voice from any screen. Press the 😥 button and follow the prompts.

# ■ Receiving a Call



When there is an incoming call, an audible notification sounds and the **Incoming Call** screen appears.

Press the button to answer the call.

Press the button to decline or end the call.

#### ■ Receiving a Call

Call Waiting

Press the <u>c</u> button to put the current call on hold to answer the incoming call.

Press the <u>L</u> button again to return to the current call.

Select **Ignore** to ignore the incoming call if you do not want to answer it.

Press the button if you want to hang up the current call.

You can select the icons on the audio/information screen instead of the  $\square$  and  $\square$  buttons. Rotate  $\bowtie$  to select the icon, then press  $\trianglerighteq$ .

# ■ Options During a Call

The following options are available during a call.


**Swap Call:** Put the current call on hold to answer the incoming call.

Mute: Mute your voice.

**Transfer Call:** Transfer a call from HFL to your phone.

**Dial Tones:** Send numbers during a call. This is useful when you call a menu-driven

phone system.



- **1.** To view the available options, press the **\** button.
- - ➤ The check box is checked when **Mute** is selected. Select **Mute** again to turn it off.

**≥**Options During a Call


**Dial Tones:** Available on some phones.

#### Models with display audio system

The *Bluetooth*® HandsFreeLink® (HFL) allows you to place and receive phone calls using your vehicle's audio system, without handling your cell phone.

# **Using HFL**

#### ■ HFL Buttons

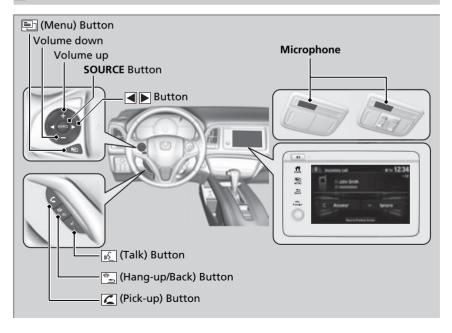

#### **>>** Bluetooth® HandsFreeLink®

Place your phone where you can get good reception.

To use HFL, you need a *Bluetooth*-compatible cell phone. For a list of compatible phones, pairing procedures, and special feature capabilities:

- U.S.: Visit automobiles.honda.com/handsfreelink/, or call 1-888-528-7876.
- Canada: For more information on smartphone compatibility, call 1-855-490-7351.

To use the system, the **Bluetooth On/Off Status** setting must be **On**. If there is an active connection to Apple CarPlay, HFL is unavailable.

#### Customized Features P. 356

Voice control tips

- Aim the vents away from the ceiling and close the windows, as noise coming from them may interfere with the microphones.
- Press the button when you want to call a number using a stored voice tag. Speak clearly and naturally after a beep.
- If the microphones pick up voices other than yours, the command may be misinterpreted.
- To change the volume level, use the audio system's volume knob or the remote audio controls on the steering wheel.

Up to five speed dial entries can be displayed among a total of 20 that can be entered. If there is no entry in the system, Speed Dial is disabled.

Speed Dial P. 410

(Pick-up) button: Press to go directly to the phone screen, or to answer an incoming call.

(Hang-up/back) button: Press to end a call, go back to the previous command, or cancel a command.

(Talk) button: Press to call a number with a stored voice tag.

(Menu) button: Press and hold to display Speed Dial, Call History, or Redial on the phone screen.

**button:** Press to select an item displayed on the phone screen.

**SOURCE button:** Press to call a number listed in the selected item on the phone screen.

To go to the **Phone Menu** screen:

- 1. Select nome.
- **2.** Select **Phone** to switch the display to the phone screen.
- 3. Select 🖳

#### **≫**Bluetooth® HandsFreeLink®

Up to five call histories can be displayed among a total of 20 that can be entered. If there is no call history, Call History is disabled.

#### Bluetooth® Wireless Technology


The *Bluetooth*® word mark and logos are registered trademarks owned by *Bluetooth* SIG, Inc., and any use of such marks by Honda Motor Co., Ltd., is under license. Other trademarks and trade names are those of their respective owners.

#### **HFL** Limitations

An incoming call on HFL will interrupt the audio system when it is playing. It will resume when the call is ended.

# ■ HFL Status Display

The audio/information screen notifies you when there is an incoming call.

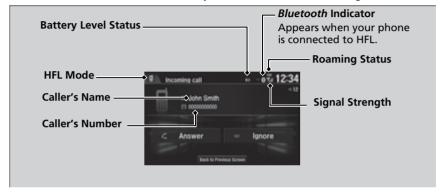

# Limitations for Manual Operation

Certain manual functions are disabled or inoperable while the vehicle is in motion. You cannot select a grayed-out option until the vehicle is stopped.

Only previously stored speed dial entries with voice tags, phonebook names, or numbers can be called using voice commands while the vehicle is in motion.

Speed Dial P. 410

#### >> HFL Status Display

The information that appears on the audio/information screen varies between phone models.

You can change the system language.

**■ Customized Features** P. 356

#### **HFL Menus**

The ignition switch must be in ACCESSORY I or ON III \*1 to use the system.

#### ■ Phone settings screen




- 1. Select .
- 2. Select Settings.
- 3. Select Phone.


#### 

To use HFL, you must first pair your *Bluetooth*-compatible cell phone to the system while the vehicle is parked.

Some functions are limited while driving.

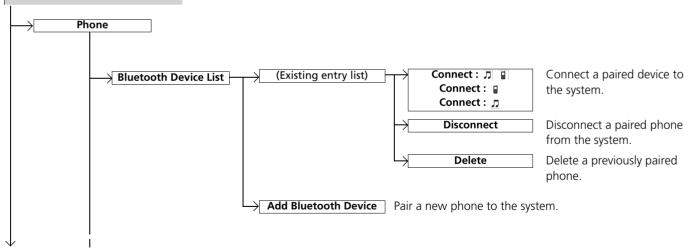


\*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

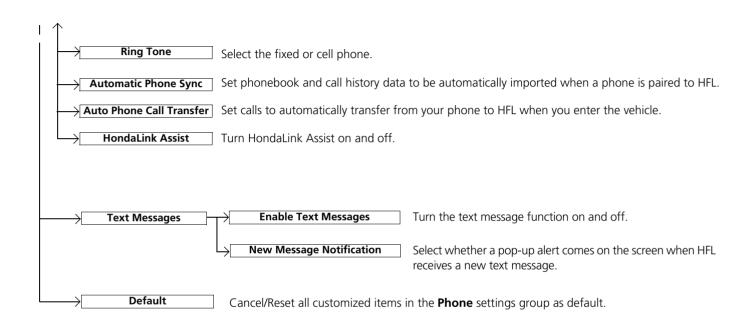


#### ■ Phone Menu screen



- 1. Select A
- 2. Select Phone
- 3. Select 🖳.

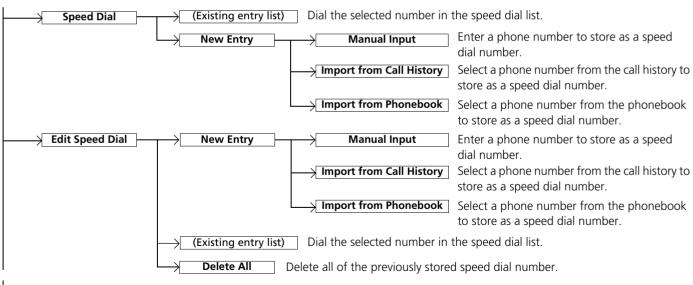

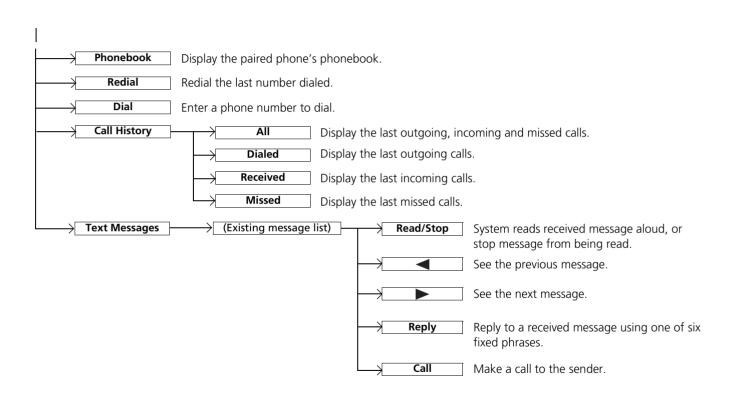

# ■ Phone Setup



- To pair a cell phone (when there is no phone paired to the system)
- 1. Select Phone
- 2. Select Yes
- **3.** Make sure your phone is search or discoverable mode, then select **Continue**.
  - ► HFL automatically searches for a Bluetooth® device.
- **4.** Select your phone when it appears on the list.
  - ► If your phone does not appear, you can select **Refresh** to search again.
  - ▶ If your phone still does not appear, select Phone Not Found and search for Bluetooth® devices using your phone. From your phone, search for HandsFreeLink
- **5.** The system gives you a pairing code on the audio/information screen.
  - Confirm if the pairing code on the screen and your phone match.This may vary by phone.

#### ▶ Phone Setup

Your *Bluetooth*-compatible phone must be paired to the system before you can make and receive hands-free calls

#### Phone Pairing Tips:

- You cannot pair your phone while the vehicle is moving.
- Up to six phones can be paired.
- Your phone's battery may drain faster when it is paired to the system.
- If your phone is not ready for pairing or not found by the system within three minutes, the system will time out and returns to idle


Once you have paired a phone, you can see it displayed on the screen with one or two icons on the right side.

These icons indicate the following:

: The phone can be used with HFL.

☐: The phone is compatible with *Bluetooth®* Audio.

If there is an active connection to Apple CarPlay, pairing of additional *Bluetooth*-compatible devices is unavailable and **Add Bluetooth Device** is grayed out from the **Bluetooth Device List** screen.





#### ■ To change the currently paired phone

- **1.** Go to the phone settings screen.
  - **▶ Phone settings screen** P. 400
- 2. Select Bluetooth Device List.
- 3. Select a phone to connect.
  - ► HFL disconnects the connected phone and starts searching for another paired phone.
- 4. Select Connect: p g, Connect: g, or Connect: p.
- To change the pairing code setting
- 1. Select A
- 2. Select Settings.
- 3. Select Bluetooth / Wi-Fi.
- **4.** Select the **Bluetooth** tab.
- **5.** Select **Edit Pairing Code**.

6. Select Random or Fixed.

#### ∑To change the currently paired phone

If no other phones are found or paired when trying to switch to another phone, HFL will inform you that the original phone is connected again.

To pair other phones, select **Add Bluetooth Device** from the **Bluetooth Device List** screen.

#### ∑To change the pairing code setting

The default pairing code is **0000** until you change the setting.

To create your own, select **Fixed**, and delete the current code, then enter a new one.

For a randomly generated pairing code each time you pair a phone, select **Random**.




## ■ To delete a paired phone

- **1.** Go to the phone settings screen. **▶ Phone settings screen** P. 400
- 2. Select Bluetooth Device List.
- 3. Select a phone you want to delete.


- 4. Select **Delete**
- **5.** A confirmation message appears on the screen. Select **Yes**.

## ■ To Set Up Text Message Options



# ■ To turn on or off the text message function

- **1.** Go to the phone settings screen. **▶ Phone settings screen** P. 400
- 2. Select Enable Text Messages.
  - A pop-up menu appears on the screen.
- 3. Select On or Off.



# ■ To turn on or off the text message notice

- 1. Go to the phone settings screen. ▶ Phone settings screen P. 400
- 2. Select New Message Notification.
  - A pop-up menu appears on the screen.
- 3. Select On or Off.

#### ∑To Set Up Text Message Options

To use the text message function, it may be necessary to set up on your phone.

#### ∑To turn on or off the text message notice

**On:** A pop-up notification comes on every time you receive a new message.

**Off:** The message you receive is stored in the system without notification.

# ■ Ring Tone


You can change the ring tone setting.



- **1.** Go to the phone settings screen. **▶ Phone settings screen** P. 400
- 2. Select Ring Tone.
- 3. Select Fixed or Mobile Phone.

# Automatic Transferring

If you get into the vehicle while you are on the phone, the call can be automatically transferred to HFL.



- **1.** Go to the phone settings screen.
  - **▶ Phone settings screen** P. 400
- 2. Select Auto Phone Call Transfer.
- 3. Select On or Off.

#### 

**Fixed:** The fixed ring tone sounds from the speakers. **Mobile Phone:** For certain connected phones, the ring tone stored in the phone sounds from the speakers.

# ■ Automatic Import of Cellular Phonebook and Call History



Phone Settings

Ring Tone

HondaLink Assist

Automatic Phone Sync Auto Phone Call Transfer

**Automatic Phone Sync** 

Synchronization On: Phonebook and

call history will not be

12:34

12:34

Off

Text Messages

■ When Automatic Phone Sync is set to On:

When your phone is paired, the contents of its phonebook and call history are automatically imported to the system.



- **1.** Go to the phone settings screen. **▶ Phone settings screen** P. 400
- 2. Select Automatic Phone Sync.

3. Select On or Off.

Matter Automatic Import of Cellular Phonebook and Call History

When you select a name from the list in the cellular phonebook, you can see up to three category icons. The icons indicate what types of numbers are stored for that name.



On some phones, it may not be possible to import the category icons to the system.

The phonebook is updated after every connection. Call history is updated after every connection or call.

# Speed Dial

Up to 20 speed dial numbers can be stored per phone.

12:34 √€ 111111111111 C. Work C <New Entry> New Entry 12:34 Manual Input 12:34 Edit Speed Dial Record Voice Tag

To store a speed dial number:

- 1. Go to the phone menu screen.

  Phone Menu screen P. 402
- 2. Select Speed Dial.
- 3. Select New Entry.
- **4.** Select a place to choose a number.

# From Import from Call History:

► Select a number from the call history.

#### From Manual Input:

Input the number manually.

#### From Import from Phonebook:

- Select a number from the connected cell phone's imported phonebook.
- **5.** When the speed dial is successfully stored, you are asked to create a voice tag for the number. Select **Yes** or **No**.
- **6.** Select **Record** to store a voice tag for the speed dial entry.
  - ▶ Using the ② button, follow the prompts to store a voice tag for the speed dial entry.

#### Speed Dial

When a voice tag is stored, press the  $\swarrow$  button to call the number using the voice tag. Say the voice tag name.



Edit Speed Dial

Voice Tag

12:34

Play

Record

# ■ To add a voice tag to a stored speed dial number

- **1.** Go to the phone menu screen.
  - Phone Menu screen P. 402
- 2. Select Edit Speed Dial.
- **3.** Select an existing speed dial entry.
  - From the pop-up menu, select **Edit**.
- 4. Select Voice Tag.
  - From the pop-up menu, select **Record**.
- **5.** Select **Record**, or use the <u>№</u> button, follow the prompts to complete the voice tag.

# ■ To delete a voice tag

- **1.** Go to the phone menu screen.
  - Phone Menu screen P. 402
- 2. Select Edit Speed Dial.
- **3.** Select an existing speed dial entry.
  - From the pop-up menu, select **Edit**.
- 4. Select Voice Tag.
  - From the pop-up menu, select **Clear**.
- **5.** A confirmation message appears on the screen. Select **Yes**.

#### **≥**Speed Dial

Avoid using duplicate voice tags. Avoid using "home" as a voice tag. It is easier for the system to recognise a longer name. For example, use "John Smith" instead of "John."





### ■ To edit a speed dial

- 1. Go to the phone menu screen.

  ▶ Phone Menu screen P. 402
- 2. Select Edit Speed Dial.
- **3.** Select an existing speed dial entry.
  - From the pop-up menu, select **Edit**.
- **4.** Select a setting you want.

#### ■ To delete a speed dial

- **1.** Go to the phone menu screen.
  - Phone Menu screen P. 402
- 2. Select Edit Speed Dial.
- **3.** Select an existing speed dial entry.
  - From the pop-up menu, select **Delete**.
- **4.** A confirmation message appears on the screen. Select **Yes**

#### ■ Phonebook Phonetic Modification


Add phonetic modifications or a new voice tag to the phone's contact name so that it is easier for HFL to recognize voice commands.



- To add a new voice tag
- 1. Select .....
- 2. Select Settings.
- 3. Select System.
- **4.** Select the **Voice Recog** tab.
- 5. Select Phonebook Phonetic Modification.
- **6.** Select the phone you want to add phonetic modification to.

#### 

You can store up to 20 phonetic modification items.

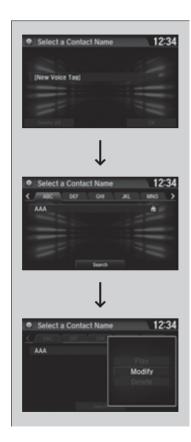

- 7. Select New Voice Tag.
- **8.** Select a contact name you want to add to.
  - The pop-up menu appears on the screen.
- 9. Select Modify.
- **10.** Using **Record** or the 😥 button, follow the prompts to complete the voice tag.
- **11.** You will receive a confirmation message on the screen, then select **OK**.




#### ■ To modify a voice tag

- 1. Select A
- 2. Select Settings.
- 3. Select System.
- **4.** Select the **Voice Recog** tab.
- 5. Select Phonebook Phonetic Modification
- **6.** Select the phone you want to modify phonetic modification.
- **7.** Select a contact name you want to modify.
  - The pop-up menu appears on the screen.
- 8. Select Modify.
- **9.** Using **Record** or the button, follow the prompts to complete the voice tag.
- **10.** You will receive a confirmation message on the screen, then select **OK**.

#### 

You can only modify or delete contact names for the currently connected phone.

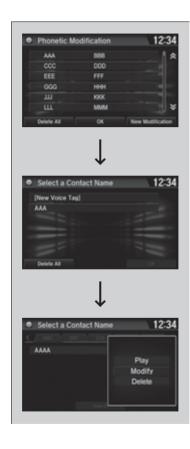

#### ■ To delete a modified voice tag

- 1. Select A
- 2. Select Settings.
- 3. Select System.
- **4.** Select the **Voice Recog** tab.
- 5. Select Phonebook Phonetic Modification
- **6.** Select the phone you want to delete phonetic modification.
- **7.** Select a contact name you want to delete.
  - ► The pop-up menu appears on the screen.
- 8. Select **Delete**.
  - ► The selected contact name has been selected.
- 9. Select OK.



#### ■ To delete all modified voice tags

- 1. Select .
- 2. Select Settings.
- 3. Select System.
- **4.** Select the **Voice Recog** tab.
- 5. Select Phonebook Phonetic Modification.
- **6.** Select the phone you want to delete phonetic modification.
  - ► The contact name list appears.
- 7. Select Delete All.
- **8.** You will receive a confirmation message on the screen, then select **Yes**.

#### 

Any voice-tagged speed dial entry can be dialed by voice from most screens.

Press the button and say the voice tag name.

Once a call is connected, you can hear the voice of the person you are calling through the audio speakers.

While there is an active connection with Apple CarPlay, phone calls cannot be made with HandsFreeLink® and are only made from Apple CarPlay.

## ■ Making a Call



You can make calls by inputting any phone number, or by using the imported phonebook, call history, speed dial entries, or redial.

@ Dial



# ■ To make a call using the imported phonebook

- 1. Go to the phone menu screen.
  - Phone Menu screen P. 402
- 2. Select Phonebook
- 3. Select a name.
  - You can also search by letter. Select **Search**.
  - ► Use the keyboard on the touch screen for entering letters.
- 4. Select a number.
  - ▶ Dialing starts automatically.

# 34 2 3

#### ■ To make a call using a phone number

- 1. Go to the phone menu screen.
  - **▶ Phone Menu screen** P. 402
- 2. Select Dial.
- 3. Select a number.
  - ► Use the keyboard on the touch screen for entering numbers.
- 4. Select 🚄
  - Dialing starts automatically.

#### ∑To make a call using the imported phonebook


You can call a stored voice-tagged speed dial number using voice commands.

Speed Dial P. 410

#### ∑To make a call using a phone number

You can call a stored voice-tagged speed dial number using voice commands.

Speed Dial P. 410




#### ■ To make a call using redial

- **1.** Go to the phone menu screen. **▶ Phone Menu screen** P. 402
- 2. Select Redial.
  - ▶ Dialing starts automatically.

#### ∑To make a call using redial

Press and hold the button to redial the last number dialed.



# ■ To make a call using the Call History Call history is stored by All, Dialed,

Received, and Missed.

- 1. Go to the phone menu screen.

  ▶ Phone Menu screen P. 402
- 2. Select Call History.
- 3. Select All, Dialed, Received, or Missed.
- **4.** Select a number.
  - ▶ Dialing starts automatically.

#### ∑To make a call using the Call History

The call history displays the last 20 all, dialed, received, or missed calls.

(Appears only when a phone is connected to the system.)

#### ■ To make a call using a Speed Dial entry

- 1. Go to the phone menu screen.

  Phone Menu screen P. 402
- 2. Select Speed Dial.
- 3. Select a number.
  - ▶ Dialing starts automatically.

#### ■To make a call using a Speed Dial entry

When a voice tag is stored, press the £ button to call the number using the voice tag.

Speed Dial P. 410

Any voice-tagged speed dial entry can be dialed by voice from any screen.

Press the 🖟 button and follow the prompts.



# Receiving a Call



When there is an incoming call, an audible notification sounds (if activated) and the **Incoming call** screen appears.

Press the button to answer the call.

Press the button to decline or end the call.

# Options During a Call

The following options are available during a call.

Mute: Mute your voice.

**Transfer:** Transfer a call from the system to your phone.

**Touch Tones:** Send numbers during a call. This is useful when you call a menudriven phone system.



The available options are shown on the lower half of the screen.

Select the option.

➤ The mute icon appears when **Mute** is selected. Select **Mute** again to turn it off.

#### ■ Receiving a Call

Call Waiting

Press the **\( \)** button to put the current call on hold to answer the incoming call.

Press the **\( \subseteq \)** button again to return to the current call.

Select **Ignore** to ignore the incoming call if you do not want to answer it.

Press the button if you want to hang up the current call.

You can select the icons on the audio/information screen instead of the and buttons.

#### **≥**Options During a Call

**Touch Tones:** Available on some phones.

You can select the icons on the audio/information screen.

# ■ Receiving a Text Message

HFL can display newly received text messages as well as 20 of the most recently received messages on a linked cell phone. Each received message can be read aloud and replied to using a fixed common phrase.



- **1.** A pop-up appears and notifies you of a new text message.
- **2.** Select **Read** to listen to the message.
  - ➤ The text message is displayed. The system automatically starts reading out the message.
- **3.** To discontinue the message read-out, select **Stop**.

#### ■ Receiving a Text Message

The system does not display any received messages while you are driving. You can only hear them read aloud.

The system can only receive messages that are sent as text (SMS) messages. Messages sent using the data services will not be displayed in the list.

With some phones, you may be able to display up to 20 most recent text messages.

State or local laws may limit your use of the HFL text message feature. Only use the text message feature when conditions allow you to do so safely.

When you receive a text message for the first time since the phone is paired to HFL, you are asked to turn the **New Message Notification** setting to **On**.

**► To turn on or off the text message notice** P. 407



# Displaying Messages




#### ■ Displaying text messages

- **1.** Go to the phone menu screen.
  - ▶ Phone Menu screen P. 402
- 2. Select Text Messages.
- 3. Select a message.
  - ➤ The text message is displayed. The system automatically starts reading the message aloud.

#### **≥** Displaying Messages

If you delete a message on the phone, the message is also deleted in the system. If you send a message from the system, the message goes to your phone's outbox.

To see the previous or next message, select (previous) or (next) on the message screen.





#### ■ Read or Stop reading a message

- **1.** Go to the text message screen.
  - ► The system automatically starts reading the message aloud.
    - Displaying Messages P. 422
- **2.** Select **Stop** to stop reading. Select **Read** again to start reading the message from the beginning.

## ■ Reply to a message

- **1.** Go to the text message screen.
  - ► The system automatically starts reading the message aloud.
    - **Displaying Messages** P. 422
- 2. Select Reply.
- **3.** Select the reply message.
  - ► The pop-up menu appears on the screen.
- **4.** Select **Send** to send the message.
  - ► Complete appears on the screen when the reply message was successfully sent.

#### ■ Reply to a message

The available fixed reply messages are as follows:

- Talk to you later, I'm driving.
- I'm on my way.
- I'm running late.
- OK
- Yes
- No

You cannot add, edit, or delete reply messages.

Only certain phones receive and send messages when paired and connected. For a list of compatible phones:

- U.S.: Visit automobiles.honda.com/handsfreelink/, or call 1-888-528-7876.
- Canada: For more information on smartphone compatibility, call 1-855-490-7351.



# ■ Making a call to a sender

- **1.** Go to the text message screen.
- 2. Select Dial.

# ■ In Case of Emergency

#### ■ Automatic collision notification



If your vehicle's airbags deploy or if the unit detects that the vehicle is severely impacted, your vehicle automatically will attempt to connect to the HondaLink® operator. If connected, information about your vehicle, its location, and its condition can be sent to the operator\*1; you also can speak to the operator when connected.

**IMPORTANT:** For vehicles equipped with HondaLink Assist, owner activation constitutes authorization for Honda to collect information from your vehicle needed to provide the service, and agreement to the Terms of Use at *www.hondalink.com/TermsAndConditions*. In a crash, HondaLink Assist will attempt to notify emergency services but NEITHER Honda-PRO NOR ITS SERVICE PROVIDERS GUARANTEE THAT SUCH NOTIFICATION WILL OCCUR.

Honda reserves the right to terminate HondaLink Assist services at any time or for any reason, and in the future may not be able to provide services due to changes in, or obsolescence of, technology integral to the service or changes in governmental regulation.

#### 

Your vehicle may not be able to connect to the operator if the battery level is low, the line is disconnected, or you do not have adequate cellular coverage.

You cannot use this emergency service when:

- You travel outside the HondaLink® service coverage areas.
- There is a problem with the connecting devices, such as the microphones, speakers, or the unit itself.


You cannot operate other phone-related functions using the screen while talking to the operator. Select **Hang Up** to terminate the connection to your vehicle.

#### ■ Automatic collision notification

If the unit fails to connect to the operator, it repeatedly tries until it succeeds.

<sup>\*1:</sup> Depending on your phone and adequate cellular coverage, your vehicle's location may not be sent to the operator.

#### **■** To enable notification



- **1.** Go to the phone settings screen.
  - **▶ Phone settings screen** P. 400
- 2. Select HondaLink Assist.
  - A pop-up menu appears on the screen.
- 3. Select On or Off.

#### >> To enable notification

#### Setting options:

- On: Notification is available.
- Off: Disable the feature.



This chapter discusses driving and refueling.

Before Driving
Driving Preparation 428
Maximum Load Limit431
Towing a Trailer
Towing Behind a Motorhome 433
Off-Highway Driving Guidelines 434
When Driving
Starting the Engine436, 439
Precautions While Driving442
Continuously Variable Transmission 443
Shifting444, 446
ECON Button 450
Cruise Control*451

Vehicle Stability Assist™ (VSA®), aka Electroni
Stability Control (ESC), System 454
LaneWatch™*456
Real Time AWD with Intelligent Control
System™* 458
Tire Pressure Monitoring System (TPMS) 459
Tire Pressure Monitoring System (TPMS) -
Required Federal Explanation 462
Honda Sensing®*464
Collision Mitigation Braking System™
(CMBS™)467
Adaptive Cruise Control (ACC) 477
Lane Keeping Assist System (LKAS) 490

Road Departure Mitigation (RDM) System Front Sensor Camera Radar Sensor	504
raking	
Brake System	507
Anti-lock Brake System (ABS)	512
Brake Assist System	513
arking Your Vehicle	
When Stopped	514
/Iulti-View Rear Camera	515
efueling	
Fuel Information	517
How to Refuel	518
uel Economy and CO, Emissions	520

# **Before Driving**

# **Driving Preparation**

Check the following items before you start driving.

#### Exterior Checks

- Make sure there are no obstructions on the windows, door mirrors, exterior lights, or other parts of the vehicle.
  - Remove any frost, snow, or ice.
  - ► Remove any snow on the roof, as this can slip down and obstruct your field of vision while driving. If frozen solid, remove ice once it has softened.
  - ▶ When removing ice from around the wheels, be sure not to damage the wheel or wheel components.
- Make sure the hood is securely closed.
  - ▶ If the hood opens while driving, your front view will be blocked.
- Make sure the tires are in good condition.
  - ► Check air pressure, and check for damage and excessive wear.

#### **≥** Checking and Maintaining Tires P. 559

- Make sure there are no people or objects behind or around the vehicle.
  - ▶ There are blind spots from the inside.

#### 

#### NOTICE

When doors are frozen shut, use warm water around the door edges to melt any ice. Do not try to force them open, as this can damage the rubber trim around the doors. When done, wipe dry to avoid further freezing.

Do not pour warm water into the key cylinder. You will be unable to insert the key if the water freezes in the hole.

Heat from the engine and exhaust can ignite flammable materials left under the hood, causing a fire. If you've parked your vehicle for an extended period, inspect and remove any debris that may have collected, such as dried grass and leaves that have fallen or have been carried in for use as a nest by a small animal. Also, check under the hood for leftover flammable materials after you or someone else has performed maintenance on your vehicle.

#### ■ Interior Checks

- Store or secure all items on board properly.
  - ➤ Carrying too much cargo, or improperly storing it, can affect your vehicle's handling, stability, stopping distance, and tires, and make it unsafe.
    - Maximum Load Limit P. 431
- Do not pile items higher than the seat height.
  - ► They can block your view and may be thrown forward in the event of sudden braking.
- Do not place anything in the front seat footwells. Make sure to secure the floor mat.
  - An object or unsecured floor mat can interfere with your brake and accelerator pedal operation while driving.
- If you have any animals on board, do not let them move around in the vehicle.
  - ▶ They may interfere with driving and a crash could occur.
- Securely close and lock all doors and the tailgate.
  - Locking/Unlocking the Doors from the Inside P. 152
- Adjust your seating position properly.
- Adjust the head restraint, too.
  - Adjusting the Seats P. 194
  - Adjusting the front head restraint positions P. 201
- Adjust the mirrors and steering wheel properly for your driving.
  - Adjust them while sitting in the proper driving position.
    - Adjusting the Mirrors P. 191
    - Adjusting the Steering Wheel P. 190

#### 


The headlight aim is set by the factory, and does not need to be adjusted. However, if you regularly carry heavy items in the cargo area, have the aiming readjusted at a dealer or by a qualified technician.

- Be sure items placed on the floor behind the front seats cannot roll under the seats.
  - ▶ They can interfere with the driver's ability to operate the pedals, the operation of the seats, or the operation of the sensors under the seats.
- Everyone in the vehicle must fasten their seat belt.
  - Fastening a Seat Belt P. 46
- Make sure that the indicators in the instrument panel come on when you start the vehicle, and go off soon after.
  - ▶ Always have a dealer check the vehicle if a problem is indicated.
    - **▶ Indicators** P. 84

# **Maximum Load Limit**

The maximum load for your vehicle is 850 lbs (385 kg). See the Tire and Loading Information label attached to the driver's doorjamb.

Label Example



This figure includes the total weight of all occupants, cargo, and accessories, and the tongue load if you are towing a trailer.

Steps for Determining Correct Load Limit -

- (1) Locate the statement "The combined weight of occupants and cargo should never exceed XXX kg or XXX lbs." on your vehicle's placard.
- **(2)** Determine the combined weight of the driver and passengers that will be riding in your vehicle.
- **(3)** Subtract the combined weight of the driver and passengers from XXX kg or XXX lbs.
- **(4)** The resulting figure equals the available amount of cargo and luggage load capacity. For example, if the "XXX" amount equals 1,400 lbs. and there will be five 150 lb. passengers in your vehicle, the amount of available cargo and luggage load capacity is 650 lbs.  $(1,400 750 (5 \times 150) = 650 \text{ lbs.})$

Maximum Load Limit

# **AWARNING**

Overloading or improper loading can affect handling and stability and cause a crash in which you can be hurt or killed.

Follow all load limits and other loading guidelines in this manual.

Gross Vehicle Weight Rating (GVWR):

The maximum allowable weight of the vehicle, all occupants, all accessories and all cargo.

**Specifications** P. 618


Gross Axle Weight Rating (GAWR):

The maximum allowable weight of the vehicle axle.

Specifications P. 618

- **(5)** Determine the combined weight of luggage and cargo being loaded on the vehicle. That weight may not safely exceed the available cargo and luggage load capacity calculated in step 4.
- **(6)** If your vehicle will be towing a trailer, load from your trailer will be transferred to your vehicle. Consult this manual to determine how this reduces the available cargo and luggage load capacity of your vehicle.

In addition, the total weight of the vehicle, all occupants, accessories, cargo, and trailer tongue load must not exceed the Gross Vehicle Weight Rating (GVWR) or the Gross Axle Weight Rating (GAWR). Both are on a label on the driver's doorjamb.

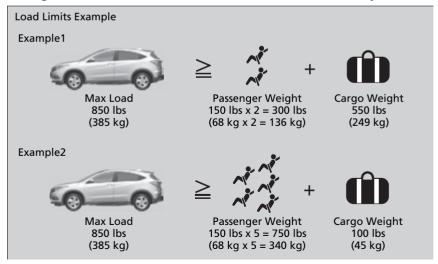

#### Maximum Load Limit

Towing a Trailer:

See Towing a Trailer to determine whether your vehicle is designed to tow a trailer.

Towing a Trailer P. 433

# Towing a Trailer

Your vehicle is not designed to tow a trailer. Attempting to do so can void your warranties.

# **Towing Behind a Motorhome**

Your vehicle is not designed to be towed behind a motorhome. If your vehicle needs to be towed in an emergency, refer to the emergency towing information.

**Emergency Towing** P. 613

# Off-Highway Driving Guidelines

## **General Information**

Your vehicle has been designed primarily for use on pavement, however, its higher ground clearance allows you to occasionally travel on unpaved roads. It is not designed for trail-blazing, or other challenging off-highway activities.

If you decide to drive on unpaved roads, you will find that it requires somewhat different driving skills and that your vehicle will handle somewhat differently than it does on pavement. Pay attention to the precautions and tips in this section, and get acquainted with your vehicle before leaving the pavement.

# **Important Safety Precautions**

To avoid loss of control or rollover, be sure to follow all precautions and recommendations:

- Be sure to store cargo properly and do not exceed your cargo load limits.
   Maximum Load Limit P. 431
- Whenever you drive, make sure you and your passengers always wear seat belts.
- Keep your speed low, and never go faster than the conditions allow.
- It's up to you to continually assess the situation and drive within the limits.

■ Off-Highway Driving Guidelines

# **AWARNING**

Improperly operating this vehicle on or offpavement can cause a crash or rollover in which you and your passengers could be seriously injured or killed.

- Follow all instructions and guidelines in this owner's manual.
- Keep your speed low, and don't drive faster than conditions permit.

Failure to operate your vehicle correctly might result in a crash or a rollover.

- **Important Handling Information** P. 38
- **▶** Precautions While Driving P. 442

# **Avoiding Trouble**


- **Check Out Your Vehicle** before you leave the pavement and make sure that all scheduled maintenance has been completed. Pay special attention to the condition of the tires, and check the tire pressures.
- **Remember** the route you choose presents limits (too steep or bumpy), you have limits (driving skill and comfort), and your vehicle has limits (traction, stability, and power). Failing to recognize these limits will likely put you and your passengers in a hazardous situation.
- Accelerating and Braking should be done slowly and gradually. Trying to start or stop too fast can cause a loss of traction and you could lose control.
- **Avoiding Obstacles and Debris** in the road reduces the likelihood of a rollover or damage to your suspension or other components.
- **Driving on Slopes** increases your risk of a rollover, particularly if you attempt to drive across a slope that is too steep. Going straight up or down a slope is usually the safest. If you can't clearly see all conditions or obstacles on a slope, walk it before you drive it. If there is any doubt whether you can safely pass, don't try it. Find another route. If you get stuck when climbing, do not try to turn around. Back down slowly following the same route you took up the hill.
- Crossing a Stream Avoid driving through deep water. If you encounter water
  in your route (a small stream or large puddle, for example), evaluate it carefully
  before going ahead. Make sure it is shallow, flowing slowly, and has firm ground
  underneath. If you are not sure of the depth or the ground, turn around and find
  another route. Driving through deep water can also damage your vehicle. The
  water can get into the transmission and differential, diluting the lubricant and
  causing an eventual failure. It can also wash the grease out of the wheel bearings.
- If You Get Stuck, carefully go in the direction that you think will get you unstuck. Do not spin the tires as this will only make things worse and could damage the transmission. If you are unable to free yourself, your vehicle will need to be towed. Front and rear tow hooks are provided for this purpose.

# When Driving

Models without keyless access system

# **Starting the Engine**





- 1. Make sure the parking brake is applied.
  - ➤ The electric parking brake indicator comes on for 15 seconds when you pull up to electric parking brake switch.

- **2.** Check that the transmission is in **P**, then depress the brake pedal.
  - ► Although it is possible to start the vehicle in N, it is safer to start it in P.

### Starting the Engine


Keep your foot firmly on the brake pedal when starting the engine.

The engine is harder to start in cold weather and in thinner air found at altitudes above 8,000 feet (2,400 meters).

When starting the engine in cold weather, turn off all electrical accessories such as the lights, heating and cooling system\*/climate control system\*, and rear defogger in order to reduce battery drain.

If you live in a region where winter is extremely cold, an engine block heater will improve starting and warming of the engine. Consult a dealer for details.

If the exhaust system sounds abnormal or you can smell exhaust gas inside the vehicle, have your vehicle checked by a dealer. There may be a problem with the engine or exhaust system.



**3.** Turn the ignition switch to START **III** without depressing the accelerator pedal.

#### Starting the Engine

Do not hold the key in START [III] for more than 10 seconds.

- If the engine does not start right away, wait for at least 30 seconds before trying again.
- If the engine starts, but then immediately stops, wait at least 30 seconds before repeating step 3 while gently depressing the accelerator pedal.
   Release the accelerator pedal once the engine starts.

The immobilizer system protects your vehicle from theft. If an improperly coded device is used, the engine's fuel system is disabled.

**Immobilizer System** P. 163

# Starting to Drive

- **1.** Keeping your right foot on the brake pedal, put the shift lever in  $\boxed{D}$ . Select  $\boxed{R}$  when reversing.
- **2.** With the parking brake applied, release the brake pedal and gently depress the accelerator pedal.
  - ► Make sure the electric parking brake indicator goes off.
    - Parking Brake P. 507

#### Starting to Drive

You can also release the parking brake by pressing the electric parking brake switch while depressing the brake pedal.

When facing downhill, you can start your vehicle more smoothly by manually releasing it with the electric parking brake switch than by releasing it with the accelerator pedal.

Continued 437

## ■ Hill start assist system

Hill start assist keeps the brake engaged briefly to help prevent the vehicle from rolling on inclines as you move your foot from the brake pedal to the accelerator. Put the transmission into  $\boxed{D}$ ,  $\boxed{S}$ , or  $\boxed{L}$  when facing uphill, or  $\boxed{R}$  when facing downhill, then release the brake pedal.

#### 

Hill start assist may not prevent the vehicle from rolling downhill on a very steep or slippery slope, and will not operate on small inclines.


Hill start assist will operate even when VSA® is switched off.

Hill start assist is not a replacement for the parking brake.

#### Models with keyless access system

# **Starting the Engine**





- **1.** Make sure the parking brake is applied.
  - ➤ The electric parking brake indicator comes on for 15 seconds when you pull up to electric parking brake switch.

- **2.** Check that the transmission is in P, then depress the brake pedal.
  - ► Although it is possible to start the vehicle in N, it is safer to start it in P.

#### Starting the Engine

Keep your foot firmly on the brake pedal when starting the engine.

The engine is harder to start in cold weather and in thinner air found at altitudes above 8,000 feet (2,400 meters).

When starting the engine in cold weather, turn off all electrical accessories such as the lights, climate control system, and rear defogger in order to reduce battery drain.

If you live in a region where winter is extremely cold, an engine block heater will improve starting and warming of the engine. Consult a dealer for details.

If the exhaust system sounds abnormal or you can smell exhaust gas inside the vehicle, have your vehicle checked by a dealer. There may be a problem with the engine or exhaust system.

The immobilizer system protects your vehicle from theft. If an improperly coded device is used, the engine's fuel system is disabled.

**Immobilizer System** P. 163

Continued 439



**3.** Press the **ENGINE START/STOP** button without depressing the accelerator pedal.

# ■ Stopping the Engine

You can turn the engine off when the vehicle is completely stopped.

- **1.** Put the transmission into **P**.
- 2. Press the **ENGINE START/STOP** button.

#### Starting the Engine

Bring the keyless remote close to the **ENGINE START/STOP** button if the battery in the keyless remote is weak.

■ If the Keyless Remote Battery is Weak P. 596

The engine may not start if the keyless remote is subjected to strong radio waves.

Do not hold the **ENGINE START/STOP** button to start the engine.

If the engine does not start, wait at least 30 seconds before trying again.

# Starting to Drive

- **1.** Keeping your right foot on the brake pedal, put the transmission into  $\boxed{\textbf{D}}$ . Select  $\boxed{\textbf{R}}$  when reversing.
- **2.** With the parking brake applied, release the brake pedal and gently depress the accelerator pedal.
  - ▶ Make sure the electric parking brake indicator goes off.
    - Parking Brake P. 507

## ■ Hill start assist system

Hill start assist keeps the brake engaged briefly to help prevent the vehicle from rolling on inclines as you move your foot from the brake pedal to the accelerator. Put the transmission into  $\boxed{\textbf{D}}$  or  $\boxed{\textbf{S}}$  when facing uphill, or  $\boxed{\textbf{R}}$  when facing downhill, then release the brake pedal.

#### Starting to Drive

You can also release the parking brake by pressing the electric parking brake switch while depressing the brake pedal.

When facing downhill, you can start your vehicle more smoothly by manually releasing it with the electric parking brake switch than by releasing it with the accelerator pedal.

#### ₩ Hill start assist system

Hill start assist may not prevent the vehicle from rolling downhill on a very steep or slippery slope, and will not operate on small inclines.

Hill start assist will operate even when VSA® is switched off.

Hill start assist is not a replacement for the parking brake.

# **Precautions While Driving**

## Driving Guidelines for Your Utility Vehicle

Utility vehicles have a significantly higher rollover rate than other types of vehicles. To prevent rollovers or loss of control:

- Take corners at slower speeds than you would with a passenger vehicle.
- Avoid sharp turns and abrupt maneuvers whenever possible.
- Do not modify your vehicle in any way that you would raise the center of gravity.
- Do not carry heavy cargo on the roof.

Never carry more than 165 lbs (75 kg) of cargo on the roof rack (Honda accessory).

#### ■ In Rain

Avoid driving in deep water and on flooded roads. This can damage the engine or driveline, or cause electrical component failure.

▶ Precautions While Driving

#### NOTICE

Do not change the shift position while pressing the accelerator pedal. You could damage the transmission.

#### NOTICE

If you repeatedly turn the steering wheel at an extremely low speed, or hold the steering wheel in the full left or right position for a while, the electric power steering (EPS) system heats up. The system goes into a protective mode, and limits its performance. The steering wheel becomes harder and harder to operate. Once the system cools down, the EPS system is restored. Repeated operation under these conditions can eventually damage the system.

If the ignition switch is turned to ACCESSORY []\*1 while driving, the engine will shut down and all steering and brake power assist functions will stop, making it difficult to control the vehicle.

Do not select  $\boxed{\mathbf{N}}$  while driving as you will lose engine braking (and acceleration) performance.

During the first 600 miles (1,000 km) of operation, avoid sudden acceleration or full throttle operation so as to not damage the engine or powertrain.

Avoid hard braking for the first 200 miles (300 km) after purchasing your new vehicle or replacing the brake pads or rotors, to allow for proper break-in.

\*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

#### Other Precautions

If there is a strong impact with something under the vehicle, stop in a safe location. Check the underside of the vehicle for damage or any fluid leaks.

# **Continuously Variable Transmission**

# Creeping

The engine runs at a higher idle speed and creeping increases. Keep the brake pedal firmly depressed when stopped.

## Kickdown

Quickly depressing the accelerator pedal while driving uphill may cause the transmission to drop to a lower ratio, unexpectedly increasing vehicle speed. Depress the accelerator pedal carefully, especially on slippery roads and curves.

#### 

Failure to operate your vehicle correctly might result in a crash or a rollover.


- **Important Handling Information** P. 38 **Important Handling Information** P. 38
- **▶** Precautions While Driving P. 442

#### Continuously variable transmission models without paddle shifters

# **Shifting**

Change the shift position in accordance with your driving needs.

## ■ Shift lever positions

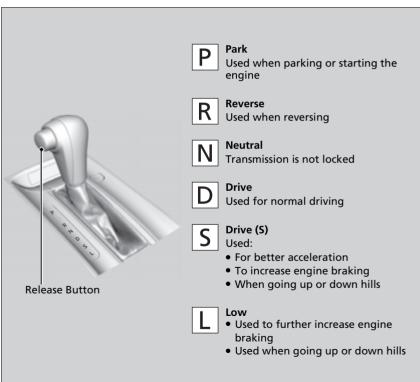

#### Shifting


You cannot turn the ignition switch to LOCK  $\boxed{0}$  and remove the key unless the shift lever is in  $\boxed{P}$ .

The vehicle may move forward very slightly even in  $\boxed{\mathbf{N}}$  while the engine is cold.

Depress the brake pedal firmly and, when necessary, apply the parking brake.

When shifting positions in extremely low temperatures (-22°F/-30°C), there may be a short delay before the shift position is displayed. Always confirm you are in the correct shift position before driving.

## ■ Shift Lever Operation

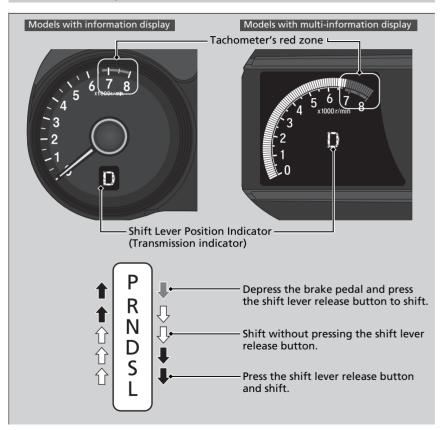

#### Shift Lever Operation

#### NOTICE

When you change the shift lever from  $\boxed{\mathbf{D}}$  to  $\boxed{\mathbf{R}}$  and vice versa, come to a complete stop and keep the brake pedal depressed.

Operating the shift lever before the vehicle has come to a complete standstill can damage the transmission.

Use the shift lever position indicator to check the lever position before pulling away.

If the transmission indicator blinks when driving, in any shift position, there is a problem with the transmission.

Avoid sudden acceleration and have the transmission checked by a dealer as soon as possible.

The fuel supply may be cut off if you drive at engine speeds in or over the tachometer red zone (engine speed limit). If this happens, you may experience a slight jolt.

It may not be possible to operate the shift lever if the brake pedal is applied while the shift lever release button is held down.


Depress the brake pedal first.

#### Continuously variable transmission models with paddle shifters

# **Shifting**

Change the shift position in accordance with your driving needs.

### ■ Shift lever positions

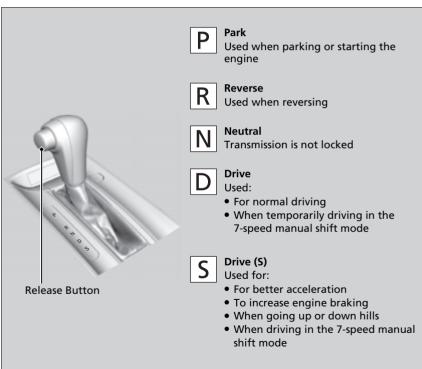

#### >> Shifting


You cannot change the power mode from ON to VEHICLE OFF (LOCK) unless the shift lever is in P.

The vehicle may move forward very slightly even in  $\boxed{\mathbf{N}}$  while the engine is cold.

Depress the brake pedal firmly and, when necessary, apply the parking brake.

When shifting positions in extremely low temperatures (-22°F/-30°C), there may be a short delay before the shift position is displayed. Always confirm you are in the correct shift position before driving.

## Shift Lever Operation

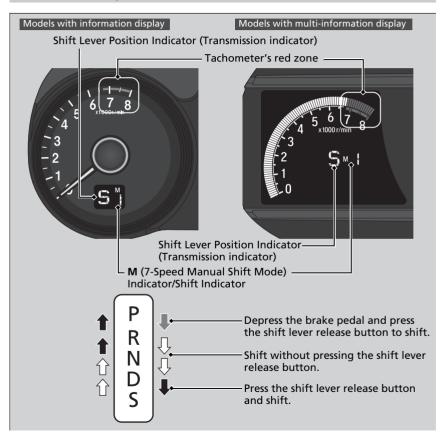

#### Shift Lever Operation

#### NOTICE

When you change the shift lever from  $\boxed{\mathbf{D}}$  to  $\boxed{\mathbf{R}}$  and vice versa, come to a complete stop and keep the brake pedal depressed.

Operating the shift lever before the vehicle has come to a complete standstill can damage the transmission.

Use the shift lever position indicator to check the lever position before pulling away.

If the transmission indicator blinks when driving, in any shift position, there is a problem with the transmission.

Avoid sudden acceleration and have the transmission checked by a dealer as soon as possible.

The fuel supply may be cut off if you drive at engine speeds in or over the tachometer red zone (engine speed limit). If this happens, you may experience a slight jolt.

It may not be possible to operate the shift lever if the brake pedal is applied while the shift lever release button is held down.

Depress the brake pedal first.

## ■ 7-Speed Manual Shift Mode

Use the paddle shifters to change between 1st and 7th speeds without removing your hands from the steering wheel. The transmission switches to the 7-speed manual shift mode when you pull a paddle shifter while driving. This mode is useful when engine braking is needed.

## ■ When the shift lever is in D:

The shift mode goes into the 7-speed manual shift mode temporarily, and the number is displayed in the shift indicator.

The 7-speed manual shift mode is canceled automatically if you drive at constant speed or accelerate, and the number in the shift indicator goes off.

You can cancel this mode by pulling the + paddle shifter for a few seconds. The 7-speed manual shift mode is especially useful when reducing the vehicle speed temporarily before making a turn.

## ■ When the shift lever is in S:

The shift mode goes into the 7-speed manual shift mode. The  $\mathbf{M}$  indicator and the speed number are displayed in the shift indicator. As the vehicle speed slows down, the transmission automatically shifts down accordingly. When the vehicle comes to a stop, it automatically shifts down into 1st.

If the vehicle speed increases and the engine speed reaches near the tachometer's red zone, the transmission automatically shifts up.

You can only pull away in 1st speed.

When canceling the 7-speed manual shift mode, move the shift lever from **S** to **D**. When the 7-speed manual shift mode is canceled, the **M** indicator and shift indicator go off.

#### ≥ 7-Speed Manual Shift Mode

In the 7-speed manual shift mode, the transmission shifts up or down by operating either paddle shifter under the following conditions:


Shift Up: The engine speed reaches the lowest threshold of the higher speed position. Shift Down: The engine speed reaches the highest threshold of the lower speed position.

When the engine speed reaches near the tachometer's red zone, the transmission shifts up automatically.

When the engine speed reaches the lowest threshold of the selected speed position, the transmission shifts down automatically.

Operating the paddle shifters on slippery surfaces may cause the tires to lock up. In this case, the 7-speed manual shift mode is canceled and goes back to the normal  $\boxed{\mathsf{D}}$  driving mode.

# ■ 7-Speed Manual Shift Mode Operation

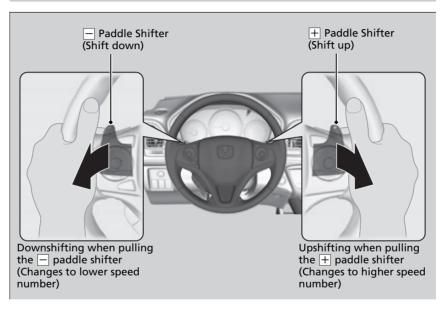

#### ≥ 7-Speed Manual Shift Mode Operation


Each paddle shift operation makes a single speed change.

To change continuously, release the paddle shifter before pulling it again for the next speed.

The shift indicator blinks when you cannot shift up or down. It indicates that your vehicle speed is not in its allowable shifting range.

Slightly accelerate to shift up and decelerate to shift down while the indicator is blinking.

## **ECON Button**



The **ECON** button turns the ECON mode on and off. The ECON mode helps you improve your fuel economy by adjusting the performance of the engine, transmission, heating and cooling system\*/climate control system\*, and cruise control\*.

#### ECON Button


#### Models with climate control system

While in ECON mode, the climate control system has greater temperature fluctuations.

## **Cruise Control\***

Maintains a constant vehicle speed without having to keep your foot on the accelerator. Use cruise control on freeways or open roads where you can travel at a constant speed with little acceleration or deceleration.

#### 

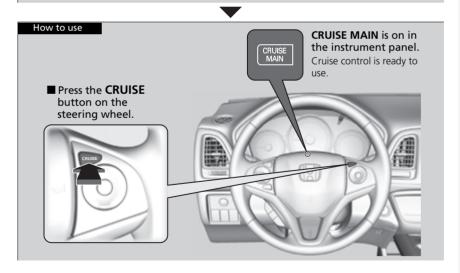

# **AWARNING**

Improper use of the cruise control can lead to a crash.


Use the cruise control only when traveling on open highways in good weather.

It may not be possible to maintain a constant speed when driving uphill or downhill.

When not using cruise control: Turn off cruise control by pressing the **CRUISE** button.

While in ECON mode, it may take relatively more time to accelerate to maintain the set speed.

# ■ To Set the Vehicle Speed

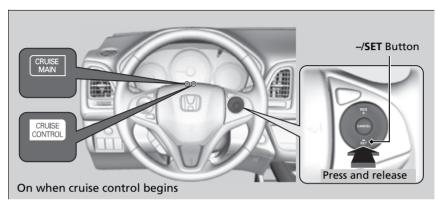


Take your foot off the pedal and press the **–/SET** button when you reach the desired speed.

The moment you release the **-/SET** button, the set speed is fixed, and cruise control begins. The **CRUISE CONTROL** indicator comes on.


## ■ To Adjust the Vehicle Speed

Increase or decrease the vehicle speed using the **RES/+** or **-/SET** buttons on the steering wheel.

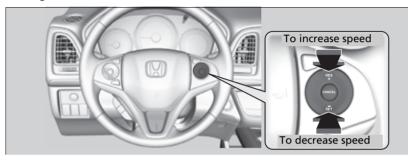

- Each time you press the button, the vehicle speed is increased or decreased by about 1 mph (1.6 km/h).
- If you keep the button pressed, the vehicle speed increases or decreases until you release it. This speed is then set.

#### ■ To Cancel



To cancel cruise control, do any of the following:

- Press the **CANCEL** button.
- Press the **CRUISE** button.
- Depress the brake pedal.

The **CRUISE CONTROL** indicator goes off.

#### ∑To Adjust the Vehicle Speed

You can set the vehicle speed using the –/**SET** button on the steering wheel when adjusting the speed with the accelerator and brake pedals.

#### ∑To Cancel

Resuming the prior set speed:

After cruise control has been canceled, you can still resume the prior set speed by pressing the **RES/+** button while driving at a speed of at least 25 mph (40 km/h) or more.

You cannot set or resume in the following situations:

- When vehicle speed is less than 25 mph (40 km/h)
- When the **CRUISE** button is turned off

At vehicle speeds of 22 mph (35 km/h) or less, cruise control is canceled automatically.

# Vehicle Stability Assist™ (VSA®), aka Electronic Stability Control (ESC), System

VSA® helps to stabilize the vehicle during cornering if the vehicle turns more or less than what was intended. It also assists in maintaining traction on slippery surfaces. It does so by regulating engine output and selectively applying the brakes.

# ■ VSA® Operation



When VSA® activates, you may notice that the engine does not respond to the accelerator. You may also notice some noise from the hydraulic brake system. You will also see the indicator blink.

 Wehicle Stability Assist™ (VSA®), aka Electronic Stability Control (ESC), System


The VSA® may not function properly if tire type and size are mixed. Make sure to use the same size and type of tire, and the air pressures as specified.

When the VSA® system indicator comes on and stays on while driving, there may be a problem with the system. While this may not interfere with normal driving, have your vehicle checked by a dealer immediately.

VSA® cannot enhance stability in all driving situations and does not control the entire braking system. You still need to drive and corner at speeds appropriate for the conditions and always leave a sufficient margin of safety.

The main function of the VSA® system is generally known as Electronic Stability Control (ESC). The system also includes a traction control function.

#### ■ VSA® On and Off



This button is on the driver side control panel. To partially disable VSA® functionality/ features, press and hold it until you hear a beep.

Your vehicle will have normal braking and cornering ability, but traction control function will be less effective.

To restore VSA® functionality/features, press the (SA)® (VSA® **OFF**) button until you hear a beep.

VSA® is turned on every time you start the engine, even if you turned it off the last time you drove the vehicle.

Wehicle Stability Assist<sup>™</sup> (VSA®), aka Electronic Stability Control (ESC), System

In certain unusual conditions when your vehicle gets stuck in shallow mud or fresh snow, it may be easier to free it with the VSA® temporarily switched off.


When the B button is pressed, the traction control function becomes less effective. This allows for the wheels to spin more freely at low speed. You should only attempt to free your vehicle with the VSA® off if you are not able to free it when the VSA® is on.

Immediately after freeing your vehicle, be sure to switch VSA® on again. We do not recommend driving your vehicle with the VSA® system switched off.

You may hear a motor sound coming from the engine compartment while system checks are being performed immediately after starting the engine or while driving. This is normal.

## LaneWatch™\*

LaneWatch is an assistance system that allows you to check the passenger side rear areas displayed on the audio/information screen when the turn signal is activated to the passenger's side. A camera in the passenger side door mirror monitors these areas and allows you to check for vehicles, in addition to your visual check and use of the passenger door mirror. You can also keep the system on for your convenience while driving.

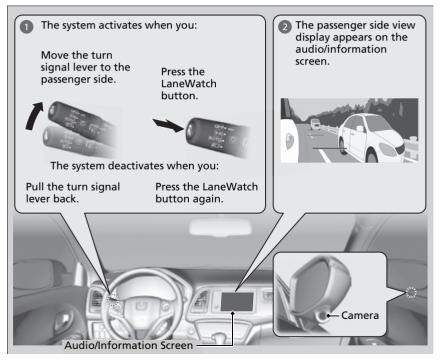

# **AWARNING**

Failure to visually confirm that it is safe to change lanes before doing so may result in a crash and serious injury or death.

Do not rely only on LaneWatch while driving.

Always look in your mirrors, to either side of your vehicle, and behind you for other vehicles before changing lanes.

#### **Important Safety Reminder**

Like all assistance systems, LaneWatch has limitations. Overreliance on LaneWatch may result in a collision.

The LaneWatch function can be affected by weather, lighting (including headlights and low sun angle), ambient darkness, camera condition, and loading.

The LaneWatch may not provide the intended display of traffic to the side and rear under the following conditions:

- Your vehicle's suspension has been altered, changing the height of the vehicle.
- Your tires are over or under inflated.
- Your tires or wheels are of varied size or construction.

## **■** Customizing the LaneWatch settings

You can customize the following items using the audio/information screen.

- **Show with Turn Signal:** Selects whether LaneWatch monitor comes on when you operate the turn signal lever.
- **Display Time after Turn Signal Off:** Changes the remaining LaneWatch display time after you pull the turn signal lever back.
- **Reference Line:** Selects whether the reference lines appear on the LaneWatch monitor.
- **Next Maneuver Pop up\*:** Selects whether a turn direction screen of the navigation system interrupts the LaneWatch display.
- **Display:** Adjusts display settings.
  - **Customized Features** P. 356

#### **■** Reference Lines



Three lines that appear on the screen can give an idea of how far the vehicles or objects on the screen are from your vehicle, respectively. If an object is near line 1 (in red), it indicates that it is close to your vehicle whereas an object near line 3 is farther away.

#### LaneWatch™\*

The LaneWatch camera view is restricted. Its unique lens makes objects on the screen slightly look different from what they are.

LaneWatch display does not come on when the shift lever is in  $\boxed{\mathbf{R}}$ .

For proper LaneWatch operation:

- The camera is located in the passenger side door mirror. Always keep this area clean. If the camera lens is covered with dirt or moisture, use a soft, moist cloth to keep the lens clean and free of debris.
- Do not cover the camera lens with labels or stickers of any kind.
- Do not touch the camera lens.

#### 

The area around the reference line 1 (red) is very close to your vehicle. As always, make sure to visually confirm the safety of a lane change before changing lanes.

The distance between your vehicle and lines 1, 2 and 3 on the screen vary depending on road conditions and vehicle loading. For example, the reference lines on the screen may seem to appear closer than the actual distances when the rear of your vehicle is more heavily loaded.

#### Consult a dealer if:

- The passenger side door mirror, or area around it is severely impacted, resulting in changing the camera angle.
- The LaneWatch display does not come on at all.

\* Not available on all models

# Real Time AWD with Intelligent Control System™\*

Your vehicle is equipped with the AWD system. When the system senses a loss of front wheel traction, it automatically transfers some power to the rear wheels. This allows you to utilize all available traction and may increase mobility.

You still need to exercise the same care when accelerating, steering, and braking that you would in a two wheel drive vehicle.

If you excessively spin all four wheels and overheat the AWD system, only the front wheels receive power. Stop until the system cools down.

■ Real Time AWD with Intelligent Control System<sup>TM</sup>\*

#### NOTICE

Do not continuously spin the front tires of your vehicle. Continuously spinning the front tires can cause transmission or rear differential damage.


The AWD system may not function properly if tire type and size are mixed. Make sure to use the same size and type of tire, and the air pressures as specified.

Tire and Wheel Replacement P. 566

#### U.S. models only

# **Tire Pressure Monitoring System (TPMS)**

Instead of directly measuring the pressure in each tire, the TPMS on this vehicle monitors and compares the rolling radius and rotational characteristics of each wheel and tire while you are driving to determine if one or more tires are significantly under-inflated.



This will cause the low tire pressure/TPMS indicator to come on and a message to appear on the multi-information display\*.

#### ∑Tire Pressure Monitoring System (TPMS)

The system does not monitor the tires when driving at low speed.

Conditions such as low ambient temperature and altitude change directly affect tire pressure and can trigger the low tire pressure/TPMS indicator to come on.

Tire pressure checked and inflated in:

- Warm weather can become under-inflated in colder weather.
- Cold weather can become overinflated in warmer weather.

The low tire pressure/TPMS indicator will not come on as a result of overinflation.

The TPMS may not function properly if tire type and size are mixed. Make sure to use the same size and type of tire.

**► Checking and Maintaining Tires** P. 559

The low tire pressure/TPMS indicator may come on with a delay or may not come on at all when:

- You rapidly accelerate, decelerate, or turn the steering wheel.
- You drive on snowy or slippery roads.
- Snow chains are used.

The low tire pressure/TPMS indicator may come on under the following conditions:

- A compact spare tire is used.
- There is a heavier and uneven load on the tires than the condition at calibration.
- Snow chains are used.

#### ■ TPMS Calibration

You must start TPMS calibration every time you:

- Adjust the pressure in one or more tires.
- Rotate the tires.
- Replace one or more tires.


Before calibrating the TPMS:

• Set the cold tire pressure in all four tires.

**EXECUTE:** Checking Tires P. 559

Make sure:

- The vehicle is at a complete stop.
- The shift lever is in **P**.
- The ignition switch is in ON II \*1.



#### Models with information display

Press and hold the TPMS button until the low tire pressure/TPMS indicator blinks twice, indicating the calibration process has begun.

- If the low tire pressure/TPMS indicator does not blink, confirm the above conditions then press and hold the TPMS button again.
- The calibration process finishes automatically.

\*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

#### ▼TPMS Calibration

TPMS cannot be calibrated if a compact spare tire is installed.


The calibration process requires approximately 30 minutes of cumulative driving at speeds between 30-60 mph (48-97 km/h).

During this period, if the ignition is turned on\*1 and the vehicle is not moved within 45 seconds, you may notice the low tire pressure/TPMS indicator comes on briefly. This is normal and indicates that the calibration process is not yet complete.

If the snow chains are installed, remove them before calibrating the TPMS.

If the low tire pressure/TPMS indicator comes on even when the properly inflated specified regular tires are installed, have your vehicle checked by a dealer.

We recommend that the tires be replaced with the same brand, model, and size as the originals. Ask a dealer for details.



#### Models with multi-information display

You can calibrate the system from the customized features on the multi-information display.

- Press the ▲①/▼ button to select Vehicle Settings, then press the SEL/RESET button.
  - ➤ **TPMS Calibration** appears on the display.
- **2.** Press the **SEL/RESET** button.
  - ► The display switches to the customization setup screen, where you can select Cancel or Calibrate.
- **3.** Press the ▲①/▼ button and select **Calibrate**, then press the **SEL/RESET** button.
  - Calibration Started screen appears, then the display returns to the customization menu screen.
- If the Calibration **Failed To Start** message appears, repeat steps 2-3.
- The calibration process finishes automatically.

#### U.S. models

# Tire Pressure Monitoring System (TPMS) - Required Federal Explanation

Each tire, including the spare (if provided), should be checked monthly when cold and inflated to the inflation pressure recommended by the vehicle manufacturer on the vehicle placard or tire inflation pressure label.

(If your vehicle has tires of a different size than the size indicated on the vehicle placard or tire inflation pressure label, you should determine the proper tire inflation pressure for those tires.)

As an added safety feature, your vehicle has been equipped with a tire pressure monitoring system (TPMS) that illuminates a low tire pressure telltale



when one or more of your tires is significantly under-inflated.

Accordingly, when the low tire pressure telltale illuminates, you should stop and check your tires as soon as possible, and inflate them to the proper pressure.

Driving on a significantly under-inflated tire causes the tire to overheat and can lead to tire failure. Under-inflation also reduces fuel efficiency and tire tread life, and may affect the vehicle's handling and stopping ability. Please note that the TPMS is not a substitute for proper tire maintenance, and it is the driver's responsibility to maintain correct tire pressure, even if under-inflation has not reached the level to trigger illumination of the TPMS low tire pressure telltale.

Your vehicle has also been equipped with a TPMS malfunction indicator to indicate when the system is not operating properly. The TPMS malfunction indicator is combined with the low tire pressure telltale. When the system detects a malfunction, the telltale will flash for approximately one minute and then remain continuously illuminated. This sequence will continue upon subsequent vehicle start-ups as long as the malfunction exists.

When the malfunction indicator is illuminated, the system may not be able to detect or signal low tire pressure as intended.

TPMS malfunctions may occur for a variety of reasons, including the installation of replacement or alternate tires or wheels on the vehicle that prevent the TPMS from functioning properly.

Always check the TPMS malfunction telltale after replacing one or more tires or wheels on your vehicle to ensure that the replacement or alternate tires and wheels allow the TPMS to continue to function properly.

# Honda Sensing®\*

Honda Sensing® is a driver support system which employs the use of two distinctly different kinds of sensors: a radar sensor located in the front grille and a front sensor camera mounted to the interior side of the windshield, behind the rearview mirror.

Honda Sensing® has following functions.


#### ■ The functions which do not require switch operations to activate

- Collision Mitigation Braking System<sup>™</sup> (CMBS<sup>™</sup>) ▶ P. 467
- Road Departure Mitigation (RDM) System 2 P. 499

## ■ The functions which require switch operations to activate

- Adaptive Cruise Control (ACC) 
  ▶ P. 477
- Lane Keeping Assist System (LKAS) ₽ P. 490

## Operation Switches for the ACC and LKAS



#### ■ MAIN Button

Press to activate standby mode for ACC and LKAS. Or press to cancel these systems.

#### **■ LKAS Button**

Press to activate or cancel the LKAS.

#### ■ RES/+ and -/SET Button

Press **RES/+** to resume the ACC or increase the vehicle speed.

Press **–/SET** to set the ACC or decrease the vehicle speed.

#### **■** Interval Button


Press the (interval) button to change the ACC following-interval.

#### **■ CANCEL Button**

Press to cancel ACC.

Continued 465

# **■ Multi-Information Display Content**




You can see the current state of ACC and LKAS.

- Indicates that ACC and LKAS are ready to be activated.
- 2 Indicates that LKAS is activated and whether or not traffic lane lines are detected.
- 3 Indicates whether or not a vehicle is detected ahead.
- 4 Shows the set vehicle speed.
- **5** Shows the set vehicle interval.

# **Collision Mitigation Braking System™ (CMBS™)**

The system can assist you when it determines there is a possibility of your vehicle colliding with a vehicle or a pedestrian detected in front of your vehicle. The CMBS™ is designed to alert you when the potential for a collision is determined, as well as to reduce your vehicle speed to help minimize collision severity when a collision is deemed unavoidable.

## ■ How the system works

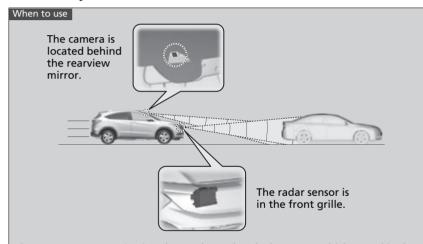

The system starts monitoring the roadway ahead when your vehicle speed is about 3 mph (5 km/h) or above and will search for a vehicle in front of you.

The CMBS™ activates when:

- The speed difference between your vehicle and a vehicle or pedestrian detected in front of you becomes about 3 mph (5 km/h) and over with a chance of a collision.
- Your vehicle speed is about 62 mph (100 km/h) or less and there is a chance of a collision with an oncoming detected vehicle or a pedestrian in front of you.

## **Important Safety Reminder**

The CMBS<sup>TM</sup> is designed to reduce the severity of an unavoidable collision. It does not prevent a collision nor stop the vehicle automatically. It is still your responsibility to operate the brake pedal and steering wheel appropriately according to the driving conditions.

The CMBS™ may not activate or may not detect a vehicle in front of your vehicle under certain conditions:

**EXECUTE:** Conditions and Limitations P. 471

You can read about handling information for the camera equipped with this system.

Front Sensor Camera P. 504

For directions on the proper handling of the radar sensor, refer to the following page.

Radar Sensor P. 506

## 

Rapid vibrations on the steering wheel alert you when your vehicle speed is between 19 and 62 mph (30 and 100 km/h) with an oncoming vehicle detected in front of you.

When the CMBS™ activates, it may automatically apply the brake. It will be canceled when your vehicle stops or a potential collision is not determined.

# ■ When the system activates

The system provides visual, audible and tactile alerts of a possible collision, and stops if the collision is avoided.

• Take appropriate action to prevent a collision (apply the brakes, change lanes, etc.)



You can change the distance (**Long/Normal/Short**) between vehicles at which the system's earliest collision alert will come on through audio/information screen setting options.

**≥** List of customizable options P. 362

## ■ Vibration alert on the steering wheel

When a potential collision to an oncoming detected vehicle is determined, the system alerts you with rapid vibration on the steering wheel, in addition to visual and audible alerts.

► Take appropriate action to prevent a collision (apply the brakes, operate the steering wheel, etc.).

#### When the system activates

The camera in the CMBS™ is also designed to detect pedestrians.

However, this pedestrian detection feature may not activate or may not detect a pedestrian in front of your vehicle under certain conditions.

Refer to the ones indicating the pedestrian detection limitations from the list.

**EXECUTE:** Conditions and Limitations P. 471

## 

Vibration alert function is disabled when the electric power steering (EPS) system indicator comes on.

**Electric Power Steering (EPS) System**Indicator P. 94

# **■** Collision Alert Stages

The system has three alert stages for a possible collision. However, depending on circumstances, the CMBS $^{\text{TM}}$  may not go through all of the stages before initiating the last stage.

Distance between vehicles		CMBS™				
		The sensors detect a vehicle	Audible & Visual WARNINGS	Steering Wheel	Braking	
Stage	Normal Vehicle Long Short Ahead  Your Vehicle	There is a risk of a collision with the vehicle ahead of you.	When in <b>Long</b> , visual and audible alerts come on at a longer distance from a vehicle ahead than in <b>Normal</b> setting, and in <b>Short</b> , at a shorter distance than in <b>Normal</b> .	If an oncoming vehicle is detected, rapid vibration is provided.	_	
Stage two	Your Vehicle Ahead	The risk of a collision has increased, time to respond is reduced.	Viewal and available aloute	-	Lightly applied	
Stage three	Your Vehicle Vehicle Ahead	The CMBS™ determines that a collision is unavoidable.	Visual and audible alerts.	-	Forcefully applied	

# CMBS™ On and Off



Press and hold the button until the beeper sounds to switch the system on or off.

When the CMBS™ is off:

- The CMBS™ indicator in the instrument panel comes on.
- A message on the multi-information display reminds you that the system is off.

The CMBS™ is turned on every time you start the engine, even if you turned it off the last time you drove the vehicle.

#### CMBS™ On and Off

The CMBS™ may automatically shut off, and the CMBS™ indicator will come and stay on under certain conditions:

**► CMBS™ Conditions and Limitations** P. 471

# CMBS™ Conditions and Limitations

The system may automatically shut off and the CMBS™ indicator will come on under certain conditions. Some examples of these conditions are listed below. Other conditions may reduce some of the CMBS™ functions.

Front Sensor Camera P. 504

Radar Sensor P. 506

## ■ Environmental conditions

- Driving in bad weather (rain, fog, snow, etc.).
- Sudden changes between light and dark, such as an entrance or exit of a tunnel.
- There is little contrast between objects and the background.
- Driving into low sunlight (e.g., at dawn or dusk).
- Strong light is reflected onto the roadway.
- Driving in the shadows of trees, buildings, etc.
- Roadway objects or structures are misinterpreted as vehicles and pedestrians.
- Reflections on the interior of the windshield.
- Driving at night or in a dark condition such as a tunnel.

## ■ Roadway conditions

- Driving on a snowy or wet roadway (obscured lane marking, vehicle tracks, reflected lights, road spray, high contrast).
- The road is hilly or the vehicle is approaching the crest of a hill.
- Driving on curvy, winding, or undulating roads.

#### CMBS™ Conditions and Limitations

Have your vehicle checked by a dealer if you find any unusual behavior of the system (e.g., the warning message appears too frequently).

## **■** Vehicle conditions

- Headlight lenses are dirty or the headlights are not properly adjusted.
- The outside of the windshield is blocked by dirt, mud, leaves, wet snow, etc.
- The inside of the windshield is fogged.
- An abnormal tire or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tire, etc.).
- When tire chains are installed.
- The vehicle is tilted due to a heavy load or suspension modifications.
- The camera temperature gets too high.
- Driving with the parking brake applied.
- When the radar sensor in the front grille gets dirty.

## **■** Detection limitations

- A vehicle or pedestrian suddenly crosses in front of you.
- The distance between your vehicle and the vehicle or pedestrian ahead of you is too short.
- A vehicle cuts in front of you at a slow speed, and it brakes suddenly.
- When you accelerate rapidly and approach the vehicle or pedestrian ahead of you at high speed.
- The vehicle ahead of you is a motorcycle, bicycle, mobility scooter or other small vehicle.
- When there are animals in front of your vehicle.
- When you drive on a curved, winding or undulating road that makes it difficult for the sensor to properly detect a vehicle in front of you.
- The speed difference between your vehicle and a vehicle or pedestrian in front of you is significantly large.
- An oncoming vehicle suddenly comes in front of you.
- Another vehicle suddenly comes in front of you at an intersection, etc.
- Your vehicle abruptly crosses over in front of an oncoming vehicle.
- When driving through a narrow iron bridge.
- When the lead vehicle suddenly slows down.

#### Limitations applicable to pedestrian detection only

- When there is a group of people in front of your vehicle walking together side by side.
- Surrounding conditions or belongings of the pedestrian alter the pedestrian's shape, preventing the system from recognizing that the person is a pedestrian.
- When the pedestrian is shorter than about 3.3 feet (1 meter) or taller than about 6.6 feet (2 meters) in height.
- When a pedestrian blends in with the background.
- When a pedestrian is bent over or squatting, or when their hands are raised or they are running.
- When several pedestrians are walking ahead in a group.
- When the camera cannot correctly identify that a pedestrian is present due to an unusual shape (holding luggage, body position, size).

#### ■ Automatic shutoff

 $\mathsf{CMBS^{TM}}$  may automatically shut itself off and the  $\mathsf{CMBS^{TM}}$  indicator comes and stays on when:

- The temperature inside the system is high.
- You drive off-road or on a mountain road, or curved and winding road for an extended period.
- An abnormal tire condition is detected (incorrect tire size, flat tire, etc.).
- The camera behind the rearview mirror, or the area around the camera, including the windshield, gets dirty.

Once the conditions that caused CMBS $^{\text{TM}}$  to shut off improve or are addressed (e.g., cleaning), the system comes back on.

# ■ With Little Chance of a Collision


The CMBS™ may activate even when you are aware of a vehicle ahead of you, or when there is no vehicle ahead. Some examples of this are:

## ■ When passing

Your vehicle approaches another vehicle ahead of you and you change lanes to pass.


## ■ At an intersection

Your vehicle approaches or passes another vehicle that is making a left or right turn.

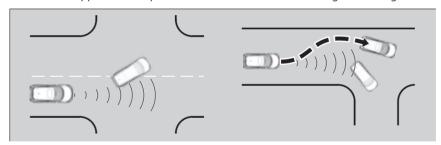

#### On a curve

When driving through curves, your vehicle comes to a point where an oncoming vehicle is right in front of you.




# ■ Through a low bridge at high speed

You drive under a low or narrow bridge at high speed.


# ■ Speed bumps, road work sites, train tracks, roadside objects, etc.

You drive over speed bumps, steel road plates, etc., or your vehicle approaches train tracks or roadside objects [such as a traffic sign and guard rail] on a curve or, when parking, stationary vehicles and walls.



# **Adaptive Cruise Control (ACC)**

Helps maintain a constant vehicle speed and a set following-interval behind a vehicle detected ahead of yours, without you having to keep your foot on the brake or the accelerator.

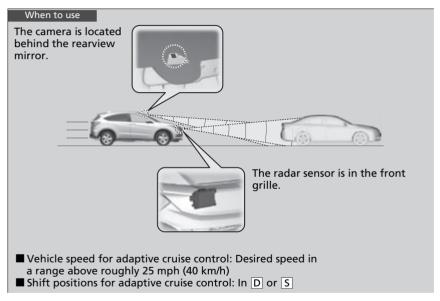

# **AWARNING**

Improper use of ACC can lead to a crash.

Use ACC only when driving on expressways or freeways and in good road and weather conditions.


# **AWARNING**

ACC has limited braking capability.

When your vehicle speed drops below 22 mph (35 km/h), ACC will automatically cancel and no longer will apply your vehicle's brakes.

Always be prepared to apply the brake pedal when conditions require.

# ■ How to activate the system

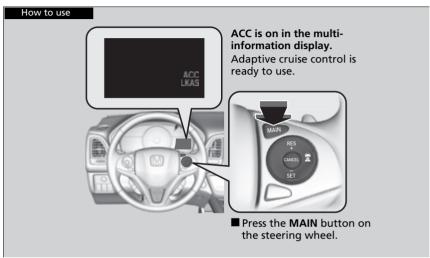

#### 

## **Important Reminder**

As with any system, there are limits to ACC. Use the brake pedal whenever necessary, and always keep a safe interval between your vehicle and other vehicles.


You can read about handling information for the camera equipped with this system.

Front Sensor Camera P. 504


For directions on the proper handling of the radar sensor, refer to the following page.

Radar Sensor P. 506

# ■ To Set the Vehicle Speed

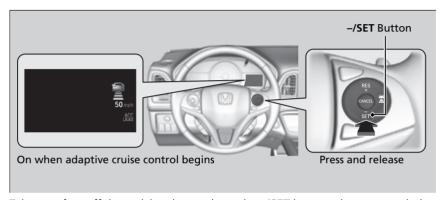

Take your foot off the pedal and press down the **-/SET** button when you reach the desired speed. The moment you release the button, the set speed is fixed, and ACC begins.



When ACC starts operating, the vehicle icon, interval bars and set speed appear on the multi-information display.

#### ■ Adaptive Cruise Control (ACC)

ACC may not work properly under certain conditions.

When not using ACC: Turn off adaptive cruise by pressing the **MAIN** button. This also will turn off the Lane Keeping Assist System (LKAS).

When the **MAIN** button is pressed, both ACC and the Lane Keeping Assist System (LKAS) are either turned on or off.

Do not use ACC under the following conditions:


- On roads with heavy traffic or while driving in continuous stop and go traffic.
- On roads with sharp turns.
- On roads with steep downhill sections, as the set vehicle speed can be exceeded by coasting. In such cases, ACC will not apply the brakes to maintain the set speed.
- On roads with toll collection facilities or other objects between lanes of traffic, or in parking areas, or facilities with drive through access.


# ■ When in Operation

#### ■ There is a vehicle ahead

ACC monitors if a vehicle ahead of you enters the ACC range. If a vehicle is detected doing so, the ACC system maintains or decelerates your vehicle's set speed in order to keep the vehicle's set following-interval from the vehicle ahead.

**≥** To Set or Change Following-interval P. 485

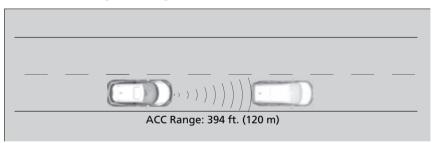




When a vehicle whose speed is slower than your set speed is detected in front of you, your vehicle starts to slow down.

## When in Operation ■ The Control of the Contr


If the vehicle ahead of you slows down abruptly, or if another vehicle cuts in front of you, the beeper sounds, a message appears on the multi-information display.



Depress the brake pedal, and keep an appropriate interval from the vehicle ahead.



## ■ There is no vehicle ahead



A vehicle icon with dotted-line contour appears on the multi-information display.

Your vehicle maintains the set speed without having to keep your foot on the brake or accelerator pedal.

If there previously was a vehicle detected ahead that kept your vehicle from traveling at the set speed, ACC accelerates your vehicle to the set speed, and then maintains it.

# ■ When you depress the accelerator pedal

You can temporarily increase the vehicle speed. In this case, there is no audible or visual alert even if a vehicle is in the ACC range.

ACC stays on unless you cancel it. Once you release the accelerator pedal, the system resumes an appropriate speed for keeping the following-interval while a vehicle ahead is within the ACC range.

#### When in Operation ■

Even if the interval between your vehicle and the vehicle detected ahead is short, ACC may start accelerating your vehicle under the following circumstances:

- The vehicle ahead of you is going at almost the same speed as, or faster than, your vehicle.
- A vehicle that cuts in front of you is going faster than your vehicle, gradually increasing the interval between the vehicles.

You can also set the system to beep when a vehicle in front of you comes in and goes out of the ACC detecting range. Change the **ACC Forward Vehicle Detect Beep** setting.

**≧** Customized Features P. 127

### Limitations

You may need to use the brake to maintain a safe interval when using ACC. Additionally, ACC may not work properly under certain conditions.

**ACC Conditions and Limitations** P. 482

## ACC Conditions and Limitations

The system may automatically shut off under certain conditions. Some examples of these conditions are listed below. Other conditions may reduce some of the ACC functions.

Front Sensor Camera P. 504

Radar Sensor P. 506

#### **■** Environmental conditions

Driving in bad weather (rain, fog, snow, etc.).

## ■ Roadway conditions

Driving on a snowy or wet roadway (obscured lane marking, vehicle tracks, reflected lights, road spray, high contrast).

#### ■ Vehicle conditions


- The outside of the windshield is blocked by dirt, mud, leaves, wet snow, etc.
- An abnormal tire or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tire, etc.).
- The camera temperature gets too high.
- The parking brake is applied.
- The front grille is dirty.
- The vehicle is tilted due to a heavy load or suspension modifications.
- Tire chains are installed.

#### 

If you need the radar sensor to be repaired, or removed, or the radar sensor cover is strongly impacted, turn off the system by pressing the **MAIN** button and take your vehicle to a dealer.

## **■** Detection limitations

- A vehicle suddenly crosses in front of you.
- The interval between your vehicle and the vehicle ahead of you is too short.
- A vehicle cuts in front of you at a slow speed, and it brakes suddenly.
- You accelerate rapidly and approach the vehicle ahead of you at high speed.
- The vehicle ahead of you is a motorcycle, bicycle, mobility scooter, or other small vehicle
- There are animals in front of your vehicle.
- You drive on a curved or winding or undulating road that makes it difficult for the sensor to properly detect a vehicle in front of you.

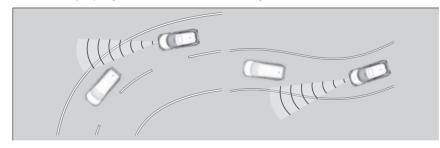


- The speed difference between your vehicle and a vehicle in front of you is significantly large.
- An oncoming vehicle suddenly comes in front of you.
- Your vehicle abruptly crosses over in front of an oncoming vehicle.

• Driving through a narrow metal bridge.




- The vehicle ahead of you brakes suddenly.
- The vehicle ahead of you has a unique shape.

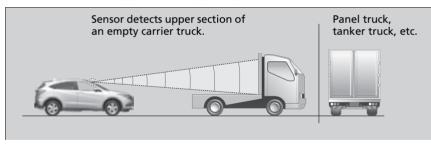

• Your vehicle or the vehicle ahead of you is driving on one edge of the lane.

# ■ To Adjust the Vehicle Speed

Increase or decrease the vehicle speed using the **RES/+** or **-/SET** buttons on the steering wheel.

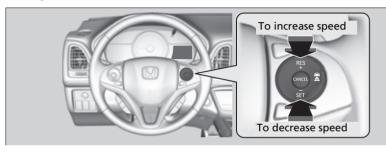

- Each time you press the button, the vehicle speed is increased or decreased by about 1 mph or 1 km/h accordingly.
- If you keep the button pressed, the vehicle speed increases or decreases by about 5 mph or 5 km/h accordingly.

# ■ To Set or Change Following-interval



Press the interval button to change the ACC following-interval.

Each time you press the button, the followinginterval (the interval behind a vehicle detected ahead of you) setting cycles through short, middle, long, and extra long followingintervals.

## ∑To Adjust the Vehicle Speed

If a vehicle detected ahead is going at a speed slower than your increased set speed, ACC may not accelerate your vehicle. This is to maintain the set interval between your vehicle and the vehicle ahead.

You can switch the displayed set speed measurements on the multi-information display between mph and km/h.


Customized Features P 127

Determine the most appropriate following-interval setting based on your specific driving conditions. Be sure to adhere to any following-interval requirements set by local regulation.

The higher your vehicle's following-speed is, the longer the short, middle, long or extra long following-interval becomes. See the following examples for your reference.

Following-Interval		When the Set Speed is:		
		50 mph (80 km/h)	65 mph (104 km/h)	
Short		86.7 feet 26.4 meters 1.2 sec	100.5 feet 30.6 meters 1.1 sec	
Middle		112.9 feet 34.4 meters 1.5 sec	137.4 feet 41.9 meters 1.5 sec	
Long	1	157.2 feet 47.9 meters 2.2 sec	200.0 feet 61.0 meters 2.1 sec	
Extra Long		220.2 feet 67.1 meters 3.0 sec	282.7 feet 86.2 meters 3.0 sec	

## ■ To Cancel



To cancel ACC, do any of the following:

- Press the **CANCEL** button.
- Press the MAIN button.
   ACC indicator (green) goes off.
- Depress the brake pedal.

## ■ Automatic cancellation

The beeper sounds and a message appears on the multi-information display when ACC is automatically canceled. Any of these conditions may cause the ACC to automatically cancel:

- Bad weather (rain, fog, snow, etc.).
- When the radar sensor in the front grille gets dirty.
- The vehicle ahead of you cannot be detected.
- An abnormal tire condition is detected, or the tires are skidding.
- Driving on a mountainous road, or driving off road for extended periods.
- Abrupt steering wheel movement.
- When the ABS or VSA® or CMBS™ is activated.
- When the ABS or VSA® system indicator comes on.
- When you manually apply the parking brake.
- When the detected vehicle within the ACC range is too close to your vehicle.
- The camera behind the rearview mirror, or the area around the camera, including the windshield, gets dirty.

#### ∑To Cancel


Resuming the prior set speed: After you have canceled ACC, you can resume the prior set speed while it is still displayed. Press the **RES/+** button when driving at a speed of at least 25 mph (40 km/h) or more.

The set speed cannot be set or resumed when ACC has been turned off using the **MAIN** button. Press the **MAIN** button to activate the system, then set the desired speed.

#### ■ Automatic cancellation

Even though ACC has been automatically canceled, you can still resume the prior set speed. Wait until the condition that caused ACC to cancel improves, then press the **RES/+** button.

## ■ To Switch ACC to Cruise Control



Press and hold the (Interval) button for one second. Cruise Mode Selected appears on the multi-information display for two seconds, and then the mode switches to Cruise. To switch back to ACC, press and hold the (Interval) button again for one second. ACC Mode Selected appears on the multi-information display for two seconds.

#### ■ When to use

Desired speed in a range above roughly 25 mph (40 km/h).

#### ▼To Switch ACC to Cruise Control

Always be aware which mode you are in. When you are driving in Cruise mode, the system will not assist you to maintain a following-interval from a vehicle ahead of you.

# ■ To Set the Vehicle Speed

Take your foot off the pedal and press the **–/SET** button when you reach the desired speed.

The moment you release the **-/SET** button, the set speed is fixed, and cruise control begins. The **CRUISE CONTROL** indicator comes on.

# ■ To Adjust the Vehicle Speed

Each time you press the **RES/+** or **-/SET** button, the vehicle speed is increased or decreased by about 1 mph (1 km/h).

If you keep the **RES/+** or **-/SET** button pressed, the vehicle speed increases or decreases by about 5 mph or 5 km/h accordingly.

# ■ To Cancel

To cancel cruise control, do any of the following:

- Press the **CANCEL** button.
- Press the **MAIN** button.
- Depress the brake pedal.

The **CRUISE CONTROL** indicator goes off.

#### ∑To Cancel

Resuming the prior set speed:

After cruise control has been canceled, you can still resume the prior set speed by pressing the **RES/+** button while driving at a speed of at least 25 mph (40 km/h) or more.

You cannot set or resume in the following situations:

- When vehicle speed is less than 25 mph (40 km/h)
- When the **MAIN** button is turned off.


At vehicle speeds of 22 mph (35 km/h) or less, cruise control canceled automatically.

# Lane Keeping Assist System (LKAS)

Provides steering input to help keep the vehicle in the middle of a detected lane and provides tactile and visual alerts if the vehicle is detected drifting out of its lane.

#### ■ Steering input assist

The system applies torque to the steering to keep the vehicle between the left and right lane lines. The applied torque becomes stronger as the vehicle gets closer to either of the lane lines.

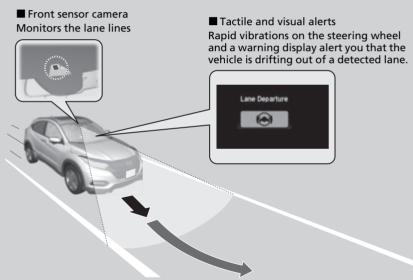

When you operate the turn signals to change lanes, the system is suspended, and resumes after the signals are off.

If you make a lane change without operating the turn signals, the LKAS alerts activate, and torque is applied to the steering.

∑Lane Keeping Assist System (LKAS)

#### **Important Safety Reminders**

The LKAS is for your convenience only. It is not an autonomous driving system and always requires driver attention and control. The system does not work if you take your hands off the steering wheel or fail to steer the vehicle.

The LKAS is convenient when it is used on freeways.

Do not place objects on the instrument panel. Objects may reflect on the front windshield and prevent correct detection of the traffic lanes.

The LKAS only alerts you when lane drift is detected without a turn signal in use. The LKAS may not detect all lane markings or lane departures; accuracy will vary based on weather, speed, and lane marker condition. It is always your responsibility to safely operate the vehicle and avoid collisions.

The LKAS may not work properly or may work improperly under the certain conditions:

LKAS Conditions and Limitations P. 496


You can read about handling information for the camera equipped with this system.

Front Sensor Camera P. 504

When it fails to detect lanes, the system will temporarily be canceled. When lane is detected, system will recover automatically.


# ■ Lane Keep Support Function

Provides assistance to keep the vehicle in the center of the lane. When the vehicle nears a white or yellow line, steering force of the electric power steering will become stronger.

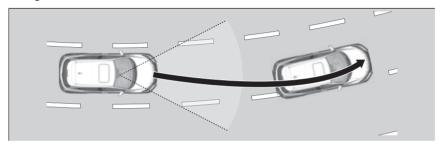

# **■** Lane Departure Warning Function

When the vehicle enters the warning area, the LKAS alerts you with slight steering wheel vibration as well as a warning display.

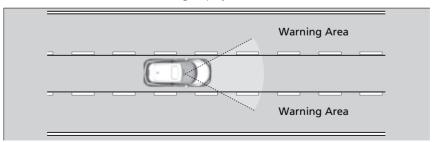

#### ∑Lane Keeping Assist System (LKAS)


The LKAS may not function as designed while driving in frequent stop and go traffic, or on roads with sharp curves.

# When the System can be Used

The system can be used when the following conditions are met.

- The lane in which you are driving has detectable lane markers on both sides, and your vehicle is in the center of the lane.
- The vehicle speed is traveling between about 45 and 90 mph (72 and 145 km/h).
- You are driving on a straight or slightly curved road.
- The turn signals are off.
- The brake pedal is not depressed.
- The wipers are not in high speed operation.

## ■ How to activate the system



- 1. Press the MAIN button
  - ► The LKAS indicator comes on in the multi-information display. The system is ready to use.

- 2. Press the LKAS button.
  - Lane outlines appear on the multiinformation display. The system is activated.

#### ∑Lane Keeping Assist System (LKAS)

If the vehicle drifts toward either left or right lane line due to the system applying torque, turn off the LKAS and have your vehicle checked by a dealer.




- **3.** Keep your vehicle near the center of the lane while driving.
  - ➤ The dotted outer lines change to solid ones once the system starts operating after detecting the left and right lane markings.

#### ∑To Cancel


Pressing the **MAIN** button also turns ACC on and off.

# ■ To Cancel



Press the **MAIN** or LKAS button.

The LKAS is turned off every time you stop the engine, even if you turned it on the last time you drove the vehicle.



When the LKAS is suspended, the lane lines on the multi-information display change to contour lines, and the beeper sounds (if activated).

# ■ The system operation is suspended if you:

- Set the wipers to **HI**.
  - ➤ Turning the wipers off or setting it to **LO** resumes the LKAS.
- Decrease the vehicle speed to about 40 mph (64 km/h) or less.
  - ► Increasing the vehicle speed to about 45 mph (72 km/h) or more resumes the I KAS
- Depress the brake pedal.
  - ► The LKAS resumes and starts detecting the lane lines again once you release the brake pedal.

#### Models with automatic intermittent wipers

- Set the wiper switch to **AUTO** and the wipers operate at high speed.
  - ► The LKAS resumes when the wipers stop or operate at low speed.

# ■ The LKAS may be automatically suspended when:

- The system fails to detect lane lines.
- The steering wheel is quickly turned.
- You fail to steer the vehicle.
- Driving through a sharp curve.
- Driving at a speed in excess of approximately 90 mph (145 km/h).

Once these conditions no longer exist, the LKAS automatically resumes.

# ■ The LKAS may be automatically canceled when:

- The camera temperature gets extremely high.
- The camera behind the rearview mirror, or the area around the camera, including the windshield, gets dirty.
- The ABS or VSA® system engages.

The beeper sounds if the LKAS is automatically canceled.

# LKAS Conditions and Limitations


The system may not detect lane markings and therefore may not keep the vehicle in the middle of a lane under certain conditions, including the following:

#### **■** Environmental conditions

- Driving in bad weather (rain, fog, snow, etc.).
- Sudden changes between light and dark, such as an entrance or exit of a tunnel.
- There is little contrast between lane lines and the roadway surface.
- Driving into low sunlight (e.g., at dawn or dusk).
- Strong light is reflected onto the roadway.
- Driving in the shadows of trees, buildings, etc.
- Shadows of adjacent objects are parallel to lane markings.
- Roadway objects or structures are misinterpreted as lane markers.
- Reflections on the interior of the windshield.
- Driving at night or in a dark condition such as a tunnel.

# **■** Roadway conditions


- Driving on a snowy or wet roadway (obscured lane marking, vehicle tracks, reflected lights, road spray, high contrast).
- Driving on a road with temporary lane markings.
- Faint, multiple, or varied lane markings are visible on the roadway due to road repairs or old lane markings.

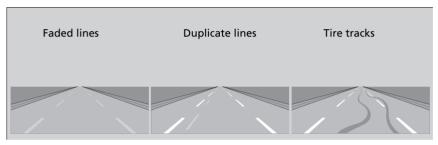

- The roadway has merging, split, or crossing lines (e.g., such as at an intersection or crosswalk).
- The lane markings are extremely narrow, wide, or changing.



- The vehicle in front of you is driving near the lane lines.
- The road is hilly or the vehicle is approaching the crest of a hill.
- Driving on rough or unpaved roads, or over bumpy surfaces.
- When objects on the road (curb, guard rail, pylons, etc.) are recognized as white lines (or yellow lines).
- Driving on roads with double lines.




#### ■ Vehicle conditions

- Headlight lenses are dirty or the headlights are not properly adjusted.
- The outside of the windshield is streaked or blocked by dirt, mud, leaves, wet snow, etc.
- The inside of the windshield is fogged.
- The camera temperature gets too high.
- An abnormal tire or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tire, etc.).
- The vehicle is tilted due to a heavy load or suspension modifications.

# **Road Departure Mitigation (RDM) System**

Alerts and helps to assist you when the system detects a possibility of your vehicle unintentionally crossing over detected lane markings and/or leaving the roadway altogether.

# How the System Works



The front camera behind the rearview mirror monitors left and right lane markings (in white or yellow). If your vehicle is getting too close to detected lane markings without a turn signal activated, the system, in addition to a visual alert, applies steering torque and alerts you with rapid vibrations on the steering wheel, to help you remain within the detected lane.

**■ Customized Features** P. 127

As a visual alert, the **Lane Departure** message appears on the multi-information display.

If the system determines that its steering input is insufficient to keep your vehicle on the roadway, it may apply braking.

▶ Braking is applied only when the lane markings are solid continuous lines.

The system cancels assisting operations when you turn the steering wheel to avoid crossing over detected lane markings.

If the system operates several times without detecting driver response, the system beeps to alert you.

■ Road Departure Mitigation (RDM) System

### **Important Safety Reminder**

Like all assistance systems, the RDM system has limitations.

Over-reliance on the RDM system may result in a collision. It is always your responsibility to keep the vehicle within your driving lane.

The RDM system only alerts you when lane drift is detected without a turn signal in use. The RDM system may not detect all lane markings or lane or roadway departures; accuracy will vary based on weather, speed and lane marker condition. It is always your responsibility to safely operate the vehicle and avoid collisions.

You can read about handling information for the camera equipped with this system.

Front Sensor Camera P. 504

The RDM system may not work properly or may work improperly under the certain conditions:

RDM Conditions and Limitations P. 502

There are times when you may not notice RDM functions due to your operation of the vehicle, or road surface conditions.

# How the System Activates

The system activates when all the following conditions are met:

- The vehicle is traveling between about 45 and 90 mph (72 and 145 km/h).
- The vehicle is on a straight or slightly curved road.
- The turn signals are off.
- The brake pedal is not depressed.
- The wipers are not in continuous operation.
- The system makes a determination that the driver is not actively accelerating, braking or steering.

#### 

If LKAS is off and you have selected **Narrow** from the customized options using the multi-information display, the message below will appear in case the system determines a possibility of your vehicle crossing over detected lane markings.

**Customized Features** P. 127



#### ➤ How the System Activates


The RDM system may automatically shut off and the spin indicator comes and stays on.

Indicators P. 84

RDM system function can be impacted when the vehicle is:

- Not driven within a traffic lane.
- Driven on the inside edge of a curve, or outside of a lane.
- Driven in a narrow lane.

# RDM On and Off



Press the RDM button to turn the system on and off.

➤ The indicator in the button comes on and the message appears on the multiinformation display when the system is on.

#### **≥** RDM On and Off

When you have selected **Warning Only** from the customized options using the multi-information display, the system does not operate the steering wheel and braking.

Customized Features P. 127

# ■ RDM Conditions and Limitations

The system may not properly detect lane markings and the position of your vehicle under certain conditions. Some examples of these conditions are listed below.

#### **■** Environmental conditions

- Driving in bad weather (rain, fog, snow, etc.).
- Sudden changes between light and dark, such as an entrance or exit of a tunnel.
- There is little contrast between lane lines and the roadway surface.
- Driving into low sunlight (e.g., at dawn or dusk).
- Strong light is reflected onto the roadway.
- Driving in the shadows of trees, buildings, etc.
- Shadows of adjacent objects are parallel to lane markings.
- Roadway objects or structures are misinterpreted as lane markers.
- Reflections on the interior of the windshield.
- Driving at night or in a dark condition such as a tunnel.

### **■** Roadway conditions

- Driving on a snowy or wet roadway (obscured lane marking, vehicle tracks, reflected lights, road spray, high contrast).
- Driving on a road with temporary lane markings.
- Faint, multiple, or varied lane markings are visible on the roadway due to road repairs or old lane markings.
- The roadway has merging, split, or crossing lines (e.g., such as at an intersection or crosswalk).
- The lane markings are extremely narrow, wide, or changing.
- The vehicle in front of you is driving near the lane lines.
- The road is hilly or the vehicle is approaching the crest of a hill.
- Driving on rough or unpaved roads, or over bumpy surfaces.
- When objects on the road (curb, guard rail, pylons, etc.) are recognized as white lines (or yellow) lines.
- Driving on roads with double lines.


### ■ Vehicle conditions

- Headlight lenses are dirty or the headlights are not properly adjusted.
- The outside of the windshield is streaked or blocked by dirt, mud, leaves, wet snow, etc.
- The inside of the windshield is fogged.
- The camera temperature gets too high.
- An abnormal tire or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tire, etc.).
- The vehicle is tilted due to a heavy load or suspension modifications.
- When tire chains are installed.

### **Front Sensor Camera**

The camera, used in systems such as Lane Keeping Assist System, Road Departure Mitigation, Adaptive Cruise Control, and Collision Mitigation Braking System™, is designed to detect an object that triggers any of the systems to operate its functions.

## ■ Camera Location and Handling Tips



This camera is located behind the rearview mirror.

To help reduce the likelihood that high interior temperatures will cause the camera's sensing system to shut off, when parking, find a shady area or face the front of the vehicle away from the sun. If you use a reflective sun shade, do not allow it to cover the camera housing. Covering the camera can concentrate heat on it.

#### ∑Front Sensor Camera

Never apply a film or attach any objects to the windshield, the hood, or the front grille that could obstruct the camera's field of vision and cause the system to operate abnormally.

Scratches, nicks, and other damage to the windshield within the camera's field of vision can cause the system to operate abnormally. If this occurs, we recommend that you replace the windshield with a genuine Honda replacement windshield. Making even minor repairs within the camera's field of vision or installing an aftermarket replacement windshield may also cause the system to operate abnormally. After replacing the windshield, have a dealer recalibrate the camera. Proper calibration of the camera is necessary for the system to operate properly.

Do not place an object on the top of the instrument panel. It may reflect onto the windshield and prevent the system from detecting lane lines properly.

#### >> Front Sensor Camera


If the Some Driver Assist Systems Cannot Operate: Camera Temperature Too High message appears:

- Use the climate control system to cool down the interior and, if necessary, also use defroster mode with the airflow directed towards the camera.
- Start driving the vehicle to lower the windshield temperature, which cools down the area around the camera.

If the Some Driver Assist Systems Cannot Operate: Clean Front Windshield message appears:

 Park your vehicle in a safe place, and clean the windshield. If the message does not disappear after you have cleaned the windshield and driven for a while, have your vehicle checked by a dealer.

### **Radar Sensor**



The radar sensor is in the front grille.

#### 

Avoid strong impacts to the radar sensor cover.

For the CMBS™ to work properly:

- Always keep the radar sensor cover clean.
- Never use chemical solvents or polishing powder for cleaning the sensor cover. Clean it with water or a mild detergent.
- Do not put a sticker on the radar sensor cover or replace the radar sensor cover.

If you need the radar sensor to be repaired, or removed, or the radar sensor cover is strongly impacted, turn off the system by using the CMBS OFF button and take your vehicle to a dealer.

**EXECUTE:** CMBS™ On and Off P. 470

If the vehicle is involved in any of the following situations, the radar sensor may not work properly. Have your vehicle checked by a dealer:

- Your vehicle is involved in a frontal collision.
- Your vehicle drives through deep water or is submerged in deep water.
- Your vehicle strongly strikes a bump, curb, chock, or embankment that could jar the radar sensor.

# **Braking**

# **Brake System**

# ■ Parking Brake

Use the parking brake to keep the vehicle stationary when parked. When the parking brake is applied, you can manually or automatically release it.





### ■ To apply

The electric parking brake can be applied any time the vehicle has battery, no matter which position the ignition switch\*1 is in.

Pull the electric parking brake switch up gently and securely.

► The electric parking brake indicator comes on.

### ■ To release

The ignition switch must be ON  $III^{*1}$  in order to release the electric parking brake.

- **1.** Depress the brake pedal.
- **2.** Press the electric parking brake switch.
  - ➤ The electric parking brake indicator goes off.

Manually releasing the parking brake using the switch helps your vehicle start slowly and smoothly when facing downhill on steep hills.

### ▶ Parking Brake

You may hear the electric parking brake system operating from the rear wheel area when you apply or release the parking brake. This is normal.

The brake pedal may slightly move due to the electric parking brake system operation when you apply or release the parking brake. This is normal.

You cannot apply or release the parking brake if the battery goes dead.

**If the Battery Is Dead** P. 598

If you pull up and hold the electric parking brake switch while driving, the brakes on all four wheels are applied by the VSA system until the vehicle comes to a stop. The electric parking brake then applies, and the switch should be released.

In the following situations, the parking brake automatically operates.

- When the vehicle stops with the automatic brake hold system activated for more than 10 minutes.
- When the driver's seat belt is unfastened while your vehicle is stopped and the brake hold system is applied.
- When the engine is turned off while the brake hold system is applied.
- When there is a problem with the brake hold system.


Continued 507

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

### **■** To release automatically

Use the accelerator pedal to release the brake when you are starting the vehicle facing uphill, or in a traffic jam.

Depressing the accelerator pedal releases the parking brake.



Gently depress the accelerator pedal. When on a hill, it may require more accelerator input to release.

➤ The electric parking brake indicator goes off.

### ▶ Parking Brake

If the parking brake cannot be released automatically, release it manually.

When the vehicle is traveling uphill, the accelerator pedal may need to be pressed farther to automatically release the electric parking brake.

The parking brake cannot be released automatically while the following indicators are on:

- Malfunction indicator lamp
- Transmission indicator

The parking brake may not be released automatically while the following indicators are on:

- Electric parking brake system indicator
- VSA® system indicator
- ABS indicator
- Supplemental restraint system indicator The parking brake is applied while the vehicle is moving with the electric parking brake switch being pulled.

You can release the parking brake automatically when:

- You are wearing the driver's seat belt.
- The engine is running.
- The transmission is not in **P** or **N**.

### ■ Foot Brake

Your vehicle is equipped with disc brakes at all four wheels. A vacuum power assist helps to reduce the effort needed on the brake pedal. The brake assist system increases the stopping force when you depress the brake pedal hard in an emergency situation. The anti-lock brake system (ABS) helps you retain steering control when braking very hard.

**Brake Assist System** P. 513

Anti-lock Brake System (ABS) P. 512

### ∑Foot Brake

Check the brakes after driving through deep water, or if there is a buildup of road surface water. If necessary, dry the brakes by lightly depressing the pedal several times.

If you hear a continuous metallic friction sound when applying the brakes, this is caused by the brake wear indicator rubbing on the brake rotor and indicates that the brake pads need to be replaced. Have the vehicle checked by a dealer. If you hear only an occasional squeak or squeal when you initially apply the brake pedal, this may be normal and caused by high frequency vibration of the brake pads against the rotating brake disc.


Constantly using the brake pedal while going down a long hill builds up heat, which reduces the brake effectiveness. Apply engine braking by taking your foot off the accelerator pedal and downshifting to a lower speed position.

Do not rest your foot on the brake pedal while driving, as it will lightly apply the brakes and cause them to lose effectiveness over time and reduce pad life. It will also confuse drivers behind you.

Continued 509

### Automatic Brake Hold

Keeps the brake applied after releasing the brake pedal until the accelerator pedal is pressed. You can use this system while the vehicle is temporarily stopped, like at traffic lights and in heavy traffic.

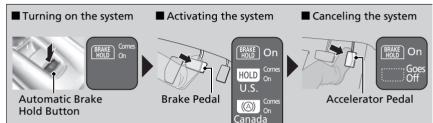

Fasten your seat belt properly, then start the engine. Press the automatic brake hold button.

 The automatic brake hold system indicator comes on. The system is turned on. Depress the brake pedal to come to a complete stop. The shift lever must be in other than P or R.

- The automatic brake hold indicator comes on. Braking is kept for up to 10 minutes.
- Release the brake pedal after the automatic brake hold indicator comes on.

Depress the accelerator pedal while the shift lever is in a position other than P or N. The system is canceled and the vehicle starts to move.

 The automatic brake hold indicator goes off. The system releases the brake automatically. ■ Automatic Brake Hold

# **AWARNING**

Activating the automatic brake hold system on steep hills or slippery roads may still allow the vehicle to move if you remove your foot from the brake pedal.

If a vehicle unexpectedly moves, it may cause a crash resulting in serious injury or death.

Never activate the automatic brake hold system or rely on it to keep a vehicle from moving when stopped on a steep hill or slippery roads.

# **AWARNING**

Using the automatic brake hold system to park the vehicle may result in the vehicle unexpectedly moving.

If a vehicle moves unexpectedly, it may cause a crash, resulting in serious injury or death.

Never leave the vehicle when braking is temporarily kept by automatic brake hold and always park the vehicle by putting the transmission in P and applying the parking brake.


### ■ The system automatically cancels when:

- You engage the parking brake.
- You depress the brake pedal and move the shift lever to P or R.

### ■ The system automatically cancels and the parking brake is applied when:

- Braking is kept for more than 10 minutes.
- The driver's seat belt is unfastened.
- The engine is turned off.
- There is a problem with automatic brake hold system.

### ■ Turning off the automatic brake hold system



While the system is on, press the automatic brake hold button again.

➤ The automatic brake hold system indicator goes off.

If you want to turn off automatic brake hold while the system is in operation, press the automatic brake hold button with the brake pedal depressed.

### ■ Automatic Brake Hold

While the system is activated, you can turn off the engine or park the vehicle through the same procedure as you normally do.

**When Stopped** P. 514

Whether the system is on, or the system is activated, the automatic brake hold turns off once the engine is off.

### ■Turning on the system

Make sure to turn off the automatic brake hold system before using an automated car wash.

You may hear an operating noise if the vehicle moves while the automatic brake hold system is in operation. The system generates sound while holding the vehicle and it moves.

# **Anti-lock Brake System (ABS)**

### ABS

Helps prevent the wheels from locking up, and helps you retain steering control by pumping the brakes rapidly, much faster than you can.

The electronic brake distribution (EBD) system, which is part of the ABS, also balances the front-to-rear braking distribution according to vehicle loading.

You should never pump the brake pedal. Let the ABS work for you by always keeping firm, steady pressure on the brake pedal. This is sometimes referred to as "stomp and steer."

### ■ ABS operation

The brake pedal may pulsate slightly when the ABS is working. Depress the brake pedal and keep holding the pedal firmly down. On dry pavement, you will need to press on the brake pedal very hard before the ABS activates. However, you may feel the ABS activate immediately if you are trying to stop on snow or ice.

ABS may activate when you depress the brake pedal when driving on:

- Wet or snow covered roads.
- Roads paved with stone.
- Roads with uneven surfaces, such as potholes, cracks, manholes, etc.

When the vehicle speed goes under 6 mph (10 km/h), the ABS stops.

#### NOTICE

The ABS may not function correctly if you use a tire of the incorrect size or type.

If the **ABS** indicator comes on while driving, there may be a problem with the system.

While normal braking will not be affected, there is a possibility that the ABS will not be operating. Have your vehicle checked by a dealer immediately.

The ABS is not designed for the purpose of reducing the time or distance it takes for a vehicle to stop: It is designed to limit brake lockup which can lead to skidding and loss of steering control.

In the following cases, your vehicle may need more distance to stop than a vehicle without the ABS:

- You are driving on rough or uneven road surfaces, such as gravel or snow.
- The tires are equipped with snow chains.

The following may be observed with the ABS system:

- Motor sounds coming from the engine compartment when the brakes are applied, or when system checks are being performed after the engine has been started and while the vehicle accelerates.
- Brake pedal and/or the vehicle body vibration when ABS activates.

These vibrations and sounds are normal to ABS systems and are no cause for concern.

# **Brake Assist System**

Designed to assist the driver by generating greater braking force when you depress the brake pedal hard during emergency braking.

### ■ Brake assist system operation

Press the brake pedal firmly for more powerful braking.

When brake assist operates, the pedal may wiggle slightly and an operating noise may be heard. This is normal. Keep holding the brake pedal firmly down.

# Parking Your Vehicle

# When Stopped

- **1.** Depress the brake pedal firmly.
- **2.** With the brake pedal depressed, pull up the electric parking brake switch slowly, but fully.
- **3.** Move the shift lever from **D** to **P**.
- 4. Turn off the engine.
  - ▶ The electric parking brake indicator goes off in about 15 seconds.

Always set the parking brake, in particular if you are parked on an incline.

### ▶ Parking Your Vehicle

Do not park your vehicle near flammable objects, such as dry grass, oil, or timber.

Heat from the exhaust can cause a fire.

When Stopped

# **AWARNING**

The vehicle can roll away if left unattended without confirming that Park is engaged.

A vehicle that rolls away could cause a crash resulting in serious injury or death.

Always keep your foot on the brake pedal until you have confirmed that  $\boxed{P}$  is shown on the shift position indicator.

### NOTICE

The following can damage the transmission:

- Depressing the accelerator and brake pedals simultaneously.
- Holding the vehicle in place when facing uphill by depressing the accelerator pedal.
- Moving the shift lever into P before the vehicle stops completely.

In extremely cold temperatures, the parking brake may freeze up if applied. If such temperatures are expected, do not apply the parking brake but, if parking on a slope, either turn the front wheels so they will contact the curb if the vehicle rolls down the slope or block the wheels to keep the vehicle from moving. If you do not take either precaution, the vehicle may roll unexpectedly, leading to a crash.


# Multi-View Rear Camera

### **About Your Multi-View Rear Camera**

The audio/information screen can display your vehicle's rear view.

The display automatically changes to a rear view when the transmission is put into  $\boxed{\mathbf{R}}$ .

### ■ Multi-View Rear Camera Display Area

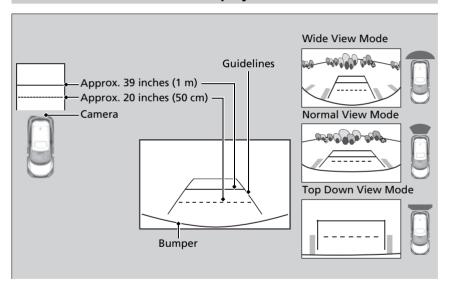

#### ■ About Your Multi-View Rear Camera

The rear camera view is restricted. You cannot see the corner ends of the bumper or what is underneath the bumper. Its unique lens also makes objects appear closer or farther than they actually are.

Visually confirm that it is safe to drive before backing up. Certain conditions (such as weather, lighting, and high temperatures) may also restrict the rear view. Do not rely on the rearview display which does not give you all information about conditions at the back of your vehicle.

If the camera lens is covered with dirt or moisture, use a soft, moist cloth to keep the lens clean and free of debris.

#### Models with display audio system

You can change the **Fixed Guideline** and **Dynamic Guideline** settings.

**■ Customized Features** P. 356

#### **Fixed Guideline**

**On:** Guidelines appear when you put the transmission into  $\boxed{\mathbf{R}}$ .

**Off:** Guidelines do not appear.

#### **Dynamic Guideline**

**On:** Guidelines move according to the steering wheel direction

Off: Guidelines do not move.

Continued 515

You can view three different camera modes on the rearview display.

#### Models with color audio system

Press the **LIST/SELECT** (selector) knob to switch the mode.

### Models with display audio system

Touch the appropriate icon to switch the mode.

: Wide view mode

🙎 : Normal view mode

🖺 : Top down view mode

#### All models

- If the last used viewing mode was Wide or Normal, the same mode is selected the next time you put the transmission into R.
- If Top down view was last used before you turned off the engine, Wide View mode is selected next time you turn the ignition switch to ON III\* and put the transmission into R.
- If Top down view was last used more than 10 seconds after you put the transmission from  $\boxed{\mathbf{R}}$ , Wide View mode is selected the next time you put the transmission into  $\boxed{\mathbf{R}}$ .

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

# Refueling

### **Fuel Information**

### **■** Fuel recommendation

### Unleaded gasoline, pump octane number 87 or higher

Use of lower octane gasoline can cause a persistent, heavy metallic knocking noise that can lead to engine damage.

### **■** Top tier detergent gasoline

Because the level of detergency and additives in gasoline vary in the market, Honda endorses the use of "TOP TIER Detergent Gasoline" where available to help maintain the performance and reliability of your vehicle. TOP TIER Detergent Gasoline meets a new gasoline standard jointly established by leading automotive manufacturers to meet the needs of today's advanced engines.

Qualifying gasoline retailers will, in most cases, identify their gasoline as having met "TOP TIER Detergent Gasoline" standards at the retail location. This fuel is guaranteed to contain the proper level of detergent additives and be free of metallic additives. The proper level of detergent additives, and absence of harmful metallic additives in gasoline, help avoid buildup of deposits in your engine and emission control system.

For further important fuel-related information for your vehicle, or on information on gasoline that does not contain MMT, visit www.hondacars.com. In Canada, visit www.honda.ca for additional information on gasoline. For more information on top tier gasoline, visit www.toptiergas.com.

### ■ Fuel tank capacity: 13.2 US gal (50 L)

#### ∑Fuel Information


### NOTICE

We recommend quality gasoline containing detergent additives that help prevent fuel system and engine deposits. In addition, in order to maintain good performance, fuel economy, and emissions control, we strongly recommend the use of gasoline that does NOT contain harmful manganese-based fuel additives such as MMT, if such gasoline is available.

Use of gasoline with these additives may adversely affect performance, and cause the malfunction indicator lamp on your instrument panel to come on. If this happens, contact a dealer for service.

Some gasoline today is blended with oxygenates such as ethanol. Your vehicle is designed to operate on oxygenated gasoline containing up to 15% ethanol by volume. Do not use gasoline containing methanol. If you notice any undesirable operating symptoms, try another service station or switch to another brand of gasoline.

### **How to Refuel**





- Stop your vehicle with the service station pump on the left side of the vehicle in the rear.
- 2. Turn off the engine.
- **3.** Pull on the fuel fill door release handle under the driver's side lower outside corner of the dashboard.
  - ► The fuel fill door opens.
- **4.** Remove the fuel fill cap slowly. If you hear a release of air, wait until this stops, then turn the knob slowly to open the fuel fill cap.

# **AWARNING**


Gasoline is highly flammable and explosive. You can be burned or seriously injured when handling fuel.

- Stop the engine, and keep heat, sparks, and flame away.
- Handle fuel only outdoors.
- Wipe up spills immediately.

The filler nozzle automatically stops to leave space in the fuel tank so that fuel does not overflow as a result of changes in air temperature.

Do not continue to add fuel after the filler nozzle has automatically stopped. Additional fuel can exceed the full tank capacity.

If the filler nozzle keeps turning off when the tank is not full, there may be a problem with the pump's fuel vapor recovery system. Try filling at another pump. If this does not fix the problem, consult a dealer.



- **5.** Place the fuel fill cap in the holder.
- **6.** Insert the fuel filler nozzle fully.
  - ➤ When the tank is full, the filler nozzle will click off automatically. This leaves space in the fuel tank in case the fuel expands with a change in the temperature.

### 2WD models

If you do not fill up the tank to full, always add a minimum of 1.3 US gal (5.0 L) of fuel.

### AWD models

- ► If you do not fill up the tank to full, always add a minimum of 2.6 US gal (10 L) of fuel.
- **7.** After filling, replace the fuel fill cap, tightening it until you hear it click at least once.
  - ► Shut the fuel fill door by hand.

#### 

If you repeatedly fill the tank with less than the specified minimum amount of fuel, the malfunction indicator lamp may come on. If this happens, have your vehicle checked by a dealer.

# Fuel Economy and CO<sub>2</sub> Emissions

# Improving Fuel Economy and Reducing CO<sub>2</sub> Emissions

Achieving fuel economy and reducing  $\mathrm{CO}_2$  emissions is dependent on several factors, including driving conditions, load weight, idling time, driving habits, and vehicle condition. Depending on these and other factors, you may not achieve the rated fuel economy of this vehicle.

# Maintenance and Fuel Economy

You can optimize your fuel economy with proper maintenance of your vehicle. Always maintain your vehicle in accordance with the messages displayed on the information display.

- Use engine oil with the viscosity recommended.
  - Recommended Engine Oil P. 535
- Maintain the specified tire pressure.
- Do not load the vehicle with excess cargo.
- Keep your vehicle clean. A buildup of snow or mud on your vehicle's underside adds weight and increases wind resistance.

### 

Direct calculation is the recommended method to determine actual fuel consumed while driving.



In Canada, posted fuel economy numbers are established following a simulated test. For more information on how this test is performed, please visit <a href="https://www.nrcan.gc.ca">https://www.nrcan.gc.ca</a> and search for "fuel consumption testing" in the search field at the top of the page.



This chapter discusses basic maintenance.

inspection and infinitenance	. 522
Safety When Performing Maintenance	523
Parts and Fluids Used in Maintenand	:e
Service	. 524
Maintenance Minder™	. 525
Maintenance Under the Hood	
Maintenance Items Under the Hood	533
Opening the Hood	534
Recommended Engine Oil	. 535

**Before Performing Maintenance** 

Changing the Engine Oil and Oil Filter	. 53
Engine Coolant	54
Transmission Fluid	54
Brake Fluid	54
Refilling Window Washer Fluid	54
Replacing Light Bulbs	54
Checking and Maintaining Wiper Blades	. 55
Checking and Maintaining Tires	
Checking Tires	55
Tire and Loading Information Label	56
Tire Labeling	56
DOT Tire Quality Grading (U.S. Vehicles).	. 56
Wear Indicators	56

Tire Service Life	565
Tire and Wheel Replacement	566
Tire Rotation	567
Winter Tires	568
attery	570
emote Transmitter Care	
Replacing the Remote Battery	572
leating and Cooling System*/Clir	nate
Control System* Maintenance	574
leaning	
Interior Care	575
Exterior Care	577
ccessories and Modifications	580

\* Not available on all models

# Before Performing Maintenance

# **Inspection and Maintenance**

For your safety, perform all listed inspections and maintenance to keep your vehicle in good condition. If you become aware of any abnormality (noise, smell, insufficient brake fluid, oil residue on the ground, etc.), have your vehicle inspected by a dealer. (Note, however, that service at a dealer is not mandatory to keep your warranties in effect.)

# ■ Types of Inspection and Maintenance

### **■** Routine inspections

Perform inspections before long distance trips, when washing the vehicle, or when refueling.

**Maintenance** P. 29

### **■** Periodic inspections

- Check the brake fluid level monthly.
  - Brake Fluid P. 543
- Check the tire pressure monthly. Examine the tread for wear and foreign objects.
   Checking and Maintaining Tires P. 559
- Check the operation of the exterior lights monthly.
  - Replacing Light Bulbs P. 545
- Check the condition of the wiper blades at least every six months.
  - **≧** Checking and Maintaining Wiper Blades P. 555

### 

#### U.S. models

Maintenance, replacement, or repair of emissions control devices and systems may be done by any automotive repair establishment or individuals using parts that are "certified" to EPA standards.

According to state and federal regulations, failure to perform maintenance on the maintenance main items marked with # will not void your emissions warranties. However, all maintenance services should be performed in accordance with the intervals indicated by the information display\*/multi-information display\*.

**Maintenance Service Items** P. 527, 531

If you want to perform complex maintenance tasks that require more skills and tools, you can purchase a subscription to the Service Express website at www techinfo honda com

**■ Authorized Manuals** P. 628

If you want to perform maintenance yourself, make sure that you have the necessary tools and skills first. After performing maintenance, update the records in the separate maintenance booklet.

# **Safety When Performing Maintenance**

Some of the most important safety precautions are given here. However, we cannot warn you of every conceivable hazard that can arise in performing maintenance. Only you can decide whether you should perform a given task.

# ■ Maintenance Safety

- To reduce the possibility of fire or explosion, keep cigarettes, sparks, and flames away from the battery and all fuel related parts.
- Never leave rags, towels, or other flammable objects under the hood.
  - ▶ Heat from the engine and exhaust can ignite them, causing a fire.
- To clean parts, use a commercially available degreaser or parts cleaner, not gasoline.
- Wear eye protection and protective clothing when working with the battery or compressed air.
- Engine exhaust contains carbon monoxide, which is poisonous and can kill you.
   Only operate the engine if there is sufficient ventilation.

# ■ Vehicle Safety

- The vehicle must be in a stationary condition.
  - ► Make sure your vehicle is parked on level ground, the parking brake is set, and the engine is off.
- Be aware that hot parts can burn you.
  - ► Make sure to let the engine and exhaust system cool thoroughly before touching vehicle parts.
- Be aware that moving parts can injure you.
  - ▶ Do not start the engine unless instructed, and keep your hands and limbs away from moving parts.

Safety When Performing Maintenance

# **AWARNING**

Improperly maintaining this vehicle or failing to correct a problem before driving can cause a crash in which you can be seriously hurt or killed.

Always follow the inspection and maintenance recommendations according to the schedules in this owner's manual.

# **AWARNING**

Failure to properly follow maintenance instructions and precautions can cause you to be seriously hurt or killed.

Always follow the procedures and precautions in this owner's manual.

# **Parts and Fluids Used in Maintenance Service**

The use of Honda genuine parts and fluids is recommended when maintaining and servicing your vehicle. Honda genuine parts are manufactured according to the same high quality standards used in Honda vehicles.

≥ Parts and Fluids Used in Maintenance Service

### NOTICE


Do not press the engine cover forcibly. This may damage the engine cover and component parts.

If the engine oil life is less than 15%, you will see the Maintenance Minder messages appear on the information display or the multi-information display every time you turn the ignition switch to ON  $\boxed{II}^{*1}$ . The messages notify you when to change the engine oil, or when to bring your vehicle to a dealer for indicated maintenance services.

#### Models with information display

### To Use Maintenance Minder™

### Displaying the Engine Oil Life



- **1.** Turn the ignition switch to ON III.
- **2.** Press the (select/reset) knob repeatedly until the engine oil life appears on the information display.

The Maintenance Minder indicator ( ) stays on in the instrument panel after the engine oil life becomes **0%**. Have the indicated maintenance done by a dealer immediately.

### Displaying the Engine Oil Life

Based on the engine operating conditions, the remaining engine oil life is calculated and displayed as a percentage.

Displayed Engine Oil	Calculated Engine Oil
Life (%)	Life (%)
100	100 to 91
90	90 to 81
80	80 to 71
70	70 to 61
60	60 to 51
50	50 to 41
40	40 to 31
30	30 to 21
20	20 to 16
15	15 to 11
10	10 to 6
5	5 to 1
0	0

Continued 525

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

# ■ Maintenance Minder Messages on the Information Display

To switch the display, press the [2] (select/reset) knob.

Oil Life Display	Explanation	Information	Maintenance Minder Indicator
2:345 QLUFE 55*	The engine oil life indicator starts to appear along with other due soon maintenance item codes when the remaining oil life becomes 15 percent.	The engine oil is approaching the end of its service life.	Starts to come on when the remaining engine oil life becomes 15 percent. It goes off when the display is
OLUFE 5%	The <b>SERVICE</b> message also starts to appear along with the engine oil life indicator and the maintenance item codes.	The engine oil has almost reached the end of its service life, and the maintenance items should be inspected and serviced as soon as possible.	switched.
SERVICE AS	The remaining engine oil life has passed its service life, and a negative distance appears after driving over 10 miles. The negative distance on the display blinks.	The engine oil life has passed. The maintenance items must be inspected and serviced immediately.	Stays on as a reminder even when the display is switched.

### ■ Maintenance Service Items



#### Maintenance Service Items ■ Maintenanc

- Independent of the Maintenance Minder information, replace the brake fluid every 3 years.
- Adjust the valves during services A, B, 1, 2, or 3 if they are noisy.

CODE	Maintenance Main Items
Α	• Replace engine oil*1
В	<ul> <li>Replace engine oil*1 and oil filter</li> <li>Inspect front and rear brakes</li> <li>Inspect tie rod ends, steering gearbox, and boots</li> <li>Inspect suspension components</li> <li>Inspect driveshaft boots</li> <li>Inspect brake hoses and lines (Including ABS/VSA®)</li> <li>Inspect all fluid levels and condition of fluids</li> <li>Inspect exhaust system#</li> <li>Inspect fuel lines and connections#</li> </ul>
*1: If a mess	rage <b>SERVICE</b> does not appear more than 12 months after the display is reset, change the

#### \*1: If a message SERVICE does not appear more than 12 months after the display is reset, change the engine oil every year.


CODE	Maintenance Sub Items
1	Rotate tires
2	<ul> <li>Replace air cleaner element*<sup>2</sup></li> <li>Replace dust and pollen filter*<sup>3</sup></li> <li>Inspect drive belt</li> </ul>
3	Replace transmission fluid*4
4	<ul><li>Replace spark plugs</li><li>Inspect valve clearance</li></ul>
5	Replace engine coolant
6	Replace rear differential fluid*

- \*2: If you drive in dusty conditions, replace the air cleaner element every 15,000 miles (24,000 km).
- \*3: If you drive primarily in urban areas that have high concentrations of soot in the air from industry and from diesel-powered vehicles, replace the dust and pollen filter every 15,000 miles (24,000 km).
- \*4: Driving in mountainous areas at very low vehicle speeds results in higher transmission temperatures. This requires transmission fluid changes more frequently than recommended by the Maintenance Minder. If you regularly drive your vehicle under these conditions, have the transmission fluid changed every 25,000 miles (40,000 km).

<sup>#:</sup> See information on maintenance and emissions warranty.

# Resetting the Display

Reset the engine oil life display if you have performed the maintenance service.



- **1.** Turn the ignition switch to ON II.
- **2.** Display the engine oil life by repeatedly pressing the (select/reset) knob.
- **3.** Press and hold the knob for 10 seconds or more.
  - ➤ The engine oil life indicator and the maintenance item codes blink.
- **4.** Press the knob for five seconds or more.
  - ➤ The displayed maintenance items disappear, and the engine oil life display returns to **100%**.

### ■ Resetting the Display

### NOTICE

Failure to reset the engine oil life after a maintenance service results in the system showing incorrect maintenance intervals, which can lead to serious mechanical problems.

The dealer will reset the engine oil life display after completing the required maintenance service. If someone other than a dealer performs maintenance service, reset the engine oil life display yourself.

### Models with multi-information display


# To Use Maintenance Minder™

# Displaying the Maintenance Minder Information

Maintenance items, which should be serviced at the same time that you replace the engine oil, appear on the multi-information display.

You can view them on the engine oil life screen at any time.

- **1.** Turn the ignition switch to ON  $III^{*1}$ .
- 2. Press the ▲①/▼ (Information) button repeatedly until the engine oil life appears on the multi-information display.

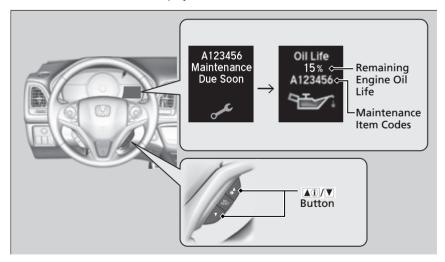

### \*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

### Displaying the Maintenance Minder Information ■ Output Displaying the Maintenance Minder Information

Based on the engine operating conditions, the remaining engine oil life is calculated and displayed as a percentage.

Displayed Engine Oil Life (%)	Calculated Engine Oil Life (%)
100	100 to 91
90	90 to 81
80	80 to 71
70	70 to 61
60	60 to 51
50	50 to 41
40	40 to 31
30	30 to 21
20	20 to 16
15	15 to 11
10	10 to 6
5	5 to 1
0	0

There is a list of maintenance main and sub items you can view on the multi-information display.

Maintenance Service Items P. 531


Continued

# ■ Maintenance Minder Messages on the Multi-Information Display

Maintenance Message	Oil Life Display	Explanation	Information
Maintenance Due Soon  A123456 Maintenance Due Soon	011 Life 15 x A123456	The remaining engine oil life is 15 to 6 percent. Once you switch the display by pressing the ▲①/▼ (Information) button, this message will go off.	The engine oil is approaching the end of its service life, and the maintenance items should be inspected and serviced soon.
Maintenance Due Now  A123456 Maintenance Due Now	5 % Oil Life 5 x A123456	The remaining engine oil life is 5 to 1 percent. Press the ▲①/▼ button to switch to another display.	The engine oil has almost reached the end of its service life, and the maintenance items should be inspected and serviced as soon as possible.
Maintenance Past Due  A123456 Maintenance Past Due 10 mies	Negative Distance	The remaining engine oil life has passed its service life, and a negative distance appears after driving over 10 miles (U.S. models) or 10 km (Canadian models). Press the  ① / V button to switch to another display.	The engine oil life has passed. The maintenance items must be inspected and serviced immediately.

The system message indicator (①) comes on along with the Maintenance Minder message.

### ■ Maintenance Service Items

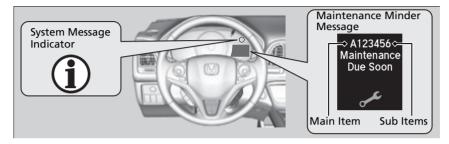

#### Maintenance Service Items

- Independent of the Maintenance Minder information, replace the brake fluid every 3 years.
- Adjust the valves during services A, B, 1, 2, or 3 if they are noisy.

CODE	Maintenance Main Items
Α	Replace engine oil*1
В	• Replace engine oil*1 and oil filter
	Inspect front and rear brakes
	<ul> <li>Inspect tie rod ends, steering gearbox, and boots</li> </ul>
	Inspect suspension components
	<ul> <li>Inspect driveshaft boots</li> </ul>
	<ul> <li>Inspect brake hoses and lines (Including ABS/VSA®)</li> </ul>
	Inspect all fluid levels and condition of fluids
	• Inspect exhaust system#
	Inspect fuel lines and connections#
*1: If a moss	cage CEDVICE does not appear more than 12 months after the display is reset, change the

<sup>\*1:</sup> If a message **SERVICE** does not appear more than 12 months after the display is reset, change the engine oil every year.


CODE	Maintenance Sub Items
1	Rotate tires
2	<ul> <li>Replace air cleaner element*<sup>2</sup></li> <li>Replace dust and pollen filter*<sup>3</sup></li> <li>Inspect drive belt</li> </ul>
3	• Replace transmission fluid*4
4	<ul><li>Replace spark plugs</li><li>Inspect valve clearance</li></ul>
5	Replace engine coolant
6	Replace rear differential fluid*

- \*2: If you drive in dusty conditions, replace the air cleaner element every 15,000 miles (24,000 km).
- \*3: If you drive primarily in urban areas that have high concentrations of soot in the air from industry and from diesel-powered vehicles, replace the dust and pollen filter every 15,000 miles (24,000 km).
- \*4: Driving in mountainous areas at very low vehicle speeds results in higher transmission temperatures. This requires transmission fluid changes more frequently than recommended by the Maintenance Minder. If you regularly drive your vehicle under these conditions, have the transmission fluid changed every 25,000 miles (40,000 km).

<sup>#:</sup> See information on maintenance and emissions warranty.

# Resetting the Display

Reset the maintenance minder information display if you have performed the maintenance service.

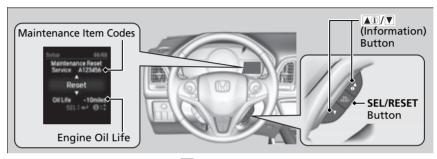

- **1.** Turn the ignition switch to ON II<sup>\*1</sup>.
- 2. Press the ▲③/▼ button to select Maintenance Info., then press the SEL/RESET button.
- **3.** Select **Reset** with the ▲①/▼ button, then press the **SEL/RESET** button.
  - ▶ The displayed maintenance items disappear, and the engine oil life display returns to 100%.

To cancel the oil life reset mode, select **Cancel**, then press the **SEL/RESET** button.

■ Resetting the Display


### NOTICE

Failure to reset the Maintenance Minder™ display after a maintenance service results in the system showing incorrect maintenance intervals, which can lead to serious mechanical problems.

The dealer will reset the Maintenance Minder™ display after completing the required maintenance service. If someone other than a dealer performs maintenance service, reset the Maintenance Minder™ display yourself.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.


# **Maintenance Items Under the Hood**

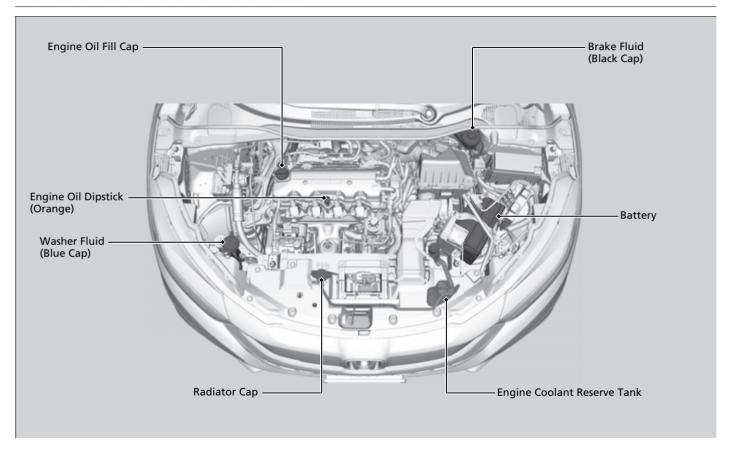


# **Opening the Hood**



- **1.** Park the vehicle on a level surface, and set the parking brake.
- **2.** Pull the hood release handle under the driver's side lower corner of the dashboard.
  - ► The hood will pop up slightly.



3. Push the hood latch lever (located under the front edge of the hood to the center) to the side and raise the hood. Once you have raised the hood slightly, you can release the lever.



**4.** Remove the support rod from the clamp using the grip. Mount the support rod in the hood.

When closing, remove the support rod, and stow it in the clamp, then gently lower the hood. Remove your hand at a height of approximately 12 inches (30 cm) and let the hood close.

### Opening the Hood

### NOTICE

Do not open the hood when the wiper arms are raised. The hood will strike the wipers, resulting in possible damage to the hood and/or the wipers.

#### NOTICE

Do not press the engine cover forcibly. This may damage the engine cover and component parts.

When closing the hood, check that the hood is securely latched.

If the hood latch lever moves stiffly, or if you can open the hood without lifting the lever, the latch mechanism should be cleaned and Jubricated

# **Recommended Engine Oil**

Use a genuine engine oil or another commercial engine oil of suitable type and viscosity (for the ambient temperature) as shown in the image that follows.

Oil is a major contributor to your engine's performance and longevity. If you drive the vehicle with insufficient or deteriorated oil, the engine may fail or be damaged.

Genuine Engine Oil	Commercial Engine Oil
Honda Genuine Motor Oil	<ul> <li>Premium-grade 0W-20 detergent oil with an API Certification Seal on the container</li> </ul>
-20 0 20 40 60 80 100°F -30 -20 -10 0 10 20 30 40°C Ambient Temperature	-20 0 20 40 60 80 100°F -30 -20 -10 0 10 20 30 40°C Ambient Temperature

<sup>\*1:</sup>Formulated to improve fuel economy.

### ■ Synthetic oil


You may also use synthetic motor oil if it is labeled with the API Certification Seal and is the specified viscosity grade.

### ■ Recommended Engine Oil

Engine Oil Additives

Your vehicle does not require oil additives. In fact, they may adversely affect the engine performance and durability.


The following seal indicates the oil is energy conserving and that it meets the American Petroleum Institute's latest requirements.




# Oil Check

We recommend that you check the engine oil level every time you refuel. Park the vehicle on level ground.

Wait approximately three minutes after turning the engine off before you check the oil.



- **1.** Remove the dipstick (orange).
- **2.** Wipe the dipstick with a clean cloth or paper towel.
- **3.** Insert the dipstick back all the way into its hole.



**4.** Remove the dipstick again, and check the level. It should be between the upper and lower marks. Add oil if necessary.

#### ≫Oil Check

If the oil level is near or below the lower mark, slowly add oil, being careful not to overfill.

# **Adding Engine Oil**



- **1.** Unscrew and remove the engine oil fill cap.
- 2. Add oil slowly.
- **3.** Reinstall the engine oil fill cap, and tighten it securely.
- **4.** Wait for three minutes and recheck the engine oil dipstick.

### 

### NOTICE


Do not fill the engine oil above the upper mark. Overfilling the engine oil may result in leaks and engine damage.

If any oil spills, wipe it away immediately. Spilled oil may damage the engine compartment components.

# **Changing the Engine Oil and Oil Filter**

You must change the engine oil and oil filter regularly in order to maintain the engine's lubrication. The engine may be damaged if they are not changed regularly.


Change the oil and filter in accordance with the maintenance message on the information display\*/multi-information display\*.



- **1.** Run the engine until it reaches normal operating temperature, and then turn the engine off.
- **2.** Open the hood and remove the engine oil fill cap.

#### 2WD models

**3.** Remove the bolts and clips on the undercarriage and remove the under cover.




#### All models

**4.** Remove the drain bolt and washer from the bottom of the engine, and drain the oil into a suitable container.

### ∑Changing the Engine Oil and Oil Filter

### NOTICE

You may damage the environment if you do not dispose of the oil in a suitable way. If you are changing the oil by yourself, appropriately dispose of the used oil. Put the oil in a sealed container and take it to a recycling center. Do not throw the oil away into a garbage can or onto the ground.



- **5.** Remove the oil filter and dispose of the remaining oil.
- **6.** Check that the filter gasket is not stuck to the engine contact surface.
  - ▶ If it is stuck, you must detach it.
- **7.** Wipe away dirt and dust adhering to the contact surface of the engine block, and install a new oil filter.
  - ► Apply a light coat of new engine oil to the filter gasket.
- **8.** Put a new washer on the drain bolt, then reinstall the drain bolt.
  - ➤ Tightening torque: 30 lbf·ft (40 N·m, 4.0 kgf·m)
- **9.** Pour the recommended engine oil into the engine.
  - ► Engine oil change capacity (including filter):
    - 3.9 US qt (3.7 L)
- **10.** Reinstall the engine oil fill cap securely and start the engine.
- **11.** Run the engine for a few minutes, and then check that there is no leak from the drain bolt or oil filter.
- **12.** Stop the engine, wait for three minutes, and then check the oil level on the dipstick.
  - ▶ If necessary, add more engine oil.

## ∑Changing the Engine Oil and Oil Filter

You will need a special wrench to replace the oil filter. You can buy this wrench from a dealer.

When installing the new oil filter, follow the instructions supplied with the oil filter.

Reinstall the engine oil fill cap. Start the engine. The low oil pressure indicator should go off within five seconds. If it does not, turn off the engine, and check your work.


# **Engine Coolant**


## Specified coolant: Honda Long Life Antifreeze/Coolant Type 2

This coolant is premixed with 50% antifreeze and 50% water. Do not add any straight antifreeze or water.

We recommend you check the engine coolant level every time you refuel. Check the reserve tank first. If it is completely empty, also check the coolant level in the radiator. Add the engine coolant accordingly.

### Reserve Tank





- 1. Make sure the engine and radiator are cool.
- **2.** Check the amount of coolant in the reserve tank.
  - ► If the coolant level is below the MIN mark, add the specified coolant until it reaches the MAX mark.
- **3.** Inspect the cooling system for leaks.

## **AWARNING**

Removing the radiator cap while the engine is hot can cause the coolant to spray out, seriously scalding you.

Always let the engine and radiator cool down before removing the radiator cap.


#### NOTICE

Genuine Honda engine coolant is a 50/50 mixture of antifreeze and water that can withstand freezing at temperatures as low as about -31°F (-35°C). If your vehicle is consistently subjected to temperatures below this, the concentration of antifreeze in the coolant should be increased. Consult a dealer for details.

If Honda antifreeze/coolant is not available, you may use another major brand of non-silicate coolant as a temporary replacement. Check that it is a high quality coolant recommended for aluminum engines. Continued use of any non-Honda coolant can result in corrosion, causing the cooling system to malfunction or fail. Have the cooling system flushed and refilled with Honda antifreeze/coolant as soon as possible.

Do not add rust inhibitors or other additives to your vehicle's cooling system. They may not be compatible with the coolant or with the engine components.

## ■ Radiator



- 1. Make sure the engine and radiator are cool.
- **2.** Turn the radiator cap 1/8 turn counter-clockwise and relieve any pressure in the cooling system. Do not push the cap down when turning.
- **3.** Push down and turn the radiator cap counter-clockwise to remove it.
- **4.** The coolant level should be up to the base of the filler neck. Add coolant if it is low.
- **5.** Put the radiator cap back on, and tighten it fully.

### 

### NOTICE

Pour the fluid slowly and carefully so you do not spill any. Clean up any spills immediately; they can damage components in the engine compartment.

## **Transmission Fluid**

## ■ Continuously Variable Transmission (CVT) Fluid

## Specified fluid: Honda HCF-2

Have a dealer check the fluid level and replace if necessary.

Do not attempt to check or change the continuously variable transmission fluid yourself.

○ Continuously Variable Transmission (CVT) Fluid

### NOTICE


#### Do not mix HCF-2 with other transmission fluids

Using a transmission fluid other than HCF-2 may adversely affect the operation and durability of your vehicle's transmission, and damage the transmission. Any damage caused by using a transmission fluid that is not equivalent to HCF-2 is not covered by Honda's new vehicle limited warranty.

## **Brake Fluid**

Specified fluid: Honda Heavy Duty Brake Fluid DOT 3

## ■ Checking the Brake Fluid



The fluid level should be between the **MIN** and **MAX** marks on the side of the reserve tank.

#### ■ Brake Fluid

### NOTICE


Brake fluid marked DOT 5 is not compatible with your vehicle's braking system and can cause extensive damage.

If the specified brake fluid is not available, you should use only DOT 3 or DOT 4 fluid from a sealed container as a temporary replacement.

Using any non-Honda brake fluid can cause corrosion and decrease the longevity of the system. Have the brake system flushed and refilled with Honda Heavy Duty Brake Fluid DOT 3 as soon as possible.

If the brake fluid level is at or below the **MIN** mark, have a dealer inspect the vehicle for leaks or worn brake pads as soon as possible.

# **Refilling Window Washer Fluid**



### Models without washer level sensor

Check the amount of window washer fluid by looking at the reservoir.

If the level is low, fill the washer reservoir.

## Canadian models

If the washer fluid is low, a message appears on the multi-information display.

Pour the washer fluid carefully. Do not overflow the reservoir.

### ■ Refilling Window Washer Fluid

#### NOTICE

Do not use engine antifreeze or a vinegar/water solution in the window washer reservoir.

Antifreeze can damage your vehicle's paint. A vinegar/water solution can damage the window washer pump.

Use only commercially available windshield washer fluid.

Avoid prolonged use of hard water to prevent lime scale buildup.

# Replacing Light Bulbs

# **Headlight Bulbs**

When replacing, use the following bulbs.

### Models with halogen headlights


High beam headlight: 60 W (HB3 for halogen bulb type)
Low beam headlight: 55 W (H11 for halogen bulb type)

Models with LED headlights

High beam headlight: LED type Low beam headlight: LED type

## High Beam Headlights

## Models with halogen headlights



- 1. Push the tab to remove the coupler.
- **2.** Rotate the old bulb counter-clockwise to remove.
- 3. Insert a new bulb.
- **4.** Insert the coupler into the connector of the bulb.

### 

#### Models with halogen headlights

#### NOTICE

Halogen bulbs get very hot when lit.

Oil, perspiration, or a scratch on the glass can cause the bulb to overheat and shatter.

#### All models

The headlight aim is set by the factory, and does not need to be adjusted. However, if you regularly carry heavy items in the cargo area, have the aiming readjusted at a dealer or by a qualified technician.

### Models with halogen headlights

When replacing a halogen bulb, handle it by its base, and protect the glass from contact with your skin or hard objects. If you touch the glass, clean it with denatured alcohol and a clean cloth.

### 


## Models with LED headlights

High beam headlights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.

Continued 545

## **■ Low Beam Headlights**

## Models with halogen headlights



- **1.** Push the tab to remove the coupler.
- **2.** Rotate the old bulb counter-clockwise to remove
- 3. Insert a new bulb.
- **4.** Insert the coupler into the connector of the bulb.

## **≥** Low Beam Headlights

### Models with LED headlights


Low beam headlights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.

# **Front Turn Signal Light Bulbs**

When replacing, use the following bulbs.

Front Turn Signal Light: 28/8 W (Amber)\*
Front Turn Signal Light: LED type\*

### Models with halogen headlights



- **1.** Turn the socket counter-clockwise and remove it.
- 2. Pull the bulb straight out of its holder.
- **3.** Insert a new bulb.

## Front Turn Signal Light Bulbs

#### Models with LED headlights

Front turn signal lights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.

\* Not available on all models

# **Front Side Marker Lights**

Front side marker lights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.

# **Parking/Daytime Running Lights**

Parking/daytime running lights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.


# Fog Light Bulbs\*

When replacing, use the following bulbs.

Fog Light: 35 W (H8 for halogen bulb type)\*

Fog Light: LED type\*

## Models with halogen fog lights



**1.** Remove the clips using a flat-tip screwdriver, and push up the under cover.


### ∑Fog Light Bulbs\*

### Models with LED fog lights


Fog lights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.


### Models with halogen fog lights

Insert a flat-tip screwdriver, lift and remove the center pin to remove the clip.



Insert the clip with the center pin raised, and push until it is flat.





- **2.** Push the tab to remove the coupler.
- **3.** Rotate the old bulb counter-clockwise on driver side and clockwise on passenger side to remove.
- **4.** Insert a new bulb into the fog light assembly and turn it clockwise on driver side and counter-clockwise on passenger side.
- **5.** Insert the coupler into the connector of the bulb.




### Models with halogen fog lights

#### NOTICE

Halogen bulbs get very hot when lit. Oil, perspiration, or a scratch on the glass can cause the bulb to overheat and shatter.

When replacing a halogen bulb, handle it by its plastic case, and protect the glass from contact with your skin or hard objects. If you touch the glass, clean it with denatured alcohol and a clean cloth.




# Side Turn Signal/Emergency Indicator Lights\*

Door mirror side turn lights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.


# **Rear Turn Signal Light Bulbs**

When replacing, use the following bulbs.

## Rear Turn Signal Light: 21 W (Amber)



- **1.** Use a Phillips-head screwdriver to remove the bolts.
- 2. Pull the light assembly out of the rear pillar.



- **3.** Turn the socket counter-clockwise and remove it.
- **4.** Remove the old bulb.
- **5.** Insert a new bulb.
- **6.** Slide the light assembly onto the guide on the body.


# **Back-Up Light Bulbs**

When replacing, use the following bulbs.

## Back-Up Light: 16 W



- **1.** Remove the cover by prying on the edge using a flat-tip screwdriver.
  - ➤ Wrap the flat-tip screwdriver with a cloth to prevent scratches.



- **2.** Turn the socket counter-clockwise and remove it.
- **3.** Remove the old bulb.
- 4. Insert a new bulb.

# **Brake/Tail/Rear Side Marker Lights**

Brake/tail/rear side marker lights are the LED type. Have an authorized Honda dealer inspect and replace the light assembly.


# **High-Mount Brake Light**

High-mount brake light is a LED type. Have an authorized Honda dealer inspect and replace the light assembly.


# **Rear License Plate Light Bulbs**

When replacing, use the following bulbs.

## Rear License Plate Light: 5 W



**1.** Push the lens on the left and pull out the lens and the socket attached to it.




- Remove the license plate light assembly by squeezing the tabs on both sides of the socket.
- **3.** Remove the old bulb and insert a new bulb.

# **Checking and Maintaining Wiper Blades**


# **Checking Wiper Blades**

If the wiper blade rubber has deteriorated, it will leave streaks, become noisy, and the hard surfaces of the blade may scratch the window glass.

# **Changing the Front Wiper Blade Rubber**



**1.** Lift the driver side wiper arm first, then the passenger side.




**2.** Press up on and hold the tab, then slide the holder off the wiper arm.

○ Changing the Front Wiper Blade Rubber


### NOTICE

Avoid dropping the wiper arm onto the windshield, it may damage the wiper arm and/or the windshield.

Continued 555




**3.** Slide the wiper blade out of the holder by pulling the tabbed end out.




- **4.** Slide the new wiper blade onto the holder from the bottom end.
  - ➤ The tab on the blade should fit in the indent of the top of the wiper holder.
- **5.** Slide the holder onto the wiper arm securely.
- **6.** Lower the passenger side wiper arm first, then the driver side.

# **Changing the Rear Wiper Blade Rubber**



- **1.** Raise the wiper arm off.
- **2.** Pivot up the bottom end of the wiper blade until it comes off from the wiper arm.




**3.** Slide the wiper blade out of the end with the indent.


## NOTICE

Avoid dropping the wiper arm; it may damage the rear window

Continued 557



**4.** Remove the retainers from the rubber blade that has been removed, and mount to a new rubber blade.



- **5.** Slide the new wiper blade onto the holder.
  - ► Make sure it is engaged correctly, then install the wiper blade assembly onto the wiper arm.

# **Checking and Maintaining Tires**

# **Checking Tires**

To safely operate your vehicle, your tires must be of the proper type and size, in good condition with adequate tread, and properly inflated.

## ■ Inflation guidelines

Properly inflated tires provide the best combination of handling, tread life, and comfort. Refer to the driver's doorjamb label or specifications page for the specified pressure.

Underinflated tires wear unevenly, adversely affect handling and fuel economy, and are more likely to fail from overheating.

Overinflated tires make your vehicle ride harshly, are more prone to road hazards, and wear unevenly.

Every day before you drive, look at each of the tires. If one looks lower than the others, check the pressure with a tire gauge.

At least once a month or before long trips, use a gauge to measure the pressure in all tires, including the spare. Even tires in good condition can lose 1-2 psi (10-20 kPa, 0.1-0.2 kgf/cm²) per month.

○ Checking Tires

## **AWARNING**

Using tires that are excessively worn or improperly inflated can cause a crash in which you can be seriously hurt or killed.

Follow all instructions in this owner's manual regarding tire inflation and maintenance.

Measure the air pressure when tires are cold. This means the vehicle has been parked for at least three hours, or driven less than 1 mile (1.6 km). If necessary, add or release air until the specified pressure is reached.

If checked when hot, tire pressure can be as much as 4–6 psi (30–40 kPa, 0.3–0.4 kgf/cm²) higher than if checked when cold.

Have a dealer check the tires if you feel a consistent vibration while driving. New tires and any that have been removed and reinstalled should be properly balanced.

Continued 559

## **■** Inspection guidelines

Every time you check inflation, also examine the tires and valve stems. Look for:

- Bumps or bulges on the side or in the tread. Replace the tire if you find any cuts, splits, or cracks in the side of the tire. Replace it if you see fabric or cord.
- Remove any foreign objects and inspect for air leaks.
- Uneven tread wear. Have a dealer check the wheel alignment.
- Excessive tread wear.
  - **Wear Indicators** P 565
- Cracks or other damage around valve stem.

## ○ Checking Tires

### U.S. models


Whenever tire pressure is adjusted, you must calibrate the TPMS.

TPMS Calibration P. 460


Check the spare tire pressure once a month or before long trips.

# **Tire and Loading Information Label**

The label attached to the driver's doorjamb provides necessary tire and loading information.

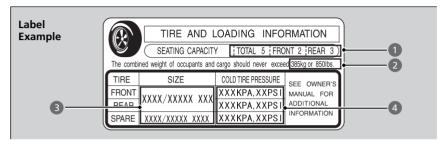

## **Tire Labeling**



The tires that came on your vehicle have a number of markings. Those you should be aware of are described as shown.

## ■ Tire Sizes

Whenever tires are replaced, they should be replaced with tires of the same size.

## ∑Tire and Loading Information Label

The tire and loading information label attached to the driver's doorjamb contains:

- 1 The number of people your vehicle can carry.
- 2 The total weight your vehicle can carry. Do not exceed this weight.
- 3 The original tire sizes for front, rear, and spare.
- The proper cold tire pressure for front, rear, and spare.

### ∑Tire Sizes

Following is an example of tire size with an explanation of what each component means.

#### 215/55R17 94V

215: Tire width in millimeters.

55: Aspect ratio (the tire's section height as a percentage of its width).

R: Tire construction code (R indicates radial).

17: Rim diameter in inches.

94: Load index (a numerical code associated with the maximum load the tire can carry).

V: Speed symbol (an alphabetical code indicating the maximum speed rating).

Continued 561

## ■ Tire Identification Number (TIN)

The tire identification number (TIN) is a group of numbers and letters that look like the example in the side column. TIN is located on the sidewall of the tire.

## ■ Glossary of Tire Terminology

**Cold Tire Pressure** – The tire air pressure when the vehicle has been parked for at least three hours or driven less than 1 mile (1.6 km).

**Load Rating** – Means the maximum load that a tire is rated to carry for a given inflation pressure.

**Maximum Inflation Pressure** – The maximum tire air pressure that the tire can hold.

**Maximum Load Rating** – Means the load rating for a tire at the maximum permissible inflation pressure for that tire.

**Recommended Inflation Pressure** – The cold tire inflation pressure recommended by the manufacturer.

**Treadwear Indicators (TWI)** – Means the projections within the principal grooves designed to give a visual indication of the degrees of wear of the tread.

∑Tire Identification Number (TIN)

### **DOT B97R FW6X 2209**

DOT: This indicates that the tire meets all requirements of the U.S. Department of Transportation.

B97R: Manufacturer's identification mark. FW6X: Tire type code.

22 09: Date of manufacture.

Year Week

# **DOT Tire Quality Grading (U.S. Vehicles)**

The tires on your vehicle meet all U.S. Federal Safety Requirements. All tires are also graded for treadwear, traction, and temperature performance according to Department of Transportation (DOT) standards. The following explains these gradings.

## Uniform Tire Quality Grading

Quality grades can be found where applicable on the tire sidewall between tread shoulder and maximum section width.

## ■ Treadwear

The treadwear grade is a comparative rating based on the wear rate of the tire when tested under controlled conditions on a specified government test course. For example, a tire graded 150 would wear one and one-half (1 1/2) times as well on the government course as a tire graded 100. The relative performance of tires depends upon the actual conditions of their use, however, and may depart significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate.

For example:

Treadwear 200 Traction AA Temperature A

All passenger car tires must conform to Federal Safety Requirements in addition to these grades.

Continued 563

## ■ Traction

The traction grades, from highest to lowest, are AA, A, B, and C. Those grades represent the tire's ability to stop on wet pavement as measured under controlled conditions on specified government test surfaces of asphalt and concrete. A tire marked C may have poor traction performance.

## ■ Temperature

The temperature grades are A (the highest), B, and C, representing the tire's resistance to the generation of heat and its ability to dissipate heat when tested under controlled conditions on a specified indoor laboratory test wheel. Sustained high temperature can cause the material of the tire to degenerate and reduce tire life, and excessive temperature can lead to sudden tire failure. The grade C corresponds to a level of performance which all passenger car tires must meet under the Federal Motor Vehicle Safety Standard No. 109. Grades B and A represent higher levels of performance on the laboratory test wheel than the minimum required by law.


#### ∑Traction

Warning: The traction grade assigned to this tire is based on straight-ahead braking traction tests, and does not include acceleration, cornering, hydroplaning, or peak traction characteristics.

### ∑Temperature

Warning: The temperature grade for this tire is established for a tire that is properly inflated and not overloaded. Excessive speed, underinflation, or excessive loading, either separately or in combination, can cause heat buildup and possible tire failure.

## **Wear Indicators**



The groove where the wear indicator is located is about 1/16 inch (about 1.6 mm) shallower than elsewhere on the tire. If the tread has worn so that the indicator is exposed, replace the tire.

Worn out tires have poor traction on wet roads.

## **Tire Service Life**

The life of your tires is dependent on many factors, including driving habits, road conditions, vehicle loading, inflation pressure, maintenance history, speed, and environmental conditions (even when the tires are not in use).

In addition to regular inspections and inflation pressure maintenance, it is recommended that you have annual inspections performed once the tires reach five years old. All tires, including the spare, should be removed from service after 10 years from the date of manufacture, regardless of their condition or state of wear.

# **Tire and Wheel Replacement**

Replace your tires with radials of the same size, load range, speed rating, and maximum cold tire pressure rating (as shown on the tire's sidewall). Using tires of a different size or construction can cause certain vehicle systems such as the ABS and Vehicle Stability Assist $^{\text{TM}}$  (VSA®) system to work incorrectly.

It is best to replace all four tires at the same time. If that isn't possible, replace the front or rear tires in pairs.

Make sure that the wheel's specifications match those of the original wheels.

∑Tire and Wheel Replacement

## **AWARNING**


Installing improper tires on your vehicle can affect handling and stability. This can cause a crash in which you can be seriously hurt or killed.

Always use the size and type of tires recommended in this owner's manual.

## **Tire Rotation**


Rotating tires according to the maintenance messages on the information display\*/ multi-information display\* helps to distribute wear more evenly and increase tire life.

### **■** Tires without rotation marks



Rotate the tires as shown here.


### ■ Tires with rotation marks



Rotate the tires as shown here.

### ▼Tire Rotation

Tires with directional tread patterns should only be rotated front to back (not from one side to the other). Directional tires should be mounted with the rotation indication mark facing forward, as shown below.



### U.S. models

Whenever tires are rotated, you must calibrate the TPMS.

**TPMS Calibration** P. 460

## **Winter Tires**

If driving on snowy or frozen roads, mount all season marked **M+S** tires, snow tires, or tire chains; reduce speed; and maintain sufficient distance between vehicles when driving.

Be particularly careful when operating the steering wheel or brakes to prevent skidding.

Winter Tires

## **AWARNING**

Using the wrong chains, or not properly installing chains, can damage the brake lines and cause a crash in which you can be seriously injured or killed.

Follow all instructions in this owner's manual regarding the selection and use of tire chains.

### NOTICE

Traction devices that are the wrong size or improperly installed can damage your vehicle's brake lines, suspension, body, and wheels. Stop driving if they are hitting any part of the vehicle.

When tire chains are mounted, follow the chain manufacturer's instructions regarding vehicle operational limits.

If your vehicle is equipped with summer tires, be aware that these tires are not designed for winter driving conditions. For more information, contact a dealer

Use tire chains, snow tires, or all season tires when necessary or according to the law.

When mounting, refer to the following points.

#### For winter tires:

- Select the size and load ranges that are the same as the original tires.
- Mount the tires to all four wheels.

#### For tire chains:

- Install them on the front tires only.
- Because your vehicle has limited tire clearance, we strongly recommend using the chains listed below:

#### Models with 215/55R17 tires

Cable-type: SCC Radial Chain SC1036

Models with 225/50R18 tires

## Not recommended to use any type of chains

- Follow the chain manufacturer's instruction when installing. Mount them as tightly as you can.
- Check that the chains do not touch the brake lines or suspension.
- Drive slowly.

## Models with 225/50R18 tires

Your vehicle's tires are not suitable for mounting any traction device.

# **Battery**

# **Checking the Battery**

The condition of the battery is monitored by a sensor located on the negative terminal of the battery. If there is a problem with this sensor, the information display\*/multi-information display\* will display a warning message. If this happens, have your vehicle inspected by a dealer.

Check the battery terminals for corrosion monthly.

If your vehicle's battery is disconnected or goes dead:

- The audio system is disabled.
  - **Audio System Theft Protection** P. 234
- The clock resets.
  - **Clock** P. 138

Battery

## **AWARNING**

The battery gives off explosive hydrogen gas during normal operation.

A spark or flame can cause the battery to explode with enough force to kill or seriously hurt you.

When conducting any battery maintenance, wear protective clothing and a face shield, or have a skilled technician do it.

**WARNING:** Battery post, terminals, and related accessories contain lead and lead compounds.

Wash your hands after handling.

When replacing the battery, the replacement must be of the same specifications.

Consult a dealer for more information

# **Charging the Battery**

Disconnect both battery cables to prevent damaging your vehicle's electrical system. Always disconnect the negative (–) cable first, and reconnect it last.

### ≫ Battery


When you find corrosion, clean the battery terminals by applying a baking powder and water solution. Clean the terminals with a damp towel. Cloth/towel dry the battery. Coat the terminals with grease to help prevent future corrosion.


## **Remote Transmitter Care**

# **Replacing the Remote Battery**

If the indicator does not come on when the button is pressed, replace the battery.

## Keys with Remote Transmitter\*





## Battery type: CR1620

- **1.** Unscrew the cover with a small Phillipshead screwdriver.
- **2.** Open the remote transmitter.
  - ➤ Wrap the small flat-tip screwdriver with a cloth to prevent scratching the transmitter.
- **3.** Remove the button battery with the small flat-tip screwdriver.
- **4.** Make sure to replace the battery with the correct polarity.

■ Replacing the Remote Battery

## **AWARNING**

### **CHEMICAL BURN HAZARD**

The battery that powers the remote transmitter can cause severe internal burns and can even lead to death if swallowed. Keep new and used batteries away from children.

If you suspect that a child has swallowed the battery, seek medical attention immediately.

#### NOTICE

An improperly disposed of battery can damage the environment. Always confirm local regulations for battery disposal.


Replacement batteries are commercially available or at a dealer.

## ■ Keyless Remote\*



## Battery type: CR2032

**1.** Remove the built-in key.



- **2.** Remove the upper half of the cover by carefully prying on the edge with a coin.
  - ➤ Wrap a coin with a cloth to prevent scratching the keyless remote.
  - ➤ Remove carefully to avoid losing the buttons.
- **3.** Make sure to replace the battery with the correct polarity.

\* Not available on all models

# Heating and Cooling System\*/Climate Control System\* Maintenance

# **Air Conditioning**

To ensure proper and safe operation, the Society of Automotive Engineers (SAE J2845) recommends that the refrigerant system only be serviced by trained and certified technicians.

Never repair or replace the air conditioning evaporator (cooling coil) with one removed from a used or salvaged vehicle.

New replacement mobile air conditioning evaporators must be certified (and labeled) as meeting SAE Standard J2842.

## **Dust and Pollen Filter**

The heating and cooling system\*/climate control system\* is equipped with a dust and pollen filter that collects pollen, dust, and other debris in the air. The Maintenance Minder™ messages will let you know when to replace the filter.

We recommend that you replace the dust and pollen filter sooner when using your vehicle in areas with high concentrations of dust.

\* Not available on all models

▶ Heating and Cooling System\*/Climate Control System\* Maintenance

### NOTICE

Vented refrigerant is harmful to the environment. To avoid refrigerant from venting, never replace the evaporator with one removed from a used or salvaged vehicle.

Refrigerant in your vehicle's air conditioning system is flammable and can be ignited during servicing if proper procedures are not followed.

The air conditioner label is found under the hood:

**Safety Labels** P. 82 **Specifications** P. 618

#### Canadian models



⚠ : Caution

: Flammable Refrigerant

: Requires Registered Technician to Service

☆: Air Conditioning
 System

## ■Dust and Pollen Filter

If the airflow from the heating and cooling system\*/ climate control system\* deteriorates noticeably, and the windows fog up easily, the filter may need to be replaced. Please contact a dealer for replacement.


# Cleaning

### **Interior Care**

Use a damp cloth with a mixture of mild detergent and warm water to remove dirt. Use a clean cloth to remove detergent residue.

# Cleaning Seat Belts

Use a soft brush with a mixture of mild soap and warm water to clean the seat belts. Let the belts air dry. Wipe the loop of the seat belt anchors using a clean cloth.



# Cleaning the Window

Wipe using a glass cleaner.

#### 

Do not spill liquids inside the vehicle. Electrical devices and systems may malfunction if liquids are splashed on them.

Do not use silicone based sprays on electrical devices such as audio devices and switches. Doing so may cause the items to malfunction or cause a fire inside the vehicle.

If a silicone based spray is inadvertently used on electrical devices, consult a dealer.

Depending on their composition, chemicals and liquid aromatics may cause discoloration, wrinkles, and cracking to resin-based parts and textiles. Do not use alkali solvents or organic solvents such as benzene or gasoline.

After using chemicals, make sure to gently wipe them away using a dry cloth.

Do not place used cloths on top of resin based parts or textiles for long periods of time without washing.

### Cleaning the Window

Wires are mounted to the inside of the rear window. Wipe along the same direction as the wires with a soft cloth so as not to damage them.

Be careful not to spill fluids, such as water or glass cleaner, on or around the cover of both the front sensor camera\* and the rainfall/light sensor\*.

### ■ Floor Mats



The driver's floor mat hooks over the floor anchors, which keep the mat from sliding forward. To remove a mat for cleaning, turn the anchor knobs to the unlock position. When reinstalling the mat after cleaning, turn the knobs to the lock position.

Do not put additional floor mats on top of the anchored mats.

# ■ Maintaining Genuine Leather\*

To properly clean leather:

- 1. Use a vacuum or soft dry cloth first to remove any dirt or dust.
- **2.** Clean the leather with a soft cloth dampened with a solution comprised of 90% water and 10% neutral soap.
- **3.** Wipe away any soap residue with a clean damp cloth.
- **4.** Wipe away residual water and allow leather to air dry in the shade.

#### ≫Floor Mats

If you use any floor mats that were not originally provided with your vehicle, make sure they are designed for your specific vehicle, fit correctly, and are securely anchored by the floor anchors. Position the rear seat floor mats properly. If not properly positioned, the floor mats can interfere with the front seat functions.

#### Maintaining Genuine Leather<sup>⋆</sup>

It is important to clean or wipe away dirt or dust as soon as possible. Spills can soak into leather resulting in stains. Dirt or dust can cause abrasions in the leather. In addition, please note that some dark colored clothing can rub onto the leather seats resulting in discoloration or stains.

### **Exterior Care**

Dust off the vehicle body after you drive.

Regularly inspect your vehicle for scratches on painted surfaces. A scratch on a painted surface can result in body rust. If you find a scratch, promptly repair it.

### ■ Washing the Vehicle

Wash the vehicle regularly. Wash more frequently when driving in the following conditions:

- If driving on roads with road salt.
- If driving in coastal areas.
- If tar, soot, bird droppings, insects, or tree sap are stuck to painted surfaces.

## Using an Automated Car Wash

- Make sure to follow the instructions indicated on the automated car wash.
- Fold in the door mirrors.
- For models equipped with automatic intermittent wipers, turn the wipers off.

## Using High Pressure Cleaners

- Keep sufficient distance between the cleaning nozzle and the vehicle body.
- Take particular care around the windows. Standing too close may cause water to enter the vehicle interior.
- Do not spray high pressure water directly into the engine compartment. Instead, use low pressure water and a mild detergent.

### **≥** Washing the Vehicle

Do not spray water into the air intake vents. It can cause a malfunction.



## Applying Wax

A good coat of automotive body wax helps protect your vehicle's paint from the elements. Wax will wear off over time and expose your vehicle's paint to the elements, so reapply as necessary.

## ■ Maintaining the Bumpers and Other Resin Coated Parts

If you get gasoline, oil, engine coolant, or battery fluid on resin coated parts, they may be stained or the coating may peel. Promptly wipe it away using a soft cloth and clean water.

# ■ Cleaning the Window

Wipe using a glass cleaner.

## ■ Maintaining Aluminum Wheels

Aluminum is susceptible to deterioration caused by salt and other road contaminants. When necessary, as early as possible use a sponge and mild detergent to wipe away these contaminants. Do not use a stiff brush or harsh chemicals (including some commercial wheel cleaners). These can damage the protective finish on aluminum alloy wheels, resulting in corrosion. Depending on the type of finish, the wheels also may lose their luster or appear burnished. To avoid water stains, wipe the wheels dry with a cloth while they are still wet.

### ■ Applying Wax

#### NOTICE

Chemical solvents and strong cleaners can damage the paint, metal, and plastic on your vehicle. Wipe away spills immediately.

Maintaining the Bumpers and Other Resin Coated Parts

Ask a dealer about the correct coating material when you want to repair the painted surface of the parts made of resin.

### ■ Fogged Exterior Light Lenses

The inside lenses of exterior lights (headlights, brake lights etc.) may fog temporarily if you have driven in the rain, or after the vehicle has been run through a car wash. Dew condensation also may build up inside the lenses when there is a significant enough difference between the ambient and inside lens temperatures (similar to vehicle windows fogging up in rainy conditions). These conditions are natural processes, not structural design problems in the exterior lights.

Lens design characteristics may result in moisture developing on the light lens frame surfaces. This also is not a malfunction.

However, if you see large amounts of water accumulation, or large water drops building up inside the lenses, have your vehicle inspected by a dealer.

# **Accessories and Modifications**

### **Accessories**

When installing accessories, check the following:

- Do not install accessories on the windshield. They can obstruct your view and delay your reaction to driving conditions.
- Do not install any accessories over areas marked **SRS AIRBAG**, on the sides or backs of the front seats, on front or side pillars, or near the side windows. Accessories installed in these areas may interfere with proper operation of the vehicle's airbags or may be propelled into you or another occupant if the airbags deploy.
- Be sure electronic accessories do not overload electrical circuits or interfere with proper operation of your vehicle.

**Fuses** P. 608

• Before installing any electronic accessory, have the installer contact a dealer for assistance. If possible, have a dealer inspect the final installation.

■ Accessories and Modifications

# **AWARNING**

Improper accessories or modifications can affect your vehicle's handling, stability, and performance, and cause a crash in which you can be seriously hurt or killed.

Follow all instructions in this owner's manual regarding accessories and modifications.

Honda Genuine accessories are recommended to ensure proper operation on your vehicle.

### **Modifications**

Do not modify your vehicle in a manner that may affect its handling, stability, or reliability, or install non-genuine Honda parts or accessories that may have a similar effect.

Even minor modifications to vehicle systems can affect overall vehicle performance. Always make sure all equipment is properly installed and maintained, and do not make any modification to your vehicle or its systems that might cause your vehicle to no longer meet federal, state, province, territory, and local regulations.

The on-board diagnostic port (OBD-II/SAE J1962 connector) installed on this vehicle is intended to be used with automobile system diagnostic devices or with other devices that Honda has approved. Use of any other type of device may adversely affect the vehicle's electronic systems or allow them to be compromised, possibly resulting in a system malfunction, drained battery, or other unexpected problems.

Do not modify or attempt to repair any of the electrical components.

This page intentionally left blank.

# Handling the Unexpected

This chapter explains how to handle unexpected troubles.


10015	
Types of Tools	584
If a Tire Goes Flat	
Changing a Flat Tire	586
Engine Does Not Start	
Checking the Engine	595
If the Keyless Remote Battery is Weak	596
Emergency Engine Stop	597
If the Battery Is Dead	598
Shift Lever Does Not Move	600
Overheating	
How to Handle Overheating	601

### Indicator, Coming On/Blinking

If the Low Oil Pressure Indicator Comes On.	603
If the Charging System Indicator Co	mes
On	. 603
If the Malfunction Indicator Lamp Co	omes
On or Blinks	. 604
If the Brake System Indicator (Red) C	omes
On	. 605
If the Electric Power Steering (EPS) S	ystem
Indicator Comes On	. 605
If the Electric Parking Brake System	
Indicator Comes On	606


If You Cannot Open the Tailgate 6	14
Emergency Towing6	13
Inspecting and Changing Fuses 6	12
Fuse Locations 60	36
Fuses	
Comes On or Blinks 60	)7
If the Low Tire Pressure/TPMS Indicator	

# **Types of Tools**

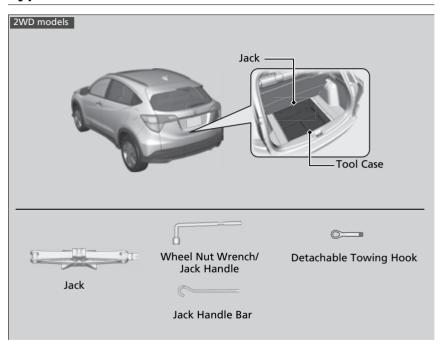

### ∑Types of Tools

The tools are stored in the cargo area.

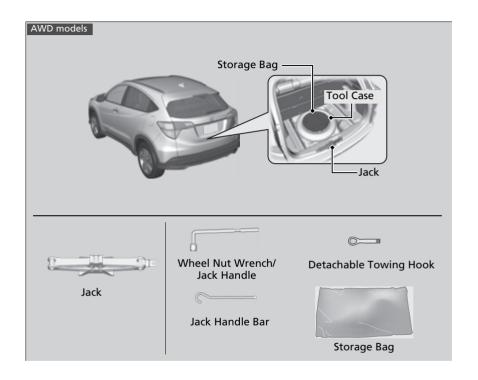

## If a Tire Goes Flat

# **Changing a Flat Tire**

If a tire goes flat while driving, grasp the steering wheel firmly, and brake gradually to reduce speed. Then, stop in a safe place. Replace the flat tire with a compact spare tire. Go to a dealer as soon as possible to have the full-size tire repaired or replaced.

- 1. Park the vehicle on firm, level, non-slippery surface and apply the parking brake.
- **2.** Put the transmission into **P**.
- **3.** Turn on the hazard warning lights and turn the ignition switch to LOCK  $0^{*1}$ .

### ○ Changing a Flat Tire

Follow compact spare precautions: Periodically check the tire pressure of the compact spare. It should be set to the specified pressure. Specified Pressure: 60 psi (420 kPa. 4.2 kgf/cm²)

When driving with the compact spare tire, keep the vehicle speed under 50 mph (80 km/h). Replace with a full-size tire as soon as possible.


The compact spare tire and wheel in your vehicle are specifically for this model. Do not use them with another vehicle. Do not use another type of compact spare tire or wheel with your vehicle.

Do not mount tire chains on a compact spare tire. If a chain-mounted front tire goes flat, remove one of the full-size rear tires and replace it with the compact spare tire. Remove the flat front tire and replace it with the full-size tire that was removed from the rear. Mount the tire chains on the front tire.


Do not use the jack if it doesn't work properly. Call your dealer or a professional towing service.

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

## ■ Getting Ready to Replace the Flat Tire



1. Open the cargo area floor lid.



**2.** Take the tool case out of the cargo area.

### 2WD models

Take the wheel nut wrench, jack handle bar and jack out of the tool case.

### AWD models

Take the wheel nut wrench and jack handle bar out of the tool case.

### All models


**3.** Unscrew the wing bolt, and remove the spacer cone. Then, remove the spare tire.

#### ■ Getting Ready to Replace the Flat Tire

The wheel nut wrench supplied with your vehicle is specially adapted to fit the holder shaft. Do not use any other tool.


The shape of the tool case varies by model.

Continued 587



### AWD models

**4.** Turn the jack's end bracket anti-clockwise to loosen it, then remove the jack.



### All models

**5.** Place a wheel block or rock in front and rear of the wheel diagonal to the flat tire.




**6.** Place the compact spare tire (wheel side up) under the vehicle body, near the tire that needs to be replaced.



**7.** Loosen each wheel nut about one turn using the wheel nut wrench.

### ■ How to Set Up the Jack



**1.** Place the jack under the jacking point closest to the tire to be changed.



Wheel Nut

Wrench as Jack Handle

**3.** Raise the vehicle, using the jack handle bar and the jack handle, until the tire is off the ground.

**2.** Turn the end bracket clockwise as shown in

the jacking point.

the image until the top of the jack contacts

► Make sure that the jacking point tab is

resting in the jack notch.

# **AWARNING**

The vehicle can easily roll off the jack, seriously injuring anyone underneath.

Follow the directions for changing a tire exactly, and never get under the vehicle when it is supported only by the jack.

Do not use the jack with people or luggage in the vehicle.

Use the jack provided in your vehicle. Other jacks may not support the weight ("load") or may not fit the jacking point.

The following instructions must be followed to use the jack safely:

- Do not use while the engine is running.
- Use only where the ground is firm and level.
- Use only at the jacking points.
- Do not get in the vehicle while using the jack.
- Do not put anything on top of or underneath the jack.

Store the wheel, jack, and tools securely before driving.

Loose items can fly around the interior in a crash and can seriously injure the occupants.




Jack


Bar

Handle


# ■ Replacing the Flat Tire



1. Remove the wheel nuts and flat tire.



- **2.** Wipe the mounting surfaces of the wheel with a clean cloth.
- 3. Mount the compact spare tire.
- **4.** Screw the wheel nuts until they touch the lips around the mounting holes, then stop rotating.



**5.** Lower the vehicle and remove the jack. Tighten the wheel nuts in the order indicated in the image. Go around, tightening the nuts, two to three times in this order.

### Wheel nut torque:

80 lbf·ft (108 N·m, 11 kgf·m)


### ■ Replacing the Flat Tire

Do not over tighten the wheel nuts by applying extra torque using your foot or a pipe.

Continued 591

### 2WD models

# ■ Storing the Flat Tire



- **1.** Remove the center cap.
- **2.** Place the flat tire face down in the spare tire well.
- **3.** Remove the spacer cone from the wing bolt, flip it over, and insert it back on the bolt. Secure the flat tire with the wing bolt.
- **4.** Securely store the wheel nut wrench, jack handle bar and jack back in the tool case. Store the case in the cargo area under the cargo floor lid.

Storing the Flat Tire


# **AWARNING**

Loose items can fly around the interior in a crash and can seriously injure the occupants.

Store the wheel, jack, and tools securely before driving.

### AWD models


# Storing the Flat Tire



- **1.** Put the flat tire in the storage bag provided with your vehicle.
  - ▶ The storage bag is in the tool case.
- **2.** Knot the top of the storage bag.
- **3.** Store the jack in its holder. Turn the jack's end bracket to lock it in place.
- **4.** Securely store the wheel nut wrench and jack handle bar back in the tool case.



**5.** Bore through the bag, and pass the holding belt through the hole of the bag and the wheel of the flat tire as shown.



- **6.** Place the flat tire in the cargo area, and thread the belt through the rear anchor as shown.
- **7.** Pass the belt through the ring, and tighten the belt to secure the flat tire in place.

Storing the Flat Tire

# **AWARNING**

Loose items can fly around the interior in a crash and can seriously injure the occupants.

Store the wheel, jack, and tools securely before driving.

Continued 593

### U.S. models

# **■ TPMS and the Compact Spare Tire**

If you replace a flat tire with the spare tire, the low tire pressure/TPMS indicator comes on while you are driving. After driving for a few miles (kilometers), **Tire Pressure Monitor Problem** will appear on the multi-information display\* and the indicator will start blinking for a short time and then stay on; however, this is normal and is no cause for concern.

Calibrate the TPMS when you replace the tire with a specified regular tire.

**TPMS Calibration** P. 460

# **Engine Does Not Start**

# **Checking the Engine**

If the engine does not start, check the starter.

### ■ Checking the Engine

If you must start the vehicle immediately, use an assisting vehicle to jump start it.

**▶ If the Battery Is Dead** P. 598

Starter condition	Checklist
Starter doesn't turn or turns	Models with keyless access system
over slowly.	Check for a message on the multi-information display*.
The battery may be dead. Check	• If the <b>To Start, Hold Remote Near Start Button</b> message appears.
each of the items on the right and	<b>☑</b> If the Keyless Remote Battery is Weak P. 596
respond accordingly.	►Make sure the keyless remote is in its operating range.
	<b>ENGINE START/STOP Button Operating Range</b> P. 170
	Check the brightness of the interior lights.
	Turn on the interior lights and check the brightness.
	If the interior lights are dim or do not come on at all
	Battery P. 570
	If the interior lights come on normally
The starter turns over normally	Review the engine start procedure.
but the engine doesn't start.	Follow its instructions, and try to start the engine again. Starting the Engine P. 436, 439
There may be a problem with a	Check the immobilizer system indicator.
fuse. Check each of the items on	When the immobilizer system indicator is blinking, the engine cannot be started.
the right and respond accordingly.	Immobilizer System P. 163
	Check the fuel level.
	There should be enough fuel in the tank. <b>▶ Fuel Gauge</b> P. 121, 124
	Check the fuses.
	Check all fuses, or have your vehicle checked by a dealer.
	<b>Inspecting and Changing Fuses</b> P. 612
	If the problem continues:
	Emergency Towing P. 613

\* Not available on all models

### Models with keyless access system

# If the Keyless Remote Battery is Weak

If the beeper sounds, the **To Start, Hold Remote Near Start Button** message appears on the multi-information display, the **ENGINE START/STOP** button flashes, and the engine won't start, start the engine as follows:



- 1. Touch the center of the ENGINE START/ STOP button with the H logo on the keyless remote while the ENGINE START/STOP button is flashing. The buttons on the keyless remote should be facing you.
  - ► The **ENGINE START/STOP** button flashes for about 30 seconds.



- 2. Depress the brake pedal and press the ENGINE START/STOP button within 10 seconds after the beeper sounds while the ENGINE START/STOP button changes from flashing to on.
  - ► If you don't depress the pedal, the mode will change to ACCESSORY.

#### Models with keyless access system

# **Emergency Engine Stop**

The **ENGINE START/STOP** button may be used to stop the engine due to an emergency situation even while driving. If you must stop the engine, do either of the following operations:

- Press and hold the **ENGINE START/STOP** button for about two seconds.
- Firmly press the **ENGINE START/STOP** button three times.

The steering wheel will not lock. However, because turning off the engine disables the power assist the engine provides to the steering and braking systems, it will require significantly more physical effort and time to steer and slow the vehicle. Use both feet on the brake pedal to slow down the vehicle and stop immediately in a safe place.

The power mode is in ACCESSORY when the engine is stopped.

To change the mode to VEHICLE OFF, put the transmission into  $\boxed{\textbf{P}}$  after the vehicle comes to a complete stop.

#### Canadian models

Then, press the **ENGINE START/STOP** button twice without depressing the brake pedal.

### Emergency Engine Stop


Do not press the **ENGINE START/STOP** button while driving unless it is absolutely necessary for the engine to be turned off.

If you press the **ENGINE START/STOP** button while driving, the beeper sounds.

# If the Battery Is Dead

# **Jump Starting Procedure**

Turn off the power to electric devices, such as audio and lights. Turn off the engine, then open the hood.



- **1.** Connect the first jumper cable to your vehicle's battery  $\oplus$  terminal.
  - ► Remove the cover from the under-hood fuse box.

Engine Compartment Fuse Box P. 608

- **2.** Connect the other end of the first jumper cable to the booster battery  $\oplus$  terminal.
  - ► Use a 12-volt booster battery only.
  - ▶ When using the automotive battery charger to boost your 12-volt battery, select a lower charging voltage than 15-volt. Check the charger manual for the proper setting.
- **3.** Connect the second jumper cable to the booster battery ⊖ terminal.
- **4.** Connect the other end of the second jumper cable to the stud bolt as shown. Do not connect this jumper cable to any other part.
- **5.** If your vehicle is connected to another vehicle, start the assisting vehicle's engine and increase its rpm slightly.
- **6.** Attempt to start your vehicle's engine. If it turns over slowly, check that the jumper cables have good metal-to-metal contact.

If the Battery Is Dead


## **AWARNING**

A battery can explode if you do not follow the correct procedure, seriously injuring anyone nearby.

Keep all sparks, open flames, and smoking materials away from the battery.

Securely attach the jumper cables clips so that they do not come off when the engine vibrates. Be careful not to tangle the jumper cables or allow the cable ends to touch each other while attaching or detaching the jumper cables.

Battery performance degrades in cold conditions and may prevent the engine from starting.



Handling the Unexpected

### **■** What to Do After the Engine Starts

Once your vehicle's engine has started, remove the jumper cables in the following order.


- 1. Disconnect the jumper cable from your vehicle's stud bolt.
- **2.** Disconnect the other end of the jumper cable from the booster battery  $\bigcirc$  terminal.
- **3.** Disconnect the jumper cable from your vehicle's battery  $\oplus$  terminal.
- **4.** Disconnect the other end of the jumper cable from the booster battery  $\oplus$  terminal.

Have your vehicle inspected by a nearby service station or a dealer.

## Shift Lever Does Not Move

Follow the procedure below if you cannot move the shift lever out of the P position.

### ■ Releasing the Lock



1. Set the parking brake.

#### Models without keyless access system


**2.** Remove the key from the ignition switch.

### Models with keyless access system

**2.** Remove the built-in key from the keyless remote.

### All models

- **3.** Wrap a cloth around the tip of a small flattip screwdriver. Put it into the shift lock release slot as shown in the image, and remove the cover.
- **4.** Insert the key into the shift lock release slot.
- **5.** While pushing the key down, press the shift lever release button, and place the shift lever into [N].
  - ► The lock is now released. Have the shift lever checked by a dealer as soon as possible.



# Overheating

# **How to Handle Overheating**

Overheating symptoms are as follows:

- The high temperature indicator (red) comes on or the engine suddenly loses power.
- Steam or spray comes out of the engine compartment.

### ■ First thing to do

- 1. Immediately park the vehicle in a safe place.
- 2. Turn off all accessories and turn on the hazard warning lights.
  - ▶ No steam or spray present: Keep the engine running and open the hood.
  - ► Steam or spray is present: Turn off the engine and wait until it subsides. Then, open the hood.

# **AWARNING**

Steam and spray from an overheated engine can seriously scald you.


Do not open the hood if steam is coming out.

#### NOTICE

Continuing to drive with the high temperature indicator on may damage the engine.

Continued 601

### ■ Next thing to do



- **1.** Check that the cooling fan is operating and stop the engine once the high temperature indicator goes off.
  - ► If the cooling fan is not operating, immediately stop the engine.
- **2.** Once the engine has cooled down, inspect the coolant level and check the cooling system components for leaks.
  - ► If the coolant level in the reserve tank is low, add coolant until it reaches the MAX mark.
  - ▶ If there is no coolant in the reserve tank, check that the radiator is cool. Cover the radiator cap with a heavy cloth and open the cap. If necessary, add coolant up to the base of the filler neck, and put the cap back on.

### ■ Last thing to do

Once the engine has cooled sufficiently, restart it and check the high temperature indicator.

If the high temperature indicator is off, resume driving. If it stays on, contact a dealer for repairs.

# **AWARNING**

Removing the radiator cap while the engine is hot can cause the coolant to spray out, seriously scalding you.

Always let the engine and radiator cool down before removing the radiator cap.

If the coolant is leaking, contact a dealer for repairs.

Use water as an emergency/temporary measure only. Have a dealer flush the system with proper antifreeze as soon as possible.

# Indicator, Coming On/Blinking

## If the Low Oil Pressure Indicator Comes On



■ Reasons for the indicator to come on

Comes on when the engine oil pressure is low.

- What to do as soon as the indicator comes on
- **1.** Immediately park the vehicle on level ground in a safe place.
- 2. If necessary, turn the hazard warning lights on.
- What to do after parking the vehicle
- 1. Stop the engine and let it sit for about three minutes.
- **2.** Open the hood and check the oil level.
  - Add oil as necessary.

Oil Check P. 536

- **3.** Start the engine and check the low oil pressure indicator.
  - ► The indicator goes off: Start driving again.
  - ► The indicator does not go off within 10 seconds: Immediately stop the engine and contact a dealer for repairs.

# If the Charging System Indicator Comes On



■ Reasons for the indicator to come on

Comes on when the battery is not being charged.

■ What to do when the indicator comes on

Turn off the heating and cooling system\*/climate control system\*, rear defogger, and other electrical systems, and immediately contact a dealer for repairs.

If the Low Oil Pressure Indicator Comes On

### NOTICE

Running the engine with low oil pressure can cause serious mechanical damage almost immediately.

≥ If the Charging System Indicator Comes On

If you need to stop temporarily, do not turn off the engine. Restarting the engine may rapidly discharge the battery.

\* Not available on all models

# If the Malfunction Indicator Lamp Comes On or Blinks



### ■ Reasons for the indicator lamp to come on or blink

- Comes on when there is a problem with the engine emissions control system, or the fuel fill cap is missing, or loose.
- Blinks when engine misfiring is detected.

### ■ What to do when the indicator lamp comes on

Avoid high speeds and immediately get your vehicle inspected at a dealer.

### ■ What to do when the indicator lamp blinks

Park the vehicle in a safe place with no flammable items and wait at least 10 minutes or more with the engine stopped until it cools.

# Check/Tighten Fuel Cap Message

### ■ The message appears on when:

An evaporative system leak is detected. This may be caused by the fuel fill cap being loose or not being installed.

### ■ What to do when the message appears:

- 1. Stop the engine.
- 2. Check that the fuel fill cap is fully installed.
  - If not, loosen the cap, and then retighten it until it clicks at least once.
- 3. Drive for several days of normal driving.
  - ► The message should go off.

### ■ When the malfunction indicator lamp comes on

The malfunction indicator lamp comes on if the system continues to detect a leak of gasoline vapor. If this happens, check the fuel fill cap using the procedures described above.

≥ If the Malfunction Indicator Lamp Comes On or Blinks

### NOTICE

If you drive with the malfunction indicator lamp on, the emissions control system and the engine could be damaged.

If the malfunction indicator lamp blinks again when restarting the engine, drive to the nearest dealer at 31 mph (50 km/h) or less. Have your vehicle inspected.

# If the Brake System Indicator (Red) Comes On

U.S. BRAKE ■ Reasons for the indicator to come on

- The brake fluid is low.
- There is a malfunction in the brake system.

Canada

■ What to do when the indicator comes on while driving

- Depress the brake pedal lightly to check pedal pressure.
- If normal, check the brake fluid level the next time you stop.
- If abnormal, take immediate action. If necessary, downshift the transmission to slow the vehicle using engine braking.

# If the Electric Power Steering (EPS) System Indicator Comes On



- Reasons for the indicator to come on
- Comes on when there is a problem with the EPS system.
- What to do when the indicator comes on

Stop the vehicle in a safe place and restart the engine. If the indicator comes on and stays on, immediately have your vehicle inspected by a dealer.

≥ If the Brake System Indicator (Red) Comes On

Have your vehicle repaired immediately. It is dangerous to drive with low brake fluid. If there is no resistance from the brake pedal, stop immediately in a safe place. If necessary downshift the gears.

If the brake system indicator and **ABS** indicator come on simultaneously, the electronic brake distribution system is not working. This can result in vehicle instability under sudden braking.

Have your vehicle inspected by a dealer immediately.

# If the Electric Parking Brake System Indicator Comes On



### ■ Reasons for the indicator to come on

Comes on when there is a problem with the electric parking brake system.

#### ■ What to do when the indicator comes on

Avoid using the parking brake and immediately get your vehicle inspected at a dealer.

■ What to do when the electric parking brake indicator comes on or blinks at the same time.

Release the parking brake.

### Parking Brake P. 507

- If the electric parking brake indicator remains on or blinks even after releasing the parking brake, immediately stop the vehicle in a safe place and call a dealer.
  - ▶ To prevent your vehicle from moving, put the transmission into P.
- If only the electric parking brake indicator goes off, immediately get your vehicle inspected at a dealer.

≥ If the Electric Parking Brake System Indicator Comes On

If you apply the parking brake, it may not release.

If the electric parking brake indicator also turns on, the parking brake is still applied.

When the electric parking brake indicator blinks at the same time as the electric parking brake system indicator, the system must be checked. The parking brake may not operate under these conditions.

### U.S. models

# If the Low Tire Pressure/TPMS Indicator Comes On or Blinks



#### Reasons for the indicator to come on or blink

A tire pressure is significantly low, or the TPMS has not been calibrated. If there is a problem with the TPMS or the compact spare tire is installed, the indicator blinks for about one minute, and then stays on.

### ■ What to do when the indicator comes on

Drive carefully and avoid abrupt cornering and hard braking. Stop your vehicle in a safe place. Check the tire pressure and adjust the pressure to the specified level. The specified tire pressure is on a label on the driver side doorjamb.

- Calibrate the TPMS after the tire pressure is adjusted.
- What to do when the indicator blinks, then remains on

Have the tire inspected by a dealer as soon as possible. If the compact spare tire causes the indicator to blink, change the tire to a full-size tire. The indicator goes off after driving for a few miles (kilometers).

■If the Low Tire Pressure/TPMS Indicator Comes On or Blinks

#### NOTICE

Driving on an extremely underinflated tire can cause it to overheat. An overheated tire can fail. Always inflate your tires to the prescribed level.

## **Fuses**

### **Fuse Locations**


If any electrical devices are not working, turn the ignition switch to LOCK  $0^{*1}$  and check to see if any applicable fuse is blown.

# ■ Engine Compartment Fuse Box

### ■ Fuse box A

Located near the brake fluid reservoir. Push the tabs to open the box.

Fuse locations are shown on the fuse box cover. Locate the fuse in question by the fuse number and box cover number.



## **■** Circuit protected and fuse rating


	•	-
	Circuit Protected	Amps
1	Headlight Low Beam Main	20 A
2	Driver's Power Seat Sliding*	(20 A)
3	Hazard	10 A
4	Drive By Wire	15 A
5	Wiper*	(30 A)
6	Stop	10 A
7	IGP	15 A
8	IG Coil	15 A
9	Daytime Running Lights	(10 A)
10	_	(20 A)
11	-	(30 A)
12	Main Fan	30 A
13	Starter SW*	(30 A)
14	MG Clutch	7.5 A
15	Battery Sensor	(7.5 A)
16	Small Light	10 A
17	Driver's Power Seat Reclining*	(20 A)
18	Horn	10 A
19	Fog Light*	(10 A)
20	Heated Windshield*2	(10 A)


	Circuit Protected	Amps
21	Back Up	10 A
22	Audio	(10 A)
23	Sub Fan	(30 A)
24	_	(30 A)
25	STRLD*	(7.5 A)
26	IGP CAM*	(7.5 A)
27	-	-
28	_	_
29	_	(30 A)
30	IGP LAF	(7.5 A)
31	IGPS	(7.5 A)
32	Right Headlight Low Beam	10 A
33	Left Headlight Low Beam	10 A


<sup>\*1:</sup>Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

<sup>\*2:</sup>Canadian models

### ■ Fuse box B







Pull up the cover on the  $\oplus$  terminal, then remove it while pulling out the tab as shown.

Replacement of engine compartment fuses should be done by a dealer.


# ■ Circuit protected and fuse rating

	Circuit Protected	Amps
а	Battery Main	100 A
b	RB Main 1	70 A
С	RB Main 2	80 A
d	CAP Main	70 A

609

### **■ Interior Fuse Boxes**

### ■ Fuse box A



Located behind the instrument panel. Fuse locations are shown on the label under the steering column.


Locate the fuse in question by the fuse number and label number.


# **■** Circuit protected and fuse rating

	Circuit Protected	Amps
1	Door Lock	20 A
2	_	_
3	Smart*	(10 A)
4	Driver Side Door Unlock	10 A
5	Passenger Side Door Unlock	10 A
6	Driver Door Unlock	10 A
7	Driver Door Lock	10 A
8	Driver's Power Window	20 A
9	Passenger's Power Window	20 A
10	Rear Left Power Window	20 A
11	Rear Right Power Window	20 A
12	Driver Side Door Lock	10 A
13	Passenger Side Door Lock	10 A
14	_	_
15	Right Headlight High Beam	10 A
16	STS*	(7.5 A)
17	-	(20 A)
18	Moonroof*	(20 A)
19	Front Seat Heater*	(20 A)
20	_	_

	Circuit Protected	Amps
21	Adaptive Cruise Control*	(7.5 A)
22	Washer	15 A
23	Rear Wiper*	(10 A)
24	A/C	7.5 A
25	Daytime Running Lights	7.5 A
26	Starter Cut*	(7.5 A)
27	ABS/VSA	7.5 A
28	SRS	10 A
29	Left Headlight High Beam	10 A
30	ACG	10 A
31	IG Relay	10 A
32	Fuel Pump	15 A
33	SRS	(7.5 A)
34	Meter	7.5 A
35	Mission SOL	7.5 A
36	Front Accessory Power Socket	20 A
37	ACC	(7.5 A)
38	_	(7.5 A)
39	Option	10 A
40	Rear Wiper	10 A
41	-	-
42	_	_

### ■ Fuse box B





Remove the cover by putting the flat-tip screwdriver into the side slot as shown.

# ■ Circuit protected and fuse rating


	Circuit Protected	Amps
	EPS	70 A
	IG Main	30 A*1
	IG IVIAITI	50 A*2
1	Fuse Box Main 2	50 A
	ABS/VSA Motor	40 A
	Fuse Box Main 1	30 A
	Fuse Box Main 3*	40 A
2	Rear Defogger	30 A
	Left Electric Parking Brake	30 A
	IG Main2*1	30 A
	*2	30 A
	Heater Motor	40 A
	Right Electric Parking Brake	30 A
	ABS/VSA FSR	30 A

	Circuit Protected	Amps
3	-	-
4	_	_
5	AWD*	(20 A)
6	_	(10 A)
7	Rear Accessory Power Socket*3	(20 A)
8	_	_
9	Interior Light	7.5 A
10	Accessory Power Socket (Console)	(20 A)
11	-	-
12*1	<del>-</del>	-
12*2	ACC Key Lock	(7.5 A)
13	Heated Door Mirror*	(10 A)
14	A/C Blower SW*	(7.5 A)
15*1	-	_
15* <sup>2</sup>	Wiper	30 A


- \*1:Models with keyless access system \*2:Models without keyless access system

<sup>\*3:</sup>Canadian models

# **Inspecting and Changing Fuses**




- **1.** Turn the ignition switch to LOCK  $0^{*1}$ . Turn headlights and all accessories off.
- **2.** Check the fuses on the battery in the engine compartment.
  - ► If the fuse is blown, have it replaced by a dealer.




**Blown Fuse** 

**Combined Fuse** 

- **3.** Remove the fuse box cover.
- **4.** Inspect the small fuses in the engine compartment and the vehicle interior.
  - ▶ If there is a blown fuse, remove it with the fuse puller and replace it with a new one.





\*1: Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

### 

### NOTICE

Replacing a fuse with one that has a higher rating greatly increases the chances of damaging the electrical system.

Use the charts to locate the fuse in question and confirm the specified amperage on the fuse label.

#### Fuse Locations P. 608

Replace fuse with a spare fuse of the same specified amperage.

There is a fuse puller in the back of the engine compartment fuse box cover.

# **Emergency Towing**

Call a professional towing service if you need to tow your vehicle.

### All models

# **■** Flat bed equipment

The operator loads your vehicle on the back of a truck.

This is the best way to transport your vehicle.

### 2WD models

### ■ Wheel lift equipment

The tow truck uses two pivoting arms that go under the front tires and lift them off the ground. The rear tires remain on the ground. **This is an acceptable way to tow your vehicle.** 

### Emergency Towing

### NOTICE

Trying to lift or tow your vehicle by the bumpers will cause serious damage. The bumpers are not designed to support the vehicle's weight.

### NOTICE

Improper towing such as towing behind a motorhome or other motor vehicle can damage the transmission.

Never tow your vehicle with just a rope or chain. It is very dangerous since ropes or chains may shift from side to side or break.

#### 2WD models

Make sure the parking brake is released. If you cannot release the parking brake, your vehicle must be transported by the flat bed equipment.

Parking Brake P. 507


# If You Cannot Open the Tailgate

# ■ What to Do If Unable to Open the Tailgate

If you cannot open the tailgate, use the following procedure.



**1.** Wrap a cloth around the flat-tip screwdriver. Put it into the cover as shown in the image, and open it.




**2.** Wrap a cloth around the flat-tip screwdriver. Put it into the lid as shown in the image, and open the lid.

### **≫**What to Do If Unable to Open the Tailgate

Follow Up:

After taking these steps, contact a dealer to have the vehicle checked.

When you open the tailgate from inside, make sure there is enough space around the tailgate, and it does not hit anyone or any object.



**3.** To open the tailgate, push the tailgate while sliding the lever to the right.

This page intentionally left blank.

# Information

This chapter includes your vehicle's specifications, locations of identification numbers, and other information required by regulation.

Specifications	618
Identification Numbers	
Vehicle Identification Number (VIN),	
Engine Number, and Transmission	
Number	620
Devices that Emit Radio Waves	621
Reporting Safety Defects	622
Emissions Testing	
Testing of Readiness Codes	623
Warranty Coverages	625
Authorized Manuals	628
<b>Customer Service Information</b>	629

# Specifications

## **■** Vehicle Specifications

•	
Model	HR-V
No. of Passengers:	
Front	2
Rear	3
Total	5
Weights:	
Gross Vehicle Weight Rating	See the certification label on the driver's doorjamb
Gross Axle Weight Rating (Front)	See the certification label on the driver's doorjamb
Gross Axle Weight Rating (Rear)	See the certification label on the driver's doorjamb

### ■ Air Conditioning

Refrigerant Type	HFO-1234yf (R-1234yf)	
Charge Quantity	13.9 - 15.7 oz (395 - 445 g)	
Lubricant Type	ND-OIL14 (POE)	
Quantity	4.27-5.00 cu-in (70-82 cm <sup>3</sup> )	

## **■** Engine Specifications

Displacement	109.8 cu-ir	109.8 cu-in (1,799 cm³)	
Spark Plugs	NGK	DILZKR7B11GS	
Spark riugs	DENSO	DXU22HCR-D11S	

#### ■ Fuel

Fuel:	Unleaded gasoline, Pump octane number
Туре	of 87 or higher
Fuel Tank Capacity	13.2 US gal (50 L)

### **■** Washer Fluid

Tank Canacity	U.S.: 2.6 US qt (2.5 L)	
Tank Capacity	Canada: 4.8 US qt (4.5 L)	

### **■** Light Bulbs

Headlights (Low Beam)	55W (H11)*1 LED*2
Headlights (High Beam)	60W (HB3)*1 LED*2
Fog Lights*	35W (H8)*1 LED*2
Parking/Daytime Running Lights	LED
Front Side Marker Lights	LED
Front Turn Signal Lights	28/8W (Amber)*1 LED* <sup>2</sup>
Side Turn Signal Lights*	LED
Brake/Tail/Rear Side Marker Lights	LED
Back-Up Lights	16W
Rear Turn Signal Lights	21W (Amber)
High-Mount Brake Light	LED
Rear License Plate Lights	5W
Interior Lights	
Vanity Mirror Light*	1.4W
Map Lights	8W
Ceiling Light	8W
Console Panel Light	LED
Cargo Area Light	5W

<sup>\*1:</sup> Models without navigation system \*2: Models with navigation system

### **■** Brake Fluid

Specified	Honda Heavy Duty Brake Fluid DOT 3
Specifica	Horida Heavy Daty Brake Hala Dor 5

### **■** Continuously Variable Transmission Fluid

Specified	Honda HCF-2	Honda HCF-2 Transmission Fluid		
Capacity	Change	3.7 US qt (3.5 L)*1 4.2 US qt (4.0 L)*2		
*1. 2MD				

<sup>\*1: 2</sup>WD \*2: AWD

### ■ Rear Differential Fluid\*

Specified	Honda DPSF-II	
Capacity	Change	1.318 US qt (1.247 L)

### **■** Engine Oil

Recommended	-Honda Genuine Motor Oil 0W-20 -API Premium-grade 0W-20 detergent oil			
	Change	3.7 US qt (3.5 L)		
Capacity	Change including filter	3.9 US qt (3.7 L)		

### **■** Engine Coolant

Specified	Honda Long-Life Antifreeze/Coolant Type2
Ratio	50/50 with distilled water
Capacity	1.39 US gal (5.25L) (change including the remaining 0.13 US gal (0.5 L) in the reserve tank)

#### ■ Tire

	Size*1		215/55R17 94V 225/50R18 95V
		225/5UR 18 95V	
Regular	Pressure	Front	32 (220 [2.2])
	psi (kPa[kgf/cm²])	Rear	30 (210 [2.1])*2
	psi (krajkyi/ciii j)	Neai	28 (190 [1.9])*3
Compact Spare	Size		T135/90D16 102M
	Pressure psi (kPa[kgf/cm²])		60 (420 [4.2])
Wheel Size	Regular		17 x 7 1/2J*2
			18 x 7 1/2J*3
	Compact Spare	, and the second	16 x 4T
*1: Original tire size is mentioned on the tire information label on			


<sup>1:</sup> Original tire size is mentioned on the tire information label on the driver's doorjamb. \*2: Models with 215/55R17

<sup>\*3:</sup> Models with 225/50R18

# **Identification Numbers**


# Vehicle Identification Number (VIN), Engine Number, and Transmission Number

Your vehicle has a 17-digit vehicle identification number (VIN) used to register your vehicle for warranty purposes, and for licensing and insuring your vehicle. The locations of your vehicle's VIN, engine number, and transmission number are shown as follows.

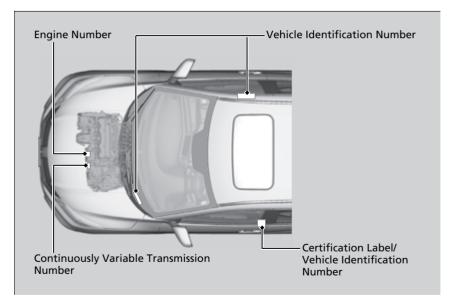

➤ Vehicle Identification Number (VIN), Engine Number, and Transmission Number

The interior vehicle identification number (VIN) is located under the cover.



# **Devices that Emit Radio Waves**

Each radio frequency device installed in the vehicle conforms to the requirements and standards of the regulation listed below:

# As required by the FCC:

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

# **Reporting Safety Defects**

In the U.S.

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying American Honda Motor Co., Inc.

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or American Honda Motor Co., Inc.

To contact NHTSA, you may call the Vehicle Safety Hotline toll-free at 1-888-327-4236 (TTY: 1-800-424-9153); go to http://www.safercar.gov; or write to: Administrator, NHTSA, 1200 New Jersey Avenue, SE., Washington, DC 20590. You can also obtain other information about motor vehicle safety from http://www.safercar.gov.

### In Canada

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform Honda Canada Inc. and you may also inform Transport Canada.

If Transport Canada receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may lead to a recall and remedy campaign. However, Transport Canada cannot become involved in individual problems between you, your dealer, or Honda Canada Inc.

To contact Transport Canada's Defect Investigations and Recalls Division, you may call 1-800-333-0510. For more information on reporting safety defects or about motor vehicle safety, go to http://www.tc.gc.ca/roadsafety.

# **Emissions Testing**

# **Testing of Readiness Codes**

Your vehicle has readiness code as part of the onboard self diagnostic system. Some states use these codes for testing to verify whether your vehicle's emissions components are working properly.

The codes may not be read properly if testing is performed just after the battery has gone dead or been disconnected.

To check if they are set, turn the ignition switch to ON  $III^{*1}$ , without starting the engine. The malfunction indicator lamp will come on for several seconds. If it then goes off, the readiness codes are set. If it blinks five times, the readiness codes are not set.

If you are required to have your vehicle tested before the readiness codes are ready, prepare the vehicle for retesting by doing the following:

- 1. Fill the gas tank to approximately 3/4 full.
- 2. Park the vehicle and leave the engine off for 6 hours or more.
- **3.** Make sure the ambient temperature is between 40°F and 95°F (4°C and 35°C).
- **4.** Start the engine without touching the accelerator pedal, and let it idle for 20 seconds.
- **5.** Keep the vehicle in P. Increase the engine speed to 2,000 rpm, and hold it there for about three minutes.
- **6.** Let the engine idle with your foot off the accelerator for 20 seconds.

### ∑Testing of Readiness Codes

The readiness codes are erased when the battery is disconnected, and set again only after several days of driving under a variety of conditions.

If a testing facility determines that the readiness codes are not set, you may be requested to return at a later date to complete the test.

If the testing facility determines the readiness codes are still not set, see a dealer.

Continued 623

<sup>\*1:</sup> Models with the keyless access system have an **ENGINE START/STOP** button instead of an ignition switch.

- 7. Select a nearby, lightly traveled major highway where you can maintain a speed of 50 to 60 mph (80 to 97 km/h) for at least 20 minutes. Drive on the highway in D. Do not use cruise control. When traffic allows, drive for 90 seconds without moving the accelerator pedal. (Vehicle speed may vary slightly; this is okay.) If you cannot do this for a continuous 90 seconds because of traffic conditions, drive for at least 30 seconds, then repeat it two more times (for a total of 90 seconds).
- **8.** Drive in city or suburban traffic for at least 10 minutes. When traffic conditions allow, let the vehicle coast for several seconds without using the accelerator pedal or the brake pedal.
- **9.** Park the vehicle and leave the engine off for 30 minutes.

# **Warranty Coverages**

### **■** U.S. Owners

Your new vehicle is covered by these warranties:

**New Vehicle Limited Warranty** – covers your new vehicle, except for the emissions control systems and accessories, against defects in materials and workmanship.

**Emissions Control Systems Defects Warranty and Emissions Performance Warranty** – these two warranties cover your vehicle's emissions control systems. Time, mileage, and coverage are conditional. Please read your warranty booklet for exact information.

**Seat Belt Limited Warranty** – a seat belt that fails to function properly is covered by a limited warranty. Please read your warranty booklet for details.

**Rust Perforation Limited Warranty** – all exterior body panels are covered against rusting from the inside out for the specified time period, regardless of mileage.

**Accessory Limited Warranty** – Honda accessories are covered under this warranty. Time and mileage limits depend on the type of accessory and other factors. Please read your warranty booklet for details.

**Replacement Parts Limited Warranty** – covers all Honda replacement parts against defects in materials and workmanship.

Continued 625

**Replacement Battery Limited Warranty** – provides prorated coverage for a replacement battery purchased from your dealer.

**Replacement Muffler Lifetime Limited Warranty** – provides coverage for as long as the purchaser of the muffler owns the vehicle.

Restrictions and exclusions apply to all these warranties. Please read the Honda warranty information booklet that came with your vehicle for precise information on warranty coverages. Your vehicle's original tires are covered by their manufacturer. Tire warranty information is in a separate booklet.

### ■ Statement on Warranty Coverage for Aftermarket and Recycled Parts

The Magnuson-Moss Warranty Act, 15 U.S.C. s.2301 et seq., makes it illegal for motor vehicle manufacturers to void a motor vehicle warranty or deny warranty coverage solely because an aftermarket or recycled part has been used to repair the vehicle or someone other than the authorized service provider performed service on the vehicle.

This provision does not apply to a new motor vehicle purchased solely for commercial or industrial use.

Under federal law, a manufacturer may deny warranty coverage and charge for repairs to a vehicle if it is discovered that an aftermarket or recycled part installed on the vehicle is defective or was installed incorrectly and caused damage to another part of the vehicle otherwise covered under warranty.

The Federal Trade Commission requires that a manufacturer demonstrate that an aftermarket or recycled part or service performed by a person other than an authorized service provider caused damage to another part of the vehicle otherwise covered under warranty before denying warranty coverage.

Additionally, federal law allows a manufacturer to void a motor vehicle warranty or deny warranty coverage if the manufacturer provides the article or service to consumers free of charge under the warranty or the manufacturer has secured a waiver from the Federal Trade Commission.

### ■ Canadian Owners

Please refer to the warranty manual that came with your vehicle.

#### **■ EPA Contact Information**

An owner may obtain further information concerning emission warranties or report violations of the terms of the emission warranties by contacting:

Director, Light-Duty Vehicle Center, U.S. Environmental Protection Agency, Attention: Warranty Claim 2000 Traverwood Drive, Ann Arbor, MI 48105; complianceinfo@epa.gov

# **Authorized Manuals**

## **■** Service Express

For electronic copies of service publications, you can purchase a subscription to Service Express. Visit www.techinfo.honda.com for pricing and options.

#### ■ For U.S. Owners

Manuals can be purchased from Helm Incorporated. You can order a manual by phone at 1 (800) 782-4356 (credit card orders only), or online at *www.helminc.com*.

### **■** For Canadian Owners

Please contact a dealer to order any manuals that you may require.

Honda dealership personnel are trained professionals who should be able to deal with any problems you may encounter with your vehicle. If, however, you are faced with a problem that they cannot resolve to your satisfaction, contact Honda Customer Services.

#### **U.S.** Owners

American Honda Motor Co., Inc. Honda Automobile Customer Service Mail Stop CHI-5 1919 Torrance Blvd. Torrance, CA 90501-2746 Tel: 1 (800) 999-1009

# In Puerto Rico and the U.S. Virgin Islands

Bella International P.O. Box 190816 San Juan, PR 00919-0816 Tel: 1 (787) 620-7546

#### **Canadian Owners**

Honda Canada Inc. Customer Relations 180 Honda Boulevard Markham, ON L6C 0H9 Tel: 1-888-9-HONDA-9

Fax: 1-888-9-HONDA-9

E-mail: Honda\_cr@ch.honda.com

#### Customer Service Information

When you call or write, please give us the following information:

- Vehicle Identification Number
  - Vehicle Identification Number (VIN), Engine Number, and Transmission Number P. 620
- Date of purchase
- Odometer reading of your vehicle
- Your name, address, and telephone number
- A detailed description of the problem
- Name of the dealer who sold the vehicle to you

Continued 629

### Disclaimer of Pandora®\*

Requirements to access Pandora®

- Latest version of the Pandora app installed on your Android, Blackberry, or iPhone.
- Registered Pandora account (you can create a free account at www.pandora.com <http:// www.pandora.com/> or on your smartphone)
- Connection to the internet via WiFi or cellular data network.
- Android devices must be connected to the vehicle via *Bluetooth*, iPhone devices may be connected via *Bluetooth* or USB.

#### Limitations

- Access to Pandora requires an active internet connection
- Ability to access Pandora through this system is subject to change without notice
- Certain functionality of Pandora service is not available when accessing the service through this system including, but not limited to, creating new stations, deleting stations, emailing current stations, buying songs, viewing additional text information, logging in to Pandora, and adjusting Cell Network Audio Quality. Pandora internet radio is a music service not affiliated with HONDA More information is available at http:// www.pandora.com <http:// www.pandora.com/>. Pandora, the Pandora logo, and the Pandora trade dress are trademarks or registered trademarks of Pandora Media, Inc., used with permission.
- Mobile access requires a smartphone with an active data plan. Standard data rates may apply.
- Pandora is only available in the United States.

Numbers	Air Conditioning System (Climate Control	iPod 250, 294
	System)	MP3/WMA/AAC 247, 253, 303
7-Speed Manual Shift Mode 44	Dust and Pollen Filter 5/4	Recommended CDs334
	Synchronization Mode	Recommended Devices
A	Air Conditioning System (Heating and	Remote Controls
ABS (Anti-lock Brake System) 51	Cooling System)	Security Code234
Accessories and Modifications 58	Cooling 210	Theft Protection 234
Accessory Power Sockets	Dust and Pollen Filter 5/4	USB Flash Drives
Adaptive Cruise Control (ACC)	Heating 218	USB Port(s)
Indicator	Air Pressure 561, 619	Audio/Information Screen 239, 260
Additives	Airbags 52	Authorized Manuals 628
Coolant 54	Advanced Airbags 58	Auto Door Locking/Unlocking 156
Engine Oil 53	Airbag Cara 67	Customize157
Washer 54	EVENT Data RECORDER ()	Auto High-Beam 180
Additives, Engine Oil	Front Airbone (CDC)	Automatic Brake Hold 510
Adjusting Oil	Indicator 64, 91	Indicator 87, 510
Armrest	Passenger Front Airbag Off Indicator 65	Automatic Brake Hold System
Front Seats	Sansors 52	Indicator 87, 510
Head Restraints 20	Side Airhags 60	Automatic Climate Control Sensors 229
Mirrors	Side Curtain Airhags 62	Average Fuel Economy 120, 125
Rear Seats	All-Mheel Drive (AMD) 458	Average Speed 125
	Android Auto 320	
Steering Wheel	Anti-lock Brake System (ARS) 517	В
Temperature	Indicator 91	В
Adjusting the Sound	Apple CarPlay 316	Battery 570
Air Conditioning System	Armrest 204	Charging System Indicator 89, 603
Climate Control System	Audio Remote Controls 235	If the Battery Is Dead 598
Defrosting the Windshield and	Audio System 232	Maintenance (Checking the Battery) 570
Windows	Adjusting the Sound 2/13 275	Maintenance (Replacing) 572
Dust and Pollen Filter 57	Error Mossagos 227	Belts (Seat)
Heating and Cooling System 21	0	Payaraga Haldars 200

Beverage Holders ...... 208

Bluetooth® HandsFreeLink®	80 507 512 510 513 509 85 I, 605 507
Brake/Clutch System	E 4 2
Fluid	
Brightness Control (Instrument Panel)	
Bulb Replacement	
Back-Up Lights	
Brake/Tail/Rear Side Marker Lights Fog Lights	
Front Side Marker Lights	
Front Turn Signal Lights	
Headlights	
High-Mount Brake Light	
Parking/Daytime Running Lights	
Rear License Plate Lights	
Rear Turn Signal Lights	
Side Turn Signal/Emergency Indicator	
Lights	550
Bulb Specifications	
bailo specifications	. 010

### C

Carbon Monoxide Gas	81
Cargo Cover	214
Cargo Floor Box	210
Carrying Cargo 42	9, 431
CD Player	247
Certification Label	620
Changing Bulbs	545
Charging System Indicator 8	
Child Safety	
Childproof Door Locks	155
Child Seat	
Booster Seats	
Child Seat for Infants	
Child Seat for Small Children	
Installing a Child Seat with a Lap/Should	
Belt	
Larger Children	
Rear-facing Child Seat	
Selecting a Child Seat	
Childproof Door Locks	
Cleaning the Exterior	
Cleaning the Interior	
Climate Control System	
Synchronization Mode	
Clock	
Coat Hook	
Compact Spare Tire 58	
Continuously Variable Transmission	
7-Speed Manual Shift Mode	
Creeping	443

Kickdown	443
Operating the Shift Lever 25, 445,	447
Shift Lever Does Not Move	600
Shifting 444,	446
Continuously Variable Transmission (CVT)	)
Fluid	542
Controls	137
Coolant (Engine)	540
Adding to the Radiator	541
Adding to the Reserve Tank	540
High Temperature Indicator	. 92
Low Temperature Indicator	
Overheating	601
Creeping (Continuously Variable	
Transmission)	443
Cruise Control	451
Indicator	
Cup Holders	
Customer Service Information	
Customized Features 127, 349,	356
D	
Daytime Running Lights	179
Dead Battery	
Defrosting the Windshield and	
Windows 219,	223
Devices that Emit Radio Waves	621
Dimming	
Headlights	175
Rearview Mirror 191,	192

Dipstick (Engine Oil) 5		Electric Parking Brake		F	
Directional Signals (Turn Signal) 1		Indicator	86	Features	231
Display Setup 244, 2		Electric Parking Brake System		Filters	231
Door Mirrors 1		Indicator	86, 606	Dust and Pollen	574
Doors 1		Electric Power Steering (EPS) System		Oil	
Auto Door Locking 1		Indicator	•	Flat Tire	
Auto Door Unlocking 1	56	Electronic Stability Control (ESC)		Floor Mats	
Door and Tailgate Open		Emergency		Fluids	570
Indicator 40, 41,		Emissions Testing (Readiness Codes)	623	Brake	543
Keys 1	40	Engine		Continuously Variable Transmission	545
Locking/Unlocking the Doors from		Coolant		(CVT)	542
the Inside 1	52	If the Battery Is Dead	598	Engine Coolant	
Locking/Unlocking the Doors from		Number		Windshield Washer	
the Outside 1		Oil	535	FM/AM Radio24	
Lockout Prevention System 1	51	Starting 4	36, 439	Fog Light Indicator	
DOT Tire Quality Grading 5	63	Switch Buzzer	169	Folding Down the Rear Seats	
Driving 4	127	Engine Coolant	540	Folding the Rear Seat Up	
Braking 5		Adding to the Radiator	541	Foot Brake	
Continuously Variable Transmission 4	143	Adding to the Reserve Tank	540	Front Airbags (SRS)	
Cruise Control 4	151	High Temperature Indicator	92	Front Seats	55
Shifting Position	146	Low Temperature Indicator	92	Adjusting	104
Starting the Engine 436, 4	139	Overheating	601	Front Sensor Camera	
Dust and Pollen Filter 5	74	Engine Oil	535	Fuel	
		Adding	537	Economy	•
E		Checking	536	Gauge	
<b>C</b>		Displaying Oil Life 5	25, 529	_	
ECO Assist® System	11	Low Oil Pressure Indicator	89, 603	Instant Fuel Economy	•
ECON Button 4	150	Recommended Engine Oil	535	Low Fuel Indicator	
ECON Mode Indicator	97	Exhaust Gas Hazard (Carbon Monoxid	l <b>e)</b> 81	Range 12	
Elapsed Time 1	25	Exterior Care (Cleaning)	577	Recommendation	
		Exterior Mirrors	193	Refueling	
				Fuel Economy	520

Fuel Fill Cap	27 519	To Set Up Text Message Option	ns 407	Ignition Switch	160
Message	•	Hazard Warning Button		Illumination Control	109
Fuel Fill Door		HD Radio™		Knob	100
Fuel Gauge	•	Head Restraints		Immobilizer System	
Fuses	•	Headlights		Indicator	
Inspecting and Changing		3			
		Aiming Auto High-Beam		Important Handling Information	
Locations	608	3		Adaptive Cruise Control (ACC) (A	
		Dimming	•	, , , ,	mber) 100
G		Operating		Adaptive Cruise Control (ACC)	100
Coording (Final)		Heated Door Mirrors		(Green)	
Gasoline (Fuel)	F20	Heated Windshield		All-Wheel Drive (AWD)	
Economy		Heating and Cooling System		Anti-lock Brake System (ABS)	
Gauge		Cooling		Auto High-Beam	
Information		Defrosting the Windshield and		Automatic Brake Hold	· ·
Instant Fuel Economy	="	Windows		Automatic Brake Hold System	87, 510
Low Fuel Indicator		Dust and Pollen Filter	574	Brake Depressing	88
Refueling		Heating	218	Brake System (Amber)	85
Gauges	117	HFL (HandsFreeLink®)	374, 397	Brake System (Red)	84, 605
Glass (care)	575, 578	High Beam Indicator	95	Charging System	89, 603
Glove Box	207	Hill Start Assist System	438, 441	Collision Mitigation Braking Syste	m <sup>™</sup>
		HomeLink® Universal Transceiv	/er 371	(CMBS <sup>TM</sup> )	101, 102
Н		Honda App License Agreemen	t 337	CRUISE CONTROL	97, 452
п		Honda Sensing®	28, 464	CRUISE MAIN	97, 451
Halogen Bulbs	545, 550	HondaLink®	308	Door and Tailgate Open	40, 93
Handling the Unexpected	583			ECON Mode	
HandsFreeLink® (HFL)	374, 397			Electric Parking Brake	86
Displaying Messages	422	1		Electric Parking Brake System	
In Case of Emergency	425	Identification Numbers		Electric Power Steering (EPS)	•
Menus	376, 400	Engine and Transmission	620	System	94, 605
Phone Setup	380, 404	Vehicle Identification	620	Fog Light	-
Phonebook Phonetic Modificat	ion 413	If the Battery Is Dead	598	3 3	
•	· · · · · · · · · · · · · · · · · · ·	If the Battery Is Dead		High Beam	

High Temperature		83	Interior
Immobilizer System	96 Brightness Control	188	Light Switches
Keyless Access System	95 Interior Lights	205	Lights On Indicator
Lane Keeping Assist System (LKAS)	Interior Rearview Mirror	191, 192	Turn Signals
(Amber) 1	00 Internet Radio	301	Load Limits
Lane Keeping Assist System (LKAS)			Locking/Unlocking
(Green) 1	00		Auto Door Locking/Un
Lights On	96		Childproof Door Locks
Low Fuel	91 Jack (Wheel Nut Wrench)	584, 590	From Inside
Low Oil Pressure 89, 6	503		From Outside
Low Temperature	<sup>92</sup> <b>K</b>		Keys
Low Tire Pressure/TPMS 94, 459, 6	507		Lockout Prevention Sy
M (7-speed manual shift mode)	Keyless Lockout Prevention	151	Using a Key
Indicator/Shift			Lockout Prevention Sy
Maintenance Minder 97, 5	Lockout Prevention	151	Low Battery Charge
Malfunction Indicator Lamp 89, 6			Low Fuel Indicator
Road Departure Mitigation (RDM)			Low Oil Pressure Indica
Seat Belt Reminder 44,	90 Remote Transmitter	148	Lower Anchors
Security System Alarm		31	Lubricant Specification
Shift Lever Position	90 Kickdown (Continuously Variable		Luggage (Maximum Lo
Supplemental Restraint System 64,	91 Transmission)	443	
System Message Indicator	95		М
Transmission System	90		IVI
Turn Signal	95		Maintenance
Vehicle Stability Assist™ (VSA®)	LaneWatch™		Battery
System 93, 4			Brake Fluid
VSA® OFF 93, 4			Cleaning
Information 6			Coolant
Information Display 1	Bulb Replacement		Heating and Cooling S
Instant Fuel Economy 120, 1			System
	Fog Lights	178	Maintenance Minder.

laintenance 521	
Battery 570	
Brake Fluid 543	
Cleaning 575	
Coolant 540	
Heating and Cooling System/Climate Control	
System 574	
Maintenance Minder 525	

Oil	536	0	Passing Indicators
Precautions	523	Odometer 120, 124	Playing Bluetooth® Audio 256, 306
Radiator	541	•	Power Windows 166
Remote Transmitter	572	Off-Highway Driving Guidelines	Precautions While Driving
Replacing Light Bulbs	545	Oil (Engine)	Driving Guidelines for Your Utility
Safety	523	Adding 537	Vehicle
Service Items	527, 531	Checking	Rain 442
Tires	559	Displaying Oil Life	Pregnant Women 50
Transmission Fluid	542	Displaying the Maintenance Minder	Puncture (Tire) 586
Under the Hood	533	Information	
Malfunction Indicator Lamp	89, 604	Low Oil Pressure Indicator 89, 603	D
Лар Lights	206	Recommended Engine Oil	R
лахітит Load Limit	431	Viscosity	Radiator 541
Meters, Gauges	117	Open Source Licenses	Radio (FM/AM) 245, 282
Airrors	191	Opening and Closing the Moonroof 168	Radio (SiriusXM®) 286
Adjusting	191	Opening/Closing	Radio Data System (RDS) 246, 284
Door	193	Hood	Range 120, 125
Exterior	193	Moonroof	RDS (Radio Data System) 246, 284
Interior Rearview	191, 192	Power Windows	Readiness Codes (Emissions Testing) 623
Modifications (and Accessories)	580	Tailgate	Real Time AWD with Intelligent Control
Moonroof	168	Outside Temperature Display 118, 121	<b>System</b> <sup>™</sup>
<b>ЛР3</b>	247, 253, 303	Overheating 601	Rear Defogger/Heated Door Mirror
Multi-Information Display	122		Button
Multi-View Rear Camera	515	P	Rear Seats (Folding Down) 198
		Dealalle Chifteen /7 Conned Managel Chift	Rearview Mirror 191, 192
<b>\1</b>		Paddle Shifters (7-Speed Manual Shift	<b>Refueling</b> 517
V		Mode)	Fuel Gauge 121, 124
Numbers (Identification)	620	Pandora®	Gasoline 517, 618
		Panic Mode	Low Fuel Indicator
		Parking	Regulations 462, 563, 621
		Parking Brake 507	Remote Transmitter
		Passenger Front Airbag Off Indicator 65	

Replacement		Front Seats	194	If the Battery Is Dead	598
Battery	572	Rear Seats	197	Steering Wheel	
Bulbs	545	Security System	163	Adjusting	190
Fuses	. 608, 610	Immobilizer System Indicato	or 96	Stopping	514
Tires	566	Security System Alarm Indic	ator 97	Summer Tires	568
Wiper Blade Rubber	. 555, 557	SEL/RESET Button	123	Supplemental Restraint System	(SRS) 55
Reporting Safety Defects	622	Select/Reset Knob	119, 123	Switches (Around the Steering	
Resetting a Trip Meter	. 120, 124	Selecting a Child Seat	72	Wheel)	6, 7, 169
Road Departure Mitigation (RDM)		Selector Knob (Audio)	238		
Indicator	99	Setting the Clock	138	Т	
		Shift Lever	25, 444, 446	ı	
S		Operation	25, 445, 447	Tachometer	118
3		Releasing	600	Tailgate	160
Safe Driving	35	Won't Move	600	Unable to Open	614
Safety Check	40	Shift Lever Position Indicate	or 90, 445, 447	Temperature	
Safety Labels	82	Shifting (Transmission)	444, 446	High Temperature Indicator	92
Safety Message	2	Shoulder Anchor	48	Low Temperature Indicator	92
Seat Belts	42	Side Airbags	60	Outside Temperature Display	118, 121
Adjusting the Shoulder Anchor	48	Side Curtain Airbags	62	Temperature Sensor	118, 121
Automatic Seat Belt Tensioners	45	Siri Eyes Free	315	Tie-down Anchors	213
Checking	51	SiriusXM® Radio	286	Time (Setting)	138
Detachable Anchor	49	Snow Tires	568	Tire Pressure Monitoring Syster	n
Fastening	46	Spare Tire	586, 619	(TPMS)	459
Installing a Child Seat with a Lap/Sho	oulder Seat	Spark Plugs	618	Indicator	94, 607
Belt	75	Specifications	618	Tires	559
Pregnant Women	50	Specified Fuel	517, 618	Air Pressure	561, 619
Reminder		Speedometer	118	Checking and Maintaining	559
Warning Indicator	44, 90	SRS Airbags (Airbags)	55	Inspection	560
Seat Heaters	215	Starting the Engine	436, 439	Labeling	561
Seats	194	Does Not Start	595	Puncture (Flat Tire)	586
Adjusting	194	Engine Switch Buzzer	169. 172	Regulations	563

Rotation 567
Spare Tire 586, 619
Summer 568
Tire Chains 568
Wear Indicators 565
Winter 568
Tools 584
Towing a Trailer 433
Towing Behind a Motorhome 433
Towing Your Vehicle
Emergency 613
TPMS (Tire Pressure Monitoring
<b>System)</b> 459
Indicator 94, 607
Transmission
7-Speed Manual Shift Mode 448
Continuously Variable
Fluid 542
Number 620
Shift Lever Position Indicator 90, 445, 447
Trip Meter 120, 124
Troubleshooting 583
Blown Fuse 608, 610
Brake Pedal Vibrates 32
Buzzer Sounds When Opening Door 32
Emergency Towing 613
Engine Won't Start 595
Noise When Braking 33
Overheating 601
Puncture/Flat Tire 586
Rear Door Won't Open

Shift Lever Won't Move 600
Warning Indicators
Turn Signals
Indicators (Instrument Panel)
marcators (instrument ranely imminimum 55
11
U
Unlocking the Doors 143, 152
USB Flash Drives 336
<b>USB Port(s)</b>
V
Vanity Mirrors9
Vehicle Identification Number (VIN) 620
Vehicle Stability Assist <sup>™</sup> (VSA®) 454
Off Button
Off Indicator
System Indicator
Viscosity (Oil) 535, 619
Voice Control Operation 278
Audio Commands 280
General Commands 281
Music Search Commands 281
On Screen Commands 281
Phone Commands 280
Voice Portal Screen
Voice Recognition
VSA® (Vehicle Stability Assist™)

# W

Walk away auto lock®	140	6
Wallpaper		
Warning and Information		
Messages	103, 104	4
Warning Indicator On/Blinking	60	3
Warning Labels	8	2
Warranties (Warranty Manual pro	vided	
separately)	62	5
Watts	618	8
Wear Indicators (Tire)	56	5
Wheel Nut Wrench (Jack Handle).	584, 59	0
Wi-Fi Connection		
Window Washers	18	3
Adding/Refilling Fluid	54	4
Switch	18	3
Windshield	18	3
Cleaning	575, 57	8
Defrosting/Defogging 18	7, 219, 22	3
Washer Fluid	54	4
Wiper Blades	55	5
Wipers and Washers	18	3
Winter Tires		
Snow Tires	56	8
Tire Chains	56	8
Wipers and Washers	18	3
Checking and Replacing Wiper		
Blades	555, 55	7
<b>WMA</b> 24	7, 253, 30	3
Worn Tires	559 56	5



# owners.honda.com (U.S.) honda.ca (Canada)