

EXTERIOR FEATURES

Panoramic roof

This extensively glazed roof provides incomparable visibility and light in the passenger compartment.

►► 79



Opening rear screen (SW)

This equipment permits easy access to the luggage compartment without the need to open the tailgate.

Check that the rear screen is closed properly before opening the boot or locking the vehicle.

►► 77

Rear parking assistance

This equipment provides a warning when reversing by detecting obstacles located behind the vehicle.

►► 122

Static directional lighting

This additional lighting automatically provides extended visibility when turning.

►► 84


Tyre under-inflation detection

This equipment monitors the pressure in each tyre and warns you if a puncture or deflation occurs.

►► 101

OPENING

Remote control key

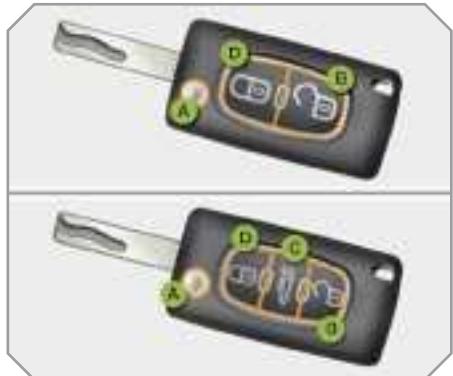

- A. Unfolding/Folding the key.
- B. Unlocking the vehicle.
- C. Unlocking and partially opening the rear screen (SW).

► 66



Also...

- D. Normal locking
or
Deadlocking of the vehicle.

Fuel tank



1. Opening the fuel filler flap.
2. Opening and hooking the fuel filler cap.

Capacity of the tank: approximately 50 litres.

► 80

Bonnet



- A. Interior control.
- B. Exterior control.
- C. Bonnet strut.

► 125

OPENING

Boot (SW)



1. Unlocking the vehicle.
2. Opening the boot.

► 77



The tailgate and the rear screen cannot both be open at the same time, to prevent damage to the glass and to the rear screen itself.

Rear screen (SW)

Vehicle locked



1. Unlocking and partially opening the rear screen.
2. Opening the rear screen.

Vehicle unlocked



1. Partially opening the rear screen.
2. Opening the rear screen.

► 77

Panoramic roof (SW)



1. Opening the shutter.
2. Closing the shutter.

► 79

INTERIOR FEATURES

Fragrance diffuser

This fragrance diffuser diffuses the perfume that you have selected throughout the passenger compartment by means of its location in the ventilation system.

► 49

Distance recorder

The trip distance recorder is reset to zero by pressing the right-hand button on the instrument panel for more than two seconds.

► 27

**Dual zone automatic air conditioning**

This equipment permits the setting of a different level of comfort for the driver and front passenger. It then automatically controls this level in relation to the exterior climatic conditions.

► 47

Audio and communication systems

This equipment benefits from the latest technology: MP3 compatible audio RD4, Bluetooth hands-free kit, RT4 GPS audio/telephone, JBL audio system.

RT4 ► 172

RD4 ► 202

INSTRUMENTS AND CONTROLS



1. Audio equipment steering wheel control.
2. Steering lock and ignition.
3. Wipers/wash-wipe/trip computer controls.
4. Instrument panel.
5. Driver's air bag.
6. Horn.
7. Dynamic stability control (ESP/ASR) button.
8. Rear parking assistance button.
9. Central locking button.
10. Alarm button.
11. Electric child lock button.
12. Gear lever.
13. Handbrake.
14. Panoramic roof shutter control (SW).
15. Exterior mirror controls.
16. Electric window controls.
17. Rear electric windows deactivation control.
18. Headlamp height adjustment.
19. Front door window de-icing vent.
20. Side adjustable and closing vent.
21. Windscreen de-icing vent.

INSTRUMENTS AND CONTROLS



1. Steering wheel adjustments control.
2. Cruise control/speed limiter switch.
3. Lights and direction indicators controls.
4. Hazard warning lights switch.
5. Fragrance diffuser.
6. Multifunction display.
Seat belt fastening status warning lights.
7. Sunshine sensor.
8. Passenger air bag.
9. Speaker (tweeter).
10. Glove box/Passenger air bag disarming/Audio/video sockets/Fuse box.
11. Bonnet release control.
12. Front ashtray/Lighter.
13. Heating/air conditioning controls.
14. CD changer.
15. Audio RD4 or RT4 GPS audio/telephone.
16. Central adjustable and closing vents.

SITTING COMFORTABLY

Front seat adjustment



1. Forwards-backwards adjustment.
2. Height adjustment.
3. Seat back angle adjustment.
4. Head restraint height and angle adjustment.

► 50

Steering wheel adjustment



1. Unlocking the control.
2. Height and depth adjustment.
3. Locking the control.

► 57

Also...

5. Access to the rear seats (3-door).
6. Armrest (except 3-door).

SITTING COMFORTABLY

Exterior mirrors adjustment



- A. Selecting the mirror.
- B. Adjusting the position of the mirror.
- C. De-selecting the mirror.

► 55



Also...
D. Folding/Unfolding.

Interior mirror adjustment



- 1. Selecting the "day" position of the mirror.
- 2. Directing the mirror.

► 56

Front seat belt



- 1. Fastening
- 2. Height adjustment.

► 104

SEEING CLEARLY

Lights



Ring A

Lights off.

AUTO Automatic lighting.

Side lights.

Dipped/main beam headlamps.

Ring B

Rear fog lamps.

or

Front and rear fog lamps.

▶▶ 81

Wipers



Control A: windscreen wipers

2. Fast wipe.
1. Normal wipe.
1. Intermittent wipe.
0. Park.

AUTO ↓ Automatic wiping or single wipe.

Wash-wipe: pull the control towards you.

▶▶ 85



Switching on "AUTO" mode

☞ Push the control downwards and release it.

Switching off "AUTO" mode

☞ Push the control upwards and return it to position "0".

▶▶ 87

Ring B: rear wiper

Park.

Intermittent wipe.

Wash-wipe.

▶▶ 86

VENTILATION

Advice on interior settings

I require...	Heating or Manual air conditioning					Manual A/C
	Air distribution	Air flow	Air recirculation/ Exterior air intake	Temperature		
HEAT						—
COOL						ON
DEMISTING DE-ICING						ON

Automatic air conditioning: use of the fully automatic mode by pressing the "AUTO" button is preferable.

MONITORING

Instrument panel



- A. With the ignition on, the fuel gauge needle should rise.
- B. With the engine running, the associated low level warning light should switch off.
- C. With the ignition on, the oil level indicator should display "OIL OK" for a few seconds.

If the levels are not correct, top up the level which is low.

►► 18

Warning lights



- 1. With the ignition on, the orange and red warning lights come on.
- 2. With the engine running, these warning lights should switch off.
If a warning light remains on, refer to the page concerned.
►► 19

Controls bar




Lighting of the indicator light indicates the status of the corresponding function.

- A. Deactivation of the ESP/ASR system.
►► 103
- B. Deactivation of the rear parking assistance.
►► 122
- C. Central locking.
►► 66
- D. Deactivation of the interior protection alarm.
►► 70
- E. Activation of the electric child lock*.
►► 99

* Except 3-door.

KEEPING YOUR PASSENGERS SAFE

Front passenger air bag

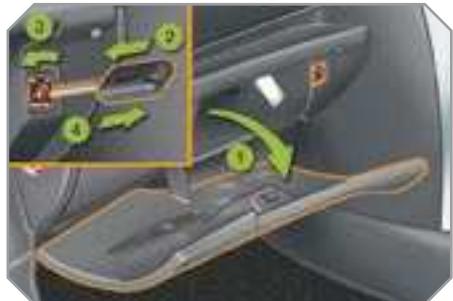

1. Open the glove box.
2. Insert the key.
3. Select position:
"ON" (activation), with front passenger or "forwards facing" child seat,
"OFF" (deactivation), with "rear facing" child seat".
4. Remove the key keeping the switch in this position.

» 108

Front and rear seat belts



- A. Front left seat belt not fastened or unfastened warning light lit in red.
- B. Front right seat belt not fastened or unfastened warning light lit in red.
- C. Rear left seat belt unfastened warning light lit in red.
- D. Rear centre seat belt unfastened warning light lit in red**.
- E. Rear right seat belt unfastened warning light lit in red.

» 104

STARTING

Ignition switch



1. Stop position.
2. Ignition position.
3. Starting position.

» 68

** Except GTi.

DRIVING SAFELY

Speed limiter "LIMIT"



1. Selecting/Switching off speed limiter mode.
2. Decrease the programmed value.
3. Increase the programmed value.
4. Speed limiter on/off.

The values must be set with the engine running.

► 114

Cruise control "CRUISE"



1. Selecting/Switching off cruise control mode.
2. Decrease the programmed value.
3. Increase the programmed value.
4. Cruise control off/resume.

In order to be programmed or activated, the vehicle speed must be higher than 25 mph (40 km/h), with at least fourth gear engaged on the manual gearbox (second gear on the "2 Tronic" or automatic gearbox).

► 116

Instrument panel display



The cruise control or speed limiter mode appears on the instrument panel when it is selected.



Cruise control



Speed limiter

DRIVING SAFELY

"2 Tronic" gearbox



This five-speed piloted manual gearbox offers a choice between the comfort of fully automatic operation or the pleasure of manual gear changing.

1. Gear lever.
2. Steering wheel control "-".
3. Steering wheel control "+".

Display on the instrument panel



The gear or the driving mode selected appears on the instrument panel.

N: neutral.

R: reverse.

1 2 3 4 5: gears engaged.

AUTO: automatic mode.

***:** automatic "snow" mode.

Moving off



- ☞ Select position **N** and press the brake pedal firmly while starting the engine.
- ☞ Engage first gear (position **A** or **M**) or reverse (position **R**) using the gear lever **1**.
- ☞ Release the handbrake.
- ☞ Take your foot off the brake pedal and accelerate.

► 112

PETROL - DIESEL MANUAL GEARBOX OR "2 TRONIC" OR AUTOMATIC GEARBOX INSTRUMENT PANELS



Panel which groups together the vehicle operation dials and indicator lights.

Dials

1. Rev counter.

Indicates the speed of rotation of the engine (x 1 000 rpm).

2. Fuel gauge.

Indicates the quantity of fuel remaining in the tank.

3. Cooling temperature.

Indicates the temperature of the engine coolant (° Celsius).

4. Speedometer.

Indicates the current speed of the moving vehicle (km/h or mph).

5. Oil temperature.

Indicates the temperature of the oil in the engine (° Celsius).

6. Display.

7. Display zero reset button.

Resets the selected function to zero (trip distance recorder or service indicator).

8. Instrument panel lighting button.

Adjusts the brightness of the lighting of the instruments and controls.

9. "2 Tronic" or automatic gearbox.

Indicates the programme selected and the gear engaged.

Display



A. Speed limiter

or

Cruise control.

(km/h or mph)

B. Trip distance recorder.

(km or miles)

C. Service indicator.

(km or miles) then,

Engine oil level indicator.

then

Distance recorder.

(km or miles)

These three functions are displayed in succession when the ignition is switched on.

For further information, refer to the section which corresponds to the function and to the display associated with it.

Indicator and warning lights



Visual indicators which inform the driver when a system comes into operation (operation or deactivation indicator lights) or of the occurrence of a fault (warning light).



The indicator/warning light comes on continuously or flashes.

Some indicator/warning lights may light in two different ways. Only by relating the type of lighting to the vehicle operating status can it be ascertained whether the situation is normal or whether a fault has occurred.

When the ignition is switched on

The warning lights come on for a few seconds when the vehicle ignition is switched on.

When the engine is started, these warning lights should switch off.

If they remain on, before moving off, consult the text relating to the warning light concerned.

Associated warnings

The lighting of certain indicator/warning lights may be accompanied by an audible signal and a message on the multifunction display.

Operation indicator lights

The lighting of one of the following indicator lights confirms that the corresponding system has come into operation.



Left-hand direction indicator.



Dipped headlamps.



Main beam headlamps.



Handbrake applied.



Right-hand direction indicator.



Front fog lamps.



Rear fog lamps.



Diesel engine pre-heating.

Wait until this switches off before operating the starter.



Deactivation indicator lights

The lighting of one of the following indicator lights confirms that the corresponding system has been switched off intentionally.



Deactivation of the dynamic stability control (ESP).

The ESP system is activated automatically when the vehicle is started.



Passenger air bag system disarmed.

The passenger air bag system is activated automatically when the vehicle is started.

A special switch, located in the glove box, permits the disarming of this system. This is confirmed by continuous lighting of this indicator light.



A special button, located in the centre of the fascia, permits the deactivation of this system as well as of the steering/ESP coupling system (SSP). This is confirmed by continuous lighting of this indicator light and of the indicator light on the button.

Warning lights



When the engine is running or the vehicle is moving, the lighting of one of the following warning lights indicates the occurrence of a fault which requires action on the part of the driver.



Any fault resulting in the lighting of a warning light must be the subject of further diagnostics by reading the associated message on the multifunction display.

If a problem arises, do not hesitate to contact a PEUGEOT dealer.

STOP

Centralised alert.

Lighting of the centralised alert is associated with the lighting of another warning light:

- punctured wheel,
- braking,
- engine oil pressure,
- coolant temperature.

It is imperative that the vehicle is stopped as soon as it is safe to do so.



Service.

Lighting of the service warning light indicates the occurrence of a problem in one of the systems which does not have a specific warning light.

To identify the problem, consult the message on the multifunction display.

After checking:

- the remote control battery,
- the engine oil level,
- the screenwash level,

for other cases, contact a PEUGEOT dealer.



Punctured tyre.

The lighting of this warning light indicates that one or more tyres are punctured. It is imperative that the vehicle is stopped as soon as it is safe to do so.

Change the damaged wheel and have it repaired by a PEUGEOT dealer.



Anti-lock braking system (ABS).

The lighting of this warning light indicates the occurrence of a fault in the anti-lock braking system.

However, this does not prevent the operation of the vehicle's assisted braking.

Air bags.

 The lighting of this warning light indicates the occurrence of a fault in one of the air bags (front, side or curtain) or pre-tensioning seat belt systems.

Dynamic stability control (ESP).

 The ESP system is activated automatically when the vehicle is started. Unless the system has been deactivated, continuous lighting of this warning light and flashing of the indicator light on the button indicate the occurrence of a fault in this system.

Engine autodiagnostics system.

 The lighting of this warning light indicates the occurrence of a fault in the engine management system. Flashing of this warning light indicates the occurrence of a fault in the emission control system.

Engine oil pressure.

 The lighting of this warning light indicates the occurrence of a fault in the engine lubrication circuit. It is imperative that the vehicle is stopped as soon as it is safe to do so.

Directional headlamps.

 Flashing of this warning light indicates the occurrence of a fault in the directional headlamps system.

Battery charge.

 The lighting of this warning light indicates the occurrence of a fault in the battery charging circuit (dirty or loose terminals, slack or cut alternator belt, ...).

Braking.

 The lighting of this warning light indicates the occurrence of a fault in one of the braking systems:

- significant drop in the level in the circuit,
- electronic brake force distribution (EBFD) faulty (if lit at the same time as the ABS warning light).

It is imperative that the vehicle is stopped as soon as it is safe to do so.

If the vehicle is moving, check that the handbrake has been released fully.



Low fuel level.

The lighting of this warning light indicates that there is enough fuel left to drive approximately 30 miles (50 km).

The capacity of the fuel tank is approximately 50 litres.



Maximum coolant temperature.

The lighting of this warning light indicates an excessively high temperature in the cooling system. It is imperative that the vehicle is stopped as soon as it is safe to do so.



Door open.

A door, the boot, the rear screen or the bonnet is still open:

- if the speed is below 6 mph (10 km/h), this warning light comes on continuously,
- if the speed is above 6 mph (10 km/h), this warning light comes on continuously, accompanied by an audible signal.



Seat belt not fastened/unfastened.

The lighting of this warning light indicates that the driver* and/or the front passenger has not fastened his seat belt or has unfastened it.

It also indicates that one or more rear passengers have unfastened their seat belt.



Power steering.

The lighting of this warning light indicates the occurrence of a fault in the electric power steering.



Presence of water in diesel*.

The lighting of this warning light indicates the presence of water in the diesel filter.

There is a risk of damage to the injection system on Diesel engines.

* According to country.

Coolant temperature indicator

System which informs the driver of the changes in the temperature of the engine coolant while driving.



With the engine running, when the needle is:

- in zone **A**, the temperature is correct,
- in zone **B**, the temperature is too high; the max temperature warning light **1** and the central **STOP** warning light come on, accompanied by an audible signal and a message on the multifunction display.

You MUST stop as soon as it is safe to do so.

Consult a PEUGEOT dealer.

After driving for a few minutes, the temperature and pressure in the cooling system increase.

To top up the level:

- ☛ wait for the engine to cool,
- ☛ unscrew the cap by two turns to allow the pressure to drop,
- ☛ when the pressure has dropped, remove the cap,
- ☛ top up the level to the "MAX" mark.



On petrol engines, the cooling of the engine is managed electronically to improve consumption. Consequently, the coolant temperature levels are no longer simply linked with the external ambient conditions and the use of the vehicle.

For example, in town, it is normal for the coolant temperature to be slightly higher in cold weather than in hot weather.

Engine oil temperature indicator

System which informs the driver of the changes in the temperature of the engine oil while driving.



With the engine running, when the needle is:

- in zone **C**, the temperature is correct,
- in zone **D**, the temperature is too high; the oil pressure warning light and the central **STOP** warning light come on, accompanied by an audible signal and a message on the multifunction display.

You MUST stop as soon as it is safe to do so.

Consult a PEUGEOT dealer.

Service indicator

System which informs the driver when the next service is due, in accordance with the manufacturer's servicing schedule.

The point at which the service is due is calculated from the last indicator zero reset. It is determined by two parameters:

- the distance travelled,
- the time elapsed since the last service.



More than 500 miles (1 000 km) remain before the next service is due

For 5 seconds after the ignition is switched on, the spanner symbolising the service operations comes on. The distance recorder display line indicates the distance remaining before the next service is due.

Example: 4 800 miles/km remain before the next service is due.

For 5 seconds after the ignition is switched on, the display indicates:



5 seconds after the ignition is switched on, **the spanner is switched off**; the distance recorder resumes its normal operation. The display then indicates the total and trip distances.



Less than 500 miles (1 000 km) remain before the next service is due

Example: 400 miles (900 km) remain before the next service is due.

For 5 seconds after the ignition is switched on, the display indicates:



5 seconds after the ignition is switched on, the distance recorder resumes its normal operation. **The spanner remains on** to indicate that a service must be carried out soon.




Service overdue

For 5 seconds after the ignition is switched on, the **spanner flashes** to indicate that the service must be carried out as soon as possible.

Example: the service is overdue by 300 miles (km).

For 5 seconds after the ignition is switched on, the display indicates:



5 seconds after the ignition is switched on, the distance recorder resumes its normal operation. **The spanner remains lit.**



The distance remaining may be weighted by the time factor, depending on the driver's driving habits. Therefore, the spanner may also come on if you have exceeded the two year service interval.

Service indicator zero reset



After each service, the service indicator must be reset to zero.

To do this, carry out the following procedure:

- ☛ switch off the ignition,
- ☛ press and hold the trip distance recorder zero reset button,
- ☛ switch on the ignition; the distance recorder display begins a countdown,
- ☛ when the display indicates "**=0**", release the button; the spanner disappears.



Following this operation, if you wish to disconnect the battery, lock the vehicle and wait at least five minutes for the zero reset to be taken into account.

Engine oil level indicator

System which informs the driver of the validity or invalidity of the engine oil level.



This information is indicated for a few seconds when the ignition is switched on, after the service information.




The level read will only be correct if the vehicle is on level ground and the engine has been off for more than 15 minutes.

Oil level correct



Lack of oil



This is indicated by the flashing of "OIL", linked with the service warning light, accompanied by an audible signal and a message on the multifunction display.

If the lack of oil is confirmed by a check using the dipstick, it is essential that the level is topped up to prevent damage to the engine.

Oil level gauge fault



This is indicated by the flashing of "OIL --". Consult a PEUGEOT dealer.

Dipstick

Refer to the "Checks" section to locate the dipstick and the oil filler cap on your engine.



There are 2 marks on the dipstick:

- **A** = max; never exceed this level,
- **B** = min; top up the level via the oil filler cap, using the type of oil suited to your engine.

Total distance recorder

System which measures the total distance travelled by the vehicle during its life.



The total and trip distances are displayed for thirty seconds when the ignition is switched off, when the driver's door is opened and when the vehicle is locked or unlocked.

Trip distance recorder

System which measures a distance travelled during a day or other period until it is reset to zero by the driver.



- With the ignition on, press the button until zeros appear.

Lighting rheostat

System for manual adjustment of the brightness of the instruments and controls in relation to the exterior brightness.



Activation

When the lights are on:

- press the button to change the brightness of the instruments and controls,
- when the lighting reaches the minimum setting, release the button, then press again to increase it,
- or
- when the lighting reaches the maximum setting, release the button, then press again to reduce it,
- when the lighting reaches the level of brightness required, release the button.

Deactivation

When the lights are off, or in day mode on vehicles fitted with daytime lights, pressing the button does not have any effect.

CLOCK

Integrated system which displays the time with independent setting of the hours and minutes.



Button 1: setting of the hours.

Button 2: setting of the minutes.

Setting

- Press the corresponding button briefly to obtain slow scrolling.
- or
- Continue to press the corresponding button to obtain rapid scrolling.

MONOCHROME SCREEN A (WITHOUT RD4 AUDIO EQUIPMENT)



Displays on the screen

This displays the following information:

- the time,
- the date,
- the outside temperature* (this flashes if there is a risk of ice),
- the status of the accesses (doors, boot, ...),
- the trip computer (refer to the end of the section).

Warning messages (e.g.: "Emission control system faulty") or information messages (e.g.: "Boot open") may appear temporarily. These can be cleared by pressing the "ESC" button.

Controls



There are three display control buttons:

- "ESC" to abandon the operation in progress,
- "MENU" to scroll through the menus or sub-menus,
- "OK" to select the menu or sub-menu required.

General menu



- ☞ Press the "MENU" button to scroll through the various menus of the **general menu**:
 - vehicle configuration,
 - options,
 - display settings,
 - languages,
 - units.
- ☞ Press the "OK" button to select the menu required.

* With air conditioning only.



Vehicle configuration



Once the "Vehicle configuration" menu has been selected, you can activate or deactivate the following equipment:

- wiper linked with reverse gear (refer to the "Visibility" section),
- directional headlamps (refer to the "Visibility" section),
- "follow-me-home" lighting (refer to the "Visibility" section).

Options

Once the "Options" menu has been selected, you can start diagnostics of the status of the equipment (active, not active, faulty).

Display settings

Once the "Display settings" menu has been selected, you can gain access to the following settings:

- year,
- month,
- day,
- hour,
- minutes,
- 12 or 24 hour mode.



☞ Once you have selected a setting, press the "OK" button to change its value.



☞ Wait for approximately ten seconds without any action to allow the changed data to be recorded or press the "ESC" button to cancel.

The display then returns to the normal display.

Languages

Once the "Languages" menu has been selected, you can change the language used by the display (Français, Italiano, Nederlands, Portugues, Portugues-Brasil, Deutsch, English, Espanol).

Units

Once the "Units" menu has been selected, you can change the units of the following parameters:

- temperature (°C or °F),
- fuel consumption (l/100 km, mpg or km/l).



For safety reasons, it is imperative that configuration of the multifunction displays by the driver takes place when stationary.

MONOCHROME SCREEN A



Displays on the screen

This displays the following information:

- the time,
- the date,
- the outside temperature* (this flashes if there is a risk of ice),
- the status of the accesses (doors, boot, ...),
- the audio sources (radio, CD, ...),
- the trip computer (refer to the end of the section).

Warning messages (e.g.: "Emission control system faulty") or information messages (e.g.: "Boot open") may appear temporarily. These can be cleared by pressing the "ESC" button.

Controls



From the RD4 audio equipment control panel, you can:

- ☞ press the "**MENU**" button to gain access to the **general menu**,
- ☞ press the "**▲**" or "**▼**" buttons to scroll through the items on the screen,
- ☞ press the "**MODE**" button to change the permanent application (trip computer, audio source, ...),
- ☞ press the "**◀**" or "**▶**" buttons to change a setting value,
- ☞ press the "**OK**" button to confirm, or
- ☞ press the "**ESC**" button to abandon the operation in progress.

General menu



☞ Press the "**MENU**" button to gain access to the **general menu**, then press the "**▲**" or "**▼**" buttons to scroll through the various menus:

- radio-CD,
- vehicle configuration,
- options,
- display settings,
- languages,
- units.

☞ Press the "**OK**" button to select the menu required.

Radio-CD

With the RD4 audio equipment switched on, once the "Radio-CD" menu has been selected you can activate or deactivate the functions linked with use of the radio (RDS, REG), the CD or the CD changer (introscan, shuffle, CD repeat).

For further details concerning the "Radio-CD" application, refer to the RD4 part of the "Audio and Telematics" section.

* With air conditioning only.



Vehicle configuration



Once the "Vehicle Configuration" menu has been selected, you can activate or deactivate the following equipment:

- wiper linked with reverse gear (refer to the "Visibility" section),
- directional headlamps (refer to the "Visibility" section),
- "follow-me-home" lighting (refer to the "Visibility" section).

Options

Once the "Options" menu has been selected, you can start diagnostics of the status of the equipment (active, not active, faulty).

Display settings

Once the "Display settings" menu has been selected, you can gain access to the following settings:

- year,
- month,
- day,
- hour,
- minutes,
- 12 or 24 hour mode.



Once you have selected a setting, press the "◀" or "▶" buttons to change its value.



Press the "▲" or "▼" buttons to switch respectively to the previous or next setting.
Press the "OK" button to record the change and return to the normal display or press the "ESC" button to cancel.

Languages

Once the "Languages" menu has been selected, you can change the language used by the display (Français, Italiano, Nederlands, Portugues, Portugues-Brasil, Deutsch, English, Espanol).

Units

Once the "Units" menu has been selected, you can change the units of the following parameters:

- temperature (°C or °F),
- fuel consumption (l/100 km, mpg or km/l).



For safety reasons, it is imperative that configuration of the multifunction displays by the driver takes place when stationary.

MONOCHROME SCREEN C



Displays on the screen

This displays the following information:

- the time,
- the date,
- the outside temperature* (this flashes if there is a risk of ice),
- the status of the accesses (doors, boot, ...),
- the audio sources (radio, CD, ...),
- the trip computer (refer to the end of the section).

Warning messages (e.g.: "Emission control system faulty") or information messages (e.g.: "Automatic switching on of the headlamps activated") may appear temporarily. These can be cleared by pressing the "ESC" button.

Controls



From the RD4 audio equipment control panel, you can:

- ☛ press the "MENU" button to gain access to the **general menu**,
- ☛ press the "▲" or "▼" buttons to scroll through the items on the screen,
- ☛ press the "MODE" button to change the permanent application (trip computer, audio source, ...),
- ☛ press the "◀" or "▶" buttons to change a setting value,
- ☛ press the "OK" button to confirm,
- or
- ☛ press the "ESC" button to abandon the operation in progress.

General menu



- ☛ Press the "MENU" button to gain access to the **general menu**:
 - audio functions,
 - trip computer (refer to the end of the section),
 - personalisation-configuration,
 - telephone (hands-free kit).
- ☛ Press the "▲" or "▼" buttons to select the menu required, then confirm by pressing the "OK" button.

"Audio functions" menu

With the RD4 audio equipment switched on, once this menu has been selected you can activate or deactivate the functions linked with use of the radio (RDS, REG, RadioText), the CD or the CD changer (introscan, shuffle, CD repeat).

For further details concerning the "Audio functions" application, refer to the RD4 part of the "Audio and Telematics" section.

* With air conditioning only.

"Trip computer" menu

Once this menu has been selected, you can consult information concerning the status of the vehicle (warnings log, status of the functions, ...).



Warnings log

This summarises the active warning messages, displaying them in succession on the multifunction display.

- ☞ Press the "MENU" button to gain access to the general menu.
- ☞ Press the arrows, then the "OK" button to select the "Trip computer" menu.

Status of the functions


This summarises the active or inactive status of the functions present on the vehicle.



Enter the distance to the destination


This allows you to enter an approximate value for the distance to the final destination.

- ☞ On the "Trip computer" menu, select one of the following applications:





"Personalisation-Configuration" menu



Once this menu has been selected, you can gain access to the following functions:

- define the vehicle parameters,
- display configuration,
- selection of the language.


Define the vehicle parameters

Once this menu has been selected, you can activate or deactivate the following equipment:


- wiper linked with reverse gear (refer to the "Visibility" section),
- directional headlamps (refer to the "Visibility" section),
- "follow-me-home" lighting (refer to the "Visibility" section).

Example: setting of the duration of the "follow-me-home" lighting


- ☞ Press the "▲" or "▼" buttons, then the "OK" button to select the menu required.



- ☞ Press the "▲" or "▼" buttons, then the "OK" button to select the "Follow-me-home lighting" line.



- ☞ Press the "◀" or "▶" buttons to set the value required (15, 30 or 60 seconds), then press the "OK" button to confirm.



- ☞ Press the "▲" or "▼" buttons, then the "OK" button to select the "OK" box and confirm or press the "ESC" button to cancel.

Display configuration

Once this menu has been selected, you can gain access to the following settings:

- brightness-video setting,
- date and time setting,
- selection of the units.

Selection of the language

Once this menu has been selected, you can change the screen display language (Deutsch, English, Espanol, Français, Italiano, Nederlands, Portugues, Portugues-Brasil).

"Telephone" menu

With the RD4 audio equipment switched on, once this menu has been selected you can configure your Bluetooth hands-free kit (matching), consult the various telephone directories (calls log, services, ...) and manage your communications (pick up, hang up, call waiting, secret mode, ...).

For further details concerning the "Telephone" application, refer to the RD4 part of the "Audio and Telematics" section.



For safety reasons, it is imperative that configuration of the multifunction displays by the driver takes place when stationary.

COLOUR SCREEN 16/9



Displays on the screen

When the ignition is switched on, this displays the following information automatically and directly:

- the time,
- the date,
- the outside temperature (if there is a risk of ice, you are warned by a message).

Warning messages (e.g.: "Fuel level low") and vehicle function status messages (e.g.: "Automatic switching on of the headlamps activated") may appear temporarily. These can be cleared by pressing the "ESC" button.

General menu



When the RT4 GPS audio/telephone is switched on, select the menu which corresponds to the following applications:

- the satellite navigation system,
- the guidance on the map,
- the traffic information,
- the audio sources (radio, CD, Jukebox, ...),
- the phone books and the telephone functions,
- the configuration of the screen and the setting of the parameters of the vehicle's equipment,
- the displaying of a video,
- the vehicle diagnostics.

Controls



From the RT4 GPS audio/telephone control panel, to select one of the applications:

- ☞ press the "**MENU**" button to gain access to the **general menu**,
- ☞ turn the navigator to move the selection,
- ☞ press the navigator to confirm the selection,

or

- ☞ press the "**ESC**" button to abandon the operation in progress and return to the previous display.

For further details concerning these applications, refer to the RT4 part of the "Audio and Telematics" section.




"Configuration" menu

- Press the "MENU" button on the RT4 GPS audio/telephone to gain access to the **general menu**.
- Turn the navigator to select the "**Configuration**" menu, then press it to confirm.



Once this menu has been selected, you can gain access to the following functions:

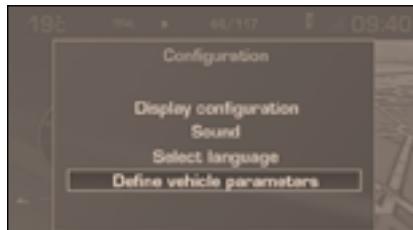


Define the vehicle parameters

Once the "Define the vehicle parameters" menu has been selected, you can activate or deactivate certain driving and comfort equipment:


- wiper linked with reverse gear (refer to the "Visibility" section),
- directional headlamps (refer to the "Visibility" section),
- "follow-me-home" lighting and duration (refer to the "Visibility" section).

Example: setting the duration of the "follow-me-home" lighting

- Turn the navigator to select the "**Lighting configuration**" menu, then press it to confirm.

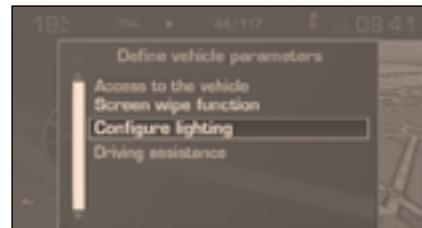


- Select the line "Duration of the "follow-me-home" lighting" then confirm.

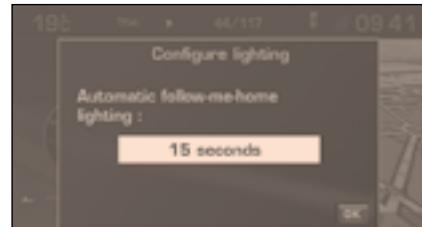

- Select the duration then press the navigator.
- Turn the navigator to set the value required (15, 30 or 60 seconds), then press the navigator.
- Select the "**OK**" box, then confirm.

Display configuration

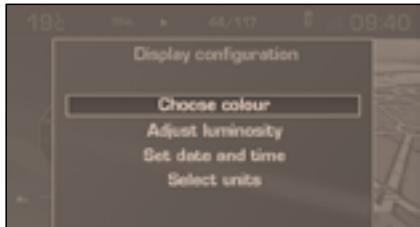

Once the "Display configuration" menu has been selected, you gain access to the following parameters:

- selection of the palette of colours available for the display,
- setting of the brightness and brilliance of the display,
- setting of the date and time (12 or 24 hour mode, adjustment of the minutes on GPS),
- selection of the units (temperature in ° Celsius or ° Fahrenheit; consumption in l/100 km or mpg or km/l).

Sounds

Once the "Sounds" menu has been selected, you gain access to the following parameters:

- setting of the voice commands,
- setting of the voice synthesiser (volume, male or female),
- activation of the auxiliary input AUX.

Language selection

Once the "Language selection" menu has been selected, you gain access to the following parameters:

- selection of the display language (Français, English, Italiano, Portugues, Espanol, Deutsch, Nederlands),
- selection of the information and voice commands language (Français, English, Italiano, Portugues, Espanol, Deutsch, Nederlands).

"Video" menu



You can connect video equipment (camcorder, digital camera, DVD player, ...) to the three audio/video sockets, located in the glove box.

Videos can only be displayed when stationary.

Once this menu has been selected, you can select:

- "Activate video mode" to activate/deactivate the video,
- "Video parameters" to set the display format, the brightness, the contrast and the colours.
- ☞ Press the **"MODE"** or **"DARK"** button to disconnect the displaying of the video.
- ☞ Press the **"SOURCE"** button several times in succession to select an audio source other than that of the video.

"Vehicle Diagnostics" menu

Once this menu has been selected, you can consult information concerning the status of the vehicle, such as the warnings log or the status of the functions.

Warnings log


This summarises the active warning messages, displaying them in succession on the multifunction display.

Status of the functions

This summarises the active or inactive status of the functions present on the vehicle.



- ☞ On the "Vehicle diagnostics" menu, select one of the following applications:

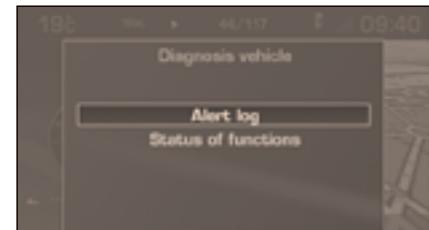

- ☞ Press the "MENU" button to gain access to the general menu.
- ☞ Turn the navigator and press it to select the "Vehicle diagnostics" menu.



TRIP COMPUTER

System which provides current information concerning the route travelled (range, consumption, ...).

Monochrome display A



Data displays



- Press the button, located at the end of the **wipers stalk**, to display the various items of trip computer data in succession.

The trip computer data is the following:

- the range,



- the current consumption,



- the distance travelled,



- the average consumption,



- the average speed.



- ☞ The next press then returns you to the normal display.

Zero reset



- ☞ Press the control for more than two seconds to reset the distance travelled, the average consumption and the average speed to zero.

A few definitions...



Range

(km or miles)

This indicates the number of miles (or kilometres) which can still be travelled with the fuel remaining in the tank in relation to the average consumption over the last few miles (kilometres) travelled.



This figure may increase following a change of driving style or relief, resulting in a significant change in the current consumption.

When the range falls below 20 miles (30 km), dashes are displayed. After filling with at least 5 litres of fuel, the range is recalculated and is displayed when it exceeds 60 miles (100 km).



If dashes are displayed continuously while driving in place of the digits, contact a PEUGEOT dealer.



Current consumption

(l/100 km or km/l or mpg)

This is the average quantity of fuel consumed over the last few seconds.



This function is only displayed from 20 mph (30 km/h).



Average consumption

(l/100 km or km/l or mpg)

This is the average quantity of fuel consumed since the last trip computer zero reset.



Distance travelled

(km or miles)

This indicates the distance travelled since the last trip computer zero reset.



Distance remaining to be travelled

(km or miles)

This is the distance remaining to be travelled to the final destination. It is calculated either instantly by the navigation system if guidance is activated, or entered by the user.

If the distance is not entered, dashes are displayed in place of the digits.



Average speed


(km/h or mph)

This is the average speed calculated since the last trip computer zero reset (ignition on).

TRIP COMPUTER

System which provides current information concerning the route travelled (range, consumption, ...).

Monochrome screen C



Colour screen 16/9



Data displays



☞ Press the button, located at the end of the **wipers stalk**, to display the various trip computer tabs in succession:



- the current information tab with:
 - the range,
 - the current consumption,
 - the distance remaining to be travelled,
- the route "1" tab with:
 - the distance travelled,
 - the average consumption,
 - the average speed, for the first route.



2

- the route "2" tab with:
 - the distance travelled,
 - the average consumption,
 - the average speed, for the second route.

☞ Press again to return to the normal display.

Route zero reset



☞ When the route required is displayed, press the control for more than two seconds.

Routes "1" and "2" are independent but their use is identical.

Route "1" permits, for example, daily calculations, and route "2" monthly calculations.

A few definitions...



Range

(km or miles)

This indicates the number of miles (or kilometres) which can still be travelled with the fuel remaining in the tank in relation to the average consumption over the last few miles (kilometres) travelled.



This figure may increase following a change of driving style or relief, resulting in a significant change in the current consumption.

When the range falls below 20 miles (30 km), dashes are displayed. After filling with at least 5 litres of fuel, the range is recalculated and is displayed when it exceeds 60 miles (100 km).



If dashes are displayed continuously while driving in place of the digits, contact a PEUGEOT dealer.



Current consumption

(l/100 km or km/l or mpg)

This is the average quantity of fuel consumed over the last few seconds.



This function is only displayed from 20 mph (30 km/h).



Average consumption

(l/100 km or km/l or mpg)

This is the average quantity of fuel consumed since the last trip computer zero reset.



Distance travelled

(km or miles)

This indicates the distance travelled since the last trip computer zero reset.



Distance remaining to be travelled

(km or miles)

This is the distance remaining to be travelled to the final destination. It is calculated either instantly by the navigation system if guidance is activated, or entered by the user.

If the distance is not entered, dashes are displayed in place of the digits.



Average speed

(km/h or mph)

This is the average speed calculated since the last trip computer zero reset (ignition on).



VENTILATION

System which creates and maintains comfortable conditions in the vehicle's passenger compartment.

Air intake

The air circulating in the passenger compartment is filtered and originates either from the outside via the grille located at the base of the windscreens or from the inside in air recirculation mode.

Air treatment

The incoming air follows various routes depending on the controls selected by the driver:

- direct arrival in the passenger compartment (air intake),
- passage through a heating circuit (heating),
- passage through a cooling circuit (air conditioning).

The temperature control enables you to obtain the level of comfort required by mixing the air of the various circuits.

The air distribution control enables you to diffuse the air in the passenger compartment combining several air vents.

The air flow control enables you to increase or reduce the speed of the ventilation blower.

Control panel

The controls of this system are grouped together on control panel **A** on the centre console. Depending on the model, the functions offered are:

- the level of comfort required,
- the air flow,
- the air distribution,
- the de-icing and demisting,
- the manual or automatic air conditioning controls.

Air diffusion

1. Windscreen de-icing or demisting vents.
2. Front side window de-icing or demisting vents.
3. Side adjustable and closing vents.
4. Central adjustable and closing vents.
5. Air outlets to the front footwells.
6. Air outlets to the rear footwells.



The air conditioning system does not contain chlorine and does not present any danger to the ozone layer.

RECOMMENDATIONS FOR VENTILATION AND AIR CONDITIONING

In order for these systems to be fully effective, follow the operation and maintenance rules below:

- ☛ If the interior temperature remains very high after the vehicle has been parked in the sun for a considerable time, do not hesitate to ventilate the passenger compartment for a few minutes.
Place the air flow control at a sufficient level to provide an adequate renewal of air in the passenger compartment.
- ☛ To obtain an even air distribution, take care not to obstruct the exterior air intake grilles located at the base of the windscreen, the nozzles, the vents and the air outlets, as well as the air extractor located in the boot.
- ☛ Do not cover the sunshine sensor, located on the fascia; this is used for regulation of the air conditioning system.
- ☛ Operate the air conditioning system for 5 to 10 minutes, once or twice a month to keep it in perfect working order.
- ☛ Ensure that the passenger compartment filter is in good condition and have the filter elements replaced regularly (refer to the "Checks" section).
We recommend the use of a combined passenger compartment filter. Thanks to its second special active filter, it contributes to the purification of the air breathed by the occupants and the cleanliness of the passenger compartment (reduction of allergic symptoms, bad odours and greasy deposits).
- ☛ To guarantee correct operation of the air conditioning system, you are also advised to have it checked regularly.
- ☛ If the system does not produce cold air, do not use it and contact a PEUGEOT dealer.

When towing the maximum load on a steep gradient in high temperatures, switching off the air conditioning permits the recovery of engine power and therefore improvement of the towing capacity.

The condensation created by the air conditioning results in a discharge of water under the vehicle which is perfectly normal.

HEATING/VENTILATION

Control panel with manual control



MANUAL AIR CONDITIONING

Control panel with manual control



Control panel with electric control



Control panel with electric control



HEATING/VENTILATION AND MANUAL AIR CONDITIONING

The heating/ventilation or air conditioning systems can only operate when the engine is running.

1. Temperature adjustment



- Turn the dial from blue (cold) to red (hot) to adjust the temperature to suit your requirements.

2. Air flow adjustment



- Turn the dial from position **1** to position **4** to obtain an air flow sufficient to ensure your comfort.



- If you place the air flow control in position **0** (deactivation of the system), the temperature is no longer maintained at a comfortable level. However, a slight flow of air, due to the movement of the vehicle, can still be felt.

3. Air distribution adjustment



Windscreen and side windows.



Windscreen, side windows and footwells.



Footwells.(vents closed)



Central and side vents.



The air distribution can be adapted by placing the dial in an intermediate position, marked by a dot "•".

4. Air intake/Air recirculation

The intake of exterior air prevents the formation of condensation on the windscreen and side windows.

The recirculation of interior air prevents exterior odours and smoke from entering the passenger compartment.

Return to exterior air intake mode as soon as possible to avoid deterioration of the air quality and prevent condensation.

Control panel with manual control



- Move the manual control to the right to the "Interior air recirculation" position.
- Move the manual control to the left to return to the "Exterior air intake" position.

Control panel with electric control



- Press the button to recirculate the interior air. This is displayed by lighting of the indicator light.
- Press the button again to permit the intake of exterior air. This is displayed by switching off of the indicator light.

De-icing - Demisting

To quickly de-ice or demist the windscreen and side windows:

- place the air intake control **4** in the "Exterior air intake" position,
- place the air distribution dial **3** in the "Windscreen" position,
- place the temperature dial **1** and the air flow dial **2** in the maximum position,
- close the central vents,
- switch on the air conditioning by pressing the "A/C" button.

HEATING/VENTILATION

Control panel with manual control



MANUAL AIR CONDITIONING

Control panel with manual control



Control panel with electric control



Control panel with electric control



HEATING/VENTILATION AND MANUAL AIR CONDITIONING

The heating/ventilation or air conditioning systems can only operate when the engine is running.

1. Temperature adjustment



- Turn the dial from blue (cold) to red (hot) to adjust the temperature to suit your requirements.

2. Air flow adjustment



- Turn the dial from position **1** to position **4** to obtain an air flow sufficient to ensure your comfort.



- If you place the air flow control in position **0** (deactivation of the system), the temperature is no longer maintained at a comfortable level. However, a slight flow of air, due to the movement of the vehicle, can still be felt.

3. Air distribution adjustment



Windscreen and side windows.



Windscreen, side windows and footwells.



Footwells.(vents closed)



Central and side vents.



The air distribution can be adapted by placing the dial in an intermediate position, marked by a dot "•".

4. Air intake/Air recirculation

The intake of exterior air prevents the formation of condensation on the windscreen and side windows.

The recirculation of interior air prevents exterior odours and smoke from entering the passenger compartment.

Return to exterior air intake mode as soon as possible to avoid deterioration of the air quality and prevent condensation.

Control panel with manual control



- Move the manual control to the right to the "Interior air recirculation" position.
- Move the manual control to the left to return to the "Exterior air intake" position.

Control panel with electric control



- Press the button to recirculate the interior air. This is displayed by lighting of the indicator light.
- Press the button again to permit the intake of exterior air. This is displayed by switching off of the indicator light.

De-icing - Demisting

To quickly de-ice or demist the windscreen and side windows:

- place the air intake control **4** in the "Exterior air intake" position,
- place the air distribution dial **3** in the "Windscreen" position,
- place the temperature dial **1** and the air flow dial **2** in the maximum position,
- close the central vents,
- switch on the air conditioning by pressing the "A/C" button.

5. Air conditioning On/Off



The air conditioning is designed to operate effectively in all seasons, with the windows closed.

It enables you to:

- lower the temperature, in summer,
- increase the effectiveness of the demisting, in winter above 0 °C.

Switching on

☞ Press the "A/C" button, the associated indicator light comes on.

The air conditioning does not operate when the air flow adjustment dial 2 is in position "0".

Switching off

☞ Press the "A/C" button again, the associated indicator light switches off.

REAR SCREEN DE-ICING



The control button is located on the heating or air conditioning system control panel.

Switching on

The rear screen de-icing can only operate when the engine is running.

☞ Press this button to de-ice the rear screen and the exterior mirrors. The indicator light associated with the button comes on.

Switching off

The de-icing switches off automatically to prevent an excessive consumption of current.

☞ It is possible to stop the de-icing operation before it is switched off automatically by pressing the button again. The indicator light associated with the button switches off.



☞ Switch off the de-icing of the rear screen and exterior mirrors as soon as you consider this necessary as lower current consumption results in reduced fuel consumption.



If the engine is switched off before the de-icing is switched off automatically, de-icing will resume next time the engine is switched on.

5. Air conditioning On/Off



The air conditioning is designed to operate effectively in all seasons, with the windows closed.

It enables you to:

- lower the temperature, in summer,
- increase the effectiveness of the demisting, in winter above 0 °C.

Switching on

☞ Press the "A/C" button, the associated indicator light comes on.

The air conditioning does not operate when the air flow adjustment dial 2 is in position "0".

Switching off

☞ Press the "A/C" button again, the associated indicator light switches off.

REAR SCREEN DE-ICING



The control button is located on the heating or air conditioning system control panel.

Switching on

The rear screen de-icing can only operate when the engine is running.

☞ Press this button to de-ice the rear screen and the exterior mirrors. The indicator light associated with the button comes on.

Switching off

The de-icing switches off automatically to prevent an excessive consumption of current.

☞ It is possible to stop the de-icing operation before it is switched off automatically by pressing the button again. The indicator light associated with the button switches off.



☞ Switch off the de-icing of the rear screen and exterior mirrors as soon as you consider this necessary as lower current consumption results in reduced fuel consumption.



If the engine is switched off before the de-icing is switched off automatically, de-icing will resume next time the engine is switched on.

DUAL ZONE AUTOMATIC AIR CONDITIONING



The air conditioning can only operate with the engine running.

Automatic operation

1. Automatic comfort programme



☞ Press the "AUTO" button. The "AUTO" symbol is displayed.

We recommend that you use this mode: it provides optimised automatic control of all of the functions, passenger compartment temperature, air flow, air distribution and air recirculation, in accordance with the comfort value that you have selected.

This system is designed to operate effectively in all seasons, with the windows closed.



When the engine is cold, to prevent too great a distribution of cold air, the air flow will only reach its optimum level gradually.

In cold weather, it favours the distribution of warm air to the windscreen, the side windows and the footwells only.

2. Driver's side adjustment

3. Passenger side adjustment



The driver and his front passenger can each set the temperature to suit their requirements.

The value indicated on the display corresponds to a level of comfort and not to a temperature in degrees Celsius or Fahrenheit.

☞ Turn dial 2 or 3 to the left to reduce the value or to the right to increase it.

A setting around 21 enables you to obtain an optimum level of comfort. Depending on your requirements, a setting between 18 and 24 is usual.

In addition, it is recommended that you avoid a left/right setting difference of more than 3.



On entering the vehicle, if the interior temperature is much colder or warmer than the comfort value, there is no need to alter the value displayed in order to obtain the required level of comfort. The system eliminates the temperature difference automatically and as quickly as possible.

4. Automatic visibility programme



The automatic comfort programme may not be sufficient to quickly demist or de-ice the windscreen and side windows (humidity, several passengers, ice...).

☞ In this case, select the automatic visibility programme.

The system automatically controls the air conditioning, the air flow and the air intake and provides optimum distribution of the ventilation to the windscreen and side windows.

- To exit this programme, press the "visibility" button again or the "AUTO" button, the indicator light on the button switches off and "AUTO" is displayed.

Resuming manual control

Depending on your requirements, you can make a different selection from that offered by the system by changing a setting. The other functions will still be controlled automatically.

- Press the "AUTO" button to return to fully automatic operation.



For maximum cooling or heating of the passenger compartment, you can exceed the minimum value of 14 or the maximum value of 28.

- Turn dial 2 or 3 to the left until "LO" is displayed or to the right until "HI" is displayed.

5. Air conditioning On/Off



- Press this button to switch the air conditioning off.

Switching the system off may result in discomfort (humidity, condensation).

- Press the button again to return to automatic operation of the air conditioning. The symbol "A/C" is displayed.

6. Air distribution adjustment



- Press this button several times in succession to direct the air flow in turn towards:

- the windscreens, the side windows and the footwells,
- the windscreens and side windows (demisting or de-icing),
- the central and side vents,
- the central vents, the side vents and the footwells,
- the footwells.

7. Air flow adjustment



- Press the "small fan" button to reduce the air flow.

- Press the "large fan" button to increase the air flow.

The air flow symbol, the fan, is filled in progressively in relation to the value required.

8. Air intake/Air recirculation



- Press this button to recirculate the interior air. The air recirculation symbol is displayed.

Air recirculation prevents exterior odours and smoke from entering the passenger compartment.

- As soon as possible, press this button again to permit the intake of exterior air and prevent condensation.



Avoid prolonged operation in interior air recirculation mode (risk of condensation and of deterioration of the air quality).

Deactivation of the system

- Press the "small fan" button until the fan symbol disappears.

This action deactivates all of the functions of the air conditioning system.

The temperature is no longer maintained at a comfortable level. However, a slight flow of air, due to the movement of the vehicle, can still be felt.

- Press the "large fan" button again or the "AUTO" button to reactivate the system with the values which were set before it was deactivated.



Avoid driving for too long with the air conditioning deactivated.

FRAGRANCE DIFFUSER

System which permits the diffusion of fragrance in the passenger compartment in accordance with your requirements, by means of the adjustment dial and the various fragrance cartridges available.



Controls

A. Adjustment dial.

This dial permits simultaneous adjustment of the ventilation and of the intensity of diffusion of the fragrance. There are three main positions:

0. Zero ventilation.
1. Maximum ventilation/Zero diffusion.
2. Maximum ventilation/Maximum diffusion.

i The intensity of diffusion of the fragrance may depend on the ventilation or air conditioning settings.



B. Fragrance cartridge.

This cartridge can be removed very easily.

You can change it at any time and store it, using the cap which seals it if it has been partly used.

You can obtain different fragrance cartridges from your PEUGEOT dealer.

Removing the cartridge

- ☞ Turn the cartridge one quarter of a turn.
- ☞ Remove the cartridge from the fascia.
- ☞ Refit its sealing cap.



Fitting the cartridge

- ☞ Remove the sealing cap from the cartridge.
- ☞ Install the cartridge in the fascia.
- ☞ Press the cartridge and turn it one quarter of a turn.

i Do not discard the original cartridge as this is used as a closer when you are not using a fragrance cartridge.
To prolong the lifespan of the cartridge, set the dial to position "0" or "1" as soon as you no longer wish to diffuse the fragrance in the passenger compartment.

FRONT SEATS

Seat consisting of a seat cushion, seat back and head restraint which can all be adjusted to adapt your position for maximum ease of driving and comfort.

1. Forwards-backwards adjustment

- ☞ Lift the control and slide the seat forwards or backwards.




2. Driver's or passenger's seat height adjustment

- ☞ Pull the handle upwards or push it downwards as many times as necessary to obtain the required position.



3. Seat back angle adjustment

- ☞ Push the handle towards the rear.

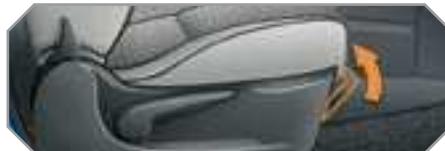

4. Access to rear seats (3-door)

- Pull the handle to fold the seat back and move the seat forwards. On re-positioning, the seat returns to its initial position.



5. Head restraint height and angle adjustment



- To raise the head restraint, pull it upwards.
- To remove the head restraint, press the lug **A** and pull the head restraint upwards.
- To put the head restraint back in position, locate the stems of the head restraint in the holes, taking care to keep them in line with the seat back.
- To lower the head restraint, press the lug **A** and the head restraint at the same time.
- To tilt the head restraint, tilt the lower part forwards or rearwards.



No person or object must prevent the seat slide from returning to its initial position; return to this position is necessary for the seat to lock in place.

Take care not to trap the seat belt to avoid hindering the passage of the rear passengers.



The head restraint has a frame with a notch which prevents the head restraint from lowering; this is a safety device which provides protection in the event of an impact.

The adjustment is correct when the upper edge of the head restraint is level with the top of the head.

Never drive with the head restraints removed; they must be in place and correctly adjusted.

6. Armrests (except 3-door)



These can be folded down and are removable.

- To remove them, press the button located between the armrest and the side of the seat and pull it.

REAR SEATS

Bench seat the left-hand part (2/3) or right-hand part (1/3) of which can be folded to adapt the load space in the boot.

Rear head restraints

These have a high position (comfort) and a low position (rear visibility).



They can also be removed; to remove them:

- pull the head restraint upwards to the stop,
- then, press the lug.



Never drive with the head restraints removed; they must be in place and correctly adjusted.

As the head restraints are not interchangeable, take care to put them back in their original position when refitting (GTi).

6. Armrests (except 3-door)



These can be folded down and are removable.

- To remove them, press the button located between the armrest and the side of the seat and pull it.

REAR SEATS

Bench seat the left-hand part (2/3) or right-hand part (1/3) of which can be folded to adapt the load space in the boot.

Rear head restraints

These have a high position (comfort) and a low position (rear visibility).



They can also be removed; to remove them:

- pull the head restraint upwards to the stop,
- then, press the lug.



Never drive with the head restraints removed; they must be in place and correctly adjusted.

As the head restraints are not interchangeable, take care to put them back in their original position when refitting (GTi).

Folding the seat (Saloon)

To fold a rear seat without any risk of damage to it, **always start with the seat cushion, never the seat back**:

- ☛ move the corresponding front seat forward if necessary,
- ☛ raise the front of the seat cushion **1**,
- ☛ tilt the seat cushion **1** against the front seat,
- ☛ check that the seat belt is positioned correctly on the side of the seat back,

- ☛ pull control **2** upwards to release the seat back **3**,
- ☛ place the head restraints in the low position or remove them if necessary,
- ☛ tilt the seat back **3**.



i The seat cushion **1** can be removed to increase the loading volume. Squeeze the seat cushion fixings to detach them from their attachments.



Repositioning the seat (Saloon)

When repositioning the rear seat:

- ☛ straighten the seat back **3** and secure it,
- ☛ fold back the seat cushion **1**.



! When repositioning the rear seat, take care not to trap the seat belts.

6. Armrests (except 3-door)



These can be folded down and are removable.

- To remove them, press the button located between the armrest and the side of the seat and pull it.

REAR SEATS

Bench seat the left-hand part (2/3) or right-hand part (1/3) of which can be folded to adapt the load space in the boot.

Rear head restraints

These have a high position (comfort) and a low position (rear visibility).



They can also be removed; to remove them:

- pull the head restraint upwards to the stop,
- then, press the lug.



Never drive with the head restraints removed; they must be in place and correctly adjusted.

As the head restraints are not interchangeable, take care to put them back in their original position when refitting (GTi).

Folding the seat (SW)

This operation can be carried out at the rear seats or through the opening rear screen.

To fold a rear seat without any risk of damage:

- ☞ move the corresponding front seat forward if necessary,
- ☞ place the head restraints in the low position,
- ☞ pull the control 1 forward to release the seat back 2 which folds easily onto the seat cushion 3.



Check that no object could hinder the movement of the bench seat, either above or below.



The seat cushion lowers in order to be covered by the seat back; this quickly enables you to benefit from a flat boot floor.

Repositioning the seat (SW)

- ☞ When repositioning the rear seat, straighten the seat back 2 and lock it.
- ☞ Check that the red indicator, located at control 1, is no longer visible.



MIRRORS



Exterior mirrors

Adjustable mirror permitting the lateral rearward vision necessary when overtaking or parking.

Manual model



Adjustment

- Move the lever in all four directions to direct the mirror correctly.

Folding

- When parked, fold the mirror manually to protect it.

Unfolding

- Before starting, unfold the mirror.

Electric model



Adjustment

- Slide switch **A** to the right or to the left to select the corresponding mirror.
- Move knob **B** in all four directions to adjust.
- Return switch **A** to the centre position.

Folding

- from outside: lock the vehicle using the remote control or the key.
- from inside: with the ignition on, pull switch **A** rearwards.

Unfolding

- from outside: unlock the vehicle using the remote control or the key.
- from inside: with the ignition on, pull switch **A** rearwards.



The folding and unfolding of the exterior mirrors can be deactivated by a PEUGEOT dealer.



The objects observed are, in reality, closer than they appear. Take this into account to correctly judge the distance of vehicles approaching from behind.

Interior mirror

Adjustable mirror permitting central rearward vision.

Manual model

The mirror is fitted with a night anti-dazzle device.



Adjustment

☞ Adjust the mirror to direct it correctly in the "day" position.

Day/night position

- ☞ Pull the lever to change to the "night" anti-dazzle position.
- ☞ Push the lever to change to the normal "day" position.



As a safety precaution, the mirrors must be adjusted to reduce the "blind spot".

Automatic day/night model

System which automatically and gradually changes between the day and night uses.



To avoid glare, the interior mirror darkens automatically in relation to the intensity of the light from the rear.

It clears as soon as the light (light beam of vehicles behind, sun...) decreases, so providing optimum visibility.

Switching on

☞ Switch on the ignition and press switch 1.

The indicator light 2 comes on and the mirror operates in automatic mode.

Switching off

☞ Press switch 1.

The indicator light 2 switches off and the mirror remains at its clearest.



In order to provide optimum visibility during your manoeuvres, the mirror clears automatically when reverse gear is engaged.

STEERING WHEEL ADJUSTMENT

The height and depth of the steering wheel can be adjusted to adapt the driving position to the size of the driver.



Adjustment

- ☞ **When stationary**, pull the control to unlock the steering wheel.
- ☞ Adjust the height and depth.
- ☞ Push the control to lock the steering wheel.



As a safety precaution, it is imperative that these operations are carried out while the vehicle is stationary.

SUN VISOR

Component which protects against sunlight from the front or the side, also equipped with an illuminated courtesy mirror.



- ☞ With the ignition on, raise the concealing flap; the mirror is lit automatically.

This sun visor is also equipped with a ticket holder.

TOLL CARD/CAR PARK TICKET WINDOWS

Facility for affixing toll cards and/or car park tickets.



These windows are located on each side of the base of the interior mirror. They are two non-reflective areas of the athermic windscreen.



The athermic windscreen limits heating of the passenger compartment by reducing the effects of the sun's rays (ultra-violet). It consists of a reflective layer, which also blocks certain radio-electric signals (toll card payments, ...).

MAT

Removable component which protects the carpet against exterior dirt.

Fitting

When fitting the mat for the first time, use only the fixings provided in the wallet attached.

Removal

To remove the mat on the driver's side:

- ☞ move the seat as far back as possible,
- ☞ unclip the fixings,
- ☞ remove the fixings, then the mat.

**Refitting**

To refit the mat on the driver's side:

- ☞ position the mat correctly,
- ☞ refit the fixings by pressing,
- ☞ check that the mat is secured correctly.



To avoid any risk of jamming of the pedals:

- only use mats which are suited to the fixings already present in the vehicle; it is imperative that these are used.
- never fit one mat on top of another.

INTERIOR LAYOUT



1. **Glove box with light**
(see details on following page)
2. **Storage compartment with non-slip mat**
3. **Storage compartment**
4. **Door tray**
5. **Card holder**
6. **Storage compartment with non-slip mat**
7. **Ashtray with light/Lighter**
(see details on following page)
8. **Storage compartments**
9. **Can holder**

Glove box with light



This has an upper open storage compartment and locations for storing a small bottle of water, the vehicle's handbook, ...

Its lid has locations for storing a pen, tokens, cards, cans, ...

It may be fitted with a lock.

☞ To open the glove box, raise the handle.

It is lit when the lid is opened.

It houses the front passenger air bag disarming switch **A**.

If the vehicle is fitted with air conditioning, it provides access to the ventilation nozzle **B**, which can be opened or closed, distributing the same conditioned air as the vents in the passenger compartment.

It also permits access to the fuse box in the fascia (refer to the "Practical information - § Changing a fuse" section).

Ashtray with light/Lighter



- ☞ Raise the lid to gain access to the ashtray and the lighter.
- ☞ To empty the ashtray, after opening, remove its receptacle.
- ☞ To use the lighter, press it and wait a few seconds until it pops out automatically.
- ☞ To connect a 12 V accessory (max power: 120 Watts), remove the lighter and connect the appropriate adaptor.

BOOT LAYOUT (SALOON)

- 1. Rear shelf**
(see details on following page)
- 2. Hooks**
(see details on following page)
- 3. Stowing rings**
- 4. Luggage retaining net**
(see details on following page)



Rear shelf (Saloon)

To remove the shelf:

- ☛ unhook the two cords,
- ☛ raise the shelf slightly, then remove it.

You have two storage options:

- either upright behind the front seats,
- or upright behind the rear seats.

Hooks

The hooks permit the securing of shopping bags.

Luggage retaining net

Hooked onto the stowing rings, this enables you to secure your luggage, either to the bottom of the boot or to the back of the rear seats.

**When changing a wheel**

The hooks permit easy access to the spare wheel by retaining the boot carpet by means of its cord.



BOOT LAYOUT (SW)

1. **Load space cover**
(see details on following page)
2. **12 V accessories socket**
(see details on following page)
3. **Hooks**
(see details on previous page)
4. **Retaining straps**
5. **Stowing rings**
6. **Luggage retaining net**
(see details on previous page)
7. **High load retaining net**
(see details on following page)
8. **Storage box**
9. **Storage net**
10. **Storage box**
(refer to the section "Practical information - § Changing a wheel")

Load space cover (SW)

This consists of three sections which can be folded back on each other.

To store it, fold it on itself and place it vertically at the back of the boot.

To fold it from the boot:

- ☞ take hold of the load space cover by its strap **A**,
- ☞ fold it concertina-style to the rear seats.

To unfold it from the boot:

- ☞ take hold of the load space cover by its strap **A**,
- ☞ unfold it to the boot pillars.

To gain access from the rear seats:

- ☞ raise the front section of the load space cover using the handle **B**.



Maximum loads

7.5 kg, load space cover unfolded with high load retaining net at row 2.



12 V accessories socket (SW)



- ☞ In order to connect a 12 V accessory (max power: 120 Watts), remove the cap and connect the appropriate adaptor.
- ☞ Turn the key to the ignition position.

High load retaining net (SW)

Hooked onto the upper fixings and onto the ISOFIX rings or the lugs, this permits use of the entire loading volume up to the roof:

- behind the rear seats (row 2),
- behind the front seats (row 1) when the rear seats are folded.



When positioning the net, check that the strap loops are visible from the boot; this will make slackening or tightening easier.



To use it in row 1:

- ☞ open the covers of the upper fixings **1**,
- ☞ unroll the high load retaining net,
- ☞ position one of the ends of the net's metal bar in the corresponding upper fixing **1**, then do the same with the other end,
- ☞ slacken the straps fully,
- ☞ fix the snap hook of each of the straps on the corresponding lug **3**, located under the bench seat cushion,
- ☞ fold the rear seats,
- ☞ tighten the straps without raising the bench seat,
- ☞ check that the net is hooked and tightened correctly.

To use it in row 2:

- ☞ fold or remove the load space cover,
- ☞ open the covers of the upper fixings **2**,
- ☞ unroll the high load retaining net,
- ☞ position one of the ends of the net's metal bar in the corresponding upper fixing **2**, then do the same with the other end,
- ☞ attach the hook of each of the net's straps in the corresponding ISOFIX ring **4**,
- ☞ tighten the straps,
- ☞ check that the net is hooked and tightened correctly.

REMOTE CONTROL KEY

System which permits central unlocking or locking of the vehicle using the lock or remotely. It also locates and starts the vehicle, as well as providing protection against theft.



Unlocking the vehicle

Unfolding the key

- First press button **A** to unfold the key.

Unlocking using the remote control



- Press the open padlock to unlock the vehicle.

Unlocking using the key

- Turn the key to the left in the driver's door lock to unlock the vehicle.

Unlocking is confirmed by rapid flashing of the direction indicators for approximately two seconds.

According to version, the exterior mirrors unfold at the same time.

Locking the vehicle

Normal locking using the remote control



- Press the closed padlock to lock the vehicle.

Normal locking using the key

- Turn the key to the right in the driver's door lock to lock the vehicle.

Locking is confirmed by fixed lighting of the direction indicators for approximately two seconds.

According to version, the exterior mirrors fold at the same time.



If one of the doors, the boot or the rear screen is still open, the central locking does not take place.

Deadlocking using the remote control

- Press the closed padlock to lock the vehicle.

- Press the closed padlock again within five seconds to deadlock the vehicle.

Deadlocking using the key

- Turn the key to the right in the driver's door lock to lock the vehicle.
- Turn the key to the right again within five seconds to deadlock the vehicle.

Deadlocking is confirmed by fixed lighting of the direction indicators for approximately two seconds.

According to version, the exterior mirrors fold at the same time.



Deadlocking renders the exterior and interior door controls inoperative. It also deactivates the manual centralised control button. Therefore, do not leave anyone inside the vehicle when it is deadlocked.



Folding the key

- First press button A to fold the key.



The vehicle will relock automatically after thirty seconds unless a door is opened. This system prevents unintentional unlocking.

The folding and unfolding of the exterior mirrors can be deactivated by a PEUGEOT dealer.

Unlocking and partial opening of the rear screen (SW)



- Press this button for more than two seconds to partially open the rear screen. This action will unlock the vehicle first.



The boot and the rear screen cannot both be open at the same time.

Anti-theft protection

Electronic engine immobiliser

The key contains an electronic chip which has a special code. When the ignition is switched on, this code must be recognised in order for starting to be possible.

This electronic engine immobiliser locks the engine management system a few minutes after the ignition is switched off and prevents starting of the engine by anyone who does not have the key.



In the event of a malfunction, you are informed by lighting of this warning light, an audible signal and a message on the multifunction display.

In this case, your vehicle does not start; contact a PEUGEOT dealer as soon as possible.


Lost keys

Visit a PEUGEOT dealer with the vehicle's V5 registration certificate and your personal identification documents.

Your PEUGEOT dealer will be able to retrieve the key code and the transponder code to order a replacement key.


Starting the vehicle

- Insert the key in the ignition switch. The system recognises the starting code.
- Turn the key fully towards the fascia to position 3 (Starting).
- When the engine starts, release the key.

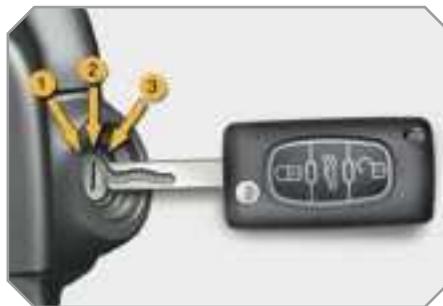

Switching the vehicle off

- Immobilise the vehicle.
- Turn the key fully towards you to position 1 (Stop).
- Remove the key from the ignition switch.

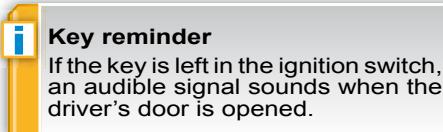

Locating your vehicle

To locate your vehicle, if you have locked it, in a car park:

- press the closed padlock, the courtesy lights come on and the direction indicators flash for a few seconds.

Remote control problem

Following disconnection of the vehicle battery, replacement of the remote control battery or in the event of a remote control malfunction, you can no longer unlock, lock or locate your vehicle.

- First of all, use the key in the lock to unlock or lock your vehicle.
- Then, reinitialise the remote control. If the problem persists, contact a PEUGEOT dealer as soon as possible.

Reinitialisation

- Switch off the ignition.
- Turn the key to position 2 (Ignition).
- Press the closed padlock immediately for a few seconds.
- Switch off the ignition and remove the key from the ignition switch.

The remote control is fully operational again.

Changing the battery



Battery ref.: CR1620/3 volts.



This replacement battery is available from PEUGEOT dealers. If the battery is flat, you are informed by lighting of this warning light, an audible signal and a message on the multifunction display.

- Unclip the casing using a coin at the notch.
- Slide the flat battery out of its location.
- Slide the new battery into its location observing the original direction.
- Clip the casing.
- Reinitialise the remote control.



Do not throw the remote control batteries away, they contain metals which are harmful to the environment.

Take them to an approved collection point.

Keys

Make a careful note of the number of each key. This number is coded on the label attached to the key.

If the keys are lost, your PEUGEOT dealer can rapidly supply you with new keys.

Remote control

The high frequency remote control is a sensitive system; do not operate it while it is in your pocket as there is a possibility that it may unlock the vehicle, without you being aware of it.

Do not repeatedly press the buttons of your remote control out of range and out of sight of your vehicle.

You run the risk of stopping it from working and the remote control would have to be reprogrammed. The remote control does not operate when the key is in the ignition, even when the ignition is switched off, except for reprogramming.

Locking the vehicle

Driving with the doors locked may make access to the passenger compartment by the emergency services more difficult in an emergency.

As a safety precaution (with children on board), remove the key from the ignition when you leave the vehicle, even for a short time.

Anti-theft protection

Do not make any modifications to the electronic engine immobiliser system, this could cause malfunctions.

When purchasing a second-hand vehicle

Have the key codes memorised by a PEUGEOT dealer, to ensure that the keys in your possession are the only ones which can start the vehicle.



Folding the key

- First press button A to fold the key.



The vehicle will relock automatically after thirty seconds unless a door is opened. This system prevents unintentional unlocking.

The folding and unfolding of the exterior mirrors can be deactivated by a PEUGEOT dealer.

Unlocking and partial opening of the rear screen (SW)



- Press this button for more than two seconds to partially open the rear screen. This action will unlock the vehicle first.



The boot and the rear screen cannot both be open at the same time.

Anti-theft protection

Electronic engine immobiliser

The key contains an electronic chip which has a special code. When the ignition is switched on, this code must be recognised in order for starting to be possible.

This electronic engine immobiliser locks the engine management system a few minutes after the ignition is switched off and prevents starting of the engine by anyone who does not have the key.



In the event of a malfunction, you are informed by lighting of this warning light, an audible signal and a message on the multifunction display.

In this case, your vehicle does not start; contact a PEUGEOT dealer as soon as possible.


Lost keys

Visit a PEUGEOT dealer with the vehicle's V5 registration certificate and your personal identification documents.

Your PEUGEOT dealer will be able to retrieve the key code and the transponder code to order a replacement key.

Starting the vehicle

- Insert the key in the ignition switch. The system recognises the starting code.
- Turn the key fully towards the fascia to position 3 (Starting).
- When the engine starts, release the key.

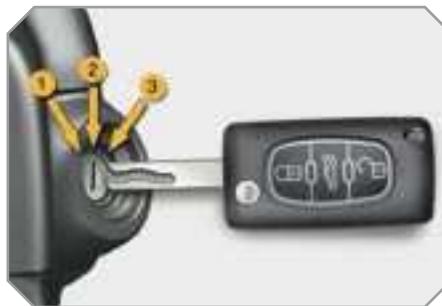

Switching the vehicle off

- Immobilise the vehicle.
- Turn the key fully towards you to position 1 (Stop).
- Remove the key from the ignition switch.



Locating your vehicle

To locate your vehicle, if you have locked it, in a car park:

- press the closed padlock, the courtesy lights come on and the direction indicators flash for a few seconds.

Remote control problem

Following disconnection of the vehicle battery, replacement of the remote control battery or in the event of a remote control malfunction, you can no longer unlock, lock or locate your vehicle.

- First of all, use the key in the lock to unlock or lock your vehicle.
- Then, reinitialise the remote control. If the problem persists, contact a PEUGEOT dealer as soon as possible.

Reinitialisation

- Switch off the ignition.
- Turn the key to position 2 (Ignition).
- Press the closed padlock immediately for a few seconds.
- Switch off the ignition and remove the key from the ignition switch.

The remote control is fully operational again.

Changing the battery



Battery ref.: CR1620/3 volts.



This replacement battery is available from PEUGEOT dealers. If the battery is flat, you are informed by lighting of this warning light, an audible signal and a message on the multifunction display.

- Unclip the casing using a coin at the notch.
- Slide the flat battery out of its location.
- Slide the new battery into its location observing the original direction.
- Clip the casing.
- Reinitialise the remote control.



Do not throw the remote control batteries away, they contain metals which are harmful to the environment.

Take them to an approved collection point.

Keys

Make a careful note of the number of each key. This number is coded on the label attached to the key.

If the keys are lost, your PEUGEOT dealer can rapidly supply you with new keys.

Remote control

The high frequency remote control is a sensitive system; do not operate it while it is in your pocket as there is a possibility that it may unlock the vehicle, without you being aware of it.

Do not repeatedly press the buttons of your remote control out of range and out of sight of your vehicle.

You run the risk of stopping it from working and the remote control would have to be reprogrammed. The remote control does not operate when the key is in the ignition, even when the ignition is switched off, except for reprogramming.

Locking the vehicle

Driving with the doors locked may make access to the passenger compartment by the emergency services more difficult in an emergency.

As a safety precaution (with children on board), remove the key from the ignition when you leave the vehicle, even for a short time.

Anti-theft protection


Do not make any modifications to the electronic engine immobiliser system, this could cause malfunctions.

When purchasing a second-hand vehicle

Have the key codes memorised by a PEUGEOT dealer, to ensure that the keys in your possession are the only ones which can start the vehicle.

Starting the vehicle

- Insert the key in the ignition switch. The system recognises the starting code.
- Turn the key fully towards the fascia to position 3 (Starting).
- When the engine starts, release the key.

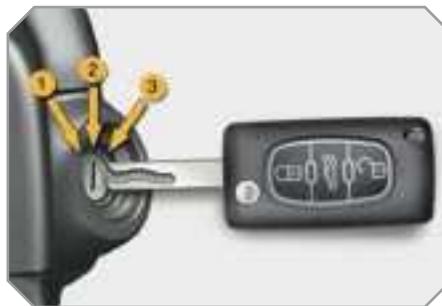

Switching the vehicle off

- Immobilise the vehicle.
- Turn the key fully towards you to position 1 (Stop).
- Remove the key from the ignition switch.



Locating your vehicle

To locate your vehicle, if you have locked it, in a car park:

- press the closed padlock, the courtesy lights come on and the direction indicators flash for a few seconds.

Remote control problem

Following disconnection of the vehicle battery, replacement of the remote control battery or in the event of a remote control malfunction, you can no longer unlock, lock or locate your vehicle.

- First of all, use the key in the lock to unlock or lock your vehicle.
- Then, reinitialise the remote control. If the problem persists, contact a PEUGEOT dealer as soon as possible.

Reinitialisation

- Switch off the ignition.
- Turn the key to position 2 (Ignition).
- Press the closed padlock immediately for a few seconds.
- Switch off the ignition and remove the key from the ignition switch.

The remote control is fully operational again.

Changing the battery



Battery ref.: CR1620/3 volts.



This replacement battery is available from PEUGEOT dealers.

If the battery is flat, you are informed by lighting of this warning light, an audible signal and a message on the multifunction display.

- Unclip the casing using a coin at the notch.
- Slide the flat battery out of its location.
- Slide the new battery into its location observing the original direction.
- Clip the casing.
- Reinitialise the remote control.



Do not throw the remote control batteries away, they contain metals which are harmful to the environment.

Take them to an approved collection point.

Keys

Make a careful note of the number of each key. This number is coded on the label attached to the key.

If the keys are lost, your PEUGEOT dealer can rapidly supply you with new keys.

Remote control

The high frequency remote control is a sensitive system; do not operate it while it is in your pocket as there is a possibility that it may unlock the vehicle, without you being aware of it.

Do not repeatedly press the buttons of your remote control out of range and out of sight of your vehicle.

You run the risk of stopping it from working and the remote control would have to be reprogrammed. The remote control does not operate when the key is in the ignition, even when the ignition is switched off, except for reprogramming.

Locking the vehicle

Driving with the doors locked may make access to the passenger compartment by the emergency services more difficult in an emergency.

As a safety precaution (with children on board), remove the key from the ignition when you leave the vehicle, even for a short time.

Anti-theft protection

Do not make any modifications to the electronic engine immobiliser system, this could cause malfunctions.

When purchasing a second-hand vehicle

Have the key codes memorised by a PEUGEOT dealer, to ensure that the keys in your possession are the only ones which can start the vehicle.

ALARM

System which protects and dissuades against the theft of your vehicle. It provides two types of protection, exterior and interior, as well as an anti-tamper function.

Exterior protection

The system detects opening of the vehicle. The alarm is triggered if anyone tries to enter the vehicle by forcing a door, the boot or the bonnet.

Interior protection

The system detects any variation in the volume in the passenger compartment.

The alarm is triggered if anyone breaks a window or moves inside the vehicle.

If you wish to leave a pet in the vehicle or a window partially open, deactivate the interior protection.

Anti-tamper function

The system detects the putting out of service of its components.

The alarm is triggered if anyone tries to put the wires of the siren, the central control or the battery out of service.



Do not make any modifications to the alarm system, this could cause malfunctions.

Locking the vehicle with full alarm



Activation

- ☛ Switch off the ignition and get out of the vehicle.
- ☛ Lock or deadlock the vehicle using the locking button on the remote control.

The alarm is activated; the indicator light on button **A** flashes once per second.

Deactivation

- ☛ Unlock the vehicle using the unlocking button on the remote control.

The alarm is deactivated; the indicator light on button **A** switches off.

Locking the vehicle with exterior protection alarm only

Deactivation of the interior protection

- ☛ Switch off the ignition.
- ☛ Within ten seconds, press button **A** until the indicator light is lit continuously.
- ☛ Get out of the vehicle.
- ☛ Lock or deadlock the vehicle using the locking button on the remote control.

The exterior protection alarm alone remains activated; the indicator light on button **A** flashes once per second.



In order to be taken into account, this deactivation must be carried out each time the ignition is switched off.

Reactivation of the interior protection

- ☛ Unlock the vehicle using the unlocking button on the remote control.
- ☛ Relock the vehicle using the remote control.

The alarm is activated again with both types of protection; the indicator light on button **A** switches off.

Triggering

This is indicated by sounding of the siren and flashing of the direction indicators for approximately thirty seconds.

After it has been triggered, the alarm is again operational.



If the alarm is triggered ten times in succession, the eleventh time will result in it becoming inactive.

If the indicator light on button **A** flashes rapidly, this indicates that the alarm was triggered during your absence. When the ignition is switched on, this flashing stops immediately.

To avoid triggering the alarm when washing your vehicle, lock it using the key.

Do not activate the alarm before disconnecting the battery, otherwise the siren will sound.

Failure of the remote control

- ☞ Unlock the vehicle using the key in the driver's door lock
- ☞ Open the door; the alarm is triggered.
- ☞ Switch on the ignition; the alarm stops.

Locking the vehicle without alarm

- ☞ Lock or deadlock the vehicle using the key in the driver's door lock.

Automatic operation*

Depending on the legislation in force in your country, one of these cases may occur:

- 45 seconds after the vehicle is locked using the remote control, the alarm is activated, regardless of the status of the doors and boot.
- 2 minutes after the last door or the boot is closed, the alarm is activated.
- ☞ To avoid triggering the alarm on entering the vehicle, first press the unlocking button on the remote control.

Malfunction

When the ignition is switched on, lighting of the indicator light on button **A** for ten seconds indicates a siren fault.

Have it checked by a PEUGEOT dealer.

* According to country.

WINDOW MECHANISMS

System which opens or closes a window manually or automatically. It is fitted with a system which provides protection if an obstacle is detected on the one-touch models and a deactivation system to prevent misuse of the rear switches on all models.



1. Driver's electric window switch.
2. Passenger's electric window switch.
3. Rear right electric window switch.
4. Rear left electric window switch.
5. Disarming of the rear electric window switches.

Electric windows



- ☞ Press or pull the switch. The window stops as soon as the switch is released.



The electric window switches remain operational for approximately 45 seconds after the ignition is switched off or until a front door is opened.



The electric window switches remain operational for approximately 45 seconds after the ignition is switched off or until a front door is opened.

One-touch electric windows



There are two methods of operation:

- manual mode

- ☞ Press or pull the switch gently. The window stops as soon as the switch is released.

- automatic mode

- ☞ Press or pull the switch fully. The window opens or closes completely when the switch is released.
- ☞ Pressing the switch again stops the movement of the window.



In the event of unwanted opening of the window on closing (for example in the presence of frost):

- ☞ press the switch until it opens completely,
- ☞ then pull it immediately until it closes.
- ☞ continue to hold the switch for approximately one second after the window has closed.

The safety auto-reverse function is not active during these operations.

Disarming the rear window switches



- For the safety of your children, press switch **5** to prevent operation of the rear windows irrespective of their position.

When the button is pressed down, disarming is active.

When the button is raised, disarming is deactivated.

Reinitialisation

Following reconnection of the battery or in the event of a malfunction you must reinitialise the operation of the electric windows:

- release the switch and pull it again until the window closes completely,
- hold the switch for approximately one second after closing,

- press the switch to lower the window automatically,
- when the window has reached the low position, press the switch again for approximately one second.

The safety auto-reverse function is not active during these operations.



Always remove the key from the ignition when leaving the vehicle, even for a short time.

In the event of contact during operation of the windows, you must reverse the movement of the window. To do this, press the switch concerned.

When the driver operates the passenger electric window switches, he must ensure that no one is preventing correct closing of the windows.

The driver must ensure that the passengers use the electric windows correctly.

Be aware of children when operating the windows.

REAR QUARTER WINDOWS

On the 3-door versions, system for ventilation of the rear seats limiting the partial opening of the window.

Opening



- Tilt the lever outwards.
- Push it fully to secure the window in the open position.

Closing

- Pull the lever to release the window.
- Tilt the lever fully inwards to secure the window in the closed position.

Disarming the rear window switches



- For the safety of your children, press switch **5** to prevent operation of the rear windows irrespective of their position.

When the button is pressed down, disarming is active.

When the button is raised, disarming is deactivated.

Reinitialisation

Following reconnection of the battery or in the event of a malfunction you must reinitialise the operation of the electric windows:

- release the switch and pull it again until the window closes completely,
- hold the switch for approximately one second after closing,

- press the switch to lower the window automatically,
- when the window has reached the low position, press the switch again for approximately one second.

The safety auto-reverse function is not active during these operations.



Always remove the key from the ignition when leaving the vehicle, even for a short time.

In the event of contact during operation of the windows, you must reverse the movement of the window. To do this, press the switch concerned.

When the driver operates the passenger electric window switches, he must ensure that no one is preventing correct closing of the windows.

The driver must ensure that the passengers use the electric windows correctly.

Be aware of children when operating the windows.

REAR QUARTER WINDOWS

On the 3-door versions, system for ventilation of the rear seats limiting the partial opening of the window.

Opening



- Tilt the lever outwards.
- Push it fully to secure the window in the open position.

Closing

- Pull the lever to release the window.
- Tilt the lever fully inwards to secure the window in the closed position.

DOORS

Opening

From outside



- After unlocking the vehicle using the remote control or the key, pull the door handle.

From inside



- Pull the front door control to open the door; this unlocks the vehicle completely.
- Pull the rear door control to open the door; this unlocks the door concerned only.

Closing

If a door is not closed correctly:



- when the engine is running**, this warning light comes on, accompanied by a message on the multifunction display for a few seconds,
- when the vehicle is moving** (speed above 6 mph (10 km/h)), this warning light comes on, accompanied by an audible signal and a message on the multifunction display for a few seconds.



The interior door controls do not operate when the vehicle is dead-locked.


Manual centralised control

System which provides full manual locking or unlocking of the doors from the inside.




Locking

☞ Press button **A** to lock the vehicle. The red indicator light on the button comes on.

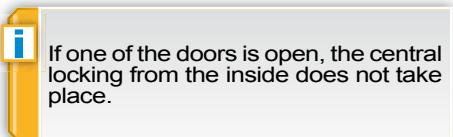

Unlocking

☞ Press button **A** again to unlock the vehicle. The red indicator light on the button switches off.

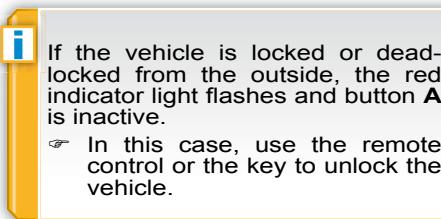


Automatic centralised control

System which provides full automatic locking or unlocking of the doors, boot and rear screen while driving.

You can activate or deactivate this function.

Locking

When the speed exceeds 6 mph (10 km/h), the doors, the boot and the rear screen lock automatically.

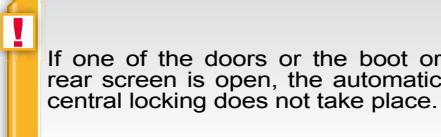

Unlocking

☞ Above 6 mph (10 km/h), press button **A** to unlock the doors, the boot and the rear screen temporarily.

Activation



☞ Press button **A** for more than two seconds.

A confirmation message appears on the multifunction display.

Deactivation

☞ Press button **A** again for more than two seconds.

A confirmation message appears on the multifunction display.

Emergency control

System which locks or unlocks the doors mechanically in the event of a malfunction of the central locking.

Locking the driver's door

- Insert the key in the lock, then turn it to the right.

Unlocking the driver's door

- Insert the key in the lock, then turn it to the left.

Locking the front and rear passenger doors



- Insert the key in the lock, located on the edge of the door, then turn it **one eighth of a turn**.

Unlocking the front and rear passenger doors

- Pull the interior door opening control.

BOOT (SALOON)



Opening

- After unlocking the vehicle using the remote control or the key, pull the handle and raise the tailgate.

Closing

If the tailgate is not closed correctly:



- **when the engine is running**, this warning light comes on, accompanied by a message on the multifunction display for a few seconds,
- **when the vehicle is moving** (speed above 6 mph (10 km/h)), this warning light comes on, accompanied by an audible signal and a message on the multifunction display for a few seconds.

Tailgate release

System for mechanical unlocking of the boot in the event of a central locking malfunction.



Unlocking

- Fold back the rear seats to gain access to the lock from inside the boot.
- Insert a small screwdriver into hole **A** of the lock to unlock the tailgate.

Emergency control

System which locks or unlocks the doors mechanically in the event of a malfunction of the central locking.

Locking the driver's door

- Insert the key in the lock, then turn it to the right.

Unlocking the driver's door

- Insert the key in the lock, then turn it to the left.

Locking the front and rear passenger doors



- Insert the key in the lock, located on the edge of the door, then turn it **one eighth of a turn**.

Unlocking the front and rear passenger doors

- Pull the interior door opening control.

BOOT (SALOON)



Opening

- After unlocking the vehicle using the remote control or the key, pull the handle and raise the tailgate.

Closing

If the tailgate is not closed correctly:



- **when the engine is running**, this warning light comes on, accompanied by a message on the multifunction display for a few seconds,
- **when the vehicle is moving** (speed above 6 mph (10 km/h)), this warning light comes on, accompanied by an audible signal and a message on the multifunction display for a few seconds.

Tailgate release

System for mechanical unlocking of the boot in the event of a central locking malfunction.



Unlocking

- Fold back the rear seats to gain access to the lock from inside the boot.
- Insert a small screwdriver into hole **A** of the lock to unlock the tailgate.

BOOT (SW)**Opening**

- After unlocking the vehicle using the remote control or the key, with the rear screen closed, pull on the handle **A** and raise the tailgate.

Closing

- Lower the tailgate using the interior grab handle.

If the tailgate is not closed correctly:



- **when the engine is running**, this warning light comes on, accompanied by a message on the multifunction display for a few seconds,
- **when the vehicle is moving** (speed above 6 mph (10 km/h)), this warning light comes on, accompanied by an audible signal and a message on the multifunction display for a few seconds.

REAR SCREEN (SW)**Opening**

- After unlocking the vehicle using the remote control or the key, with the boot closed, press the control **B** and raise the rear screen using the base **C** of the wiper arm.



The boot and the rear screen cannot both be open at the same time.

If the rear wiper is in a wiping position, the rear screen will not open until the end of the cycle.

**Closing**

- Close the rear screen by pressing at the centre of the glass.

If the rear screen is not closed correctly:



- **when the engine is running**, this warning light comes on, accompanied by a message on the multifunction display for a few seconds,
- **when the vehicle is moving** (speed above 6 mph (10 km/h)), this warning light comes on, accompanied by an audible signal and a message on the multifunction display for a few seconds.



If the rear screen is open, the central locking does not take place.

SUNROOF (SALOON)

System which improves the ventilation and light in the passenger compartment. It is fitted with a system which provides protection if an obstacle is detected and a shutter to maintain a comfortable temperature.

Operation



Opening

- Turn the control to the left (nine possible settings).

A deflector gradually unfolds on opening to prevent unwanted gusts of air.

Closing

- Return the control to the initial position "O".

Safety auto-reverse

When the sunroof is closing and meets an obstacle, it stops then partially opens again.



In the event of unwanted opening of the roof on closing (for example, in the presence of ice), and immediately after the roof stops:

- move the control to the "O" position and press the control immediately,
- continue to press the control until the roof is fully closed.

The safety auto-reverse function is not active during these operations.

Reinitialisation

If a malfunction occurs following reconnection of the battery, the sunroof must be reinitialised:

- place the control in the initial position "O",
- press the centre of the control for more than two seconds,
- wait until the roof closes completely,
- then, the sunroof opens again by a few millimetres.

The safety auto-reverse function is not active during these operations.

Shutter

The sunroof shutter is manual. It is stored automatically when the roof is opened.



Always remove the key from the ignition when leaving the vehicle, even for a short time.

In the event of contact during operation of the roof, you must reverse the movement of the roof. To do this, press the switch concerned.

When the driver operates the roof switch, he must ensure that no one is preventing correct closing of the roof.

The driver must ensure that the passengers use the sunroof correctly. Be aware of children when operating the roof.

PANORAMIC ROOF (SALOON)

System which consists of a panoramic surface of tinted glass to increase the light and visibility in the passenger compartment. It is fitted with a manual shutter in two parts to maintain a comfortable temperature.

Opening



☞ Take the shutter by its handle and push it rearwards to the required position.

Closing

☞ Take the shutter by its handle and pull it forwards to the required position.

PANORAMIC ROOF (SW)

System which consists of a panoramic surface of tinted glass to increase the light and visibility in the passenger compartment. It is fitted with an electric shutter in two parts to maintain a comfortable temperature.

Opening



☞ Pull control A.

The shutter stops when the control is released.

Closing

☞ Press control A.

The shutter stops when the control is released.



If an obstacle is encountered during operation of the shutter, the movement of the shutter must be reversed. To do this, press the control concerned.

When the driver operates the shutter control, he must ensure that no one is preventing correct closing of the shutter.

The driver must ensure that passengers use the shutter correctly.

Be aware of children when operating the shutter.

FUEL TANK

Reservoir which should be refilled with fuel, when the minimum level has been detected.

Fuel tank capacity: approximately 50 litres.

Low fuel level



When the fuel tank minimum level is reached, this warning light comes on on the instrument panel.

The distance which can be travelled with the fuel remaining is approximately 30 miles (50 km).

If you run out of fuel, refer also to the "Practical information" section.

Filling


A label affixed to the inside of the flap reminds you of the type of fuel to be used depending on your engine.



The key cannot be removed from the lock until the cap is put back on the tank.

To fill the tank in complete safety:

- ☞ **it is imperative that the engine is switched off,**
- ☞ open the fuel filler flap,
- ☞ insert the key in the cap, then turn it to the left,

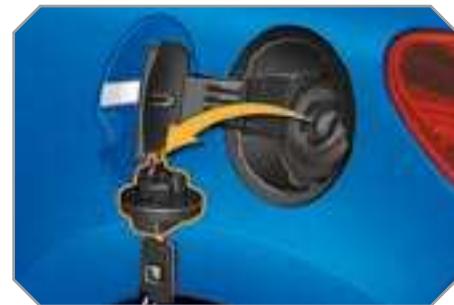

When you have filled the tank:

- ☞ put the cap back in place,
- ☞ turn the key to the right, then remove it from the cap,
- ☞ close the flap.

LIGHTING CONTROLS

System for selection and control of the various front and rear lights providing the vehicle's lighting.

Main lighting

The vehicle's various front and rear lights are designed to adapt the driver's visibility gradually in relation to the climatic conditions:

- side lights, to be seen,
- dipped headlamps to see without dazzling other drivers,
- main beam headlamps for good visibility when the road is clear.

Additional lighting

Other lights are installed to respond to particular driving conditions:

- rear fog lamps to be seen from a distance,
- front fog lamps for even better visibility,
- directional headlamps for improved visibility around bends.

Programmes

Various automatic lighting control modes are also available according to the following options:

- "follow-me-home" lighting,
- automatic lighting,
- static directional lighting.

Model without AUTO lighting



Model with AUTO lighting



Manual controls

The lighting commands are made directly by the driver by means of ring **A** and lever **B**.

A. main lighting mode selection ring, with:



lights off,



side lights only,



dipped or main beam headlamps,

AUTO automatic lighting.

B. lever for inversion of the lights by pulling: dipped headlamps/main beam headlamps.

In the lights off and side lights modes, the driver can switch on the main beam headlamps directly ("headlamp flash") for as long as he pulls the lever.

Displays

The corresponding indicator light comes on on the instrument panel to confirm the selective switching on of the lighting selected.

Model with rear fog lamps only



Model with front and rear fog lamps



C. fog lamps selection ring.

These operate with the dipped and main beam headlamps.



rear fog lamps

- ☞ To switch on the fog lamps, turn push ring **C** forwards.

When the lights are switched off automatically (on AUTO model), the fog lamps and the dipped headlamps will remain on.

- ☞ To switch off all of the lights, turn push ring **C** rearwards.



front and rear fog lamps

- ☞ To switch on the fog lamps, turn push ring **C** forwards.

- ☞ To switch off the rear fog lamps, turn push ring **C** rearwards twice in succession.

When the lights are switched off automatically (on AUTO model) or when the dipped headlamps are switched off manually, the fog lamps and the side lights will remain on.

- ☞ Turn the ring rearwards to switch off the fog lamps, the side lights will then switch off.



In good weather or in rain, both day and night, the front fog lamps and the rear fog lamps are prohibited. In these situations, the power of their beams may dazzle other drivers.

Do not forget to switch off the front fog lamps and the rear fog lamps when they are no longer necessary.



Lights on reminder


The triggering of an audible signal when a front door is opened warns the driver that he has forgotten to switch off his vehicle's lights, with the ignition off.

In this case, switching off the lights will stop the audible signal.

When the ignition is switched off, if the dipped headlamps remain on, they will be switched off automatically after thirty minutes to prevent discharging of the battery.

Daytime lights*

On vehicles fitted with daytime lights, the dipped headlamps come on when the vehicle is started.



This indicator light comes on on the instrument panel.

The instruments and controls (instrument panel, multifunction display, air conditioning control panel, ...) are not lit, unless the automatic switching on of the lights mode is activated or the lights are switched on manually.

"Follow-me-home" lighting

The dipped headlamps remain on temporarily, after switching off the vehicle's ignition, to make the driver's exit easier in poor light.

Activation

- ☞ With the ignition off, activate a "headlamp flash" using lever **B**.
- ☞ A second "headlamp flash" switches the function off again.

Switching off

The "follow-me-home" lighting is switched off automatically following the door locking command, after a given time.

* According to country.

Automatic lighting

The side lights and dipped headlamps are switched on automatically, without any action on the part of the driver, when a low level of external light is detected (sensor behind the interior mirror) or when the windscreen wipers are switched on.

As soon as the brightness returns to a sufficient level or the windscreen wipers are switched off, the lights are switched off automatically.



Activation

- ☞ Turn ring **A** to the "**AUTO**" position. The automatic lighting is accompanied by a message on the multifunction display.

Deactivation

- ☞ Turn ring **A** to a position other than "**AUTO**". Deactivation is accompanied by a message on the multifunction display.

Coupling with the "Follow-me-home" lighting

Association with the automatic lighting provides the "follow-me-home" lighting with the following additional options:

- selection of the duration of maintaining of the lighting for 15, 30 or 60 seconds in the vehicle parameters on the multifunction display configuration menu,
- automatic activation of "follow-me-home" lighting when automatic lighting is in operation.

Operating fault



In the event of a malfunction of the brightness sensor, the lights come on accompanied by the service warning light, an audible signal and a message on the multifunction display.

Have it checked by a PEUGEOT dealer.




In fog or snow, the brightness sensor may detect sufficient light. Therefore, the lights will not come on automatically.

Do not cover the brightness sensor, coupled with the rain sensor and located in the centre of the windscreen behind the interior mirror; the associated functions would no longer be controlled.

Daytime lights*

On vehicles fitted with daytime lights, the dipped headlamps come on when the vehicle is started.



This indicator light comes on on the instrument panel.

The instruments and controls (instrument panel, multifunction display, air conditioning control panel, ...) are not lit, unless the automatic switching on of the lights mode is activated or the lights are switched on manually.

"Follow-me-home" lighting

The dipped headlamps remain on temporarily, after switching off the vehicle's ignition, to make the driver's exit easier in poor light.

Activation

- ☞ With the ignition off, activate a "headlamp flash" using lever **B**.
- ☞ A second "headlamp flash" switches the function off again.

Switching off

The "follow-me-home" lighting is switched off automatically following the door locking command, after a given time.

* According to country.

Automatic lighting

The side lights and dipped headlamps are switched on automatically, without any action on the part of the driver, when a low level of external light is detected (sensor behind the interior mirror) or when the windscreen wipers are switched on.

As soon as the brightness returns to a sufficient level or the windscreen wipers are switched off, the lights are switched off automatically.



Activation

- ☞ Turn ring **A** to the "**AUTO**" position. The automatic lighting is accompanied by a message on the multifunction display.

Deactivation

- ☞ Turn ring **A** to a position other than "**AUTO**". Deactivation is accompanied by a message on the multifunction display.

Coupling with the "Follow-me-home" lighting

Association with the automatic lighting provides the "follow-me-home" lighting with the following additional options:

- selection of the duration of maintaining of the lighting for 15, 30 or 60 seconds in the vehicle parameters on the multifunction display configuration menu,
- automatic activation of "follow-me-home" lighting when automatic lighting is in operation.

Operating fault



In the event of a malfunction of the brightness sensor, the lights come on accompanied by the service warning light, an audible signal and a message on the multifunction display.

Have it checked by a PEUGEOT dealer.



In fog or snow, the brightness sensor may detect sufficient light. Therefore, the lights will not come on automatically.

Do not cover the brightness sensor, coupled with the rain sensor and located in the centre of the windscreen behind the interior mirror; the associated functions would no longer be controlled.

STATIC DIRECTIONAL LIGHTING

When the dipped or main beam headlamps are on, this function enables the beam to light the inside of the turn with an additional angle of approximately 30°.

The use of this lighting is optimum above all at low and average speed (city driving, winding roads, ...).

with directional lighting



without directional lighting



Programming



The function is activated or deactivated via the multifunction display configuration menu.

By default, this function is activated.

Switching on

The system is switched on from a certain speed and a certain angle of rotation of the steering wheel.

Switching off

The system is switched off below a certain angle of rotation of the steering wheel.

It is switched off when reverse gear is engaged.

Operating fault



In the event of a malfunction, this warning light flashes on the instrument panel, accompanied by a message on the multifunction display.

Have it checked by a PEUGEOT dealer.

HEADLAMP ADJUSTMENT



To avoid causing a nuisance to other road users, the height of the headlamps should be adjusted in relation to the load in the vehicle.

0. 1 or 2 people in the front seats.
- 3 people.
1. 5 people.
2. 5 people + maximum authorised load.
3. Driver + maximum authorised load.



The initial setting is position "0".

WIPER CONTROLS

System for the selection and control of the various front and rear wiping modes permitting the dispersal of rain and cleaning.

The vehicle's various front and rear wipers are designed to gradually improve the driver's visibility in relation to the weather conditions.

Programmes

Various automatic wiping control modes are also available depending on the following options:

- automatic windscreen wiping,
- rear wiping on engaging reverse gear.

Model with intermittent wiping



Model with AUTO wiping



Manual controls

The wiping commands are made directly by the driver using lever **A** and ring **B**.

Windscreen wipers

A. wiping speed selection lever:

2
1
I
0
↓

- fast (heavy rain),
- normal (moderate rain),
- intermittent (in proportion to the speed of the vehicle),
- off,
- single wipe (press downwards),

AUTO **↓**

automatic (refer to the following page).

Rear wiper**A. rear wiper selection ring:**

off,



intermittent wipe,



wiping with screenwash (fixed duration).

Reverse gear

When reverse gear is engaged, if the windscreen wipers are operating, the rear wiper will start.

Programming

The function is activated or switched off via the multi-function display configuration menu.

By default, this function is activated.



In the presence of snow or considerable frost and when using a tailgate bicycle carrier, deactivate the automatic rear wiper via the multifunction display configuration menu.

Windscreen and headlamp wash

☞ Pull the windscreen wiper stalk towards you. The windscreen wash then the windscreen wipers operate for a fixed period.

The headlamp wash is also activated, **if the dipped headlamps are on.**



On vehicles fitted with automatic air conditioning, any action on the windscreen wash control results in temporary closing of the air intake to avoid odour inside the passenger compartment.

Automatic windscreen wipping

The windscreen wipers operate automatically, without any action on the part of the driver, if rain is detected (sensor behind the interior mirror), adapting their speed to the intensity of the rainfall.



Activation

This is controlled manually by the driver by pushing the stalk **A** to the "**AUTO**" position.

It is accompanied by a message on the multifunction display.

Switching off

This is controlled manually by the driver by moving the stalk **A** to another position and returning it to position "**0**".

It is accompanied by a message on the multifunction display.



The automatic wiping must be reactivated if the ignition has been off for more than one minute, by pushing the stalk **A** downwards.

Operating fault

If an automatic wiping malfunction occurs, the wipers will operate in intermittent mode. Have it checked by a PEUGEOT dealer.



Do not cover the rain sensor, coupled with the brightness sensor and located in the centre of the windscreen behind the interior mirror.

Switch off the ignition when using an automatic car wash.

In winter, it is advisable to wait until the windscreen is completely clear of ice before activating the automatic wiping.

Special position of the windscreen wipers



In the minute following switching off of the ignition, any action on the stalk positions the wipers in the centre of the windscreen. This action enables you to position the wiper blades for winter parking.

To park the wipers after this has been done, switch on the ignition and operate the stalk.

COURTESY LIGHTS

Selection and control of the various passenger compartment lights.



1. Front courtesy light
2. Map reading lights
3. Rear courtesy light

Front and rear courtesy lights



In this position, the courtesy light comes on gradually:

- when the vehicle is unlocked,
- when the key is removed from the ignition,
- when the remote control locking button is activated, in order to locate your vehicle.

It switches off gradually:

- when the vehicle is locked,
- when the ignition is switched on,
- 30 seconds after the last door is closed.



Permanently off.



Permanent lighting.



In permanent lighting mode, different lighting times are available:

- with the ignition off, approximately ten minutes,
- in energy economy mode, approximately thirty seconds,
- with the engine running, unlimited.

Map reading lights

With the ignition on, press the corresponding switch.



ADVICE ON CHILD SEATS

The incorrect installation of a child seat in a vehicle compromises the child's protection in the event of an accident.

Remember to fasten the seat belts or the child seat harnesses **keeping the slack** in relation to the child's body to a minimum, even for short journeys.

For optimum installation of the "forward facing" child seat, ensure that the back of the child seat is in contact with the back of the vehicle's seat and that the head restraint does not cause any discomfort.

If the head restraint has to be removed, ensure that it is stored or attached securely to prevent it from being thrown around the vehicle in the event of sharp braking.

Children under the age of 10 must not travel in the "forward facing" position on the front passenger seat, unless the rear seats are already occupied by other children, cannot be used or are absent.

Disarm the passenger air bag when a "rear facing" child seat is installed on the front seat. Otherwise, the child would risk being seriously injured or killed if the air bag were to inflate.

Installing a booster seat

The chest part of the seat belt must be positioned on the child's shoulder without touching the neck.

Ensure that the lap part of the seat belt passes correctly over the child's thighs.

PEUGEOT recommends the use of a booster seat which has a back, fitted with a seat belt guide at shoulder level.

As a safety precaution, do not leave:

- one or more children alone and unsupervised in a vehicle,
- a child or an animal in a vehicle which is exposed to the sun, with the windows closed,
- the keys within reach of children inside the vehicle.

To prevent accidental opening of the doors, use the "Child lock".

Take care not to open the rear windows by more than one third.

To protect young children from the rays of the sun, fit side blinds on the rear windows.

GENERAL POINTS RELATING TO CHILD SEATS

Although one of PEUGEOT's main criteria when designing your vehicle, the safety of your children also depends on you.

For maximum safety, please follow these precautions:

- in accordance with Directive 2003/20, **all children under the age of 12 or less than one metre fifty tall must travel in approved child seats suited to their weight, on seats fitted with a seat belt or ISOFIX mountings***,
- **statistically, the safest seats in your vehicle for the transportation of children are the rear seats,**
- **a child weighing less than 9 kg must travel in the "rearwards-facing" position both in the front and in the rear.**



PEUGEOT recommends that children should travel in the **rear seats** of your vehicle:

- "rearwards-facing" up to the age of 2,
- "forwards-facing" over the age of 2.

INSTALLING A CHILD SEAT USING A THREE POINT SEAT BELT

"Rearwards-facing"

When a "rearwards-facing" child seat is installed on the **front passenger seat**, it is essential that the passenger air bag is disarmed. Otherwise, **the child would risk being seriously injured or killed if the air bag were to inflate**.



"Forwards-facing"

When a "forwards-facing" child seat is installed on the **front passenger seat**, adjust the vehicle's seat to the intermediate longitudinal position with the seat back upright and leave the passenger air bag armed.



Intermediate longitudinal position



* The rules for transporting children are specific to each country. Consult the current legislation in your country.



Passenger air bag OFF



CHILD SEATS RECOMMENDED BY PEUGEOT

PEUGEOT offers a complete range of recommended child seats which are secured using a **three point seat belt**:

Group 0: from birth to 10 kg

Group 0+: from birth to 13 kg



L1

"RÖMER Baby-Safe Plus"
Installed in the rear-facing position.

Groups 1, 2 and 3: from 9 to 36 kg



L2

"KIDDY Life"
For the safety of young children
(from 9 to 18 kg), PEUGEOT
recommends use of the restraining cushion.

Groups 2 and 3: from 15 to 36 kg



L3
"RECARO Start"



L4

"KLIPPAN Optima"
From the age
of 6 years
(approximately 22 kg),
the booster is used on
its own.



Passenger air bag OFF



CHILD SEATS RECOMMENDED BY PEUGEOT

PEUGEOT offers a complete range of recommended child seats which are secured using a **three point seat belt**:

Group 0: from birth to 10 kg

Group 0+: from birth to 13 kg



L1

"RÖMER Baby-Safe Plus"
Installed in the rear-facing position.

Groups 1, 2 and 3: from 9 to 36 kg



L2

"KIDDY Life"
For the safety of young children
(from 9 to 18 kg), PEUGEOT
recommends use of the restraining cushion.

Groups 2 and 3: from 15 to 36 kg



L3
"RECARO Start"



L4

"KLIPPAN Optima"
From the age
of 6 years
(approximately 22 kg),
the booster is used on
its own.

LOCATION OF CHILD SEATS SECURED USING THE SEAT BELT (SALOON)

In accordance with the European regulation (Directive 2000/3), this table indicates the options for the installation of child seats secured using the seat belt and universally approved (a) in relation to the weight of the child and the seat in the vehicle.

Seat	Weight of the child/indicative age			
	Less than 13 kg (groups 0 (b) and 0+) Up to 1 year approx	From 9 to 18 kg (group 1) From 1 to 3 years approx	From 15 to 25 kg (group 2) From 3 to 6 years approx	From 22 to 36 kg (group 3) From 6 to 10 years approx
Front passenger seat (c)				
- fixed		U	U	U
- height adjustable				
Rear side seats		U	U	U
Rear centre seat*		U	X	X

* Except GTi.

(a) Universal child seat: child seat which can be installed in all vehicles using the seat belt.

(b) Group 0: from birth to 10 kg.

(c) Consult the legislation in force in your country before installing your child on this seat.

U: seat suitable for the installation of a child seat secured using the seat belt and universally approved "rear facing" and/or "forward facing".

X: seat not suitable for the installation of a child seat of the weight group indicated.

LOCATION OF CHILD SEATS SECURED USING THE SEAT BELT (SW)

In accordance with the European regulation (Directive 2000/3), this table indicates the options for the installation of child seats secured using the seat belt and universally approved (a) in relation to the weight of the child and the seat in the vehicle.

Seat	Weight of the child/indicative age			
	Less than 13 kg (groups 0 (b) and 0+) Up to 1 year approx	From 9 to 18 kg (group 1) From 1 to 3 years approx	From 15 to 25 kg (group 2) From 3 to 6 years approx	From 22 to 36 kg (group 3) From 6 to 10 years approx
Front passenger seat (c)				
- fixed				
- height adjustable		U	U	U
Rear side seats		U	U	U
Rear centre seat		U*	U*	U*

* The rear left side seat becomes unusable.

(a) Universal child seat: child seat which can be installed in all vehicles using the seat belt.

(b) Group 0: from birth to 10 kg.

(c) Consult the legislation in force in your country before installing your child on this seat.

U: seat suitable for the installation of a child seat secured using the seat belt and universally approved "rear facing" and/or "forward facing".

"ISOFIX" MOUNTINGS

Your vehicle has been approved in accordance with the **new ISOFIX regulation**.

The seats, represented below, are fitted with regulation ISOFIX mountings:



GTi



SW



These are three rings for each seat:



- two rings **A**, located between the vehicle seat back and cushion, indicated by a label,



- a ring **B**, for fixing the upper strap referred to as the **TOP TETHER**.

This ISOFIX mounting system guarantees you fast, reliable and safe fitting of the child seat in your vehicle.

The **ISOFIX child seats** are fitted with two locks which are secured easily on the two rings **A**.

Some also have an **upper strap** which is attached to ring **B**.

To attach this strap, raise the vehicle seat's head restraint then pass the hook between its rods. Then fix the hook on ring **B** and tighten the upper strap.



The incorrect installation of a child seat in a vehicle compromises the child's protection in the event of an accident.



For information regarding the ISOFIX child seats which can be installed in your vehicle, consult the summary table for the location of the ISOFIX child seats.

ISOFIX CHILD SEAT RECOMMENDED BY PEUGEOT AND APPROVED FOR YOUR VEHICLE

RÖMER Duo Plus ISOFIX (size category B1)

Group 1: from 9 to 18 kg



Installed in the forward facing position.
Fitted with an upper strap to be secured on the upper ring **B**,
referred to as the TOP TETHER.
Three seat body angles: sitting, reclining, lying.



This child seat can also be used on seats which are not fitted with ISOFIX mountings. In this case, it must be attached to the vehicle seat using the three point seat belt.

Follow the instructions for fitting the child seat given in the seat manufacturer's installation guide.

SUMMARY TABLE FOR THE INSTALLATION OF ISOFIX CHILD SEATS (SALOON)

In accordance with the European regulation (ECE 16), this table indicates the options for the installation of ISOFIX child seats on the vehicle seats fitted with ISOFIX mountings.

In the case of the universal and semi-universal ISOFIX child seats, the child seat's ISOFIX size category, determined by a letter from **A** to **G**, is indicated on the child seat next to the ISOFIX logo.

	Weight of the child/indicative age										
	Less than 10 kg (group 0) Up to 6 months approx		Less than 10 kg (group 0) Less than 13 kg (group 0+) Up to 1 year approx			From 9 to 18 kg (group 1) From 1 to 3 years approx					
	Type of ISOFIX child seat		Infant car seat*		"rear facing"			"rear facing"		"forward facing"	
ISOFIX size category	F	G	C	D	E	C	D	A	B	B1	
Universal and semi-universal ISOFIX child seats which can be installed on the rear seats	IL-SU**		X	IL-SU**			X	IL-SU**		IUF** IL-SU**	

IUF: seat suitable for the installation of an Isofix Universal seat, "Forward facing" and secured using the "Top Tether" upper strap.

IL-SU: seat suitable for the installation an Isofix Semi-Universal seat which is:

- "rear facing" fitted with a "Top Tether" upper strap or a stay,
- "forward facing" fitted with a stay,
- an infant car seat fitted with a "Top Tether" upper strap or a stay.

For the securing of the "Top Tether" upper strap, refer to the "Isofix Mountings" section.

X: seat which is not suitable for the installation of an ISOFIX seat of the size category indicated.

* The ISOFIX infant car seat, fixed to the lower rings of a seat equipped with ISOFIX mountings, occupies the three rear seats.

To install it on the rear seats of a 3-door model, the front seat belt must be adjusted to the lowest position.

** The head restraint of the seat equipped with ISOFIX mountings must be removed and stored.

SUMMARY TABLE FOR THE INSTALLATION OF ISOFIX CHILD SEATS (GTI)

In accordance with the European regulation (ECE 16), this table indicates the options for the installation of ISOFIX child seats on the vehicle seats fitted with ISOFIX mountings.

In the case of the universal and semi-universal ISOFIX child seats, the child seat's ISOFIX size category, determined by a letter from **A** to **G**, is indicated on the child seat next to the ISOFIX logo.

	Weight of the child/indicative age									
	Less than 10 kg (group 0) Up to 6 months approx			Less than 10 kg (group 0) Less than 13 kg (group 0+) Up to 1 year approx			From 9 to 18 kg (group 1) From 1 to 3 years approx			
	Type of ISOFIX child seat	Infant car seat		"rear facing"			"rear facing"		"rear facing"	
ISOFIX size category	F	G	C*	D**	E	C*	D**	A	B	B1
Universal and semi-universal ISOFIX child seats which can be installed on the rear seats	X		IL-SU			IL-SU		IUF IL-SU		

IUF: seat suitable for the installation of an Isofix Universal seat, "Forward facing" and secured using the "Top Tether" upper strap.

IL-SU: seat suitable for the installation of an Isofix Semi-Universal seat which is:

- "rear facing" fitted with a "Top Tether" upper strap or a stay,
- "forward facing" fitted with a stay.

For the securing of the "Top Tether" upper strap, refer to the "Isofix Mountings" section.

X : seat which is not suitable for the installation of an ISOFIX seat of the size category indicated.

- * The corresponding front seat belt must be adjusted to the highest position minus one notch.
The corresponding front seat must be adjusted to the mid-way longitudinal position plus two notches.

- ** The corresponding front seat belt must be adjusted to the highest position minus one notch.

SUMMARY TABLE FOR THE INSTALLATION OF ISOFIX CHILD SEATS (SW)

In accordance with the European regulation (ECE 16), this table indicates the options for the installation of ISOFIX child seats on the vehicle seats fitted with ISOFIX mountings.

In the case of the universal and semi-universal ISOFIX child seats, the child seat's ISOFIX size category, determined by a letter from **A** to **G**, is indicated on the child seat next to the ISOFIX logo.

	Weight of the child/indicative age									
	Less than 10 kg (group 0) Up to 6 months approx		Less than 10 kg (group 0) Less than 13 kg (group 0+) Up to 1 year approx			From 9 to 18 kg (group 1) From 1 to 3 years approx				
	Type of ISOFIX child seat		Infant car seat*		"rear facing"			"rear facing"		"forward facing"
ISOFIX size category	F	G	C**	D	E	C**	D	A	B	B1
Universal and semi-universal ISOFIX child seats which can be installed on the rear seats	IL-SU (a)		IL-SU (a)			IL-SU (a)			IUF (a) IL-SU (a)	

IUF: seat suitable for the installation of an Isofix Universal seat, "Forward facing" and secured using the "Top Tether" upper strap.

IL-SU: seat suitable for the installation an Isofix Semi-Universal seat which is:

- "rear facing" fitted with a "Top Tether" upper strap or a stay,
- "forward facing" fitted with a stay,
- an infant car seat fitted with a "Top Tether" upper strap or a stay.

For the securing of the "Top Tether" upper strap, refer to the "Isofix Mountings" section.

X: seat which is not suitable for the installation of an ISOFIX seat of the category indicated.

(a) The head restraint where the ISOFIX seat is fitted must be removed and stored safely.

* The ISOFIX infant car seat, fixed to the lower rings of a seat equipped with ISOFIX mountings, occupies the three rear seats and prevents use of the 2/3 - 1/3 modularity.

** The front seat must be adjusted to the most forward position minus five notches.

MANUAL CHILD LOCK

Mechanical system to prevent opening of the rear door using its interior control. The control is located on the edge of each rear door.

Locking



- Turn the red control one quarter of a turn to the right using the ignition key.

Unlocking

- Turn the red control one quarter of a turn to the left using the ignition key.

ELECTRIC CHILD LOCK

Remote control system to prevent opening of the rear doors using their interior controls. The control is located in the centre of the fascia.

Activation



- Press button **A**. The indicator light on button **A** comes on, accompanied by a message on the multifunction display.

Deactivation

- Press button **A** again.

The indicator light on button **A** switches off, accompanied by a message on the multifunction display.



This system is independent and in no circumstances does it take the place of the central locking control. Check the status of the child lock each time you switch on the ignition. Always remove the key from the ignition when leaving the vehicle, even for a short time. In the event of a serious impact, the electric child lock is deactivated automatically to allow the rear passengers to exit the vehicle.

DIRECTION INDICATORS

Selection of the left or right direction indicators to signal a change of direction of the vehicle.



- ☞ Lower the lights stalk when moving to the left.
- ☞ Raise the lights stalk when moving to the right.



If you forget to cancel the direction indicators for more than twenty seconds, the volume of the audible signal will increase if the speed is above 40 mph (60 km/h).

HAZARD WARNING LIGHTS

A visual warning by means of the direction indicators to alert other road users to a vehicle breakdown, towing or accident.



- ☞ Press button A, the direction indicators flash.

They can operate with the ignition off.

Automatic lighting of hazard warning lights

When braking in an emergency, depending on the deceleration, the hazard warning lights come on.

They will switch off automatically the first time you accelerate.

- ☞ If they do not, press button A to switch the direction indicators off.



As a safety precaution in a traffic jam, switch on the hazard warning lights if you are the last in the queue.

HORN

Audible warning to alert other road users to an imminent danger.



- ☞ Press one of the spokes of the steering wheel.



Use the horn moderately and only in the following cases:

- immediate danger,
- when overtaking a cyclist or a pedestrian,
- when approaching an area where there is no visibility.

TYRE UNDER-INFLATION DETECTION

System which automatically checks the pressure of the tyres while driving.



Sensors fitted in each valve trigger a warning in the event of malfunction (speed above 12 mph (20 km/h)).



The tyre under-inflation detection system is an aid to driving which does not replace the need for the driver to be vigilant or to drive responsibly.

Flat tyre

A message appears on the multifunction display, accompanied by an audible signal, to locate the wheel concerned.

Check the tyre pressures as soon as possible.

This check must be carried out when the tyres are cold.

Puncture



This warning light and the **STOP** warning light come on on the instrument panel, accompanied by an audible signal and a message on the multifunction display locating the wheel concerned.

- ☞ Stop immediately, avoiding any sudden movement of the steering wheel and the brakes.
- ☞ Change the damaged wheel (punctured or very deflated tyre), and have the tyre pressure checked as soon as possible.

Sensor(s) not detected or faulty

A message appears on the multifunction display, accompanied by an audible signal, to locate the wheel or wheels which are not detected or to indicate a fault in the system. Contact a PEUGEOT dealer to replace the faulty sensor(s).



This message is also displayed when one of the wheels is away from the vehicle (being repaired) or when one or more wheels without a sensor are fitted.

The spare wheel is not fitted with a sensor.



All repairs and changing of tyres on a wheel fitted with this system must be carried out by a PEUGEOT dealer.

If, when changing a tyre, you install a wheel which is not detected by your vehicle (example: fitting of snow tyres), you must have the system reinitialised by a PEUGEOT dealer.



This system does not eliminate the need to have the tyre pressure checked regularly (refer to the "Identification features" paragraph) to ensure that the optimum dynamic performance of the vehicle is maintained and prevent premature wear of the tyres, particularly in arduous driving conditions (heavy load, high speed).

The tyre pressures must be checked cold, at least once a month. Remember to check the pressure of the spare wheel.

The tyre under-inflation detection system may experience temporary interference due to radioelectric emissions on a frequency close to that used by the system.

BRAKING ASSISTANCE SYSTEMS*

Group of supplementary systems which help you to obtain optimum braking in complete safety in emergency situations:

- the anti-lock braking system (ABS),
- the electronic brake force distribution (EBFD),
- the emergency braking assistance (EBA).

Anti-lock braking system and electronic brake force distribution

Linked systems which improve the stability and manoeuvrability of your vehicle when braking, in particular on poor or slippery surfaces.

Activation

The anti-lock braking system comes into operation automatically when there is a risk of wheel lock.

Normal operation of the ABS may make itself felt by slight vibration of the brake pedal.

! When braking in an emergency, press very firmly without releasing the pressure.

Operating fault



If this warning light comes on, accompanied by an audible signal and a message on the multifunction display, it indicates a malfunction of the anti-lock braking system which could result in loss of control of the vehicle when braking.



If this warning light comes on, together with the **STOP** and **ABS** warning lights, accompanied by an audible signal and a message on the multifunction display, it indicates a malfunction of the electronic brake force distribution which could result in loss of control of the vehicle when braking.

You MUST stop as soon as it is safe to do so.

In both cases, contact a PEUGEOT dealer.



When replacing wheels (tyres and rims), ensure that they conform to the manufacturer's recommendations.

Emergency braking assistance

System which, in an emergency, enables you to obtain the optimum braking pressure more quickly, thus reducing the stopping distance.

Activation

It is triggered by the speed at which the brake pedal is pressed.

The effect of this is a reduction in the resistance of the pedal and an increase in braking efficiency.



When braking in an emergency, press firmly without releasing the pressure.

* According to country.

TRAJECTORY CONTROL SYSTEMS

Anti-skid regulation (ASR) and electronic stability programme (ESP)

The anti-skid regulation optimises traction to prevent skidding of the wheels, by acting on the brakes of the driving wheels and on the engine.

The electronic stability programme acts on the brake of one or more wheels and on the engine to keep the vehicle on the trajectory required by the driver.

Activation

These systems are activated automatically each time the vehicle is started.



They come into operation in the event of a grip or trajectory problem.

This is indicated by flashing of this warning light on the instrument panel.

Disarming

In exceptional conditions (starting a vehicle which is bogged down, stuck in snow, on soft ground, ...), it may be advisable to disarm the ASR and ESP systems, so that the wheels can move freely and regain grip.



- ☞ Press the "ESP OFF" button, located in the centre of the fascia.



If this warning light comes on on the instrument panel and the indicator light on the button comes on, this indicates that the ASR and ESP systems are disarmed.

Reactivation

These systems are reactivated automatically each time the ignition is switched back on or from 30 mph (50 km/h) (except in the case of the 1.6 l 16V THP 175 bhp petrol engine).

- ☞ Press the "ESP OFF" button again to reactivate them manually.

Operating fault



If this warning light comes on, accompanied by an audible signal and a message on the multi-function display, this indicates a malfunction of these systems.

Have them checked by a PEUGEOT dealer.

Steering/ESP coupling system (SSP)

This system optimises the stability of the vehicle and its braking capacity by combining the actions of the ESP and electric power steering when braking on surfaces on which the grip of the right-hand and left-hand wheel differs.

It permits increased braking of the wheels which are in contact with the section of road offering the higher level of grip and, anticipating the instability of the vehicle, the application of a slight correction to the turning angle of the wheels to assist the driver in maintaining his trajectory.



The ESP/ASR systems offer exceptional safety in normal driving, but this should not encourage the driver to take extra risks or drive at high speed.

The correct functioning of these systems depends on observation of the manufacturer's recommendations regarding the wheels (tyres and rims), the braking components, the electronic components and the PEUGEOT assembly and operation procedures.

After an impact, have these systems checked by a PEUGEOT dealer.

SEAT BELTS

Front seat belts

The front seat belts are fitted with a pre-tensioning and force limiting system.

This system improves safety in the front seats in the event of front impacts. Depending on the severity of the impact, the pretensioning system instantly tightens the seat belts against the body of the occupants.

The pretensioning seat belts are active when the ignition is on.

The force limiter reduces the pressure of the seat belt on the chest of the occupant, increasing his protection.

On the 5-door and GTi versions, a slider, fitted on the seat belt, makes it possible to support the buckle as close as possible to the strap return.

Fastening



- ☞ Pull the strap, then insert the tongue in the buckle.
- ☞ Check that the seat belt is fastened correctly by pulling the strap.

Height adjustment



- ☞ To lower the attachment point, squeeze control **A** and slide it downwards.
- ☞ To raise the attachment point, slide control **A** upwards.

Unfastening

- ☞ Press the red button on the buckle.

Seat belt not fastened/unfastened warning light



When the ignition is switched on, this warning light comes on on the instrument panel if the driver* and/or the front passenger has not fastened his seat belt.

Above approximately 12 mph (20 km/h) and for two minutes, this warning light flashes accompanied by an audible signal of increasing volume. When the two minutes have elapsed, this warning light remains on until the driver* and/or the front passenger fastens his seat belt.

* According to country.

Seat belt not fastened/unfastened warning lights bar



1. Front left seat belt warning light.
2. Front right seat belt warning light.
3. Rear left seat belt warning light.
4. Rear centre seat belt warning light**.
5. Rear right seat belt warning light.

On the central bar, the corresponding warning light **1** or **2** comes on in red if the seat belt is not fastened or is unfastened.

Rear seat belts

The rear seats are fitted with three seat belts**, each with three anchoring points and an inertia reel with force limiter.

Fastening

- ☛ Pull the strap, then insert the tongue in the buckle.
- ☛ Check that the seat belt is fastened correctly by pulling the strap.

Unfastening

- ☛ Press the red button on the buckle.

Seat belt unfastened warning light



This warning light comes on on the instrument panel if one or more rear passengers unbuckle their seat belt.

Seat belt unfastened warning lights bar



When the ignition is switched on, the corresponding warning lights **3**, **4**** and **5** come on for approximately 30 seconds in red if the seat belt is not fastened:

When the engine is running, the corresponding warning light **3**, **4**** or **5** comes on in red, accompanied by an audible signal and a message on the multifunction display, if a rear passenger has unfastened his seat belt.

** Except GTi.

i The driver must ensure that the passengers use the seat belts correctly and that they are all properly restrained before setting off.

Wherever you are seated in the vehicle, always fasten your seat belt, even for short journeys.

Do not invert the seat belt buckles as they will not fulfil their role fully.

If the seats have armrests*, the lap part of the seat belt must always pass under the armrest.

The seat belts are fitted with an inertia reel permitting automatic adjustment of the length of the strap to your size. The seat belt is stored automatically when not in use.

Before and after use, ensure that the seat belt is rolled up correctly.

The lower part of the strap must be positioned as low as possible on the pelvis.

The upper part must be positioned in the hollow of the shoulder.

The inertia reels are fitted with an automatic locking device which comes into operation in the event of a collision, on emergency braking or if the vehicle rolls over. You can release the device by pulling rapidly on the strap and releasing it.

In order to be effective, a seat belt:

- must be tightened as close to the body as possible,
- must restrain one adult only,
- must not bear any trace of cuts or fraying,
- must be pulled in front of you with a smooth movement, checking that it does not twist,
- must not be transformed or modified to avoid altering its performance.

In accordance with current safety regulations, all repairs and checks must be carried out by a PEUGEOT dealer who guarantees that the work is carried out correctly.

Have your seat belts checked regularly by a PEUGEOT dealer and particularly if the straps show signs of damage.

Clean the seat belt straps with soapy water or a textile cleaning product, sold by PEUGEOT dealers.

After folding or moving a seat or rear bench seat, ensure that the seat belt is positioned and rolled up correctly.

Recommendations for children:

- use a suitable child seat if the passenger is less than 12 years old or shorter than one metre fifty,
- do not use the strap-guide* when a child seat is installed.
- never use the same seat belt to secure more than one person,
- never allow a child to travel on your lap.

Depending on the nature and seriousness of the impacts, the pretensioning device may be triggered before and independently of the air bags. Triggering of the pre-tensioners is accompanied by a slight emission of harmless smoke and a noise, due to the activation of the pyrotechnic cartridge incorporated in the system.

In all cases, the air bag warning light comes on.

Following an impact, have the seat belts system checked, and if necessary replaced, by a PEUGEOT dealer.

* According to model.

AIR BAGS

System designed to maximise the safety of the occupants (with the exception of the rear centre passenger) in the event of violent collisions. It supplements the action of the force-limiting seat belts.

If a collision occurs, the electronic detectors record and analyse the front and side impacts sustained in the impact detection zones:


- in the case of a serious impact, the air bags are triggered instantly and protect the occupants of the vehicle (with the exception of the rear centre passenger); immediately after the impact, the air bags deflate rapidly so that they do not hinder visibility or the exit of the occupants,
- in the case of a minor or rear impact or in certain roll-over conditions, the air bags will not be triggered; the seat belt alone is sufficient to provide optimum protection in these situations.



The air bags do not operate when the ignition is switched off.

This equipment will only operate once. If a second impact occurs (during the same or a subsequent accident), the air bag will not operate.

Impact detection zones

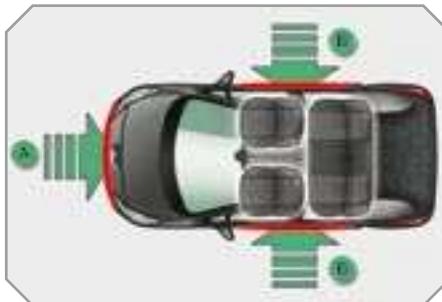

- A. Front impact zone.
- B. Side impact zone.

Front air bags

System which protects the head and chest of the driver and front passenger in the event of a front impact.

The driver's air bag is incorporated in the centre of the steering wheel; the front passenger's air bag is incorporated in the fascia above the glove box.



Activation

The air bags are triggered simultaneously, unless the passenger's front air bag is disarmed, in the event of a serious front impact applied to all or part of the front impact zone **A**, in the longitudinal centreline of the vehicle on a horizontal plane and directed from the front to the rear of the vehicle.

The front air bag inflates between the front occupant of the vehicle and the fascia to cushion his forward movement.

Deactivation

Only the front passenger's air bag can be disarmed:

- ☛ **with the ignition off**, insert the key in the passenger air bag disarming switch **1**,
- ☛ turn it to the "**OFF**" position,
- ☛ then, remove the key keeping the switch in this position.



According to version, this warning light comes on either on the instrument panel or on the central bar when the ignition is on and until the air bag is re-armed.



To guarantee the safety of your child, it is imperative that the passenger air bag is disarmed when you install a "rear facing" child seat on the front passenger seat. Otherwise, the child would risk being seriously injured or killed if the air bag were triggered.

Operating fault



If this warning light comes on on the instrument panel, accompanied by an audible warning and a message on the multifunction display, contact a PEUGEOT dealer to have the system checked.

Reactivation

When you remove the child seat, turn switch **1** to the "**ON**" position to re-arm the air bag and so guarantee the safety of your front passenger in the event of an impact.



If both air bag warning lights come on continuously, do not install a "rear facing" child seat on the front passenger seat.

Have the system checked by a PEUGEOT dealer.

Side air bags*

System which protects the driver and front passenger in the event of a serious side impact in order to limit the risk of injury to the chest.

Each side air bag is incorporated in the front seat back frame, on the door side.




Activation

It is triggered unilaterally in the event of a serious side impact applied to all or part of the side impact zone **B**, perpendicular to the longitudinal centreline of the vehicle on a horizontal plane and directed from the outside towards the inside of the vehicle.

The side air bag inflates between the front occupant of the vehicle and the corresponding door trim pad.

Impact detection zones

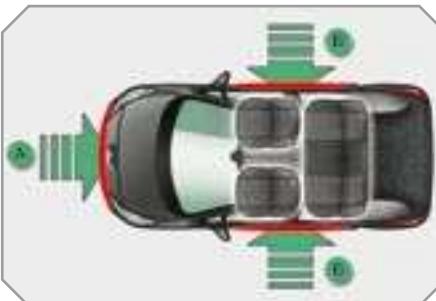

- A. Front impact zone.
- B. Side impact zone.

Activation

Activation It is triggered at the same time as the corresponding side air bag in the event of a serious side impact applied to all or part of the side impact zone **B**, perpendicular to the longitudinal centreline of the vehicle on a horizontal plane and directed from the outside towards the inside of the vehicle.

The curtain air bag inflates between the front or rear occupant of the vehicle and the windows.



In the event of a minor impact or bump on the side of the vehicle or if the vehicle rolls over, the air bag may not be triggered.

The air bag is not triggered in the event of a rear or front collision.

Operating fault



If this warning light comes on on the instrument panel, accompanied by an audible signal and a message on the multifunction display, contact a PEUGEOT dealer to have the system checked. The air bags may no longer be triggered in the event of a serious impact.

Curtain air bags*

System which protects the driver and passengers (with the exception of the rear centre passenger) in the event of a serious side impact in order to limit the risk of head injuries.

Each curtain air bag is incorporated in the pillars and the upper part of the passenger compartment.

* According to country.

! **For the air bags to be fully effective, observe the following safety rules:**

Sit in a normal upright position.

Wear a correctly adjusted seat belt.

Do not leave anything between the occupants and the air bags (a child, pet, object...). This could hamper the operation of the air bags or injure the occupants.

After an accident or if the vehicle has been stolen or broken into, have the air bag systems checked.

All work on the air bag system is strictly forbidden unless it is carried out by qualified personnel of the PEUGEOT network.

Even if all of the precautions mentioned are observed, a risk of injury or of minor burns to the head, chest or arms when an air bag is triggered cannot be ruled out. In fact, the bag inflates almost instantly (within a few milliseconds) then deflates within the same time discharging the hot gas via openings provided for this purpose.

Front air bags

Do not drive holding the steering wheel by its spokes or resting your hands on the centre part of the wheel.

Passengers must not place their feet on the fascia.

Smoke as little as possible as deployment of the air bags can cause burns or the risk of injury from a cigarette or pipe.

Never remove or pierce the steering wheel or hit it violently.

Side air bags*

Only put suitable covers on the seats. Consult a PEUGEOT dealer.

Do not fix or glue anything to the seat backs. This could cause injury to the chest or arms when the side air bag inflates.

Do not sit with the upper part of the body any nearer to the door than necessary.

Curtain air bags*


Do not fix or glue anything to the roof. This could cause injury to the head when the curtain air bag inflates.

Do not remove the grab handles installed on the roof, they play a part in securing the curtain air bags.

* According to country.

HANDBRAKE

Mechanical brake to hold the vehicle when stationary.

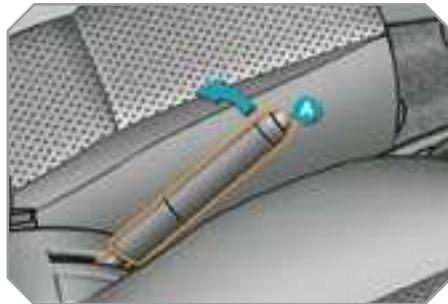

Applying

☞ Pull the handbrake to immobilise your vehicle.

Releasing

☞ Pull on the handle and press the button **A** to release the handbrake.



When the vehicle is being driven, if this warning light and **STOP** the warning light come on, accompanied by an audible signal and a message on the multi-function display, this indicates that the handbrake is still on or has not been properly released.



When parking on a slope, direct your wheels to chock them against the pavement, pull the handbrake and engage a gear.

"2 TRONIC" GEARBOX (SALOON)

Five-speed controlled manual gearbox which offers a choice between the comfort of automatic operation or the pleasure of manual gear changing.

Three driving modes are offered:

- the **automated** mode for automatic control of the gears by the gearbox,
- the **sequential** mode for manual changing of the gears by the driver,
- the **auto sequential** mode for overtaking, for example, remaining in the automated mode while using the functions of the sequential mode.

Gear lever



Steering wheel controls



R. Reverse

- ☞ With your foot on the brake, move the lever upwards to select this position.

N. Neutral.

- ☞ With your foot on the brake, select this position to start the engine.

A. Automated mode.

- ☞ Move the lever downwards to select this mode.

M. +/- Sequential mode with manual gear changing.

- ☞ Move the lever downwards, then to the left to select this mode, then:
 - push forwards to change up a gear,
 - or push rearwards to change down a gear.

+. Change up control.

- ☞ Press the back of the steering wheel control "+" to change up a gear.

-. Change down control.

- ☞ Press the back of the steering wheel control "-" to change down a gear.



The steering wheel controls do not permit the selection of neutral or the engaging and disengaging of reverse gear.

Instrument panel displays



Gear lever positions

N. Neutral

R. Reverse

1, 2, 3, 4, 5. Gears in sequential mode

AUTO. This comes on when the automated mode is selected. It switches off on changing to sequential mode.

*. In the automated mode, if the gearbox detects poor grip, this warning light comes on.



Place your **foot on the brake** when this warning light flashes (e.g.: starting the engine).



When reverse gear is engaged, an audible signal is triggered.

Moving off



- ☛ Select position **N**.
- ☛ Press the brake pedal.
- ☛ Start the engine.

N appears on the instrument panel.




N flashes on the instrument panel display if the gear lever is not in position **N** on starting.

- ☛ Select first gear (position **M** or **A**) or reverse (position **R**)
- ☛ Release the handbrake.
- ☛ Take your foot off the brake pedal, then accelerate.



AUTO and **1** or **R** appear on the instrument panel.



When stopping on a slope, do not use the accelerator to immobilise the vehicle; apply the handbrake. When moving off on a slope, accelerate gradually while releasing the handbrake.

Sequential mode

- ☛ After starting the vehicle, select position **M** to change to sequential mode.



AUTO disappears and the gears engaged appear in succession on the instrument panel.

The gear change requests are only carried out if the engine speed permits.

When driving at low speed, on approaching a stop sign or traffic lights for example, the gearbox changes down to first gear automatically.

Automated mode

- ☛ Following use of the sequential mode, select position **A** to return to the automated mode.



AUTO and the gear engaged appear on the instrument panel.

The gearbox then operates in auto-adaptive mode, without any action on the part of the driver. It continuously selects the most suitable gear in relation to the following parameters:

- driving style,
- road conditions,
- vehicle load.



If you press the accelerator pedal beyond the point of resistance, the gearbox selects the gear below to permit sharper acceleration.

"Auto sequential" mode

In the automated mode, you can resume control temporarily at any time using the steering wheel controls.

The use of these controls permits manual selection of the gears in situations which require a more rapid change-down than in the automated mode (arrival at a roundabout, leaving a car park with a steep gradient, overtaking...).

The gearbox engages the required gear if the engine speed permits. **AUTO** remains displayed on the instrument panel.

After a few minutes, the gearbox resumes automatic control of the gears.

"Snow" automated mode

In the automated mode, if the vehicle detects poor grip, the gearbox will change automatically to the "snow" automated mode.



AUTO and ***** appear on the instrument panel.

Stopping the vehicle

Before switching off the engine, you can change to position **N** to be in neutral.

In this case, it is imperative that you apply the handbrake to immobilise the vehicle.

Reinitialisation

Following disconnection of the battery, the gearbox must be reinitialised.

☞ Switch on the ignition.



AUTO, ***** and **-** appear on the instrument panel.

☞ Select position **N**.

☞ Press the brake pedal.

☞ Wait approximately 30 seconds until **N** or a gear appears on the instrument panel.

☞ Release the brake pedal.

The gearbox is operational again.

Operating fault



With the ignition on, if this warning light comes on and **AUTO** flashes, accompanied by an audible signal and a message on the multifunction display, this indicates a gearbox malfunction.

Have it checked by a PEUGEOT dealer.



It is compulsory to press the brake pedal while starting the engine.

Never select neutral **N** while the vehicle is moving.

Only engage reverse gear **R** when the vehicle is immobilised, with your foot on the brake pedal.

In all cases, it is imperative that you apply the handbrake to immobilise the vehicle.

"PORSCHE TIPTRONIC SYSTEM" AUTOMATIC GEARBOX

Four-speed automatic gearbox which offers a choice between the comfort of fully automatic operation, enhanced by sport and snow programmes, or manual gear changing.

Therefore, four driving modes are offered:

- **automatic** operation for electronic management of the gears by the gearbox,
- **sport** programme for a more dynamic style of driving,
- **snow** programme to improve driving when traction is poor,
- **manual** operation for sequential changing of the gears by the driver.

Gear selection gate



1. Gear lever.
2. Button "S" (sport).
3. Button "*" (snow).

Gear lever



- P.** Park.
 - Immobilisation of the vehicle, hand-brake on or off.
 - Starting the engine.
- R.** Reverse.
 - Reversing manoeuvres, vehicle stationary, engine at idle.
- N.** Neutral.
 - Immobilisation of the vehicle, hand-brake on.
 - Starting the engine.
- D.** Automatic operation.
- M. +/-** Manual operation with sequential changing of the four gears.
 - ☞ Press forwards to change up through the gears.
or
 - ☞ Press rearwards to change down through the gears.

Displays on the instrument panel



When you move the lever in the gate to select a position, the corresponding indicator light is displayed on the instrument panel.

- P.** Park
- R.** Reverse
- N.** Neutral
- D.** Drive (Automatic driving)
- S.** **Sport** programme
- ※.** **Snow** programme
- 1, 2, 3, 4.** Gear engaged during manual operation
- .** Invalid value during manual operation

Foot on brake



- ☞ Press the brake pedal when this indicator light is displayed on the instrument panel (e.g.: starting the engine).

Moving off

- ☛ Apply the handbrake.
- ☛ Select position **P** or **N**.
- ☛ Start the engine.

If this procedure is not followed, an audible signal is heard, accompanied by a message on the multifunction display.

- ☛ With the engine running, press the brake pedal.
- ☛ Release the handbrake.
- ☛ Select position **R**, **D** or **M**.
- ☛ Gradually release the brake pedal.

The vehicle moves off immediately.



If position **N** is engaged inadvertently while driving, allow the engine to return to idle then engage position **D** to accelerate.



When the engine is running at idle, with the brakes released, if position **R**, **D** or **M** is selected, the vehicle moves even without the accelerator being pressed.

When the engine is running, never leave children in the vehicle without supervision.

When carrying out maintenance with the engine running, apply the handbrake and select position **P**.

Automatic operation

- ☛ Select position **D** for **automatic** changing of the four gears.

The gearbox then operates in auto-adaptive mode, without any intervention on the part of the driver. It continuously selects the most suitable gear according to the style of driving, the profile of the road and the load in the vehicle.

For maximum acceleration without touching the lever, press the accelerator pedal down fully (kick down). The gearbox changes down automatically or maintains the gear selected until the maximum engine speed is reached.

On braking, the gearbox changes down automatically to provide efficient engine braking.

If you release the accelerator sharply, the gearbox will not change to a higher gear for safety reasons.



Never select position **N** while the vehicle is moving.

Never select positions **P** or **R** unless the vehicle is completely stationary.

Sport and snow programmes

These two special programmes supplement the automatic operation in very specific conditions of use.

Sport programme "S"

- ☛ Press button "S", after starting the engine.

The gearbox automatically favours a dynamic style of driving.



S appears on the instrument panel.

Snow programme "※"

- ☛ Press button "※", after starting the engine.

The gearbox adapts to driving on slippery roads.

This programme improves starting and drive when traction is poor.



※ appears on the instrument panel.

Return to automatic operation

- ☛ At any time, press the button selected again to quit the programme engaged and return to auto-adaptive mode.

Manual operation

- Select position **M** for **sequential** changing of the four gears.
- Push the lever towards the + sign to change up a gear.
- Pull the lever towards the - sign to change down a gear.

It is only possible to change from one gear to another if the vehicle speed and engine speed permit; otherwise, the gearbox will operate temporarily in automatic mode.



D disappears and the gears engaged appear in succession on the instrument panel.

In the event of under-revving or over-revving, the gear selected flashes for a few seconds, then the actual gear engaged is displayed.

It is possible to change from position **D** (automatic) to position **M** (manual) at any time.

When the vehicle is stationary or moving very slowly, the gearbox selects gear **M1** automatically.

The sport and snow programmes do not operate in manual mode.

Invalid value during manual operation



This symbol is displayed if a gear is not engaged correctly (selector between two positions).

Stopping the vehicle

Before switching off the engine, you can engage position **P** or **N** to place the gearbox in neutral.

In both cases, apply the handbrake to immobilise the vehicle.



If the lever is not in position **P**, when the driver's door is opened or approximately 45 seconds after the ignition is switched off, an audible signal is heard and a message appears.

- Return the lever to position **P**; the audible signal stops and the message disappears.

Operating fault



When the ignition is on, the lighting of this warning light, accompanied by an audible signal and a message on the multifunction display, indicates a gearbox malfunction.

In this case, the gearbox switches to emergency mode and is locked in 3rd gear. You may feel a substantial knock when changing from **P** to **R** and from **N** to **R**. This will not cause any damage to the gearbox.

Do not exceed 60 mph (100 km/h), local speed restrictions permitting.

Contact a PEUGEOT dealer as soon as possible.



If the battery is flat and the lever is in position **P**, it will not be possible to change to another position.

Above all, do not force the lever as this could damage the gearbox.

SPEED LIMITER

System which prevents the vehicle from exceeding the speed programmed by the driver.

When the programmed speed limit is reached, pressing the accelerator pedal no longer has any effect.

The speed limiter is **switched on** manually: it requires a programmed speed of at least 20 mph (30 km/h).

The speed limiter is **switched off** by manual operation of the control.

The programmed speed can be exceeded temporarily by pressing the accelerator firmly.

To return to the programmed speed, simply slow down to a speed below the programmed speed.

The programmed speed remains in the memory when the ignition is switched off.



The speed limiter cannot, in any circumstances, replace the need to respect speed limits, nor can it replace the need for vigilance and responsibility on the part of the driver.

Steering wheel controls



The controls of this system are grouped together on stalk **A**.

1. Speed limiter mode selection dial
2. Value decrease button
3. Value increase button
4. Speed limiter on/off button

Displays on the instrument panel



The programmed information is grouped together on the instrument panel display.

5. Speed limiter on/off indication
6. Speed limiter mode selection indication
7. Programmed speed value



Programming

- ☞ Turn dial **1** to the "LIMIT" position: the speed limiter mode is selected but is not switched on (OFF).
- You do not have to switch the speed limiter on in order to set the speed.
- ☞ Set the speed value by pressing button **2** or **3** (e.g.: 70 mph (110 km/h)). You can then change the programmed speed using buttons **2** and **3**:
 - by + or - 1 mph (km/h) = short press,
 - by + or - 5 mph (km/h) = long press,
 - in steps of + or - 5 mph (km/h) = maintained press.
- ☞ Switch the speed limiter on by pressing button **4**.
- ☞ Switch the speed limiter off by pressing button **4**: the display confirms that it has been switched off (OFF).
- ☞ Switch the speed limiter back on by pressing button **4** again.

Exceeding the programmed speed

Pressing the accelerator pedal to exceed the programmed speed will not have any effect unless you press the pedal **firmly** past the **point of resistance**.

The speed limiter is deactivated temporarily and the programmed speed, which is still displayed, flashes.

Returning to the programmed speed, by means of intentional or unintentional deceleration of the vehicle, automatically cancels the flashing of the programmed speed.

Return to normal driving

- ☞ Turn dial **1** to the "0" position: the speed limiter mode is deselected. The display returns to the distance recorder.



Operating fault

In the event of a speed limiter malfunction, the speed is cleared resulting in flashing of the dashes. Contact a PEUGEOT dealer to have the system checked.



On a steep descent, the speed limiter will not be able to prevent the vehicle from exceeding the programmed speed.

To avoid any risk of jamming of the pedals:

- ensure that the mat is positioned correctly,
- do not fit one mat on top of another.

CRUISE CONTROL

System which automatically maintains the speed of the vehicle at the value programmed by the driver, without any action on the accelerator pedal.

The cruise control is **switched on** manually: it requires a minimum vehicle speed of 25 mph (40 km/h), as well as the engaging:

- of fourth gear on the manual gearbox,
- of second gear with the "2 Tronic" or automatic gearbox, in sequential mode,
- of position **A** on the "2 Tronic" gearbox or **D** on the automatic gearbox.

The cruise control is **switched off** manually or by pressing the brake or clutch pedal or on triggering of the ESP system for safety reasons.

It is possible to exceed the programmed speed temporarily by pressing the accelerator pedal.

To return to the programmed speed, simply release the accelerator pedal.

Switching off the ignition cancels any programmed speed value.

Steering wheel controls



The controls of this system are grouped together on lever **A**.

1. Cruise control mode selection dial
2. Value decrease button
3. Value increase button
4. Cruise control off/resume button

Displays on the instrument panel



The programmed information is grouped together on the instrument panel display.

5. Cruise control off/resume indication
6. Cruise control mode selection indication
7. Programmed speed value



The cruise control cannot, in any circumstances, replace the need to respect speed limits, nor can it replace the need for vigilance and responsibility on the part of the driver.

You are advised to keep your feet near the pedals at all times.



Programming

- ☞ Turn dial **1** to the "CRUISE" position: the cruise control mode is selected but is not switched on (OFF).
- ☞ Set the programmed speed by accelerating to the required speed, then press button **2** or **3** (e.g.: 70 mph (110 km/h)).

You can then change the programmed speed using buttons **2** and **3**:

- by + or - 1 mph (km/h) = short press,
- by + or - 5 mph (km/h) = long press,
- in steps of + or - 5 mph (km/h) = maintained press.

- ☞ Switch off the cruise control by pressing button **4**: the display confirms that it has been switched off (OFF).
- ☞ Switch the cruise control back on by pressing button **4** again.

Exceeding the programmed speed

Intentional or unintentional exceeding of the programmed speed results in flashing of this speed on the display.

Return to the programmed speed, by means of intentional or unintentional deceleration of the vehicle, automatically cancels the flashing of the speed.

Return to normal driving

- ☞ Turn dial **1** to the "0" position: the cruise control mode is deselected. The display returns to the distance recorder.



Operating fault

In the event of a cruise control malfunction, the speed is cleared resulting in flashing of the dashes. Contact a PEUGEOT dealer to have the system checked.



When the cruise control is switched on, be careful if you maintain the pressure on one of the programmed speed changing buttons: this may result in a very rapid change in the speed of your vehicle.

Do not use the cruise control on slippery roads or in heavy traffic.

On a steep descent, the cruise control will not be able to prevent the vehicle from exceeding the programmed speed.

To avoid any risk of jamming of the pedals:

- ensure that the mat is positioned correctly,
- never fit one mat on top of another.

VISUAL AND AUDIBLE REAR PARKING ASSISTANCE

System consisting of four proximity sensors, installed in the rear bumper.



It detects any obstacle (person, vehicle, tree, barrier...) located behind the vehicle, however, it will not be able to detect obstacles located immediately below the bumper.



An object, such as a stake, a road-works cone or any other similar object may be detected at the start of the manoeuvre but may no longer be detected when the vehicle moves nearer to it.

The parking assistance is **switched on** by engaging reverse gear.
This is accompanied by an audible signal.



The proximity information is indicated by:

- an audible signal which becomes more rapid as the vehicle approaches the obstacle,
- a diagram on the multifunction display*, with blocks which move closer to the vehicle.

When the distance between the rear of the vehicle and the obstacle is less than approximately thirty centimetres, the audible signal becomes continuous and the "Danger" symbol appears, depending on the multifunction display version.

The parking assistance is **switched off** by moving the gear lever to neutral.



The parking assistance system cannot, in any circumstances, replace the need for vigilance and responsibility on the part of the driver.

* According to version.

Deactivation



- Press button **A**, the warning light comes on, the system is fully deactivated.



The system will be deactivated automatically when a trailer is being towed or when a bicycle carrier is fitted (vehicle fitted with a towbar or bicycle carrier recommended by PEUGEOT).

Reactivation

- Press button **A** again, the warning light switches off, the system is reactivated.

Operating fault

If an operating fault occurs, this warning light comes on, when reverse gear is engaged, accompanied by an audible signal (short beep) and a message on the multifunction display.

Have it checked by a PEUGEOT dealer.



In bad weather or in winter, ensure that the sensors are not covered with mud, ice or snow. When reverse gear is engaged, an audible signal (long beep) indicates that the sensors may be dirty.

BONNET

Protects the components of the engine and provides access for checking levels.

Opening

- ☛ Open the front left door.
- ☛ Pull the interior control **A**, located at the bottom of the door frame.



- ☛ Push the exterior control **B** to the left and raise the bonnet.



- ☛ Unclip the strut **C** from its housing .
- ☛ Fix the strut in one of the two notches to hold the bonnet open.



Closing

- ☛ Take the strut out of the support notch.
- ☛ Clip the strut in its housing.
- ☛ Lower the bonnet and release it at the end of its travel.
- ☛ Pull on the bonnet to check that it is secured correctly.



The location of the interior control prevents opening of the bonnet while the front left door is closed.

RUNNING OUT OF FUEL (DIESEL)

If your vehicle is fitted with an HDI engine, the fuel circuit must be reprimed if you run out of fuel (refer to the corresponding graphic).

This system consists of a repriming pump and a transparent pipe.

1.4 litre Turbo HDI engine

- ☛ Open the bonnet.
- ☛ Fill the fuel tank with at least five litres of diesel.
- ☛ Squeeze and release the repriming pump until fuel appears in the transparent pipe.
- ☛ Operate the starter until the engine starts.
- ☛ Close the bonnet.

1.6 litre Turbo HDI 16V engine

- ☛ Open the bonnet.
- ☛ Fill the fuel tank with at least five litres of diesel.
- ☛ Unclip the style cover to gain access to the repriming pump.
- ☛ Squeeze and release the repriming pump until fuel appears in the transparent pipe with the green connector.
- ☛ Operate the starter until the engine starts.
- ☛ Put the style cover back in position and clip it in place.
- ☛ Close the bonnet.



PETROL ENGINES

These allow you access to check the level of the various fluids and to replace certain components.

1. Coolant reservoir.
2. Passenger compartment filter.
3. Wash-wipe and headlamp wash reservoir.
4. Air filter.
5. Brake fluid reservoir.
6. Fuse box.
7. Battery.
8. Dipstick.
9. Engine oil filler cap.



DIESEL ENGINES

These allow you access to check the level of the various fluids, to replace certain components and to reprime the fuel.

1. Coolant reservoir.
2. Passenger compartment filter.
3. Wash-wipe and headlamp wash reservoir.
4. Repriming pump.
5. Brake fluid reservoir.
6. Fuse box.
7. Battery.
8. Dipstick.
9. Engine oil filler cap.
10. Air filter.

CHECKING LEVELS

Check all of these levels regularly and top them up if necessary, unless otherwise indicated.

If a level drops significantly, have the corresponding circuit checked by a PEUGEOT dealer.

Oil level



The reading will only be correct if the vehicle is on level ground and the engine has been off for more than 15 minutes.

The check is carried out either when the ignition is switched on using the oil level indicator on the instrument panel, or using the dipstick.

Between two oil changes, the consumption should not exceed 0.5 litre per 600 miles (1,000 km).

Draining the engine

Refer to the servicing booklet for details of the interval for this operation.

In order to maintain the reliability of the engine and emission control system, the use of additives in the engine oil is prohibited.

Oil specification

The oil must correspond to your engine and conform to the manufacturer's recommendations.

Brake fluid level



The brake fluid level should be close to the "MAX" mark. If it is not, check the brake pad wear.

Draining the circuit

Refer to the servicing booklet for details of the interval for this operation.

Fluid specification

The brake fluid must conform to the manufacturer's recommendations and fulfil the DOT4 standards.

Coolant level



The coolant level should be close to the "MAX" mark but should never exceed it.

When the engine is warm, the temperature of the coolant is regulated by the fan. This can operate with the ignition off.

On vehicles which are fitted with a particle emission filter, the fan may operate after the vehicle has been switched off, even if the engine is cold.

In addition, as the cooling system is pressurised, wait at least one hour after switching off the engine before carrying out any work.

To avoid any risk of scalding, unscrew the cap by two turns to allow the pressure to drop. When the pressure has dropped, remove the cap and top up the level.

Draining the circuit

The coolant does not have to be changed.

Fluid specification

The coolant must conform to the manufacturer's recommendations.

Wash-wipe and headlamp wash fluid*



The minimum level of this fluid is indicated by an audible signal and a message on the multifunction display.

Top up the level when you stop the vehicle.

Fluid specification

To guarantee optimum cleaning and avoid freezing, water should not be used to top up or replace this fluid.

* According to country.

Diesel additive level (Diesel with particle emission filter)

The minimum level of this additive is indicated by lighting of the service warning light, accompanied by an audible signal and a message on the multifunction display.

Topping up

It is imperative that this additive is topped up by a PEUGEOT dealer without delay.

Used products



Avoid any prolonged contact of used oil or fluids with the skin. Most of these fluids are harmful to health or indeed very corrosive.



Do not discard used oil or fluids into sewers or onto the ground. Empty used oil into the containers provided for this purpose in the PEUGEOT network.

CHECKS

Unless otherwise indicated, check these components in accordance with the servicing booklet and in relation to your engine.

Otherwise, have them checked by a PEUGEOT dealer.

Battery



The battery does not require any maintenance.

However, check that the terminals are clean and correctly tightened, particularly in summer and winter.

When carrying out work on the battery, refer to the "Practical information" section for details of the precautions to be taken before disconnecting the battery and following its reconnection.

Air filter and passenger compartment filter



Refer to the servicing booklet for details of the replacement intervals for these components.

Depending on the environment (dusty atmosphere...) and the use of the vehicle (city driving...), **replace them twice as often if necessary** (refer to the "Engines" paragraph).

A clogged passenger compartment filter may have an adverse effect on the performance of the air conditioning system and generate undesirable odours.

Particle emission filter (Diesel)

It is imperative that the maintenance of the particle emission filter is carried out by a PEUGEOT dealer.



Following prolonged operation of the vehicle at very low speed or at idle, you may, exceptionally, notice the emission of water vapour at the exhaust on acceleration. This does not have any adverse effect on the performance of the vehicle or on the environment.

Oil filter



Replace the oil filter each time the engine oil is changed.

Refer to the servicing booklet for details of the replacement interval for this component.

Diesel additive level (Diesel with particle emission filter)

The minimum level of this additive is indicated by lighting of the service warning light, accompanied by an audible signal and a message on the multifunction display.

Topping up

It is imperative that this additive is topped up by a PEUGEOT dealer without delay.

Used products



Avoid any prolonged contact of used oil or fluids with the skin. Most of these fluids are harmful to health or indeed very corrosive.



Do not discard used oil or fluids into sewers or onto the ground. Empty used oil into the containers provided for this purpose in the PEUGEOT network.

CHECKS

Unless otherwise indicated, check these components in accordance with the servicing booklet and in relation to your engine.

Otherwise, have them checked by a PEUGEOT dealer.

Battery



The battery does not require any maintenance.

However, check that the terminals are clean and correctly tightened, particularly in summer and winter.

When carrying out work on the battery, refer to the "Practical information" section for details of the precautions to be taken before disconnecting the battery and following its reconnection.

Air filter and passenger compartment filter



Refer to the servicing booklet for details of the replacement intervals for these components.

Depending on the environment (dusty atmosphere...) and the use of the vehicle (city driving...), **replace them twice as often if necessary** (refer to the "Engines" paragraph).

A clogged passenger compartment filter may have an adverse effect on the performance of the air conditioning system and generate undesirable odours.

Particle emission filter (Diesel)

It is imperative that the maintenance of the particle emission filter is carried out by a PEUGEOT dealer.



Following prolonged operation of the vehicle at very low speed or at idle, you may, exceptionally, notice the emission of water vapour at the exhaust on acceleration. This does not have any adverse effect on the performance of the vehicle or on the environment.

Oil filter



Replace the oil filter each time the engine oil is changed.

Refer to the servicing booklet for details of the replacement interval for this component.

Manual gearbox



The gearbox does not require any maintenance (no oil change).

Refer to the servicing booklet for details of the level checking intervals for this component.

"2 Tronic" gearbox



The gearbox does not require any maintenance (no oil change).

Refer to the servicing booklet for details of the level checking intervals for this component.

Automatic gearbox



The gearbox does not require any maintenance (no oil change).

Refer to the servicing booklet for details of the checking intervals for this component.

Brake pads



Brake wear depends on the style of driving, particularly in the case of vehicles used in town, over short distances. It may be necessary to have the condition of the brakes checked, even between vehicle services.

Unless there is a leak on the circuit, a drop in the brake fluid level indicates that the brake pads are worn.

Brake disc drum wear status



For any information relating to checking of the brake disc and/or drum wear status, contact a PEUGEOT dealer.

Handbrake



If the handbrake travel is too long or if you notice a loss of effectiveness of this system, the handbrake must be adjusted, even between two services.

This system must be checked by a PEUGEOT dealer.



Only use products recommended by PEUGEOT or products of equivalent quality and specifications.

In order to optimise the operation of units as important as the braking system, PEUGEOT selects and offers very specific products.

To avoid damaging the electrical units, the use of a high pressure washer in the engine compartment is strictly prohibited.

CHANGING A WHEEL

Procedure for changing a faulty wheel for the spare wheel using the tools provided with the vehicle.

Access to the tools



The tools are installed in the boot under the floor.

To gain access to them:

- ☛ open the boot,
- ☛ raise the floor,
- ☛ secure it by hooking the cord(s) on the hook(s) on the rear shelf support,
- ☛ remove the box containing the tools.

List of tools



1. **Wheelbrace.**
Permits removal of the wheel trim and removal of the wheel fixing bolts.
2. **Jack with integral handle.**
Permits raising of the vehicle.
3. **"Bolt cover" tool.**
Permits removal of the bolt protectors (covers) on alloy wheels.
4. **Socket for the anti-theft bolts** (located in the glove box).
Permits adaptation of the wheelbrace to the special "anti-theft" bolts.

Other accessories



5. **Removable towing eye.**
Refer to the paragraph "Towing the vehicle".

All of these tools are specific to your vehicle. Do not use them for other purposes.



Wheel with trim

When removing the wheel, detach the trim first using the wheelbrace 1 pulling at the valve passage hole.

When refitting the wheel, refit the trim starting by placing its notch facing the valve and press around its edge with the palm of your hand.

Access to the spare wheel (Saloon)



The spare wheel is installed in the boot under the floor.

According to model, the spare wheel may be steel or of the "space saving" type.

To gain access to it, refer to the paragraph "Access to the tools" on the previous page.

Taking out the wheel

- ☞ Unscrew the yellow central bolt.
- ☞ Raise the spare wheel towards you from the rear.
- ☞ Take the wheel out of the boot.



Putting the wheel back in place

- ☞ Put the wheel back in its housing.
- ☞ Unscrew the yellow central bolt by a few turns then put it in place in the centre of the wheel.
- ☞ Tighten fully until the central bolt clicks to retain the wheel correctly.



- ☞ Put the box back in place in the centre of the wheel.
- ☞ Put the boot floor back in place.



Fixing the steel or "space-saving" type spare wheel

If your vehicle is fitted with alloy wheels, it is normal to notice, when tightening the bolts on fitting, that the washers do not come into contact with the steel or "space-saving" type spare wheel. The wheel is secured by the conical contact of each bolt.



Tyre under-inflation detection

The spare wheel is not fitted with a sensor. The punctured wheel must be repaired by a PEUGEOT dealer.

Access to the spare wheel (SW)



The spare wheel is installed in the boot under the floor.

According to model, the spare wheel may be steel or of the "space saving" type.

To gain access to it, refer to the paragraph "Access to the tools".

Taking out the wheel

- ☞ Unscrew the yellow central bolt.
- ☞ Raise the spare wheel towards you from the rear.
- ☞ Take the wheel out of the boot.



Putting the wheel back in place

- ☞ Put the wheel back in its housing.
- ☞ Unscrew the yellow central bolt by a few turns then put it in place in the centre of the wheel.
- ☞ Tighten fully until the central bolt clicks to retain the wheel correctly.



- ☞ Put the box back in place in the centre of the wheel.
- ☞ Put the boot floor back in place.



Fixing the steel or "space-saving" type spare wheel

If your vehicle is fitted with alloy wheels, it is normal to notice, when tightening the bolts on fitting, that the washers do not come into contact with the steel or "space-saving" type spare wheel. The wheel is secured by the conical contact of each bolt.



Tyre under-inflation detection

The spare wheel is not fitted with a sensor. The punctured wheel must be repaired by a PEUGEOT dealer.

Removing the wheel



Parking the vehicle

Immobilise the vehicle where it does not block traffic: the ground must be level, stable and non-slippery.

Apply the handbrake, switch off the ignition and engage first gear* to lock the wheels.

If necessary, place a chock under the wheel diagonally opposite the wheel to be changed.

It is imperative that you ensure that the occupants get out of the vehicle and wait where they are safe.

Never go underneath a vehicle raised using a jack; use an axle stand.

List of operations

- ☛ Remove the chromed bolt cover from each of the bolts using the tool 3.
- ☛ Fit the anti-theft socket 4 on the wheelbrace 1 to unlock the anti-theft bolt.
- ☛ Unlock the other bolts using the wheelbrace 1 only.



- ☛ Place the jack 2 in contact with one of the two front A or rear B locations provided on the underframe, whichever is closest to the wheel to be changed.



- ☛ Extend the jack 2 until its base plate is in contact with the ground. Ensure that the centreline of the jack base plate is directly below the location A or B used.

- ☛ Raise the vehicle until there is sufficient space between the wheel and the ground to admit the spare (not punctured) wheel easily.



- ☛ Remove the bolts and store them in a clean place.

- ☛ Remove the wheel.

* position R for the "2 Tronic" gearbox; P for the automatic gearbox.

Fitting the wheel



List of operations

- ☛ Put the wheel in place on the hub.
- ☛ Screw in the bolts by hand to the stop.
- ☛ Pre-tighten the anti-theft bolt using the wheelbrace 1 fitted with the anti-theft socket 4.
- ☛ Pre-tighten the other bolts using the wheelbrace 1 only.

- ☛ Lower the vehicle fully.
- ☛ Fold the jack 2 and detach it.



After changing a wheel

To store the punctured wheel in the boot correctly, first remove the central cover.

When using the "space-saving" type spare wheel, do not exceed 50 mph (80 km/h).

Have the tightening of the bolts and the pressure of the spare wheel checked by a PEUGEOT dealer without delay.

Have the punctured wheel repaired and replace it on the vehicle as soon as possible.

- ☛ Lock the anti-theft bolt using the wheelbrace 1 fitted with the anti-theft socket 4.
- ☛ Lock the other bolts using the wheelbrace 1 only.
- ☛ Refit the chromed bolt covers on each of the bolts.
- ☛ Store the tools in the box.

CHANGING A BULB

Procedure for the replacement of a faulty bulb with a new bulb without the use of tools.

Front lights

Model with conventional lights



- Handle the bulbs with a dry cloth.

The headlamps are fitted with polycarbonate glass with a protective coating:

- do not clean them using a dry or abrasive cloth, or using a detergent or solvent product,
- use a sponge and soapy water.

Model with dipped headlamps with elliptical module and directional headlamps



- Direction indicators (PY 21 W amber).
- Side lights (W 5 W).
- Dipped headlamps (H7 - 55 W).
- Main beam headlamps (H1 - 55 W).
- Directional headlamps (H7 - 55 W).
- Fog lamps (H11 - 55 W).



In certain climatic conditions (low temperature, humidity), **condensation on the internal surface of the headlamp glass is normal**; it disappears a few minutes after the lights are switched on.

Blown bulb

A message appears on the multifunction display to indicate the bulb to be changed.

Refer to the appropriate procedure to change the corresponding bulb.

Changing the direction indicators



Turn the bulb holder one quarter of a turn and remove it.

Pull the bulb then change it.

To refit, carry out these operations in reverse order.



Amber coloured bulbs, such as the direction indicators, must be replaced with bulbs of identical specification and colour.

Changing the side lights


- ☛ Disconnect the main headlamp connector.
- ☛ Remove the plastic protective cover by pulling on the tab.
- ☛ Turn the bulb holder one quarter of a turn and remove it.
- ☛ Pull the bulb and change it.

To refit, carry out these operations in reverse order.



Changing the dipped headlamps, main beam headlamps or directional headlamps

- ☛ Disconnect the main headlamp connector.
- ☛ Remove the corresponding plastic protective cover by pulling on the tab.

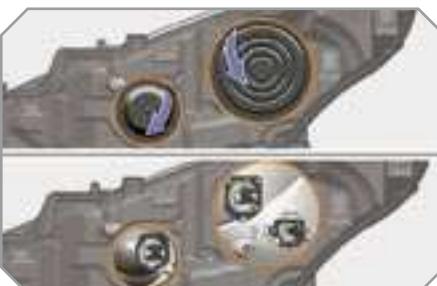

- ☛ Disconnect the connector of the corresponding light.
- ☛ Move aside the spring to release the bulb and remove the bulb.

To refit, carry out these operations in reverse order.



Changing the fog lamps

For replacement of these bulbs, contact a PEUGEOT dealer.

Changing the integrated direction indicator side repeaters




- ☛ Insert a screwdriver towards the centre of the repeater between the repeater and the base of the mirror.
- ☛ Tilt the screwdriver to extract the repeater and remove the repeater.
- ☛ Disconnect the repeater connector.

To refit, carry out these operations in reverse order.

To obtain a replacement repeater, contact a PEUGEOT dealer.

REAR LIGHTS (SALOON)

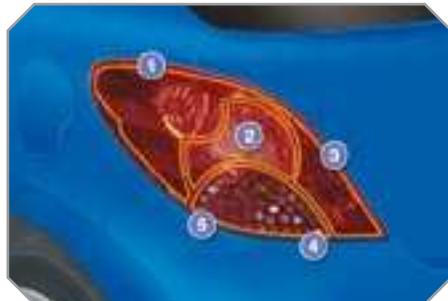

1. Brake lights (P21 W).
2. Side lights (R5 W).
3. Fog lamps (P21 W).
4. Direction indicators (PY 21 W amber).
5. Reversing lights (P21 W).

Changing bulbs

These five bulbs are changed from outside the boot:

- ☞ remove the light fixing bolt,
- ☞ take out the light from the outside,
- ☞ disconnect the light connector,
- ☞ remove the light seal,



- ☞ press the four tabs and remove the bulb holder,
- ☞ turn the bulb one quarter of a turn and change it.


To refit, carry out these operations in reverse order.



Amber coloured bulbs, such as the direction indicators, must be replaced with bulbs of identical specification and colour.



If the vehicle is fitted with the JBL audio system, on the right-hand side, open the flap first to gain access to the fixing bolt.

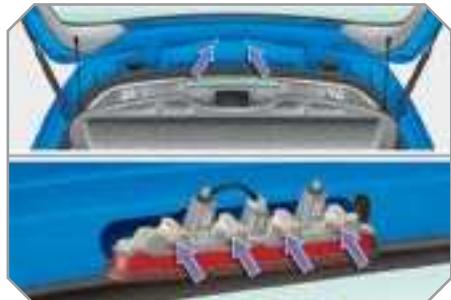**Changing the third brake light bulbs
(4 bulbs W 5 W)**

- ☞ Press on the fixing pins on each side of the light.
- ☞ Take out the light from the outside.
- ☞ Turn the bulb holder which corresponds to the faulty bulb one quarter of a turn and remove it.
- ☞ Pull the bulb and change it.

To refit, carry out these operations in reverse order.

**Changing the number plate light
bulbs (W 5 W)**

- ☞ Insert a thin screwdriver in one of the exterior holes of the lens.
- ☞ Push it towards the outside to unclip it.
- ☞ Remove the lens.
- ☞ Pull the bulb and change it.

**High pressure washing**

When using this type of washing on stubborn dirt, do not persist on the headlamps, the lights and their surrounds to avoid damaging their varnish and their seal.

Rear lights (SW)



1. Brake lights (P21 W).
2. Side lights (R5 W).
3. Direction indicators (PY 21 W amber).
4. Fog lamps (P21 W).
5. Reversing lights (P21 W).

Changing bulbs

These five bulbs are changed from outside the boot:

- ☛ remove the access flap,
- ☛ disconnect the light connector,
- ☛ remove the light fixing bolt,
- ☛ take out the light from the outside,



- ☛ press on the four tabs and remove the bulb holder,
- ☛ turn the bulb a quarter of a turn and change it.

To refit, carry out these operations in reverse order.

Take care to engage the light in its guides keeping it in the centreline of the vehicle.

Tighten the fixing bolt sufficiently by hand to guarantee the sealing of the light.



Amber coloured bulbs, such as the direction indicators, must be replaced with bulbs of identical specification and colour.

**Changing the third brake light bulbs
(4 bulbs W 5 W)**

- ☞ Remove the two light fixing nuts.
- ☞ Take out the light from the outside.
- ☞ Press on the two tabs and remove the bulb holder
- ☞ Pull the bulb and change it.

To refit, carry out these operations in reverse order.

Tighten the fixing bolt sufficiently by hand to guarantee the sealing of the light.

**Changing the number plate bulbs
(W 5 W)**

- ☞ Insert a thin screwdriver into one of the exterior holes of the lens.
- ☞ Push it towards the outside to unclip it
- ☞ Remove the lens.
- ☞ Pull the bulb and change it.

**High pressure washing**

When using this type of washing on stubborn dirt, do not persist on the headlamps, the lights and their surrounds to avoid damaging their varnish and their seal.

CHANGING A FUSE

Procedure for the replacement of a faulty fuse with a new fuse in order to rectify a failure of the corresponding function.



Access to the tools

The extraction pliers are positioned on the back of the fascia fuse box cover.

To gain access to them:

- ☛ open the glove box lid,
- ☛ push the opening guide to the left to go beyond the first notch,
- ☛ open the glove box lid fully,
- ☛ unclip the fuse box cover pulling at the top,

- ☛ remove the cover completely,
- ☛ remove the pliers.

To close the glove box, take care to push the opening guide back to the left to go beyond the first notch.

Replacing a fuse

Before replacing a fuse, the cause of the failure must be identified and rectified.

- ☛ Identify the faulty fuse by examining the condition of its filament.



Correct



Incorrect

- ☛ Use the special pliers to extract the fuse from its housing.
- ☛ Always replace the faulty fuse with a fuse of the same rating.
- ☛ Check that the number engraved on the box and the rating engraved on the top correspond to the tables which follow.



Installation of electrical accessories

Your vehicle's electrical circuit is designed to operate with the standard or optional equipment.

Before installing other electrical equipment or accessories in your vehicle, contact a PEUGEOT dealer.



PEUGEOT does not accept any responsibility for the costs incurred in repairing your vehicle or for the malfunctions resulting from the installation of additional accessories which are not supplied or recommended by PEUGEOT and which are not installed in accordance with its instructions, particularly when the combined consumption of all of the additional equipment connected exceeds 10 milliamperes.


Fascia fuses

The fuse box is located in the lower part of the fascia (left-hand side).




Access to the fuses

☞ refer to the "Access to the tools" paragraph.

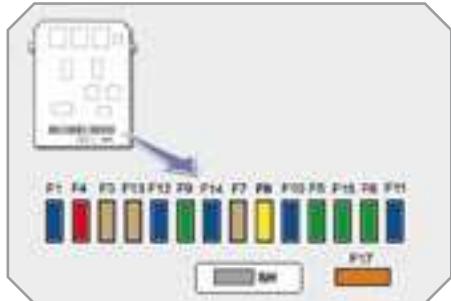

Fuse tables

Fuse N°	Rating	Functions
G39	20 A	Hi-Fi amplifier.
G40	-	Not used.
Fuse	Rating	Functions
F1	15 A	Rear wiper
F2	-	Not used.
F3	5 A	Air bags and pre-tensioners control unit.
F4	10 A	Clutch pedal switch, diagnostic socket, electrochromatic interior mirror, air conditioning, steering wheel angle sensor, particle emission filter pump (Diesel).
F5	30 A	Electric windows, rear one-touch electric windows, sunroof, panoramic roof shutter (SW).
F6	30 A	Front one-touch electric windows, folding mirrors supply.
F7	5 A	Front and rear courtesy lights, map reading lights, sun visor lighting, glove box lighting, clock.

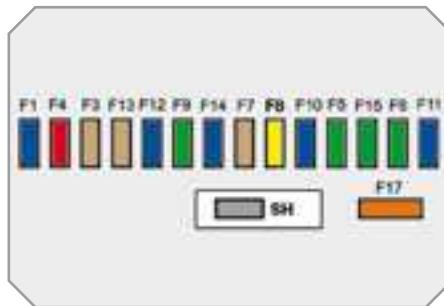

Fuse N°	Rating	Functions
F8	20 A	Audio equipment, audio/telephone, CD changer, multifunction display, clock, steering wheel controls, tyre under-inflation detection, trailer fuse box.
F9	30 A	Front 12 V socket, rear 12 V socket (SW).
F10	15 A	Alarm siren, alarm control unit, directional headlamps.
F11	15 A	Diagnostic socket, low current ignition switch, automatic gearbox control unit.
F12	15 A	Rain/brightness sensor, amplifier, trailer fuse box, driving school module.
F13	5 A	Engine fuse box, ABS relay, dual-function brake switch, "2 Tronic" gearbox gear lever.
F14	15 A	Instrument panel, seat belt warning lights bar, headlamp adjustment, air conditioning, hands-free kit, rear parking assistance control unit, air bags.
F15	30 A	Locking and deadlocking.
F17	40 A	Rear screen and exterior mirrors de-icing.
SH	-	PARC shunt.


Engine compartment fuses

The fuse box is placed in the engine compartment, near the battery (left-hand side).




Access to the fuses

- ☞ Unclip the cover.
- ☞ Replace the fuse (refer to the corresponding paragraph).
- ☞ When you have finished, close the cover carefully to guarantee the sealing of the fuse box.

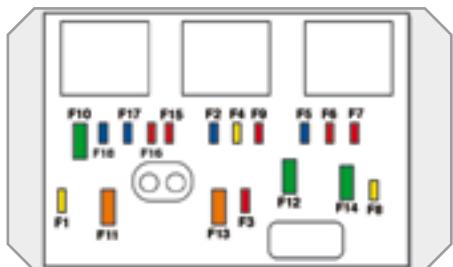

Fuse table

Fuse N°	Rating	Functions
F1	20 A	Engine control unit and fan assembly control relay supply, timing and canister solenoid valves (1.6 l 16V THP), air flow sensor (Diesel), injection pump (Diesel), water in diesel sensor (Diesel), EGR solenoid valves, air heating (Diesel).
F2	15 A	Horn
F3	10 A	Front and rear wash-wipe.
F4	20 A	Headlamp wash.
F5	15 A	Fuel pump (petrol), Turbo solenoid valves (1.6 l 16V THP).
F6	10 A	Vehicle speed sensor, automatic gearbox.
F7	10 A	Electric power steering, directional headlamps, directional headlamps control relay, switching and protection unit (Diesel).
F8	25 A	Starter control.
F9	10 A	ABS/ESP control unit, brake pedal switch.
F10	30 A	Engine control unit actuators (petrol: ignition coils, solenoid valves, oxygen sensors, injectors, heaters, controlled thermostat) (Diesel: solenoid valves, heaters).
F11	40 A	Air conditioning blower.
F12	30 A	Windscreen wipers Low/High speed.

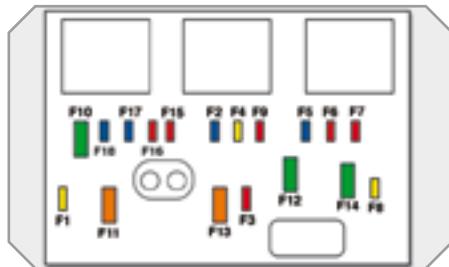

Fuse N°	Rating	Functions
F13	40 A	Built-in systems interface supply (ignition positive).
F14	30 A	Diesel heater (Diesel).
F15	10 A	Left main beam headlamp.
F16	10 A	Right main beam headlamp.
F17	15 A	Left dipped beam headlamp.
F18	15 A	Right dipped beam headlamp.

Maxi-fuse table

	Fuse N°	Rating	Functions
Box 1	MF1*	70 A	Fan assembly.
	MF2*	20 A/30 A	ABS/ESP pump.
	MF3*	20 A/30 A	ABS/ESP solenoid valves.
	MF4*	60 A	Built-in systems interface supply.
	MF5*	60 A	Built-in systems interface supply.
	MF6*	30 A	Additional fan assembly (1.6 I 16V THP).
Box 2	MF7*	80 A	Passenger compartment fuse box.
	MF8*	30 A	"2 Tronic" gearbox ECU.
	MF9*	80 A	Heating unit (Diesel).
	MF10*	80 A	Electric power steering.
	MF11*	40 A	Valvetronic electric motor (1.6 I 16V THP).

* The maxi-fuses provide additional protection for the electrical systems. All work on the maxi-fuses must be carried out by a PEUGEOT dealer.

BATTERY

Procedure for charging your battery when it is flat or for starting the engine using another battery.

Access to the battery




The battery is located under the bonnet on the left.

To gain access to it:

- ☛ open the bonnet using the interior lever, then the exterior lever,
- ☛ secure the bonnet strut,
- ☛ remove the plastic cover to gain access to the two terminals.


Starting using another battery

- ☛ Connect the red cable to the positive terminal (+) of the flat battery **A**, then to the positive terminal (+) of the slave battery **B**.

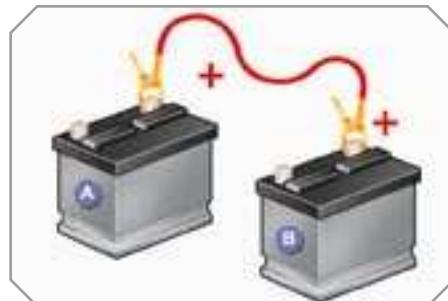

- ☛ Connect one end of the green or black cable to the negative terminal (-) of the slave battery **B**.

- ☛ Connect the other end of the green or black cable to an earth point **C** on the broken down vehicle, as far as possible from the battery (for example, right-hand engine mounting).

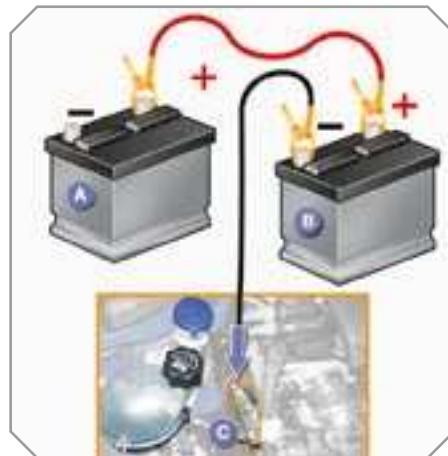

- ☛ Operate the starter, let the engine run.

- ☛ Wait until the engine returns to idle and disconnect the cables.

Charging the battery using a battery charger

- Disconnect the battery from the vehicle.
- Follow the instructions for use provided by the manufacturer of the charger.
- Reconnect starting with the negative terminal (-).
- Check that the terminals and connectors are clean. If they are covered with sulphate (whitish or greenish deposit), remove them and clean them.



The batteries contain harmful substances such as sulphuric acid and lead. They must be disposed of in accordance with regulations and must not, in any circumstances, be discarded with household waste. Take used remote control batteries and vehicle batteries to a special collection point.



It is advisable to disconnect the battery if the vehicle is to be left unused for more than one month.



Do not disconnect the terminals while the engine is running.
Do not charge the batteries without disconnecting the terminals first.
Do not push the vehicle to start the engine if it is fitted with a "2 Tronic" gearbox.

Before disconnecting the battery

Wait 2 minutes after switching off the ignition before disconnecting the battery.

Close the windows, the sunroof and the doors before disconnecting the battery.

Following reconnection of the battery

Following reconnection of the battery, switch on the ignition and wait 1 minute before starting to permit initialisation of the electronic systems. However, if slight difficulties are encountered following this operation, contact a PEUGEOT dealer.

Referring to the corresponding section, you must yourself reinitialise:

- the remote control key,
- the one-touch electric windows,
- the sunroof,
- the GPS satellite navigation system.

LOAD REDUCTION MODE

System which manages the use of certain functions in relation to the level of charge remaining in the battery.

When the vehicle is being driven, the load reduction function temporarily deactivates certain functions, such as the air conditioning, the rear screen de-icing...

The deactivated functions are reactivated automatically as soon as conditions permit.



At the risk of discharging the battery, the deactivated functions can be reactivated manually.

Charging the battery using a battery charger

- Disconnect the battery from the vehicle.
- Follow the instructions for use provided by the manufacturer of the charger.
- Reconnect starting with the negative terminal (-).
- Check that the terminals and connectors are clean. If they are covered with sulphate (whitish or greenish deposit), remove them and clean them.



The batteries contain harmful substances such as sulphuric acid and lead. They must be disposed of in accordance with regulations and must not, in any circumstances, be discarded with household waste. Take used remote control batteries and vehicle batteries to a special collection point.



It is advisable to disconnect the battery if the vehicle is to be left unused for more than one month.



Do not disconnect the terminals while the engine is running.
Do not charge the batteries without disconnecting the terminals first.
Do not push the vehicle to start the engine if it is fitted with a "2 Tronic" gearbox.

Before disconnecting the battery

Wait 2 minutes after switching off the ignition before disconnecting the battery.

Close the windows, the sunroof and the doors before disconnecting the battery.

Following reconnection of the battery

Following reconnection of the battery, switch on the ignition and wait 1 minute before starting to permit initialisation of the electronic systems. However, if slight difficulties are encountered following this operation, contact a PEUGEOT dealer.

Referring to the corresponding section, you must yourself reinitialise:

- the remote control key,
- the one-touch electric windows,
- the sunroof,
- the GPS satellite navigation system.

LOAD REDUCTION MODE

System which manages the use of certain functions in relation to the level of charge remaining in the battery.

When the vehicle is being driven, the load reduction function temporarily deactivates certain functions, such as the air conditioning, the rear screen de-icing...

The deactivated functions are reactivated automatically as soon as conditions permit.



At the risk of discharging the battery, the deactivated functions can be reactivated manually.

ENERGY ECONOMY MODE

System which manages the duration of use of certain functions to conserve a sufficient level of charge in the battery.

After the engine has stopped, you can still use functions such as the audio equipment, windscreen wipers, dipped headlamps, courtesy lights, etc. for a maximum combined duration of thirty minutes.

Switching to economy mode

Once the thirty minutes are over, a message appears on the multi-function display indicating that the vehicle has switched to economy mode and the active functions are put on standby.



If the telephone is being used at this time:

- it will be maintained for 5 minutes with the RD4 audio equipment hands-free kit,
- it will still be possible to finish the call with the RT4 GPS audio/telephone.

Exiting economy mode

These functions are reactivated automatically next time the vehicle is driven.

- ☞ In order to resume the use of these functions immediately, start the engine and let it run for a few minutes.

The time available to you will then be double the duration for which the engine is left running. However, this period will always be between five and thirty minutes.



A flat battery prevents the engine from starting (refer to the corresponding paragraph).

CHANGING A WIPER BLADE

Procedure for replacing a worn wiper blade with a new one without the use of tools.

Removing a front or rear wiper blade

- ☞ Raise the corresponding wiper arm.
- ☞ Unclip the wiper blade and remove it.

Fitting a front or rear wiper blade

- ☞ At the front, check the size of the wiper blade as the shorter blade is fitted on the right-hand side of the vehicle.
- ☞ Put the corresponding new wiper blade in place and clip it.
- ☞ Fold down the wiper arm carefully.

TOWING THE VEHICLE

Procedure for having your vehicle towed or for towing another vehicle using a removable towing eye.

Access to the tools



The towing eye is installed in the boot under the floor.

To gain access to it:

- ☛ open the boot,
- ☛ raise the floor,
- ☛ secure it by hooking its cord on the hook on the shelf support,
- ☛ remove the towing eye from the holder.

Towing your vehicle



- ☛ On the front bumper, unclip the cover by pressing at the bottom.
- ☛ Screw the towing eye in fully.
- ☛ Install the towbar.
- ☛ Switch on the hazard warning lights on the towed vehicle.

Towing another vehicle



- ☛ On the rear bumper, unclip the cover by pressing at the bottom.
- ☛ Screw the towing eye in fully.
- ☛ Install the towbar.
- ☛ Switch on the hazard warning lights on the towed vehicle.



- ☛ Place the gear lever in neutral (position **N** on the "2 Tronic" or automatic gearbox).

Failure to comply with this special requirement may result in damage to certain braking components and the absence of braking assistance the next time the engine is started.



When towing with all four wheels on the ground, always use a towbar. When towing with only two wheels on the ground, always use professional lifting equipment.

When towing with the engine off, there is no longer any braking or steering assistance.

TOWING A TRAILER, A CARAVAN, ETC.

Towbar suited to the attachment of a trailer or caravan with additional signalling and lighting.



Your vehicle is primarily designed for transporting people and luggage, but it may also be used for towing a trailer.



We recommend the use of original PEUGEOT towbars and their harnesses that have been tested and approved from the design stage of your vehicle and that the fitting of the towbar is entrusted to a PEUGEOT dealer.

If the trailer is not fitted by a PEUGEOT dealer, it is imperative that it is fitted using the electrical pre-equipment installed at the rear of the vehicle, in accordance with the manufacturer's instructions.

Driving with a trailer subjects the towing vehicle to more significant stress and its driver must be particularly careful.

Driving advice

Distribution of loads

- ☞ Distribute the load in the trailer so that the heaviest items are as close as possible to the axle and the nose weight approaches the maximum permitted without exceeding it.

The maximum towing load on a long slope depends on the gradient and the outside temperature.

In all cases, pay attention to the coolant temperature.



- ☞ If the warning light and the **STOP** warning light come on, stop the vehicle and switch off the engine as soon as possible.

Braking

Towing a trailer increases the braking distance.

Tyres

- ☞ Check the tyre pressures of the towing vehicle and of the trailer, observing the recommended pressures.

Lights

- ☞ Check the electrical signalling on the trailer.



The rear parking assistance will be deactivated automatically if a genuine PEUGEOT towbar is used.

Side wind

- ☞ Take into account the increased sensitivity to side wind.

Cooling

Towing a trailer on a slope increases the temperature of the coolant.

As the fan is electrically controlled, its cooling capacity is not dependent on the engine speed.

- ☞ To lower the engine speed, reduce your speed.

FITTING ROOF BARS (SALOON)

When fitting transverse roof bars, use the four quick-fit fixings provided for this purpose:

- ☛ lift the concealing flaps,
- ☛ adjust the roof bar quick-fit fixings.



Maximum authorised weight on the roof rack, for a loading height not exceeding 40 cm (with the exception of bicycle carriers): 65 kg.

If the height exceeds 40 cm, adapt the speed of the vehicle to the profile of the road to avoid damaging the roof bars and the fixings on the roof.

Be sure to refer to national legislation in order to comply with the regulations for transporting objects which are longer than the vehicle.

FITTING ROOF BARS (SW)

Consult a PEUGEOT dealer for the installation of longitudinal roof bars.

When fitting transverse roof bars, ensure that they are positioned correctly as shown by marks on the longitudinal roof bars.

Use accessories recommended by PEUGEOT and follow the accessory manufacturer's fitting instructions.

In order to place a load on the roof, your vehicle must be fitted with longitudinal roof bars with transverse roof bars fitted on top of these.

The longitudinal roof bars cannot be removed.



Lashing the straps through the ends of the longitudinal roof bars is prohibited.



Maximum authorised weight on the roof bars, for a loading height not exceeding 40 cm (except bicycle carriers): 75 kg.

If the height exceeds 40 cm, adapt the speed of the vehicle to the condition of the road, to avoid damaging the roof bars and the fixings on the roof.

Please refer to national legislation to comply with the regulations regarding the transportation of objects which are longer than the vehicle.

ACCESSORIES

You can obtain a wide range of accessories and original parts from the PEUGEOT network.

These accessories and parts have been tested and approved for reliability and safety.

They are all adapted to your vehicle and benefit from PEUGEOT's recommendation and warranty.

The product range offered by PEUGEOT Accessories is structured around 5 categories: PROTECTION - TOURING - IN-CAR TECHNOLOGY - STYLING - UNIVERSAL.

"Protection":



anti-theft alarm, window engraving, wheel locks, first aid kit, warning triangle, safety jacket, stolen vehicle tracking system, snow chains.

"Touring":



mats*, boot tray, luggage net, fixed coat hook on head restraint, aluminium or PVC door sills.

For leisure pursuits: roof bars, bicycle carrier on towbar, bicycle carrier on roof bars, ski carrier, roof box, booster seats and child seats, side blinds and rear blind, front centre armrest, CD storage, under shelf storage.

Trailer towbar which must be fitted by the PEUGEOT network.

"In-car technology":



audio systems, telephone, amplifiers, satellite navigation systems, hands-free kit, CD changer, speakers, DVD player, connection kit for MP3 player or portable CD player, rear parking assistance.

"Styling":



seat covers compatible with side air bags, aluminium gear lever knob, fog lamps, door deflectors, spoiler, styling strips, alloy wheels, trims, sport exhaust, chromed mirror shells.

"Universal":



screenwash, interior and exterior maintenance and cleaning products.

You can obtain "Van" conversion kits to transform a private vehicle into a van.



Depending on the country in which the vehicle is sold, it is compulsory to have a safety jacket, warning triangle and spare bulbs available in the vehicle.



The fitting of electrical equipment or accessories which are not recommended by PEUGEOT may result in a failure of your vehicle's electronic system.

Please note this specific warning. You are advised to contact a representative of the Marque to be shown the range of recommended equipment and accessories.

- * To avoid any risk of jamming of the pedals:
 - ensure that the mat is positioned and secured correctly,
 - never fit one mat on top of another.

MODELS:		ENGINES AND GEARBOXES			
Model codes:		KFV-C	KFU-C	KFU-C/P	8FS-C
PETROL ENGINES		1.4 litre 75 bhp	1.4 litre 16V 90 bhp*		1.4 litre VTi 16V 95 bhp
	Cubic capacity (cm ³)	1 360	1 360		1 397
	Bore x stroke (mm)	75 x 77	75 x 77		75 x 77
	Maximum power: EU standard (kW)	54	65		70
	Maximum power engine speed (rpm)	5 400	5 250		6 000
	Maximum torque: EU standard (Nm)	118	133		136
	Maximum torque engine speed (rpm)	3 300	3 250		4 000
	Fuel	Unleaded	Unleaded		Unleaded
	Catalytic converter	Yes	Yes		Yes
GEARBOX		Manual (5-speed)	Manual (5-speed)	"2 Tronic" (5-speed)	Manual (5-speed)
OIL CAPACITIES (in litres)					
Engine (with cartridge replacement)		3.25	3.25	3.25	4.25
Gearbox - Final drive		1.9	1.9	-	1.9

* Not available on SW and SW Outdoor.

MODELS:		ENGINES AND GEARBOXES				
Model codes:		NFU-C	5FW-C	5FW-F	5FX-C	5FY-C
PETROL ENGINES		1.6 litre 16V 110 bhp*	1.6 litre VTi 16V 120 bhp		1.6 litre THP 16V 150 bhp*	1.6 litre THP 16V 175 bhp
Cubic capacity (cm ³)		1 587		1 598	1 598	1 598
Bore x stroke (mm)		78.5 x 82		77 x 85.8	77 x 85.8	77 x 85.8
Maximum power: EU standard (kW)		80		88	110	128
Maximum power engine speed (rpm)		5 800		6 000	5 800	6 000
Maximum torque: EU standard (Nm)		147		160	240	240
Maximum torque engine speed (rpm)		4 000		4 250	1 400	1 600
Fuel		Unleaded		Unleaded	Unleaded	Unleaded**
Catalytic converter		Yes		Yes	Yes	Yes
GEARBOX		Manual (5-speed)	Manual (5-speed)	Auto (4-speed)	Manual (5-speed)	Manual (5-speed)
OIL CAPACITIES (in litres)						
Engine (with cartridge replacement)		3.25	4.25	4.25	4.25	4.25
Gearbox - Final drive		1.9	1.9	-	1.9	1.9

* Not available on SW and SW Outdoor.

** PEUGEOT recommends the use of RON98 unleaded petrol to guarantee optimum performance of the engine.

MODELS:		ENGINES AND GEARBOXES				
Model codes:		8HZ-C	9HX-C	9HV-C	9HY-C	9HZ-C
DIESEL ENGINES		1.4 litre Turbo HDI 70 bhp*	1.6 litre Turbo HDI 16V 90 bhp		1.6 litre Turbo HDI 16V 110 bhp	
Cubic capacity (cm ³)		1 398	1 560		1 560	
Bore x stroke (mm)		73.7 x 82	75 x 88.3		75 x 88.3	
Maximum power: EU standard (kW)		50	66		80	
Maximum power engine speed (rpm)		4 000	4 000		4 000	
Maximum torque: EU standard (Nm)		160	215		240	
Maximum torque engine speed (rpm)		2 000	1 750		1 750	
Fuel		Diesel	Diesel		Diesel	
Catalytic converter		Yes	Yes		Yes	
Particle emission filter		No	No	Yes	No	Yes
GEARBOX		Manual (5-speed)	Manual (5-speed)		Manual (5-speed)	
OIL CAPACITIES (in litres)						
Engine (with cartridge replacement)		3.75	3.25		3.25	
Gearbox - Final drive		1.9	1.9		1.9	

* Not available on SW and SW Outdoor.

SALOON CONSUMPTION			In accordance with EC directive 80/1268 (as amended)			
Petrol engines	Gearbox	Model codes WC... WA... WG... WM...	Urban driving mpg (litres/100 km)	Inter-urban driving mpg (litres/100 km)	Mixed driving mpg (litres/100 km)	Emission of CO ₂ by mass (g/km)
1.4 litre 75 bhp	Manual	KFV-C	33.6 (8.4)	56.5 (5.0)	44.8 (6.3)	150
1.4 litre 16V 90 bhp	Manual	KFU-C	33.2 (8.5)	54.3 (5.2)	44.1 (6.4)	152
	"2 Tronic"	KFU-C/P	35.8 (7.9)	54.3 (5.2)	45.6 (6.2)	146
1.4 litre VTi 16V 95 bhp	Manual	8FS-C	34.9 (8.1)	56.5 (5.0)	46.3 (6.1)	145
1.6 litre 16V 110 bhp	Manual	NFU-C	30.4 (9.3)	50.4 (5.6)	40.4 (7.0)	166
1.6 litre VTi 16V 120 bhp	Manual	5FW-C	33.6 (8.4)	58.8 (4.8)	46.3 (6.1)	145
	Auto.	5FW-F	28.8 (9.8)	51.4 (5.5)	40.4 (7.0)	167
1.6 litre THP 16V 150 bhp	Manual	5FX-C	30.4 (9.3)	50.4 (5.6)	40.4 (7.0)	166
1.6 litre THP 16V 175 bhp	Manual	5FY-C	28.5 (9.9)	49.6 (5.7)	39.2 (7.2)	171

The consumption figures shown here correspond to the values communicated at the time of printing.

These consumption values were established in accordance with EC Directive 80/1268 (as amended). They may vary depending on the style of driving, traffic conditions, weather conditions, the load in the vehicle, the maintenance of the vehicle and the use of the accessories.

SALOON CONSUMPTION			In accordance with EC directive 80/1268 (as amended)			
Diesel engines	Gearbox	Model codes WC... WA... WG...	Urban driving mpg (litres/100 km)	Inter-urban driving mpg (litres/100 km)	Mixed driving mpg (litres/100 km)	Emission of CO ₂ by mass (g/km)
1.4 litre Turbo HDI 70 bhp	Manual	8HZ-C	5.8	3.8	4.5	120
1.6 litre Turbo HDI 16V 90 bhp	Manual	9HX-C	5.8	3.8	4.5	120
		9HV-C	6.0	4.1	4.7	124
1.6 litre Turbo HDI 16V 110 bhp	Manual	9HY-C	6.2	4.1	4.9	129
		9HZ-C	6.0	4.1	4.7	124

The consumption figures shown here correspond to the values communicated at the time of printing. These consumption values were established in accordance with EC Directive 80/1268 (as amended). They may vary depending on the style of driving, traffic conditions, weather conditions, the load in the vehicle, the maintenance of the vehicle and the use of the accessories.

SW CONSUMPTION			In accordance with EC directive 80/1268 (as amended)			
Petrol engines	Gearbox	Model codes WE...	Urban driving mpg (litres/100 km)	Inter-urban driving mpg (litres/100 km)	Mixed driving mpg (litres/100 km)	Emission of CO ₂ by mass (g/km)
1.4 litre 75 bhp	Manual	KFV-C	32.1 (8.8)	53.3 (5.3)	43.5 (6.5)	155
1.4 litre VTi 16V 95 bhp	Manual	8FS-C	34.4 (8.2)	54.3 (5.2)	44.8 (6.3)	150
1.6 litre VTi 16V 120 bhp	Manual	5FW-C	32.8 (8.6)	56.5 (5.0)	44.8 (6.3)	150
	Auto.	5FW-F	28.8 (9.8)	51.4 (5.5)	40.4 (7.0)	167
1.6 litre THP 16V 175 bhp	Manual	5FY-C	27.7 (10.2)	47.9 (5.9)	38.2 (7.4)	175

SW OUTDOOR CONSUMPTION			In accordance with EC directive 80/1268 (as amended)			
Petrol engines	Gearbox	Model codes WU...	Urban driving mpg (litres/100 km)	Inter-urban driving mpg (litres/100 km)	Mixed driving mpg (litres/100 km)	Emission of CO ₂ by mass (g/km)
1.4 litre VTi 16V 95 bhp	Manual	8FS-C	34.0 (8.3)	53.3 (5.3)	44.1 (6.4)	153
1.6 litre VTi 16V 120 bhp	Manual	5FW-C	32.4 (8.7)	55.4 (5.1)	44.1 (6.4)	152
	Auto.	5FW-F	27.5 (10.1)	49.6 (5.7)	38.7 (7.3)	173

The consumption figures shown here correspond to the values communicated at the time of printing.

These consumption values were established in accordance with EC Directive 80/1268 (as amended). They may vary depending on the style of driving, traffic conditions, weather conditions, the load in the vehicle, the maintenance of the vehicle and the use of the accessories.

SW CONSUMPTION			In accordance with EC directive 80/1268 (as amended)			
Diesel engines	Gearbox	Model codes WE...	Urban driving mpg (litres/100 km)	Inter-urban driving mpg (litres/100 km)	Mixed driving mpg (litres/100 km)	Emission of CO ₂ by mass (g/km)
1.6 litre Turbo HDI 16V 90 bhp	Manual	9HX-C	5.8	4.0	4.6	123
		9HV-C	6.1	4.4	5.0	131
1.6 litre Turbo HDI 16V 110 bhp	Manual	9HY-C	-	-	-	-
		9HZ-C	6.1	4.4	5.0	131
SW OUTDOOR CONSUMPTION			In accordance with EC Directive 80/1268 (as amended)			
Diesel engines	Gearbox	Model codes WU...	Urban driving mpg (litres/100 km)	Inter-urban driving mpg (litres/100 km)	Mixed driving mpg (litres/100 km)	Emission of CO ₂ by mass (g/km)
1.6 litre Turbo HDI 16V 90 bhp	Manual	9HX-C	5.8	4.1	4.7	125
		9HV-C	-	-	-	-
1.6 litre Turbo HDI 16V 110 bhp	Manual	9HY-C	-	-	-	-
		9HZ-C	6.4	4.5	5.2	136

The consumption figures shown here correspond to the values communicated at the time of printing.

These consumption values were established in accordance with EC Directive 80/1268 (as amended). They may vary depending on the style of driving, traffic conditions, weather conditions, the load in the vehicle, the maintenance of the vehicle and the use of the accessories.

SALOON WEIGHTS AND TOWED LOADS (in kg)

Petrol engines	1.4 litre 75 bhp	1.4 litre 16V 90 bhp	
Gearbox	Manual	Manual	"2 Tronic"
Model codes: WC... WA... WG...	KFV-C	KFU-C	KFU-C/P
- Kerb weight	1 300 - 1 288 - 1 232	1 224 - 1 214	1 241 - 1 231
- Payload	320 - 292 - 338	416 - 406	409 - 399
- Gross vehicle weight (GVW)	1 620 - 1 580 - 1 570	1 640 - 1 620	1 650 - 1 630
- Gross train weight (GTW)			
on a 12 % gradient	2 400	2 580	2 580
- Braked trailer (within GTW limit)			
on a 10 % or 12 % gradient	780 - 820 - 830	940 - 960	930 - 950
on an 8 % gradient	830 - 870	980 - 1 000	950 - 970
- Braked trailer*** (with load transfer within GTW limit)	950	1 150	1 150
- Unbraked trailer	600 - 600 - 590	600	600
- Recommended nose weight	38 - 38 - 46	46	46

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High exterior temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the exterior temperature is higher than 37 °C, limit the weight towed.

SALOON WEIGHTS AND TOWED LOADS (in kg)

Petrol engines	1.4 litre VTi 16V 95 bhp	1.6 litre 16V 110 bhp
Gearbox	Manual	Manual
Model codes: WC... WA... WG...	8FS-C	NFU-C
- Kerb weight	1 253 - 1 240	1 300 - 1 288
- Payload	387 - 400	380 - 382
- Gross vehicle weight (GVW)	1 640	1 680 - 1 670
- Gross train weight (GTW)		
on a 12 % gradient	2 580	2 630
- Braked trailer (within GTW limit)		
on a 10 % or 12 % gradient	940	950 - 960
on an 8 % gradient	-	1 000 - 1 010
- Braked trailer*** (with load transfer within GTW limit)	1 150	1 150
- Unbraked trailer	600	600
- Recommended nose weight	46	46

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High exterior temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the exterior temperature is higher than 37 °C, limit the weight towed.

SALOON WEIGHTS AND TOWED LOADS (in kg)

Petrol engines	1.6 litre VTi 16V 120 bhp	1.6 litre THP 16V 150 bhp	1.6 litre THP 16V 175 bhp
Gearbox	Manual	Auto.	Manual
Model codes: WC... WA... WM...	5FW-C	5FW-F	5FX-C
- Kerb weight	1 275	1 321 - 1 312	1 370 - 1 356
- Payload	375 - 365	374 - 366	340 - 344
- Gross vehicle weight (GVW)	1 650 - 1 640	1 695 - 1 678	1 710 - 1 700
- Gross train weight (GTW)			
on a 12 % gradient	2 600	2 645 - 2 638	2 640
- Braked trailer (within GTW limit)			
on a 10 % or 12 % gradient	950 - 960	950 - 960	930
on an 8 % gradient	1 000 - 1 010	1 000 - 1 010	1 000
- Braked trailer*** (with load transfer within GTW limit)	1 150	1 150	1 150
- Unbraked trailer	600	600	600
- Recommended nose weight	46	46	46
			44

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High exterior temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the exterior temperature is higher than 37 °C, limit the weight towed.

SALOON WEIGHTS AND TOWED LOADS (in kg)

Diesel engines	1.4 litre Turbo HDI 70 bhp	1.6 litre Turbo HDI 16V 90 bhp	1.6 litre Turbo HDI 16V 110 bhp		
Gearbox	Manual	Manual	Manual		
Model codes: WC... WA... WG...	8HZ-C	9HX-C	9HV-C	9HY-C	9HZ-C
- Kerb weight	1 261 - 1 251 - 1 269	1 280 - 1 272 - 1 290	1 328 - 1 319 - 1 358		
- Payload	399 - 369 - 341	420 - 408 - 340	382 - 391 - 323		
- Gross vehicle weight (GVW)	1 660 - 1 620 - 1 610	1 700 - 1 680 - 1 630	1 710 - 1 710 - 1 681		
- Gross train weight (GTW)					
on a 12 % gradient	2 600	2 650	2 690		
- Braked trailer (within GTW limit)					
on a 10 % or 12 % gradient	940 - 980 - 990	950 - 970 - 1 020	980		
on an 8 % gradient	940 - 980	980 - 1 000	1 030		
- Braked trailer** (with load transfer within GTW limit)	1 150	1 150	1 150		
- Unbraked trailer	600	600	600		
- Recommended nose weight	46	46	46		

** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its roadholding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High exterior temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the exterior temperature is higher than 37 °C, limit the weight towed.

SW WEIGHTS AND TOWED LOADS (in kg)

Petrol engines	1.4 litre 75 bhp	1.4 litre VTi 16V 95 bhp
Gearbox	Manual	Manual
Model codes: WE...	KFV-C	8FS-C
- Kerb weight	1 271	1 290
- Payload	371	401
- Gross vehicle weight (GVW)	1 642	1 691
- Gross train weight (GTW)		
on a 12 % gradient	2 422	2 591
- Braked trailer (within GTW limit)		
on a 10 % or 12 % gradient	780	900
on an 8 % gradient	800	900
- Braked trailer*** (with load transfer within GTW limit)	1 045	1 150
- Unbraked trailer	600	600
- Recommended nose weight	42	46

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country).

High exterior temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the exterior temperature is higher than 37 °C, limit the weight towed.

SW WEIGHTS AND TOWED LOADS (in kg)

Petrol engines	1.6 litre VTi 16V 120 bhp		1.6 litre THP 16V 175 bhp
Gearbox	Manual	Auto.	Manual
Model codes: WE...	5FW-C	5FW-F	5FY-C
- Kerb weight	1 302	1 335	1 428
- Payload	403	402	340
- Gross vehicle weight (GVW)	1 705	1 737	1 768
- Gross train weight (GTW)			
on a 12 % gradient	2 605	2 687	2 718
- Braked trailer (within GTW limit)			
on a 10 % or 12 %	900	950	950
on an 8 % gradient	950	950	950
- Braked trailer*** (with load transfer within GTW limit)	1 150	1 150	1 150
- Unbraked trailer	600	600	600
- Recommended nose weight	46	46	46

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country).

High exterior temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the exterior temperature is higher than 37 °C, limit the weight towed.

SW OUTDOOR WEIGHTS AND TOWED LOADS (in kg)			
Petrol engines	1.4 litre VTi 16V 95 bhp	1.6 litre VTi 16V 120 bhp	
Gearbox	Manual	Manual	Auto.
Model codes: WU...	8FS-C	5FW-C	5FW-F
- Kerb weight	1 330	1 378	1 415
- Payload	391	354	351
- Gross vehicle weight (GVW)	1 721	1 732	1 766
- Gross train weight (GTW)			
on a 12 % gradient	2 572	2 582	2 716
- Braked trailer (within GTW limit)			
on a 10 % or 12 % gradient	900	850	950
on an 8 % gradient	900	900	950
- Braked trailer*** (with load transfer within GTW limit)	1 150	1 150	1 150
- Unbraked trailer	600	600	600
- Recommended nose weight	46	45	46

*** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its road holding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country).

High exterior temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the exterior temperature is higher than 37 °C, limit the weight towed.

SW WEIGHTS AND TOWED LOADS (in kg)

Diesel engines	1.6 litre Turbo HDI 16V 90 bhp		1.6 litre Turbo HDI 16V 110 bhp	
Gearbox	Manual		Manual	
Model codes: WE...	9HX-C	9HV-C	9HY-C	9HZ-C
- Kerb weight		1 339		1 350
- Payload		402		408
- Gross vehicle weight (GVW)		1 741		1 758
- Gross train weight (GTW)				
on a 12 % gradient		2 691		2 708
- Braked trailer (within GTW limit)				
on a 10 % or 12 % gradient		950		950
on an 8 % gradient		980		1 000
- Braked trailer** (with load transfer within GTW limit)		1 150		1 150
- Unbraked trailer		600		600
- Recommended nose weight		46		46

** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its roadholding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country).

High exterior temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the exterior temperature is higher than 37 °C, limit the weight towed.

SW OUTDOOR WEIGHTS AND TOWED LOADS (in kg)

Diesel engines	1.6 litre Turbo HDI 16V 90 bhp	1.6 litre Turbo HDI 16V 110 bhp		
Gearbox	Manual			
Model codes: WU...	9HX-C	9HV-C	9HY-C	9HZ-C
- Kerb weight	1 387		1 431	
- Payload	378		352	
- Gross vehicle weight (GVW)	1 765		1 783	
- Gross train weight (GTW)				
on a 12 % gradient	2 715		2 733	
- Braked trailer (within GTW limit)				
on a 10 % or 12 % gradient	950		950	
on an 8 % gradient	950		950	
- Braked trailer** (with load transfer within GTW limit)	1 150		1 150	
- Unbraked trailer	600		600	
- Recommended nose weight	46		46	

** The weight of the braked trailer may be increased, within the GTW limit, on condition that the GVW of the towing vehicle is reduced by the same amount; warning, towing using a lightly loaded towing vehicle may adversely affect its roadholding performance.

The GTW and towed load values indicated apply up to a maximum altitude of 1 000 metres; the towed load mentioned must be reduced by 10 % for each additional 1 000 metres of altitude.

The speed of a towing vehicle must not exceed 60 mph (100 km/h) (comply with the legislation in force in your country). High exterior temperatures may result in a reduction in the performance of the vehicle in order to protect the engine; when the exterior temperature is higher than 37 °C, limit the weight towed.

DIMENSIONS (IN MM)

207 saloon (3 and 5 door versions)/207 GTi



207 SW/207 SW Outdoor



* SW with roof bars.

** SW Outdoor with roof bars.

IDENTIFICATION FEATURES

Various visible marking elements for the identification and tracking of your vehicle.



A. Chassis number under the bonnet.

This number is etched on the bodywork near the passenger compartment filter.

B. Chassis number on the fascia.

This number is indicated on a gummed label which is visible through the windscreens.

C. Chassis number on the chassis.

This number is indicated on a self-destroying label affixed to the centre pillar, near the driver's door striker.

D. Manufacturer's label.

This label is affixed to the edge of the door on the driver's side.

It bears the following information:

- the wheel rim and tyre sizes,
- the brands of tyre recommended by the manufacturer,
- the associated inflation pressures,
- the paint colour reference.




Wheels which are fitted with 205/45 R17 tyres cannot be fitted with snow chains. For further information, contact a PEUGEOT dealer.



The inflation pressure must be checked when the tyres are cold, at least once a month.



If the inflation pressure is too low, this increases fuel consumption.

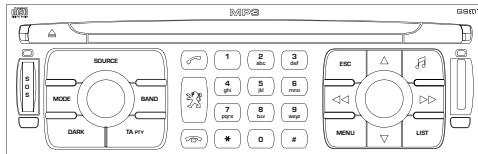

RT4

MULTIMEDIA AUDIO EQUIPMENT/TELEPHONE JUKEBOX FUNCTION (10 GB)/GPS (EUROPE)



The SERVICE BOX website provides additional, animated information on the RT4. It can be consulted at the following address:

the following address:
<http://public.servicebox.peugeot.com>.

Registering on the site allows access to the vehicle handbook documentation, which can be consulted free of charge.



The RT4 GPS audio/telephone is coded in such a way that it will only operate in your vehicle. If it is to be installed in another vehicle, contact your PEUGEOT dealer for configuration of the system.



For safety reasons, the driver must carry out operations which require prolonged attention while the vehicle is stationary.

When the engine is off and in order to prevent discharging of the battery, the RT4 GPS audio/telephone may switch off after a few minutes.

CONTENTS


• 01 First steps	pg. 173
• 02 General menu	pg. 174
• 03 GPS	pg. 175
• 04 Traffic information	pg. 184
• 05 Audio	pg. 186
• 06 Telephone	pg. 192
• 07 Control short-cuts	pg. 195
• 08 Configuration	pg. 197
• 09 Display flow chart	pg. 198
• Frequently asked questions	pg. 213

FIRST STEPS 01



1. Ejection of the CD.
2. Selection of the source: radio, Jukebox, CD, CD changer and auxiliary (AUX, if activated on the Configuration menu). Long press: CD copy to hard disc.
3. Long press on the SOS button: emergency call.
4. Selection of the display on the screen from the modes: TRIP, TEL, NAV and AUDIO.
5. Modification of the screen display. Long press: reinitialisation of the RT4 GPS audio/telephone.
6. On/Off and Volume adjustment.
7. Selection of the wavebands FM1, FM2, FMast, AM.
8. TA (Traffic Announcement) function on/off. Long press: access to the PTY (radio Programme TYpes) mode.
9. Access to the "PEUGEOT" services menu.
10. Cancellation of the current operation. Long press: return to the current application.
11. Automatic search for a lower/higher frequency. Selection of the previous/next CD, MP3 or Jukebox track.
12. Displaying of the general menu.
13. Keypad for entering descriptions by successive presses.
14. Selection of the previous/next CD. Selection of the previous/next MP3/Jukebox directory.
15. Audio option adjustments: front/rear, left/right balance, loudness, sound ambiences.
16. Selection and confirmation.
17. SIM card slot.
18. Displaying of the list of local radio stations, of the tracks on the CD or of the MP3/Jukebox directories. Long press: updating of the local radio stations.

02 GENERAL MENU

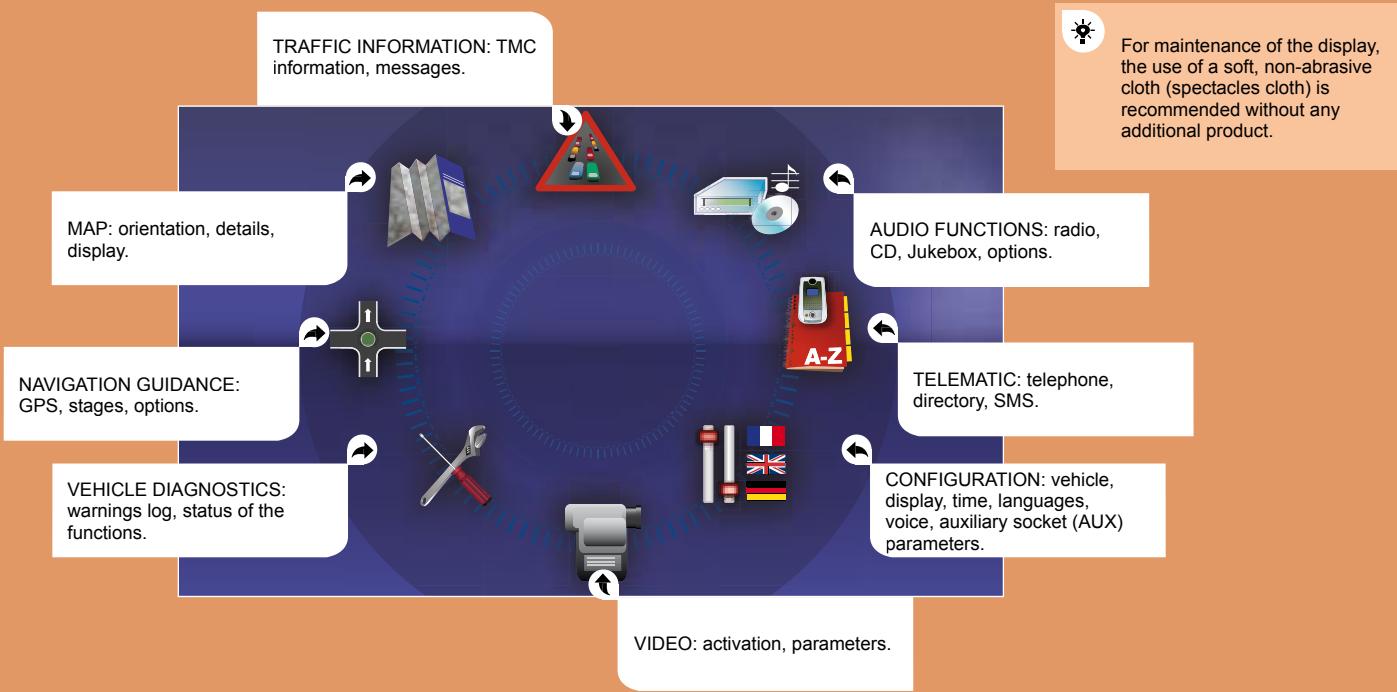


03 GPS



SELECTING A DESTINATION

Tip: for a detailed global view of the menus available, refer to the "Display flow charts" section of this RT4 chapter.



Press the MENU button.



Turn the dial and select the NAVIGATION GUIDANCE function.




Press the dial to confirm the selection.



Turn the dial and select the ENTER AN ADDRESS function.

ENTER AN ADDRESS



Press the dial to confirm the selection.



Press the dial to confirm the selection.




Turn the dial and select the DESTINATION CHOICE function.

DESTINATION CHOICE




When the country has been selected, turn the dial and select the TOWN function.

TOWN






9 Press the dial to confirm the selection.



10 Turn the dial and select the letters of the town one by one confirming each time by pressing the dial.

PARIS



11 To speed up the process, the POST CODE can be entered instead of the name of the town.
Use the alphanumeric keypad to enter the letters and digits and "*" to correct.



12 Select OK and press the dial to confirm.

OK




13 Repeat steps 8 to 12 for the ROAD and N° functions.



14 Select OK on the ENTER AN ADDRESS page.

OK



15 Press the dial to confirm the selection.



Select the STORE function to record the address entered in a directory record and press the dial to confirm the selection.

The points of interest (POI) indicate all of the service locations in the vicinity (hotels, various businesses, airports...).


STORE

POI

03 GPS



GUIDANCE OPTIONS



Press the MENU button.



Turn the dial and select the NAVIGATION GUIDANCE function.



Press the dial to confirm the selection.



Turn the dial and select the GUIDANCE OPTIONS function.

GUIDANCE OPTIONS



Press the dial to confirm the selection.



Turn the dial and select the DEFINE CALCULATION CRITERIA function.

DEFINE CALCULATION CRITERIA



Press the dial to confirm the selection.



Turn the dial and select, for example, the DISTANCE/TIME function.

DISTANCE/TIME






GUIDANCE SPEECH SYNTHESIS



Press the dial to confirm the selection.



Turn the dial and select the TRAFFIC INFO function if it is not ticked.

TRAFFIC INFO



Tick this box for optimum operation of the traffic information, diversions will be suggested.




Press the dial to confirm the selection.



Select OK and press the dial to confirm.

OK



Press the MENU button.



Turn the dial and select the NAVIGATION GUIDANCE function.




Press the dial to confirm the selection.



Turn the dial and select the GUIDANCE OPTIONS function.

GUIDANCE OPTIONS



Press the dial to confirm the selection.




03 GPS



GUIDANCE SPEECH SYNTHESIS



During the announcements, the volume of each speech synthesis function (guidance, traffic information...) can be adjusted directly.



6

Select the ADJUST SPEECH SYNTHESIS function and press the dial to confirm.



ADJUST SPEECH SYNTHESIS



7

Select the DEACTIVATE function and press the dial to confirm.



DEACTIVATE



8

Select OK and press the dial to confirm.



OK



ACTIONS ON THE MAP

1



Press the MENU button.



2



Turn the dial and select the MAP function.



3



Press the dial to confirm the selection.



4



Turn the dial and select the MAP DETAILS function.
Permits selection of the services which can be seen on the map (hotels, restaurants...).




MAP DETAILS

03 GPS



3D VIEW

For improved visibility, beyond the scale of 10 km, the map automatically switches to North Orientation.



Press the MENU button.



Turn the dial and select the MAP function.



Press the dial to confirm the selection.



Turn the dial and select the MAP ORIENTATION function.

MAP ORIENTATION



Press the dial to confirm the selection.



Turn the dial and select the 3D VIEW tab.

3D VIEW



Select OK and press the dial to confirm.

OK



03 GPS



DISPLAYING THE MAP IN A WINDOW OR IN FULL SCREEN MODE



Press the MENU button.



Turn the dial and select the MAP function.



Press the dial to confirm the selection.



Turn the dial and select the DISPLAY MAP function.

DISPLAY MAP



Press the dial to confirm the selection.



Turn the dial and select the MAP IN WINDOW or FULL SCREEN MAP tab.

MAP IN WINDOW
FULL SCREEN MAP



Select OK and press the dial to confirm.



OK


GPS

List of POI

 Flying club	 Station	 Covered parking
 Airport	 Dock station	 Skating rink
 Lay-by	 Bus station	 Ports
 Bowling alley	 Hospitals	 Restaurant
 Casino	 Hotels	 Shopping
 Business park	 Vehicle hire	 Show/Exhibition
 Sports centre	 Town halls	 Winter sports centre
 Town centre	 Historical monuments	 Service station
 Cinema	 Tourist information	 Supermarkets
 Sports complexes	 Theme park	 Golf course
 Culture/Museum	 Park/Garden	 Tourism
 Vineyard	 Park and ride	 University
 Garage	 Car park	 Night life

03 GPS

ADDING A STAGE



During guidance, press the MENU button.



Turn the dial and select the NAVIGATION GUIDANCE function.



Press the dial to confirm the selection.



Turn the dial and select the JOURNEY LEGS AND ROUTE function.

JOURNEY LEGS AND ROUTE



Press the dial to confirm the selection.



Select the ADD A STAGE function (9 stages maximum) and press the dial to confirm.

ADD A STAGE



Enter for example a new address.

ENTER AN ADDRESS




When the new address has been entered, select OK and press the dial to confirm.

OK



Select OK and press the dial to confirm the order of the stages.

OK




The stage must be completed or deleted before the guidance can continue to the next destination. Otherwise, the RT4 GPS audio/telephone will always guide you back to the previous stage.

04 TRAFFIC



ACTIVATING THE FILTER ON THE ROUTE



Press the MENU button.



Turn the dial and select the TRAFFIC INFORMATION function.



We recommend a filter on the route and a filter around the vehicle of:

- 5 km or 10 km for a region with heavy traffic,
- 20 km for a region with a normal level of traffic,
- 100 km for long journeys (motorway).



Press the dial to confirm the selection.



Select the GEOGRAPHIC FILTER function and press the dial to confirm.

GEOGRAPHIC FILTER



Turn the dial and select the ON THE ROUTE tab.

ON THE ROUTE



Turn the dial and select the FILTER TRAFFIC INFORMATION function.

FILTER TRAFFIC INFORMATION



Select OK and press the dial to confirm.

OK



04 TRAFFIC





CONFIGURING THE TMC MESSAGE ANNOUNCEMENTS



Press the MENU button.



Turn the dial and select the TRAFFIC INFORMATION function.



Press the dial to confirm the selection.



Turn the dial and select the CONFIGURE MESSAGE ANNOUNCEMENT function.


CONFIGURE MESSAGE ANNOUNCEMENT



Press the dial to confirm the selection.



We recommend that you do not tick the NEW MESSAGE DISPLAY tab for regions with heavy traffic.



Select the READ MESSAGES tab.

READ MESSAGES



The Traffic Information Messages will be read by the voice synthesiser. Select the NEW MESSAGE DISPLAY tab.

The traffic information messages are extended to the filters selected (geographic...) and can also be displayed when guidance is not active.

NEW MESSAGE DISPLAY



Select OK and press the dial to confirm.




OK


05 AUDIO/VIDEO




RADIO SELECTING A STATION



1 Press the SOURCE button several times in succession and select the RADIO.



2 Press the BAND button to select a waveband: FM1, FM2, FMast, AM.



3 Briefly press one of the buttons to carry out an automatic search of the radio stations.




4 Press one of the buttons to carry out a manual search of the radio stations.



5 Press the LIST button to display the list of stations received locally (60 maximum). To update this list, press for more than two seconds.



RDS



1 Press the MENU button.



2 Select AUDIO FUNCTIONS then press OK.



3 Select the RADIO PREFERENCES function then press OK.

RADIO PREFERENCES



4 Select ACTIVATE FREQUENCY FOLLOWING (RDS) then press OK. RDS appears on the display.

ACTIVATE FREQUENCY FOLLOWING (RDS)



5 The RDS, if displayed, enables you to continue listening to the same station by means of frequency following. However, in certain conditions, this RDS station is not followed throughout the country as radio stations do not cover 100 % of the territory. This explains the loss of reception of the station during a journey.

05 AUDIO/VIDEO



MP3 CD INFORMATION AND ADVICE



The MP3 format, an abbreviation of MPEG 1.2 & 2.5 Audio Layer 3, is an audio compression standard which permits the recording of several tens of music files on a single disc.



In order to be able to play a recorded CDR or CDRW, when recording it is preferable to select standards ISO 9660 level 1.2 or Joliet. If the disc is recorded in another format, it may not be played correctly.

It is recommended that the same recording standard is always used for an individual disc, with as low a speed as possible (4x maximum) for optimum sound quality.

In the particular case of a multi-session CD, the Joliet standard is recommended.



The audio equipment will only play audio files with the extension ".mp3" with a sampling rate of 22.05 KHz or 44.1 KHz. No other type of file (.wma, .mp4, m3u...) can be played.



It is advisable to restrict file names to 20 characters without using special characters (e.g.: " " ?; ü) to avoid any playing or displaying problems.


CD

PLAYING A CD OR AN MP3 COMPILATION



Insert circular compact discs only. Some anti-pirating systems, on original discs or CDs copied using a personal recorder, may generate malfunctions regardless of the quality of the original player. Insert an audio CD or an MP3 compilation in the player, play begins automatically.

1



If the player already contains a disc, press the SOURCE button several times in succession and select CD to listen to it.



2



Press one of the buttons to select a track on the CD. Press the LIST button to display the list of tracks on the CD or of the directories of the MP3 compilation.



!

The playing and displaying of an MP3 compilation may depend on the recording programme and/or the parameter settings used. We recommend use of the ISO 9660 recording standard.

JUKEBOX FUNCTION


COPYING A CD ONTO THE HARD DISC



1 Insert a CD or an MP3 compilation and press the MENU button.



2 Select AUDIO FUNCTIONS and press the dial to confirm.



3 Select COPY CD TO JUKEBOX and press the dial to confirm.

COPY CD TO JUKEBOX



4 Select COMPLETE CD to copy the entire CD and press the dial to confirm.

COMPLETE CD



5 Select CREATE ALBUM and press the dial to confirm.

CREATE ALBUM



The AUTO CREATION tab automatically copies the CD by default into an album of the type "album n°...".



6 Select the letters one by one and select OK to confirm.

OK



7 The audio or MP3 CD is copied onto the hard disc. Copying may take approximately 20 minutes depending on the duration of the CD. During this copying phase, it is not possible to listen to the albums previously recorded on the hard disc or the CDs.

8 If it is not an MP3 CD, the Jukebox automatically compresses the CD in MP3 format. The compression may take approximately 20 minutes depending on the duration of the CD. During this compression phase, it is possible to listen to the CD or to albums previously recorded on the hard disc.











A long press on the SOURCE button starts the copying of the CD.



! When copying an MP3 CD, the Jukebox only retains the last album level. It is not possible to copy files from the Jukebox to a CD. The STOP THE CD COPY action does not delete the files which have already been transferred onto the jukebox hard disc.

JUKEBOX FUNCTION RENAMING AN ALBUM

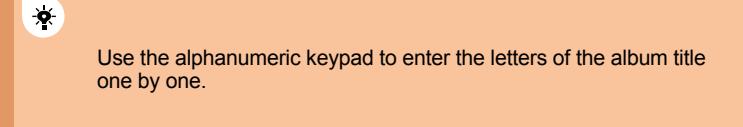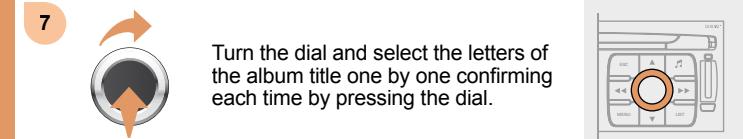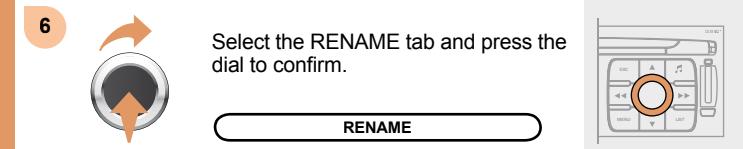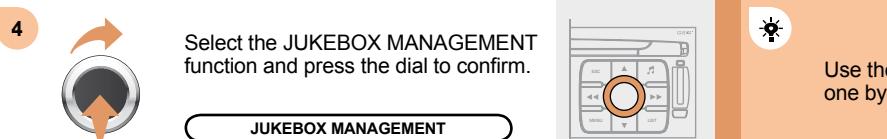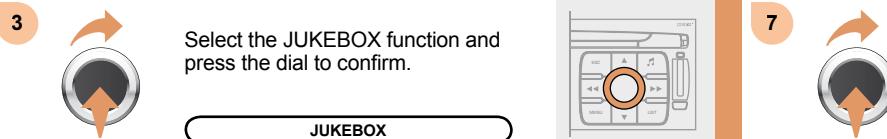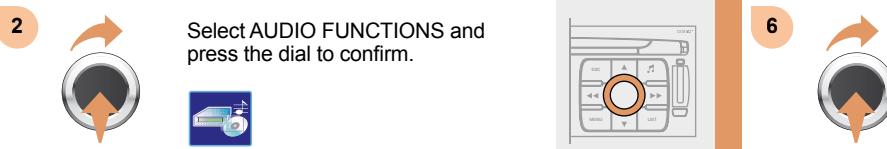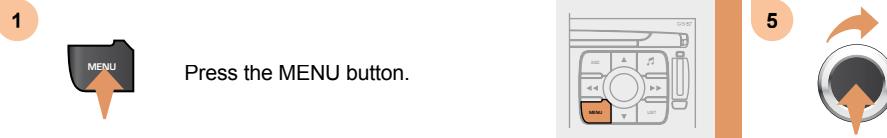

JUKEBOX FUNCTION

LISTENING TO THE JUKEBOX

8



Select OK and press the dial to confirm.

OK



To rename the tracks of an album, follow the same procedure, selecting the tracks to be renamed.
Use the ESC button to exit from the list of tracks.



Select the DELETE function to delete an album or a track from the Jukebox.

DELETE



1



Press the SOURCE button several times in succession and select the JUKEBOX function.

JUKEBOX



2



Press the LIST button.



3



Turn the dial to select the files.



Press the ESC button to return to the first file level.

USING THE AUXILIARY INPUT (AUX) JACK/RCA AUDIO CABLE NOT SUPPLIED



Press the MENU button then select the CONFIGURATION function, then SOUNDS, then ACTIVATE AUXILIARY SOURCE to activate the auxiliary input of the RT4 GPS audio/telephone.

1

Connect the portable equipment (MP3 player...) to the audio sockets (white and red, RCA type) located in the glove box using a JACK/RCA audio cable.



2



Press the SOURCE button several times in succession and select AUX.



The displaying and management of the commands takes place via the portable equipment.



! It is not possible to copy the files onto the hard disc from the auxiliary input.

CD CHANGER PLAYING A CD (NOT MP3 COMPATIBLE)

1



Insert one or more CDs in the changer. Press the SOURCE button several times in succession and select CD CHANGER.



2



Press one of the buttons on the alphanumeric keypad to select the corresponding CD.



3



Press one of the buttons to select a track on the CD.




! It is not possible to copy the files onto the hard disc from the CD changer.

06 TELEPHONE



INSTALLING YOUR SIM CARD (NOT SUPPLIED)


1



Access the slot by pressing the button using the tip of a pen.



2



Install the SIM card in the holder and then insert it in the slot.



3

To remove the SIM card, repeat step 1.



!

Your SIM card must be installed and removed with the RT4 GPS audio/telephone switched off and the ignition off.

ENTERING THE PIN CODE

1



Enter the PIN code on the keypad.

PIN CODE



2






Confirm the PIN code by pressing button #.



When entering your PIN code, tick the STORE PIN tab to gain access to the telephone without having to enter this code when it is used subsequently.

06 TELEPHONE

CALLING A CONTACT

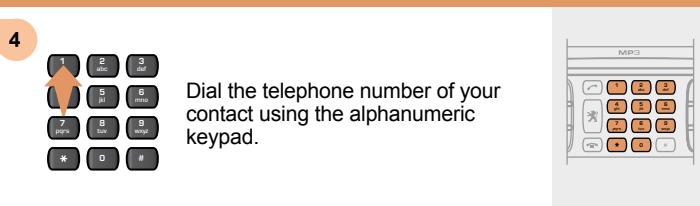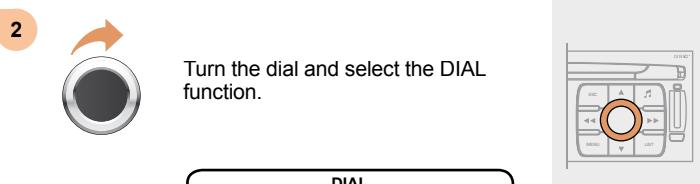



1 Press the PICK UP button to display the superimposed telephone menu.

2 Turn the dial and select the DIAL function.

DIAL

3 Press the dial to confirm the selection.



4 Dial the telephone number of your contact using the alphanumeric keypad.

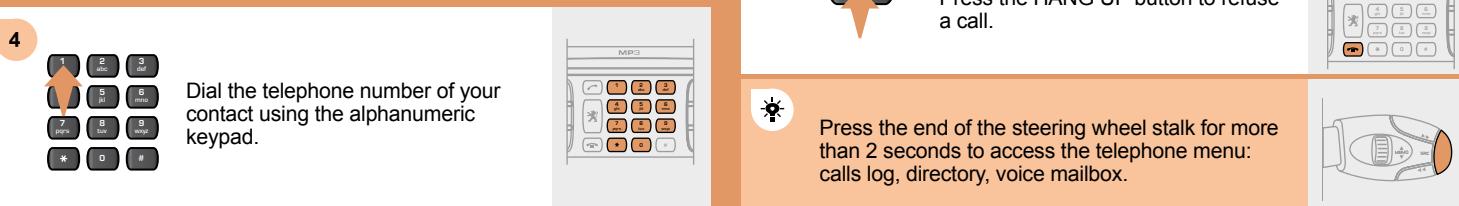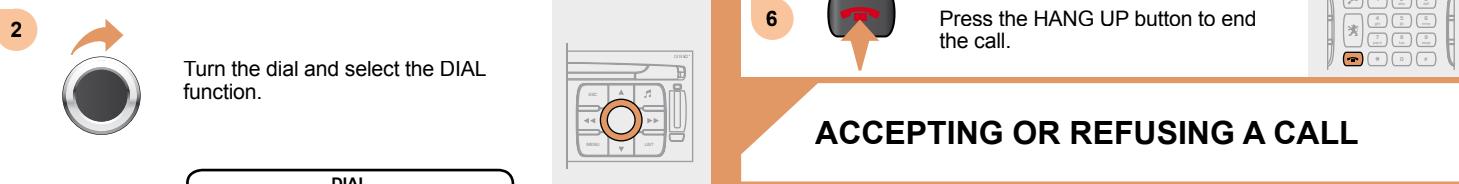

5 Press the PICK UP button to call the number dialled.

6 Press the HANG UP button to end the call.

ACCEPTING OR REFUSING A CALL

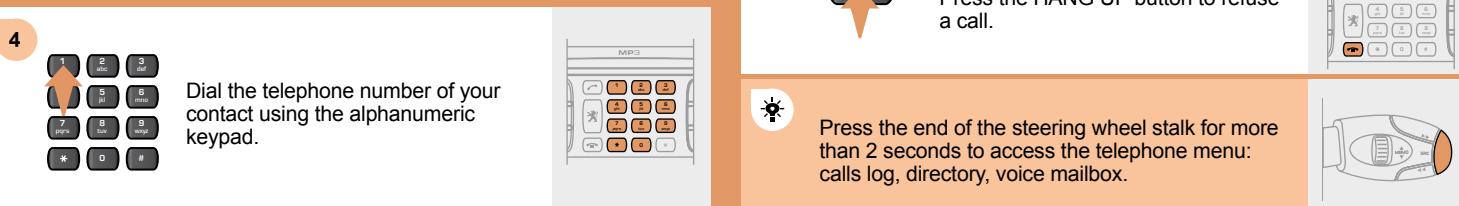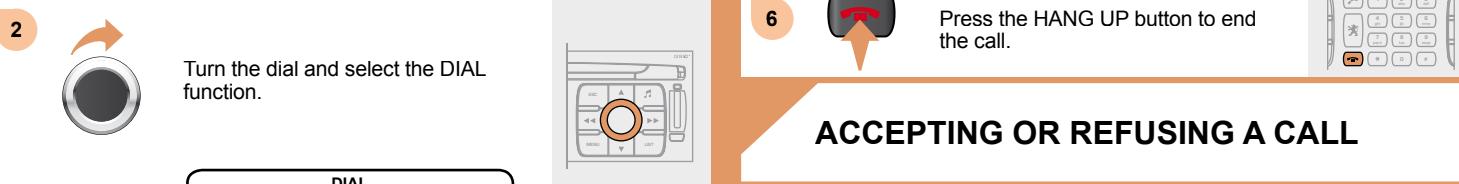

Press the end of the steering wheel stalk for more than 2 seconds to access the telephone menu: calls log, directory, voice mailbox.

EMERGENCY CALL



In an emergency, press the SOS button until an audible signal is heard and a CONFIRMATION/ CANCELLATION screen is displayed (if valid SIM card inserted).

A call is made to the emergency services (112).

In certain countries*, this emergency call is made directly by the PEUGEOT Emergency team which locates the vehicle and alerts the appropriate emergency services as quickly as possible.



* On condition that the PEUGEOT Emergency contract has been signed. This is free and of unlimited duration. Consult a PEUGEOT dealer.



When the PEUGEOT Emergency contract has been signed, it is recommended that an initial call is made to the PEUGEOT Emergency team.

CONSULTING THE SERVICES



Press the LION button to gain access to the PEUGEOT services*.



Select CUSTOMER CONTACT CENTRE to request any information about the PEUGEOT marque.

CUSTOMER CONTACT CENTRE



Select PEUGEOT ASSISTANCE to make a breakdown assistance call.

PEUGEOT ASSISTANCE




* These services and options are subject to conditions and availability.

07 CONTROL SHORT-CUTS

STEERING WHEEL CONTROLS

RADIO: selection of the previous stored station.
MP3/JUKEBOX: selection of the previous directory.
CD CHANGER: selection of the previous CD.
Selection of the previous item on a menu.

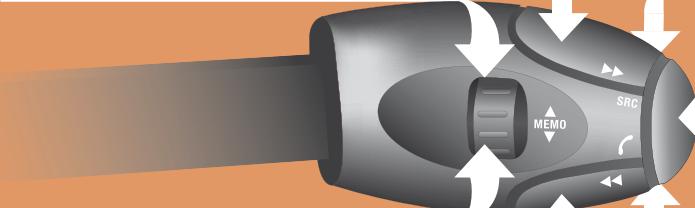

RADIO: selection of the next stored station.
MP3/JUKEBOX: selection of the next directory.
CD CHANGER: selection of the next CD.
Selection of the next item on a menu.

RADIO: automatic search for a higher frequency.
CD/MP3/JUKEBOX/CD CHANGER: selection of the next track.
CD/CD CHANGER: continuous press: fast forwards play.

Volume increase.

- Change of sound source.
- Confirmation of a selection.
- Pick up/Hang up the telephone.
- Press for more than 2 seconds: access to the telephone menu.

Volume decrease.

Mute: by pressing the volume increase and decrease buttons simultaneously.

The sound is restored by pressing one of the two volume buttons.

RADIO: automatic search for a lower frequency.
CD/MP3/JUKEBOX/CD CHANGER: selection of the previous track.
CD/CD CHANGER: continuous press: fast backwards play.

VOICE COMMANDS DISPLAYING THE LIST AND USING THEM



1



To display the list of available voice commands, press the end of the lights stalk to start the voice recognition, then say HELP or WHAT CAN I SAY.

2



For the same operation, press and hold the MENU button and select the function VOICE COMMANDS LIST.

VOICE COMMANDS LIST



2




Press the end of the lights stalk to start the voice recognition.
Say the words one by one and wait for the audible confirmation signal between each word.
The list which follows is exhaustive.

LEVEL 1	LEVEL 2	LEVEL 3
display	audio guidance navigation trip computer telephone	
call	description	
changer	disc number previous/next disc random play list track number previous/next track repeat scan	1 ... 20
guide to	description	
traffic info	display read	
CD player/jukebox	random play list track number previous/next track directory (MP3 CD) scan	1 ... 20 previous/next repeat
navigation	stop/resume directory show zoom out/in	destination description vehicle
radio	autostore list memory previous/next	1 ... 6
SMS/message	display read	
telephone	voice mailbox last number voice message service directory	description

08 CONFIGURATION



ADJUSTING THE DATE AND TIME



Press the MENU button.



Turn the dial and select the CONFIGURATION function.



Press the dial to confirm the selection.



Turn the dial and select the DISPLAY CONFIGURATION function.

DISPLAY CONFIGURATION



Press the dial to confirm the selection.



Turn the dial and select the ADJUST THE DATE AND TIME function.

ADJUST THE DATE AND TIME



Press the dial to confirm the selection.



Adjust the parameters one by one confirming by pressing the dial. Next select the OK tab on the display then confirm.

OK



09 DISPLAY FLOW CHARTS



NAVIGATION - GUIDANCE

1 SELECT DESTINATION

2 enter an address

3 country:

4 town:

4 road:

4 N°/_:

4 curr. loc

4 Archive

4 POI

5 near

5 on the route

5 around current place

5 search by name

3 GPS coordinates

3 directory



1 MAIN FUNCTION

- 2 CHOICE A
- 3 choice A1
- 3 choice A2
- 2 CHOICE B...

3 previous destinations

2 JOURNEY LEGS AND ROUTE

3 add a stage

4 enter an address

4 directory

4 previous destinations

3 order/delete journey legs

3 divert route

3 chosen destination

2 GUIDANCE OPTIONS

3 define calculation criteria

4 fastest

4 shortest

4 distance/time

4 with tolls

4 with ferry

4 traffic info

3 set speech synthesis

3 activate/deactivate road names

3 map data base description

3 delete last destinations

2 STOP/RESUME GUIDANCE



MAP

2 MAP ORIENTATION

3 vehicle direction

3 north direction

3 3D view

2 MAP DETAILS

3 administration and safety

4 town halls, town centre

4 universities, colleges

4 hospitals

3 hotels, restaurants and shops

4 hotels




4 restaurants

4 vineyards

- 4 business centres
- 4 supermarkets, shopping
- 3 **culture, tourism and shows**
 - 4 tourism
 - 4 culture and museums
 - 4 casinos and nightlife
 - 4 cinemas and theatres
 - 4 shows and exhibitions
- 3 **sports and open air centres**
 - 4 sports centres
 - 4 golf courses
 - 4 skating rinks, bowling alleys
 - 4 winter sports resorts
 - 4 parks, gardens
 - 4 theme parks
- 3 **transport and automobile**
 - 4 airports, ports
 - 4 stations, bus stations
 - 4 vehicle rental
 - 4 lay-bys, car parks
 - 4 service stations, garages

- 2 **DISPLAY MAP**
 - 3 full screen map
 - 3 map in window
- 2 **MOVE THE MAP**
 - 1  **TRAFFIC INFORMATION**
 - 1 **READ MESSAGES**
 - 2 **FILTER TRAFFIC INFORMATION**
 - 3 geographic filter
 - 4 around the vehicle
 - 4 around location
 - 4 on the route
 - 3 **road information**
 - 4 traffic information
 - 4 road closure
 - 4 size limit
 - 4 road condition
 - 4 weather and visibility
 - 3 **urban/city information**
 - 4 parking
 - 4 public transport
 - 4 demonstrations

- 2 **CONFIGURE MESSAGE ANNOUNCEMENT**
 - 3 read messages
 - 3 new message display
- 2 **SELECT TMC STATION**
 - 3 automatic TMC
 - 3 manual TMC
 - 3 list of TMC stations
- 1  **AUDIO FUNCTIONS**
 - 2 **RADIO FAVOURITES**
 - 3 enter a frequency
 - 3 activate/deactivate RDS mode
 - 3 activate/deactivate regional mode
 - 3 display/hide radio text
 - 2 **CD, JUKEBOX FAVOURITES**
 - 3 activate/deactivate Introscan (SCN)
 - 3 activate/deactivate Random mode (RDM)
 - 3 activate/deactivate Repeat (RPT)
 - 3 activate/deactivate display of CD info
 - 2 **STOP THE COPY**
 - 2 **COPY CD TO JUKEBOX**
 - 3 copy complete CD

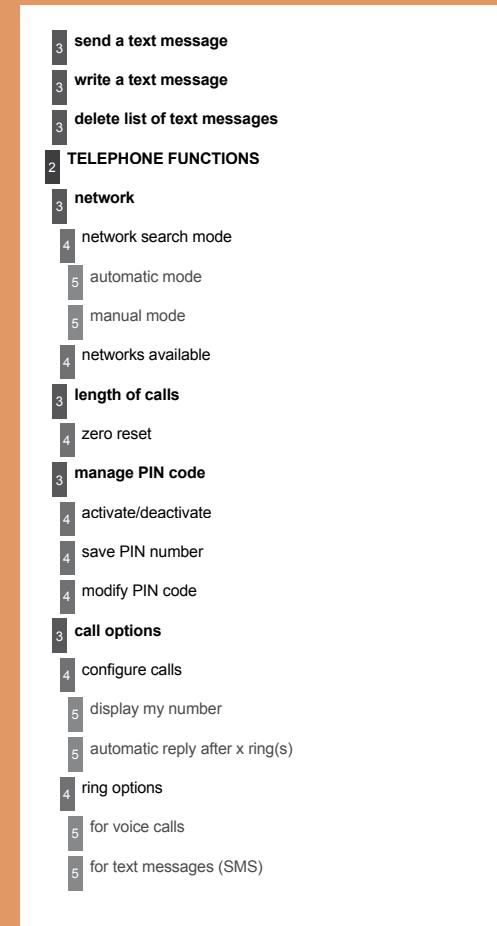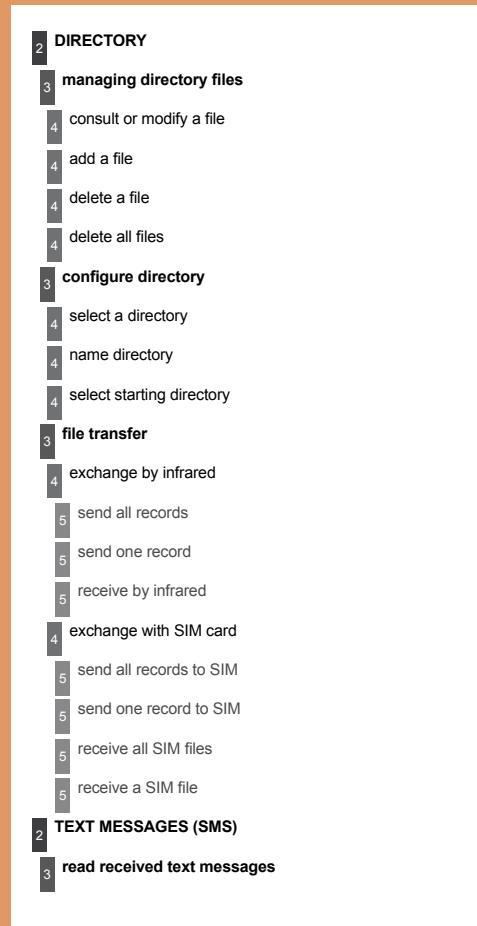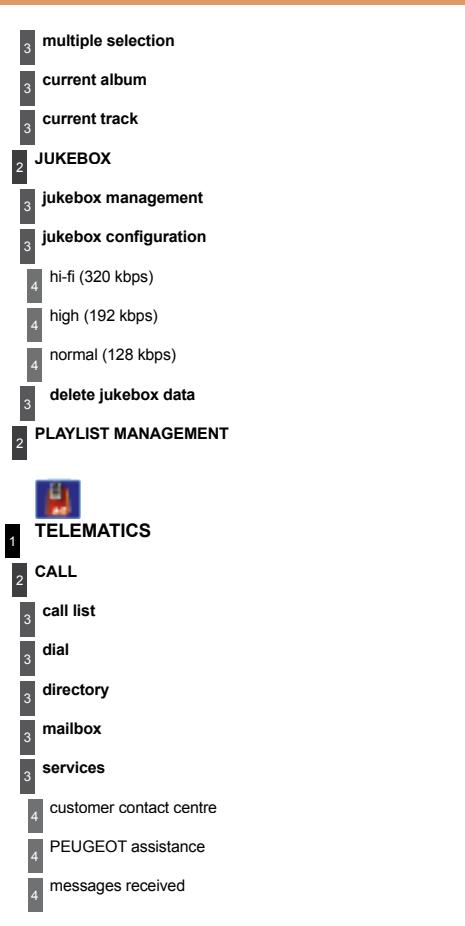

- 6 text message ring
- 3 call diversion to mailbox n°
- 3 delete calls log

CONFIGURATION

DISPLAY CONFIGURATION

- choose colour
- adjust luminosity
- set date and time
- select units

SOUND

- voice commands setting
- speech synthesis setting
- guidance instructions volume
- other message volume
- select female/male voice

activate/deactivate auxiliary source

SELECT LANGUAGE

DEFINE VEHICLE PARAMETERS*



VIDEO

ACTIVATE VIDEO MODE

VIDEO PARAMETERS

- display formats
- adjust luminosity
- set colours
- set contrasts



VEHICLE DIAGNOSTICS

ALERT LOG

STATUS OF FUNCTIONS*

RESET TYRE PRESS. DETEC. SYS.*



Press the MENU button for more than 2 seconds to gain access to the next flow chart.

VOICE COMMANDS LIST

AUDIO/TELEPHONE DIAGNOSTICS

GPS COVERAGE

UNIT BACKUP POWER

UNIT DESCRIPTION

NAVIGATION DEMONSTRATION

SERVICES CONFIGURATION



Press the Music button several times in succession to access the following settings.

MUSICAL AMBIENCE

BASS

TREBLE

LOUDNESS CORRECTION

FR-RR BALANCE

LH-RH BALANCE

AUTO VOLUME CORRECTION



Each audio source (Radio, CD, MP3, Jukebox, CD changer) has its own separate settings.

* The parameters vary according to vehicle (refer to the "Operation warning lights" chapter).

FREQUENTLY ASKED QUESTIONS

The table below groups together the answers to the most frequently asked questions concerning the RD4 audio equipment and the RT4 audio/telephone.

QUESTION	RESPONSE	SOLUTION
There is a difference in sound quality between the different audio sources (radio, CD, CD changer...).	For optimum sound quality, the audio settings (Volume, Bass, Treble, Ambience, Loudness) can be adapted to the different sound sources, which may result in audible differences when changing source (radio, CD, CD changer...).	Check that the audio settings (Volume, Bass, Treble, Ambience, Loudness) are adapted to the sources listened to. It is advisable to set the AUDIO functions (Bass, Treble, Front-Rear Balance, Left-Right Balance) to the middle position, select the musical ambience "None" and set the loudness correction to the "Active" position in CD mode or to the "Inactive" position in radio mode.
The CD is ejected automatically or is not played by the player.	<p>The CD is inserted upside down, is unplayable, does not contain any audio data or contains an audio format which the player cannot play.</p> <p>The CD is protected by an anti-pirating protection system which is not recognised by the audio equipment.</p>	<ul style="list-style-type: none"> - Check that the CD is inserted in the player the right way up. - Check the condition of the CD: the CD cannot be played if it is too damaged. - Check the content in the case of a recorded CD: consult the advice in the Audio section. - The audio equipment's CD player does not play DVDs. - Due to inadequate quality, certain recorded CDs will not be played by the audio system. - The CD changer does not play MP3 CDs.
The CD player sound is poor.	The CD used is scratched or of poor quality.	Insert good quality CDs and store them in suitable conditions.
	The audio equipment settings (bass, treble, ambiances) are unsuitable.	Set the treble or bass level to 0, without selecting an ambience.


QUESTION	RESPONSE	SOLUTION
The stored stations do not function (no sound, 87.5 Mhz is displayed...)	An incorrect waveband is selected.	Press the BAND AST button to return to the waveband (AM, FM1, FM2, FMAST) on which the stations are stored.
The traffic announcement (TA) is displayed. I do not receive any traffic information.	The radio station is not part of the regional traffic information network.	Tune to a radio station which broadcasts traffic information.
The quality of reception of the radio station listened to gradually deteriorates or the stored stations do not function (no sound, 87.5 Mhz is displayed...).	The vehicle is too far from the transmitter used by the station listened to or there is no transmitter in the geographical area through which the vehicle is travelling.	Activate the RDS function to enable the system to check whether there is a more powerful transmitter in the geographical area.
	The environment (hills, buildings, tunnels, basement car parks...) block reception, including in RDS mode.	This phenomenon is normal and does not indicate a failure of the audio equipment.
	The aerial is absent or has been damaged (for example when going through a car wash or into an underground car park).	Have the aerial checked by a PEUGEOT dealer.
Sound cut-outs of 1 to 2 seconds in radio mode.	During this brief sound cut-out, the RDS searches for any frequency permitting better reception of the station.	Deactivate the RDS function if the phenomenon is too frequent and always on the same route.
With the engine off, the audio equipment switches off after a few minutes of use.	When the engine is switched off, the audio equipment operating time depends on the battery charge. The switch-off is normal: the audio equipment switches to economy mode and switches off to prevent discharging of the vehicle's battery.	Start the vehicle's engine to increase the battery charge.
The message "the audio system is overheated" appears on the display. In order to protect the	installation if the surrounding temperature is too high, the audio equipment switches to an automatic thermal protection mode leading to a reduction of the volume or stopping of the playing of the CD.	Switch the audio system off for a few minutes to allow the system to cool.

The table below groups together the answers to the most frequently asked questions concerning the RT4 audio/telephone.

QUESTION	RESPONSE	SOLUTION
The TRAFFIC INFO box is ticked. However, certain traffic jams along the route are not indicated in real time.	On starting, it is several minutes before the system begins to receive the traffic information.	Wait until the traffic information is being received correctly (displaying of the traffic information symbols on the map).
	In certain countries, only major routes (motorways, ...) are listed for the traffic information.	This phenomenon is normal. The system is dependent on the traffic information available.
The time taken to calculate a route sometimes seems longer than usual.	The performance of the system may slow down temporarily if a CD is being copied onto the Jukebox at the same time as a route is being calculated.	Wait until the CD has been copied or stop the copying before starting the guidance function.
Does the emergency call function work without a SIM card?	No, European regulations impose the presence of a SIM card in order to make an emergency call.	Insert a valid SIM card in the slot on the RT4 GPS audio/telephone.
My SIM card is not recognised.	The RT4 accepts 3.3 V SIM cards, the old 5 V and 1.8 V SIM cards are not recognised.	Contact your telephone operator.
After changing a wheel, the system loses its location.	The RT4 GPS audio/telephone uses the wheel rotation information to improve the GPS locating function. If a wheel is changed or deflates suddenly, the system recalculates the location. For approximately ten minutes, this recalculation may affect the quality of the locating function.	Wait until the system has completed its recalculation.
The location on the map is incorrect or inaccurate. The altitude is not displayed.	On starting, the initialisation of the GPS may take up to 3 minutes to receive more than 3 satellites correctly.	Wait until the system has started up completely. Check that there is a GPS coverage of at least 3 satellites (long press on the MENU button, then select AUDIO/TELEPHONE DIAGNOSTICS, then GPS COVERAGE).
	Depending on the geographical environment (tunnel, ...) or the weather, the conditions of reception of the GPS signal may vary.	This phenomenon is normal. The system is dependent on the conditions of reception of the GPS signal.

RD4

AUDIO EQUIPMENT/HANDS-FREE KIT

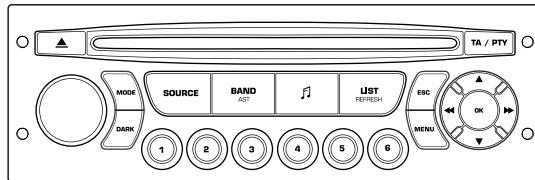

The SERVICE BOX website provides additional, animated information on the RD4. It can be consulted at the following address:

<http://public.servicebox.peugeot.com>.

Registering on the site allows access to the vehicle handbook documentation, which can be consulted free of charge.



The RD4 audio equipment is coded in such a way that it will only operate in your vehicle. If it is to be installed in another vehicle, contact your PEUGEOT dealer for configuration of the system.



For safety reasons, the driver must carry out operations which require prolonged attention while the vehicle is stationary.

When the engine is off and in order to prevent discharging of the battery, the RD4 audio equipment may switch off after a few minutes.

CONTENTS

● 01 First steps	pg. 203
● 02 General menu	pg. 204
● 03 Audio	pg. 205
● 04 Hands-free kit	pg. 208
● 05 Control short-cuts	pg. 209
● 06 Configuration	pg. 210
● 07 Display flow charts	pg. 211
● Frequently asked questions	pg. 213

FIRST STEPS 01



1. On/Off and volume adjustment.
2. CD eject.
3. Selection of the screen display mode.
4. Selection of the source: radio, CD and CD changer.
5. Selection of the FM1, FM2, FMast and AM wavebands.
6. Setting the audio options: front/rear balance, left/right balance, loudness, sound ambiances.
7. Displaying of the list of local stations, of the tracks on the CD or of the MP3 directories.
8. Abandon current operation.
9. TA (Traffic Announcement) function on/off.
Long press: access to the PTY (TTypes of radio Programme) mode.
10. Confirmation.
11. Automatic search for a lower/higher frequency.
Selection of previous/next CD or MP3 track.
12. Selection of a lower/higher radio frequency.
Selection of the previous/next CD.
Selection of the previous/next MP3 directory.
13. Displaying of the general menu.
14. Buttons 1 to 6:
Selection of a stored radio station.
Selection of a CD in the CD changer.
Long press: storing of a station.
15. The DARK button changes the display on the screen to improve driving comfort at night.
1st press: lighting of the top banner only.
2nd press: black screen display.
3rd press: return to the standard display.

02 GENERAL MENU

> MONOCHROME DISPLAY C

AUDIO FUNCTIONS: radio, CD, options.


TELEPHONE: hands-free kit, matching, management of a communication.



TRIP COMPUTER: distance entering, warnings, status of functions.

PERSONALISATION-CONFIGURATION: vehicle parameters, display, languages.

> MONOCHROME DISPLAY A

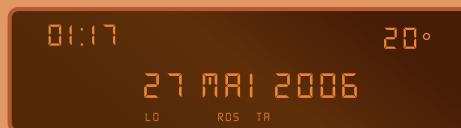

For a detailed global view of the menus available, refer to the "Display flow charts" section of this RD4 chapter.



03 AUDIO



RADIO SELECTING A STATION




Press the SOURCE button several times in succession and select the radio.



Press the BAND AST button to select a waveband: FM1, FM2, FMast, AM.



Briefly press one of the buttons to carry out an automatic search of the radio stations.



Press one of the buttons to carry out a manual search of the radio stations.



Press the LIST REFRESH button to display the list of stations received locally (30 stations maximum). To update this list, press for more than two seconds.



The external environment (hills, buildings, tunnels, basement car parks) may block reception, including in RDS mode. This is a normal effect of the way in which radio waves are transmitted and does not indicate any failure of the audio equipment.


RDS



Press the MENU button.



Select AUDIO FUNCTIONS then press OK.




Select the FM WAVEBAND PREFERENCES function then press OK.

FM WAVEBAND PREFERENCES



Select ACTIVATE FREQUENCY FOLLOWING (RDS) then press OK. RDS appears on the display.

ACTIVATE FREQUENCY FOLLOWING (RDS)



The RDS, if displayed, enables you to continue listening to the same station by means of frequency following. However, in certain conditions, this RDS station is not followed throughout the country as radio stations do not cover 100 % of the territory. This explains the loss of reception of the station during a journey.

CD CHANGER


PLAYING A CD (NOT MP3 COMPATIBLE)

1



Insert the CDs in the changer one by one.


Press the SOURCE button several times in succession and select CD CHANGER.



2



Press one of the buttons on the numeric keypad to select the corresponding CD.



3



Press one of the buttons to select a track on the CD.
Press and hold one of the buttons for fast forwards or backwards play.



CD

PLAYING A CD



Insert circular compact discs only.

Some anti-pirating systems, on original discs or CDs copied using a personal recorder, may cause faults which are no reflection on the quality of the original player.

Without pressing the EJECT button, insert a CD in the player, play begins automatically.

1




To play a disc which has already been inserted, press the SOURCE button several times in succession and select CD.



2



Press one of the buttons to select a track on the CD.
Press the LIST REFRESH button to display the list of tracks on the CD.



MP3 CD INFORMATION AND ADVICE



The MP3 format, an abbreviation of MPEG 1.2 & 2.5 Audio Layer 3, is an audio compression standard which permits the recording of several tens of music files on a single disc. The playing and displaying of an MP3 compilation may depend on the recording programme and/or the parameters used.



In order to be able to play a recorded CDR or CDRW, when recording select standards ISO 9660 level 1.2 or Joliet. If the disc is recorded in another format, it may not be played correctly.

It is recommended that the same recording standard is always used for an individual disc, with as low a speed as possible for optimum sound quality.

In the particular case of a multi-session CD, the Joliet standard is recommended.



The audio equipment will only play files with the extension ".mp3". No other type of file (.wma, .mp4...) can be played.



It is advisable to restrict file names to 20 characters without using special characters (e.g.: " " ?; ü) to avoid any playing or displaying problems.

CD PLAYING AN MP3 COMPILATION



Insert an MP3 compilation in the player. The audio equipment searches for all of the music tracks, which may take anything between a few seconds and several tens of seconds, before play begins.




On a single disc, the CD player can read up to 255 MP3 files spread over 8 directory levels. However, it is advisable to keep to a limit of two levels to reduce the access time before the CD is played.



To play a disc which has already been inserted, press the SOURCE button several times in succession and select CD.



Press one of the buttons to select a track on the CD. Press the LIST REFRESH button to display the list of directories of the MP3 compilation.



04 HANDS-FREE KIT



MATCHING A TELEPHONE DISPLAY C



For safety reasons and because they require prolonged attention on the part of the driver, the operations for matching of the Bluetooth mobile telephone with the RD4 hands-free kit must be carried out with the vehicle stationary and the ignition on.

- 1 Activate the telephone's Bluetooth function and carry out a search of the Bluetooth accessories present for the telephone.



- 2 Select the accessory which corresponds to the name of the vehicle, a superimposed configuration display appears on the multifunction display.




- 3 Enter the vehicle's authentication code (=1234). Depending on the telephone, you may be asked to enter this code before the superimposed configuration display appears.



- 4 Select the YES tab on the display using the buttons then confirm by pressing OK.

YES



The services offered by the hands-free kit depend on the network, the SIM card and the compatibility of the Bluetooth equipment used.


Consult your telephone's manual and your operator to find out which services are available to you. A list of mobile telephones which offer the best range of services is available from the network. Contact a PEUGEOT dealer.

RECEIVING A CALL

- 1 An incoming call is announced by a ring and a superimposed display on the multifunction display.




Select the YES tab on the display using the buttons and confirm by pressing OK.



OK

- 2 Press the end of the steering wheel stalk to accept the call.



MAKING A CALL

- 1 Press the end of the steering wheel stalk for more than two seconds to access your directory.



- 1 To dial a number, use the keypad on your telephone.



05 CONTROL SHORT-CUTS

STEERING WHEEL CONTROLS

RADIO: selection of the previous stored station.
CD CHANGER: selection of the previous CD.
Selection of the previous item on a menu.
MP3: selection of the previous directory.

RADIO: automatic search for a higher frequency.
CD/CD CHANGER/MP3: selection of the next track.
CD/CD CHANGER: continuous press: fast forwards play.
Selection of the previous item.

Mute: by pressing the volume increase and decrease buttons simultaneously.

The sound is restored by pressing one of the two volume buttons.

RADIO: selection of the next stored station.
CD CHANGER: selection of the next CD.
Selection of the next item on a menu.
MP3: selection of the next directory.

RADIO: automatic search for a lower frequency.
CD/CD CHANGER/MP3: selection of the previous track.
CD/CD CHANGER: continuous press: fast backwards play.
Selection of the next item.


06 CONFIGURATION



ADJUSTING THE DATE AND TIME DISPLAY C



Press the MENU button.




Press to confirm the selection.



Using the arrows, select the PERSONALISATION CONFIGURATION function.



PERSONALISATION CONFIGURATION



Using the arrows, select the ADJUST DATE AND TIME function.

ADJUST DATE AND TIME



Press to confirm the selection.




Press to confirm the selection.



Using the arrows, select the DISPLAY CONFIGURATION function.

DISPLAY CONFIGURATION



Adjust the parameters one by one confirming by pressing the OK button. Next select the OK tab on the display then confirm.



OK

07 DISPLAY FLOW CHART monochrome C



1 AUDIO FUNCTIONS

2 FM BAND PREFERENCES

3 alternative frequencies (RDS)

4 activate/deactivate

3 regional mode (REG)

4 activate/deactivate

3 radio-text information (RDTXT)

4 activate/deactivate

2 AUDIO CD PREFERENCES

3 cd changer repeat (RPT)

4 activate/deactivate

3 track random play (RDM)

4 activate/deactivate



TRIP COMPUTER

ENTER DISTANCE TO DESTINATION

3 distance: x km

2 WARNING LOG

3 diagnostics

2 STATUS OF FUNCTIONS

3 functions activated or deactivated



1 PERSONALISATION-CONFIGURATION

2 DEFINE THE VEHICLE PARAMETERS*

2 DISPLAY CONFIGURATION

3 video brightness adjustment

4 normal video

4 inverse video

4 brightness (- +) adjustment

3 date and time adjustment

4 day/month/year adjustment

4 hour/minute adjustment

4 choice of 12 h/24 h mode

3 choice of units

4 l/100 km - mpg - km/l

4 ° Celsius/° Fahrenheit

2 CHOICE OF LANGUAGE

* The parameters vary according to vehicle
(refer to the "Operation warning lights" chapter).

** According to compatibility of Bluetooth telephone
and service contract.

1 TELEPHONE

2 CONSULTING DIRECTORIES**

3 telephone directory

3 call log

3 services directory

4 customer contact centre

4 breakdown call

4 emergency call

2 CONFIGURATION

3 deletion of a match

4 list of matches

3 consulting matches

4 list of matches

3 choice of a mobile to connect

4 list of mobiles

2 MANAGEMENT OF A COMMUNICATION

3 switch**

3 terminate the current call

3 secret mode

4 activate/deactivate

07 DISPLAY FLOW CHART monochrome A

A



1 RADIO-CD

2 RDS SEARCH

3 active

3 inactive

2 REG MODE

3 active

3 inactive

2 INTROSCAN

3 active

3 inactive

2 CD REPEAT

3 active

3 inactive

2 RANDOM PLAY

3 active

3 inactive



- 1 MAIN FUNCTION
- 2 CHOICE A
- 3 Choice A1
- 3 Choice A2
- 2 CHOICE B...

1 VEHICLE CONFIG*

2 REV WIPE ACT

3 active

3 inactive

2 GUIDE LAMPS

3 active

3 inactive

1 OPTIONS

2 ABANDON/CONSULT LIST OF FAULTS

3 functions activated (or not)

3 warning messages

1 DISPLAY ADJUST

2 YEAR

2 MONTH

2 DAY

2 HOUR

2 MINUTES

2 12 H/24 H MODE

1 LANGUAGES

2 FRANCAIS

2 ITALIANO

2 NEDERLANDS

2 PORTUGUES

2 PORTUGUES-BRASIL

2 DEUTSCH

2 ENGLISH


2 ESPANOL

1 UNITS

2 TEMPERATURE: ° CELSIUS/° FAHRENHEIT

2 FUEL CONSUMPTION: KM/L - L/100 - MPG

* The parameters vary according to vehicle
(refer to the "Instruments and Controls" chapter).

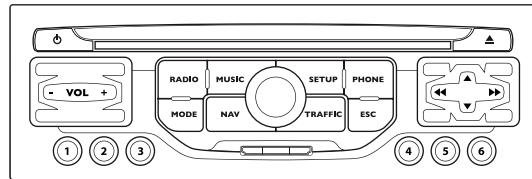

WIP Nav

MULTIMEDIA AUDIO EQUIPMENT / BLUETOOTH TELEPHONE
GPS EUROPE BY SD CARD

CONTENTS

- 01 First steps pg. 2
- 02 General operation pg. 3
- 03 Navigation - Guidance pg. 5
- 04 Traffic information pg. 12
- 05 Radio pg. 13
- 06 Music media players pg. 14
- 07 Bluetooth telephone pg. 17
- 08 Configuration pg. 19
- 09 Control short-cuts pg. 20
- 10 Display flow charts pg. 21
- Frequently asked questions pg. 24



The WIP Nav is protected in such a way that it will only operate in your vehicle. If it is to be installed in another vehicle, contact a PEUGEOT dealer for configuration of the system.



For safety reasons, it is imperative that the driver carries out operations which require prolonged attention while the vehicle is stationary.


When the engine is switched off and to prevent discharging of the battery, the WIP Nav switches off following the activation of the Energy Economy mode.



Certain functions described in this handbook will become available during the course of the year.

01 FIRST STEPS

WIP Nav CONTROL PANEL

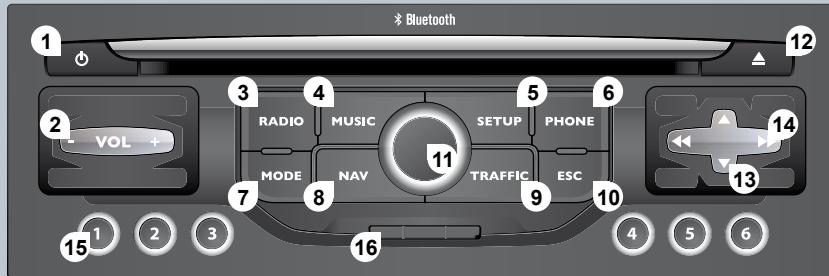

1. On/Off.
CD / SD card pause, mute for the radio.
Long press: reinitialisation of the system.
2. Volume adjustment.
3. Selection of the RADIO source. Displaying of the list of stations. Access to the RADIO menu.
4. Selection of the MUSIC source. Displaying of the tracks (CD) or of the folders (SD card). Access to the MUSIC menu.
5. Opening of the SETUP menu.
Long press: access to the GPS coverage and the demonstration mode.
6. Opening of the PHONE menu and displaying of the call list.
7. Selection of the successive displaying of: RADIO, Map, NAV (if navigation is in progress), Telephone (if a conversation is in progress), Trip Computer.
Long press: displaying of a black screen (DARK).
8. Opening of the NAVIGATION menu and displaying of the last destinations.
9. Opening of the TRAFFIC menu and displaying of the current traffic alerts.
10. Abandon the operation in progress.
11. Navigation through the menus, selection and confirmation.
Access to the short-cut menus.
Map zoom on Map or NAV display.
12. CD eject.
13. Selection of the previous/next radio station from the list.
Selection of the previous/next CD.
Selection of the previous/next MP3 directory.
Selection of the previous/next page of a list.
14. Selection of the previous/next radio station.
Selection of the previous/next CD or MP3 track.
Selection of the previous/next line of a list.
15. Buttons 1 to 6:
Selection of the stored radio station.
Selection of the CD in the CD changer.
Long press: storing of the current radio station.
16. SD card reader.

GENERAL OPERATION 02

Press the MODE button several times in succession to gain access to the following menus:


RADIO / MUSIC MEDIA PLAYERS



PHONE
(If a conversation is in progress)



TRIP COMPUTER



FULL SCREEN MAP



NAVIGATION
(If navigation is in progress)



SETUP:
system language, date and time, display,
vehicle parameters, units and system parameters



TRAFFIC:
TMC information and messages



For maintenance of the display, the use of a soft, non-abrasive cloth (spectacles cloth) is recommended, without any additional product.



For a detailed global view of the menus available, refer to the "Display flow charts" section of this handbook.

02 GENERAL OPERATION

SHORT-CUT MENUS



A press on the OK dial to permits access to short-cut menus according to the display on the screen.

NAV:

- 1 ABORT GUIDANCE
- 1 REPEAT ADVICE
- 1 BLOCK ROAD
- 1 ROUTE INFO
- 2 SHOW DEST.
- 2 TRIP INFO
- 3 route type
- 3 avoidance criteria
- 3 satellites
- 2 ZOOM/SCROLL
- 1 VOICE ADVICE
- 1 ROUTE OPTIONS

TRIP COMPUTER:

- 1 ALERT LOG
- 1 STATUS OF FUNCTIONS

PHONE:

- 1 END CALL
- 1 HOLD CALL
- 1 DIAL
- 1 DTMF TONES
- 1 PRIVATE MODE
- 1 MICRO OFF

MUSIC MEDIA PLAYERS:

- 1 TA
- 1 PLAY OPTIONS
- 2 NORMAL
- 2 RANDOM TRACK
- 2 REPEAT FOLDER
- 2 TRACK INTRO
- 1 SELECT MUSIC

RADIO:

- 1 IN FM MODE
- 2 TA
- 2 RDS
- 2 RADIOTEXT
- 2 REGIONAL PROG. (REG)
- 2 AM
- 1 IN AM MODE
- 2 TA
- 2 REFRESH AM LIST
- 2 FM

MAP:

- 1 ABORT/RESUME GUIDANCE
- 1 SET DESTINATION
- 1 POIS NEARBY
- 1 POSITION INFO
- 1 MAP SETTINGS
- 1 ZOOM/SCROLL


03 NAVIGATION - GUIDANCE

SELECTING A DESTINATION

1



Press the NAV button.




The list of the last 20 destinations appears under the NAVIGATION MENU function.

2



Press the NAV button again or select the NAVIGATION MENU function and press the dial to confirm.

NAVIGATION MENU




3



Select the DESTINATION INPUT function and press the dial to confirm.

DESTINATION INPUT




Insert the SD card in the front panel reader and leave it there to use the Navigation functions. The navigation SD card data must not be changed. The map data updates are available from PEUGEOT dealers.

4



Select the NEW DESTINATION INPUT function and press the dial to confirm.


NEW DESTINATION INPUT



5




Once the country has been selected, turn the dial and select the town function. Press the dial to confirm.



6



Select the letters of the town one by one confirming each time by pressing the dial.



A pre-set list (by entering the first few letters) of the towns in the country selected can be accessed via the LIST button on the virtual keypad.




During guidance, pressing the end of the lights stalk repeats the last guidance instruction.

7



Turn the dial and select OK.
Press the dial to confirm.




9



Then select START ROUTE
GUIDANCE and the press the dial to
confirm.

START ROUTE GUIDANCE




To speed up the process, the post code can be entered directly after
selecting the POST CODE function.
Use the virtual keypad to enter the letters and digits.

8




Repeat steps 5 to 7 for the STREET
and N° functions.



10



Select the route type:
FAST ROUTE, SHORT ROUTE or
OPTIMISED ROUTE and press the
dial to confirm.



Select the SAVE TO ADDRESS BOOK function to record the
address entered in a directory file. Press the dial to confirm the
selection.
The WIP NAV permits the recording of up to 4000 contact files.



You can zoom in / zoom out on the map using the dial.
It is possible to scroll the map or select its orientation via the
short-cut menu of the FULL SCREEN MAP. Press the dial then
select MAP SETTINGS or ZOOM/SCROLL and confirm.

03 NAVIGATION - GUIDANCE


ROUTE OPTIONS

The route selected by the WIP Nav audio/telephone depends directly on the route options. Changing these options may change the route completely.

1



Press the NAV button.




2



Press the NAV button again or select the NAVIGATION MENU function and press the dial to confirm.

NAVIGATION MENU




3



Select the ROUTE OPTIONS function and press the dial to confirm.

ROUTE OPTIONS




4



Select the ROUTE TYPE function and press the dial to confirm. This function allows you to change the route type.

ROUTE TYPE




5



Select the ROUTE DYNAMICS function. This function provides access to the TRAFFIC INDEPENDENT or SEMI-DYNAMIC options.

ROUTE DYNAMICS




6



Select the AVOIDANCE CRITERIA function. This function provides access to the AVOID options (motorways, toll roads, ferries).

AVOIDANCE CRITERIA




7



Turn the dial and select the RECALCULATE function to take into account the route options selected. Press the dial to confirm.

RECALCULATE




ADDING A STOPOVER

Stopovers can be added to the route once the destination has been selected.

1



Press the NAV button.




2



Press the NAV button again or select the NAVIGATION MENU function and press the dial to confirm.

NAVIGATION MENU




3



Select the STOPOVERS function and press the dial to confirm.

STOPOVERS




4



Select the ADD A STOPOVER function (5 stopovers maximum) and press the dial to confirm.

ADD A STOPOVER




5



Enter a new address, for example.

ENTER A NEW ADDRESS




6



Once the new address has been entered, select OK and press the dial to confirm.

OK




7



Select RECALCULATE and press the dial to confirm.




RECALCULATE





The stopover must be completed or deleted in order for the guidance to continue to the next destination. Otherwise, the WIP Nav will always return you to the previous stopover.

03 NAVIGATION - GUIDANCE



SEARCHING FOR POINTS OF INTEREST





NAVIGATION MENU




SEARCH POINTS OF INTEREST




POI NEARBY




POI NEAR DESTINATION




The points of interest (POIs) indicate all of the service locations in the vicinity (hotels, various businesses, airports...).

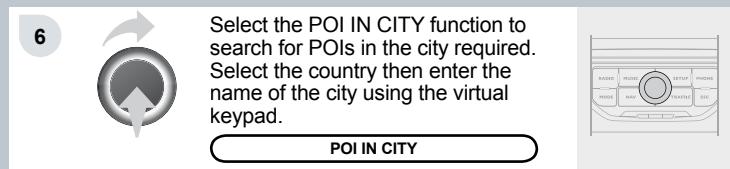

POI IN CITY

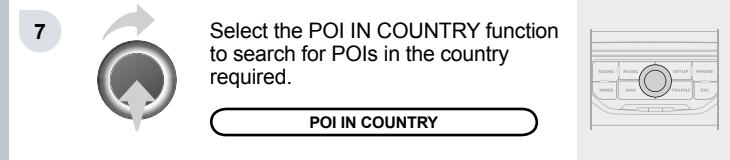

POI IN COUNTRY

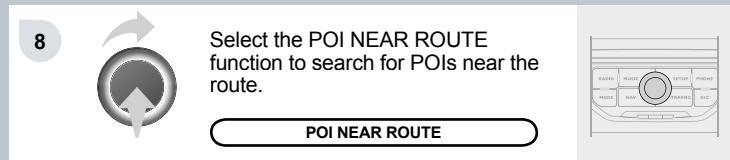

POI NEAR ROUTE

03 NAVIGATION - GUIDANCE

List of POIs

* according to availability in the country

	Service station
	LPG station
	Garage
	PEUGEOT
	Motor racing circuit
	Covered car park
	Car park
	Rest area
	Hotel
	Restaurant
	Refreshment area
	Picnic area
	Cafeteria

	Airport
	Railway station
	Bus station
	Port
	Industrial estate
	Supermarket
	Bank
	Vending machine
	Tennis court
	Swimming pool
	Golf course
	Winter sports resort
	Theatre

	Cinema
	Camp site
	Theme parks
	Hospital
	Pharmacy
	Police station
	School
	Post office
	Museum
	Tourist information
	Automatic speed camera*
	Red light camera*
	Hazardous location*

03 NAVIGATION - GUIDANCE


NAVIGATION SETTINGS

Contact a PEUGEOT dealer for details of the procedure for obtaining the HAZARDOUS LOCATION POIs.

1



Press the NAV button.




2



Press the NAV button again or select the NAVIGATION MENU function and press the dial to confirm.

NAVIGATION MENU




3



Select the SETTINGS function and press the dial to confirm.

SETTINGS




4



Select the NAVI VOLUME function and turn the dial to set the volume of each voice synthesiser (traffic information, alert messages...).

NAVI VOLUME




5



Select the POI CATEGORIES ON MAP function to select the POIs to be displayed on the map by default.

POI CATEGORIES ON MAP




6



Select HAZARDOUS LOCATION POIs to gain access to the DISPLAY ON MAP, VISUAL ALERT and SOUND ALERT functions.

HAZARDOUS LOCATION POIs




04 TRAFFIC INFORMATION

CONFIGURE THE FILTERING AND DISPLAYING OF THE TMC MESSAGES

1



Press the TRAFFIC button.



The list of TMC messages appears under the TRAFFIC MENU sorted in order of proximity.

2



Press the TRAFFIC button again or select the TRAFFIC MENU function and press the dial to confirm.



MENU TRAFFIC



The TMC icon, at the bottom left of the screen, may appear in 3 different forms:

- No TMC station available
- TMC station available, no message on route
- TMC station available and messages on route (if guidance is active)

The filters are independent and their results are cumulative. We recommend a filter on the route and a filter around the vehicle of:

- 2 miles (3 km) or 3 miles (5 km) for a region with heavy traffic,
- 6 miles (10 km) for a region with normal traffic,
- 30 miles (50 km) for long journeys (motorway).

3




Select the filter of your choice:

MESSAGES ON ROUTE

ALL WARNING MESSAGES

ONLY WARNINGS ON ROUTE

ALL MESSAGES




The messages appear on the map and on the list. To exit, press ESC.

4



Select the GEOGRAPHICAL FILTER (NONE) function and press the dial to confirm.


GEOGRAPHICAL FILTER (NONE)



5



On the list which appears, select the distance radius required in accordance with the route. Press the dial to confirm the selection.




05 RADIO

SELECTING A STATION


1




Press the RADIO button to display the list of stations received locally sorted in alphabetical order. Select the station required by turning the dial and press to confirm.



While listening to the radio, press one of the buttons to select the previous or next station on the list.



A long press of one of the buttons starts the automatic search for a station with a lower or higher frequency.



Press one of the buttons on the numeric keypad for more than 2 seconds to store the current station. Press the button on the numeric keypad to recall the stored radio station.


The external environment (hill, building, tunnel, underground car park...) may interfere with the reception, including in RDS following mode. This phenomenon is a normal result of the way in which radio waves are transmitted and does not in any way indicate a failure of the audio equipment.

RDS - REGIONAL MODE - TRAFFIC INFO

1




When the current radio station is displayed on the screen, press the dial.



2


The radio source short-cuts menu appears and provides access to the following short-cuts:



3



Select the function required and press the dial to confirm to gain access to the corresponding settings.



The RDS, if displayed, allows you to continue listening to the same station by means of the frequency following. However, in certain conditions, this RDS station cannot be followed throughout the entire country as radio stations do not cover 100% of the territory. This explains the loss of reception of the station during a journey.

06 MUSIC MEDIA PLAYERS

CD, MP3 / WMA SD CARD INFORMATION AND ADVICE



The MP3 format, an abbreviation of MPEG 1, 2 & 2.5 Audio Layer 3 and the WMA format, an abbreviation of Windows Media Audio and the property of Microsoft, are audio compression standards which permit the recording of several tens of music files on a single disc.



In order to be able to play a recorded CDR or CDRW, when recording it is preferable to select the ISO 9660 level 1, 2 or Joliet standard.

If the disc is recorded in another format it may not be played correctly.

It is recommended that the same recording standard is always used for an individual disc, with as low a speed as possible (4x maximum) for optimum sound quality.

In the particular case of a multi-session CD, the Joliet standard is recommended.

If the GPS is used, the navigation SD card must remain in the WIP NAV audio/telephone reader. In this case, it is not possible to play an SD card containing MP3 files.



The audio equipment will only play audio files with the extension ".mp3" with a speed of between 8 Kbps and 320 Kbps and the extension ".wma" with a speed of between 5 Kbps and 384 Kbps. It also supports the VBR (Variable Bit Rate) mode. No other type of file (.mp4, m3u...) can be played.



It is advisable to restrict file names to 20 characters, without using of special characters (e.g.: " " ? ; ü) to avoid any playing and displaying problems.



During play, exit the SD Card source before removing the SD card from its reader.



To avoid any risk of theft, remove the SD card when you leave your vehicle with the roof down.


SELECTING / PLAYING MUSIC

CD, MP3 / WMA CD, MP3 / WMA SD CARD

1




Press the MUSIC button.



4



Select the music source required:
CD, MP3/WMA CD, MP3/WMA SD
CARD... Press the dial to confirm.
Play begins.



!


The list of tracks or MP3/WMA files appears under MUSIC MENU.

2



Press the MUSIC button again or
select the MUSIC MENU function and
press the dial to confirm.


MUSIC MENU



5



Press the up or down button to select
the next/previous folder.



3



Select the SELECT MUSIC function
and press the dial to confirm.


SELECT MUSIC



6



Press one of the buttons to select a
music track.
Press and hold one of the buttons for
fast forward or backward play.



The playing and displaying of an MP3/WMA compilation may depend
on the recording programme and/or the parameters used. We
recommend the ISO 9660 recording standard.

06 MUSIC MEDIA PLAYERS


USING THE EXTERNAL DEVICE (AUX) AUDIO / RCA CABLE NOT SUPPLIED

1

Connect the portable equipment (MP3/WMA player...) to the audio sockets (white and red, RCA type) in the glove box using a JACK/RCA audio cable.

2


Press the MUSIC button then press it again or select the MUSIC MENU function and press the dial to confirm.



3


Select the EXTERNAL DEVICE function and press the dial to activate it.

EXTERNAL DEVICE



4

Select the AUX music source and press the dial to confirm. Play begins automatically.



!


The displaying and management of the controls are operated via the portable equipment.

CD CHANGER

PLAYING A CD (NOT MP3 / WMA COMPATIBLE)

1

Insert one or more CDs in the changer. Press the MUSIC button.




2

Press the MUSIC button again or select the MUSIC MENU function and press the dial to confirm.




3

Select the SELECT MUSIC function and press the dial to confirm.




4

Select the CD CHANGER music source and press the dial to confirm.



5

Press one of the buttons on the numeric keypad to select the corresponding CD.



07 BLUETOOTH TELEPHONE




CONNECTING A TELEPHONE

! For safety reasons and because they require prolonged attention on the part of the driver, the operations for pairing the Bluetooth mobile telephone to the hands-free system of the WIP Nav must be carried out with the vehicle stationary and the ignition on.

1 Activate the telephone's Bluetooth function. The last telephone connected is reconnected automatically.




2 Press the PHONE button.



3 Select the TELEPHONE MENU function and press the dial to confirm.



TELEPHONE MENU



! The list of telephones connected previously (4 maximum) appears on the multifunction display. Select the telephone required for a new connection.


The services offered by the telephone depend on the network, the SIM card and the compatibility of the Bluetooth equipment used. Refer to your telephone's manual and your operator to check which services you have access to. A list of mobile telephones which offer the best range of services is available from dealers.

4



For a first connection, select SEARCH PHONE and press the dial to confirm. Then select the name of the telephone.


SEARCH PHONE



5



Enter the authentication code on the telephone. The code to be entered is displayed on the screen.




i

Once the telephone has been connected, the WIP Nav can synchronise the address book and the call list. This synchronisation may take a few minutes.

1



To change the telephone connected, press the PHONE button, then select TELEPHONE MENU and press the dial to confirm.




2



Select CONNECT PHONE. Select the telephone and press to confirm.

CONNECT PHONE



RECEIVING A CALL


1

An incoming call is announced by a ring and a superimposed display on the multifunction display.

2

Select the YES tab to accept or NO to refuse and confirm by pressing the dial.


YES **NO**



3

To hang up, press the PHONE button or press the dial and select END CALL then confirm by pressing the dial.

END CALL



4

Press the end of the steering wheel control to accept the call or end the call in progress.




MAKING A CALL

1



Press the PHONE button.




2

The list of the last 20 calls made and received in the vehicle appears under TELEPHONE MENU. You can select a number and press the dial to make the call.



Select the TELEPHONE MENU function and press the dial to confirm.


TELEPHONE MENU



3

Select DIAL NUMBER, then dial the telephone number using the virtual keypad.

DIAL NUMBER



4


It is also possible to select a number from the address book. You can select DIAL FROM ADDRESS BOOK. The WIP NAV permits the recording of up to 4000 entries.

5


Press the end of the steering wheel control for more than two seconds to gain access to the address book.

08 CONFIGURATION

SETTING THE DATE AND TIME



Press the SET UP button.




Select the DATE AND TIME function and press the dial to confirm.

DATE AND TIME




Select the SET DATE AND TIME function and press the dial to confirm.

SET DATE AND TIME




Set the parameters one by one using the direction arrows and confirm by means of the dial.




This function provides access to the options: SYSTEM LANGUAGE, DATE AND TIME, DISPLAY (BRIGHTNESS, COLOUR, MAP COLOUR), VEHICLE PARAMETERS, UNITS, SYSTEM PARAMETERS.



Select the DATE FORMAT function and press the dial to confirm.



Confirm the format required using the dial.
Select the TIME FORMAT function and press the dial to confirm.



Confirm the format required using the dial.
Pressing the SET UP button for more than 2 seconds permits access to:

DESCRIPTION OF THE UNIT


GPS COVERAGE

DEMO MODE

09 CONTROL SHORT-CUTS

STEERING WHEEL CONTROLS

RADIO: selection of the next stored station.
MP3/WMA SD CARD: selection of the next directory.
CD CHANGER: selection of the next CD.
Selection of the next entry in the address book.

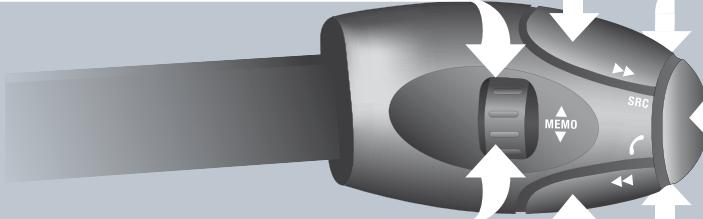

RADIO: selection of the previous stored station.
MP3/WMA SD CARD: selection of the previous directory.
CD CHANGER: selection of the previous CD.
Selection of the previous entry in the address book.

RADIO: change to the next radio station on the list.
Long press: automatic search for a higher frequency.
CD/MP3 SD CARD/CD CHANGER: selection of the next track.
CD/MP3 SD CARD/CD CHANGER: continuous press: fast forward play.

Volume increase.

- Change the sound source.
- Make a call from the address book.
- Pick up/Hang up the telephone.
- Press for more than 2 seconds: access to the address book.

Volume decrease

Mute: function activated by pressing the volume increase and decrease buttons simultaneously.

Restore the sound by pressing one of the two volume buttons.

RADIO: change to the previous radio station on the List.
Long press: automatic search for a lower frequency.
CD/MP3 SD CARD/CD CHANGER: selection of the previous track.
CD/MP3 SD CARD/CD CHANGER: continuous press: fast backward play.

10 DISPLAY FLOW CHARTS



- 1 MAIN FUNCTION
- 2 CHOICE A
- 3 choice A1
- 3 choice A2
- 2 CHOICE B...



- 1 "TRAFFIC" MENU
- 2 MESSAGES ON ROUTE
- 2 ONLY WARNINGS ON ROUTE
- 2 ALL WARNING MESSAGES
- 2 ALL MESSAGES
- 2 GEOGRAPHICAL FILTER
- 3 none
- 3 within 2 miles (3km)
- 3 within 3 miles (5km)
- 3 within 6 miles (10km)
- 3 within 30 miles (50km)



- 1 "MUSIC" MENU
- 2 SELECT MUSIC
- 2 SOUND SETTINGS
- 3 balance / fader
- 3 bass / treble
- 3 equalizer
- 4 none
- 4 classical
- 4 jazz
- 4 rock/pop
- 4 techno
- 4 vocal
- 3 loudness
- 3 initialise sound settings



- 1 "RADIO" MENU
- 2 WAVEBAND
- 3 FM
- 3 AM
- 2 MANUAL TUNE
- 2 SOUND SETTINGS
- 3 balance / fader
- 3 bass / treble
- 3 equalizer
- 4 none
- 4 classical
- 4 jazz
- 4 rock/pop
- 4 techno
- 4 vocal
- 3 loudness
- 3 initialise sound settings

"NAVIGATION" MENU**1 ABORT / RESUME GUIDANCE****2 DESTINATION INPUT****3 address input**

4 country

4 city

4 street

4 number

4 start route guidance

4 post code

4 add to address book

4 intersection

4 city district

4 geo position

4 map

3 navigate HOME**3 choose from address book****3 choose from last destinations****2 STOPOVERS****3 add stopover**

4 address input

4 navigate HOME

4 choose from address book

4 choose from last destinations

3 rearrange route**3 replace stopover****3 delete stopover****3 recalculate**

4 fast route

4 short route

4 optimised route

2 POI SEARCH**3 POI nearby****3 POI near destination****3 POI in city****3 POI in country****3 POI near route****2 ROUTE OPTIONS****3 route type**

4 fast route

4 short route

4 optimised route

2 SETTINGS**3 route dynamics**

4 traffic independent

4 semi-dynamic

3 avoidance criteria

4 avoid motorways

4 avoid toll roads

4 avoid ferries

3 recalculate



1 "TELEPHONE" MENU

- 2 DIAL NUMBER
- 2 DIAL FROM ADDRESS BOOK
- 2 CALL LIST
- 2 CONNECT PHONE
 - 3 search phone
 - 3 phones connected
 - 4 disconnect phone
 - 4 rename phone
 - 4 delete pairing
 - 4 delete all pairings
 - 4 show details

2 SETTINGS

- 3 select ring tone
- 3 phone / ring tone volume
- 3 enter mailbox number



1 SETUP

2 SYSTEM LANGUAGE

- 3 deutsch
- 3 english
- 3 espanol
- 3 français
- 3 italiano
- 3 nederlands
- 3 polski
- 3 portuguese

2 DATE AND TIME

- 3 set date and time
- 3 date format
- 3 time format

2 DISPLAY

- 3 brightness
- 3 colour
 - 4 pop titanium
 - 4 toffee
 - 4 blue steel
 - 4 technogrey

4 dark blue

3 map colour

- 4 day mode for map
- 4 night mode for map
- 4 auto. day/night for map

2 VEHICLE PARAMETERS

- 3 vehicle information
- 4 alert log
- 4 status of functions

2 UNITS

- 3 temperature
 - 4 celsius
 - 4 fahrenheit

3 Distance

- 4 km and l/100
- 4 km and km/l
- 4 miles (mi) and MPG

2 SYSTEM PARAMETERS

- 3 factory reset
- 3 software version
- 3 automatic scrolling

FREQUENTLY ASKED QUESTIONS

The table below groups together the answers to the most frequently asked questions concerning the WIP Nav.

QUESTION	RESPONSE	SOLUTION
There is a difference in sound quality between the different audio sources (radio, CD, CD changer...).	For optimum sound quality, the audio settings (Volume, Bass, Treble, Ambience, Loudness) can be adapted to the different sound sources, which may result in audible differences when changing source (radio, CD, CD changer...).	Check that the audio settings (Volume, Bass, Treble, Ambience, Loudness) are adapted to the sources listened to. It is advisable to set the AUDIO functions (Bass, Treble, Front-Rear Balance, Left-Right Balance) to the middle position, select the musical ambience "None" and set the loudness correction to the "Active" position in CD mode or to the "Inactive" position in radio mode.
The CD is ejected automatically or is not played by the player.	<p>The CD is inserted upside down, is unplayable, does not contain any audio data or contains an audio format which the player cannot play.</p> <p>The CD is protected by an anti-pirating protection system which is not recognised by the audio equipment.</p>	<ul style="list-style-type: none"> - Check that the CD is inserted in the player the right way up. - Check the condition of the CD: the CD cannot be played if it is too damaged. - Check the content in the case of a recorded CD: consult the advice in the Audio section. - The audio equipment's CD player does not play DVDs. - Due to inadequate quality, certain recorded CDs will not be played by the audio system. - The CD changer does not play MP3 CDs.
The CD player sound is poor.	The CD used is scratched or of poor quality.	Insert good quality CDs and store them in suitable conditions.
	The audio equipment settings (bass, treble, ambiances) are unsuitable.	Set the treble or bass level to 0, without selecting an ambience.

QUESTION	RESPONSE	SOLUTION
The stored stations do not function (no sound, 87.5 Mhz is displayed...)	An incorrect waveband is selected.	Press the BAND AST button to return to the waveband (AM, FM1, FM2, FMAST) on which the stations are stored.
The quality of reception of the radio station listened to gradually deteriorates or the stored stations do not function (no sound, 87.5 Mhz is displayed...).	The vehicle is too far from the transmitter used by the station listened to or there is no transmitter in the geographical area through which the vehicle is travelling.	Activate the RDS function to enable the system to check whether there is a more powerful transmitter in the geographical area.
	The environment (hills, buildings, tunnels, basement car parks...) block reception, including in RDS mode.	This phenomenon is normal and does not indicate a failure of the audio equipment.
	The aerial is absent or has been damaged (for example when going through a car wash or into an underground car park).	Have the aerial checked by a PEUGEOT dealer.
Sound cut-outs of 1 to 2 seconds in radio mode.	During this brief sound cut-out, the RDS searches for any frequency permitting better reception of the station.	Deactivate the RDS function if the phenomenon is too frequent and always on the same route.
With the engine off, the audio equipment switches off after a few minutes of use.	When the engine is switched off, the audio equipment operating time depends on the battery charge. The switch-off is normal: the audio equipment switches to economy mode and switches off to prevent discharging of the vehicle's battery.	Start the vehicle's engine to increase the battery charge.

QUESTION	RESPONSE	SOLUTION
The TRAFFIC INFO box is ticked. However, certain traffic jams along the route are not indicated in real time.	On starting, it is several minutes before the system begins to receive the traffic information.	Wait until the traffic information is being received correctly (displaying of the traffic information symbols on the map).
	In certain countries, only major routes (motorways, ...) are listed for the traffic information.	This phenomenon is normal. The system is dependent on the traffic information available.
The time taken to calculate a route sometimes seems longer than usual.	The performance of the system may slow down temporarily if a CD/DVD is being copied onto the Jukebox at the same time as a route is being calculated.	Wait until the CD/DVD has been copied or stop the copying before starting the guidance function.
Does the emergency call function work without a SIM card?	No, European regulations impose the presence of a SIM card in order to make an emergency call.	Insert a valid SIM card in the slot on the WIP Nav.
The altitude is not displayed.	On starting, the initialisation of the GPS may take up to 3 minutes to receive more than 4 satellites correctly.	Wait until the system has started up completely. Check that there is a GPS coverage of at least 4 satellites (long press on the MENU button, then select AUDIO/TELEPHONE DIAGNOSTICS, then GPS COVERAGE).
	Depending on the geographical environment (tunnel, ...) or the weather, the conditions of reception of the GPS signal may vary.	This phenomenon is normal. The system is dependent on the conditions of reception of the GPS signal.
The route calculation is not successful.	The exclusion criteria may conflict with the current location (exclusion of toll roads on a toll motorway).	Check the exclusion criteria.

QUESTION	RESPONSE	SOLUTION
There is a long waiting time after inserting a CD or SD card.	When a new medium is inserted, the system reads a certain amount of data (directory, title, artist, etc.). This may take a few seconds.	This phenomenon is normal.
I cannot connect my Bluetooth telephone.	The telephone's Bluetooth function may be deactivated or the equipment may not be visible.	<ul style="list-style-type: none"> - Check that your telephone's Bluetooth function is activated. - Check that your telephone is visible.