

CIVIC E:HEV

As you read this manual, you will find Information that is preceded by a symbol NOTICE. This information is intended to help you avoid damage to your vehicle, other property, or the environment.

Symbols on labels attached to your vehicle are to remind you to read this owner's manual for proper and safe operation of your vehicle.

 $\triangle$  or  $\triangle$  is colour-coded to indicate "danger" (red), "warning" (orange), or "caution" (amber).

Safety Labels P. 110

## A Few Words About Safety

Your safety, and the safety of others, is very important. And operating this vehicle safely is an important responsibility.

To help you make informed decisions about safety, we have provided operating procedures and other information on labels and in this manual. This information alerts you to potential hazards that could hurt you or others.

Of course, it is not practical or possible to warn you about all the hazards associated with operating or maintaining your vehicle. You must use your own good judgement.

You will find this important safety information in a variety of forms, including:

- Safety Labels on the vehicle.
- Safety Messages preceded by a safety alert symbol and one of three signal words: DANGER, WARNING, or CAUTION.
  These signal words mean:

ADANGER You WILL be KILLED or SERIOUSLY HURT if you don't follow instructions.

**AWARNING** You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.

You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.

**ACAUTION** You CAN be HURT if you don't follow instructions.

- **Safety Headings** such as Important Safety Precautions.
- Safety Section such as Safe Driving.
- **Instructions** how to use this vehicle correctly and safely.

This entire book is filled with important safety information - please read it carefully.

### **Event Data Recorders**

Your vehicle is equipped with several devices commonly referred to as Event Data Recorders. They record various types of real time vehicle data such as SRS airbag deployment and SRS system components failure.

This data belongs to the vehicle owner and may not be accessed by anyone else except as legally required or with the permission of the vehicle owner.

However this data may be accessed by Honda, its authorised dealers and authorised repairers, employees, representatives and contractors only for the purpose of the technical diagnosis, research and development of the vehicle.

### **Service Diagnostic Recorders**

Your vehicle is equipped with service-related devices that record information about powertrain performance and driving conditions. The data can be used to help technicians diagnose, repair and maintain the vehicle. This data may not be accessed by anyone else except as legally required or with the permission of the vehicle owner.

However this data may be accessed by Honda, its authorised dealers and authorised repairers, employees, representatives and contractors only for the purpose of the technical diagnosis, research and development of the vehicle.

### Digital Key\*

For more information on Digital Key, please visit the URL below. https://hondanews.eu/eu/en/corporate/media/photos/69919/ honda-motor-europe-bracknell-headquarters

#### **EU Countries**

### **Battery Information**

The importer information for the battery installed in the vehicle is as follows.

Importer Name:

Honda Motor Europe Ltd - Aalst Office

Postal address:

Wijngaardveld 1 (Noord V) 9300 Aalst - Belgium

<sup>\*</sup> Not available on all models

### Owner's Manual Application Terms and Conditions\*

General

This application allows your Display Audio to automatically search for owner's manual updates that are specific to your vehicle and Display Audio every time the power mode of the vehicle is set to ON. This application periodically transmits a limited amount of vehicle and device information to our servers: Vehicle Identification Number (VIN), Display Audio hardware serial number, preferred language, Internet Protocol (IP) address, transaction log (alerts for or views of updates, update downloads and installation, usage of the owner's manual application), etc. When the application finds an update from the server, it prompts you to download and install.

When your Display Audio searches our servers for updates, we will automatically provide you with the opportunity to update the owner's manual. We will also maintain a log of the updates that are installed on our servers.

Your Personal Data

Should the aforementioned information transmitted to Honda constitute personal information in your region, please note that this information will be treated in strict accordance with the rules and regulations outlined in this notice as well as applicable data protection law.

The terms of our privacy policy are incorporated into these terms by reference and your use of system updates will be subject to the privacy policy. Our privacy policy sets out information about how we and any named third parties will process any personal data we collect from you or that you provide to us, via the utility. (See the Honda website (https://www.privacynotice.honda.eu) for further details.)

Honda collects, uses, and stores your personal data for the reasons set out below:

Where necessary for Honda's legitimate interests, as listed below, and where our interests are not overridden by your data protection rights. to deliver owner's manual updates to you;

to allow us to improve and optimize the owner's manual application and services;

to respond to user questions and complaints; and for internal record keeping.

Protecting our legitimate business interests and legal rights. This includes, but is not limited to, use in connection with compliance, regulatory, auditing, legal claims (including disclosure of such information in connection with legal process or litigation) and other ethics and compliance reporting requirements

Honda will also convert personal data into anonymous data and use it (normally on an aggregated statistical basis) for uses such as market research and analysis, to improve the owner's manual, to analyze trends, and to assess the success of software update releases. Aggregated personal information does not personally identify you or any other use of the owner's manual.

Honda may share this data with Honda's world wide support organization or affiliated Honda companies or other third parties engaged by Honda for the purposes of rendering support services in connection with system support.

The on-board owner's manual may be terminated without warning. If service is terminated, please continue to use the owner's manual via Honda's homepage. For vehicles with the manual already installed, it can continue to be used as long as you do not perform a factory reset.

\* Not available on all models

### **System Updates Terms & Conditions**

General

Your vehicle has an application that allows your Display Audio to automatically search for Honda software updates that are specific to your Display Audio and its connected devices (initially every one (1) week via Wi-Fi or every four (4) weeks via Telematics Control Unit (TCU)\*, gueries may occur more or less frequently due to internet outages, retries, direct user action, WAP push from the server or a change in guery policy on the Honda servers). This application periodically transmits to our servers a limited amount of vehicle and device information (Vehicle Identification Number (VIN), the Model Type (MT) Identification Number, Hardware and Software Part Number, Serial Number, Software Version, preferred language, Internet Protocol (IP) address, Transaction Log (alert or update viewing, update download and installation, software status), etc.). When the application finds an update from the server, the application initially asks permission to download and install the update. Where available, in your settings menu you may elect to automatically download and install these updates or you may elect to manually update the system.

When your Display Audio searches our servers for updates or alerts, we will automatically provide you with the opportunity to update your devices or transmit the update or alert directly to your Display Audio. We will also maintain on our servers a log of the updates or alerts that are installed.

### Your Personal Data

Should the aforementioned information transmitted to Honda constitute personal information in your region, please note that this information will be treated in strict accordance with the rules and regulations outlined in this notice as well as applicable data protection law.

The terms of our privacy notice are incorporated into these terms by reference and your use of system updates will be subject to the privacy notice. Our privacy notice sets out information about how we and any named third parties will process any personal data we collect from you or that you provide to us, via the application. See the Honda website for further details.

Honda collects, uses and stores your personal data for the reasons set out below:

- to deliver the system updates and related services to you;
- to allow us to improve and optimize the system updates products and services;
- to respond to user questions and complaints; and for internal record keeping.
- where necessary for Honda's legitimate interests, as listed below, and where our interests are not overridden by your data protection rights.
- as otherwise described in Honda's Privacy Notice and Vehicle Data Privacy Notice.

Protecting our legitimate business interests and legal rights includes, but is not limited to, use in connection with compliance, regulatory, auditing, legal claims (including disclosure of such information in connection with legal process or litigation) and other ethics and compliance reporting requirements.

Honda will also convert personal data into anonymous data and use it (normally on an aggregated statistical basis) for uses such as market research and analysis, to improve the system updates, to analyze trends, and to assess the success of software update releases. Aggregated personal information does not personally identify you or any other use of the system updates.

Honda may share this data with Honda's worldwide support organization or affiliated Honda companies or other third parties engaged by Honda for the purposes of rendering support services in connection with system support.

\* Not available on all models

This owner's manual should be considered a permanent part of the vehicle and should remain with the vehicle when it is sold

This owner's manual covers all models of your vehicle. You may find descriptions of equipment and features that are not on your particular model.

The images throughout this owner's manual (including the front cover) that depict features, equipment, and Audio /Information screen, Meter screens are only examples and may not be representative of your particular model.

The information and specifications included in this publication were in effect at the time of approval for printing. Honda Motor Co., Ltd. reserves the right, however, to discontinue or change specifications or design at any time without notice and without incurring any obligation.

Although this manual is applicable to both right-hand and left-hand drive models, the illustrations contained in this manual mainly refer to the left-hand drive models

### **⇒** Safe Driving P. 41

For Safe Driving P. 42

Seat Belts P. 47

Airbags P. 58

About Your Maintenance Service P. 580

#### **▶** Instrument Panel P 113

Indicators P. 114

Gauges and Driver Information Interface P. 149

#### Controls P. 193

Clock P 194

Locking and Unlocking the Doors P. 195

Operating the Switches Around the Steering Wheel P. 225 Climate Control System P. 280

### Features P. 287

Audio System P. 288 Display Audio P. 290 Refuel Recommend\* P. 399

### Driving P. 401

Before Driving P. 402 Towing a Trailer P. 406 When Driving P. 411 Multi-View Rear Camera P. 568 Refueling P. 570

### ► Maintenance P. 575

Before Performing Maintenance P. 576 Replacing Light Bulbs P. 612

Remote Transmitter Care P. 635

### Handling the Unexpected P. 649

Tools P. 650 If a Tyre Goes Flat P. 652 Handling of the Jack P. 675

Overheating P. 683 Indicator Coming On/Blinking P. 685

If You Cannot Open the Hatch P. 702 Emergency Call (eCall) P. 703

### **▶** Information P. 709

Specifications P. 710 Identification Numbers P. 713
Open Source Licence P. 761

Pop-up Hood System P. 80		Child Safety F	P. 83	Exhaust Gas Hazard	d P. 109	Safety Labels P. 110	
Hatch P. 208 Mirrors P. 248	Security Syste Seats P. 250	m P. 211		Windows P. 218 enience Items P. 262		Panoramic Roof* P. 2	221
Audio Error Messages P. 38	7	General Infor	mation on the	Audio System P. 389	9		
							lh.
Honda SENSING P. 465 Fuel Economy and CO <sub>2</sub> Emis	Braking P. 54 ssions P. 573	6	Parking Your	Vehicle P. 556			
Service Reminder System* P Checking and Maintaining N Climate Control System Ma	Niper Blades P	. 620	Schedule* P. 5 Checking and Cleaning P. 64	Maintaining Tyres F	P. 623	Under the Bonnet P. 12-Volt Battery P. 62 nd Modifications P. 64	29
Power System Won't Start F	0 676	If the 12 \/elt	Battery Is Dea	d D 690			
Fuses P. 693 Emergency To			,	u F. 000 uel Fill Door P. 701			
	. 5						الله
Devices that Emit Radio Wa	ves* P. 714	Declaration o	f Conformity C	Content Outline* P. 7	756		

# Contents

Quick Reference Guide P. 6

Safe Driving P. 41

Instrument Panel P. 113

Controls P. 193

Features P. 287

Driving P. 401

Maintenance P. 575


Handling the Unexpected P. 649

Information P. 709

Index P. 763


# **Visual Index**

Left-hand Drive Type

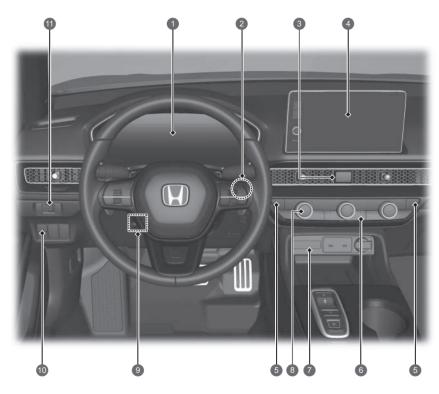


- 1 System Indicators → P.114 Gauges → P.149 Driver Information Interface → P.154, 172, 175
- 2 POWER Button P. 225
- **3** Hazard Warning Button
- 4 Audio System ← № 288
   Navigation System\*
   See the Navigation System Manual
- **⑤** Seat Heater Buttons → P. 279
- 6 Rear Demister → P.246 Heated Door Mirror Button → P.246
- Passenger's Front Airbag OFF Indicator
  ▶2.78
- 8 Climate Control System →P. 280
- Steering Wheel Adjustments →P.247
- (Vehicle Stability Assist (VSA) System OFF) Button P. 452
- **①** Brightness Control **→**P. 244, 245

#### Right-hand Drive Type

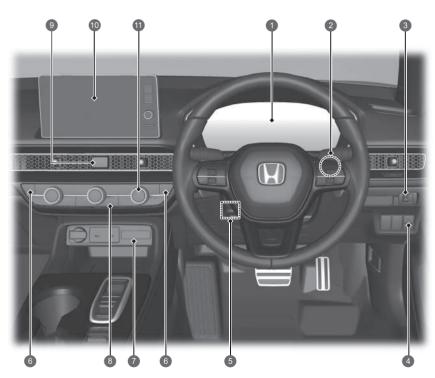


- 1 System Indicators →R 114
  Gauges →R 149
  Driver Information Interface →R 154, 172, 175
- 2 POWER Button P. 225
- **③** Brightness Control **→**P. 244, 245
- (Vehicle Stability Assist (VSA) System OFF) Button P.452
- **⑤** Steering Wheel Adjustments → P. 247
- 6 Seat Heater Buttons ← P. 279
- 8 Rear Demister → P. 246
  Heated Door Mirror Button → P. 246
- **9** Hazard Warning Button
- - See the Navigation System Manual
- **①** Climate Control System → P. 280

# **Visual Index**

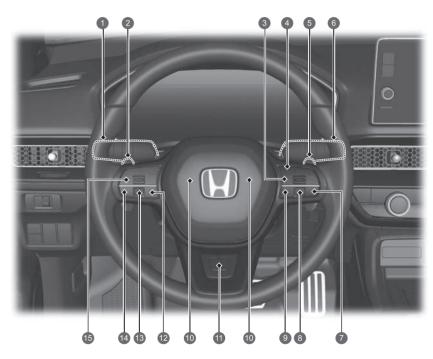

- Headlights/Turn Signals → P.227,229
  Rear Fog Light → P.231
- ② Deceleration Paddle Selector (-) →P. 425
- S LIM Button → P. 436, 443, 494
- Adaptive Cruise Control (ACC) with Low Speed Follow Buttons 
   → 2493
- **⑤** Deceleration Paddle Selector (+) **○**P. 425
- 6 Wipers/Washers ←>P. 241
- □ Lane Keeping Assist System (LKAS)
   □ Button □ P.517
- 8 Right Selector Wheel\* →P.175
- 9 Interval Button →P.508
- (1) Horn (Press an area around .)
- Heated Steering Wheel Button<sup>\*</sup> → P. 278
- **②** Voice Control Buttons\* → P. 298
- **B** Left Selector Wheel →P.154
- (Home) Button\* →P. 154
  Voice Control Buttons\* →P. 298
- ⑤ Audio Remote Controls →P.294 Hands-Free Telephone System Buttons →P.369

#### Left-hand Drive Type

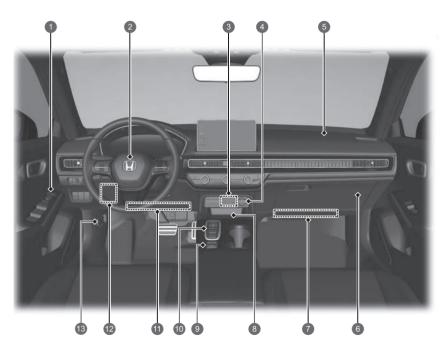


- 1 Door Mirror Controls → P.249

  Master Door Lock Switch → P.206


  Power Window Switches → P.219
- 2 Driver's Front Airbag P.60
- 3 USB Ports P.293
- 4 Accessory Power Socket 
  →P. 274
- **⑤** Passenger's Front Airbag **○**P.60
- 6 Glove Box **►>**P.264
- Passenger's Knee Airbag → P.66
- **⑧** Wireless Charger → P. 275
- ⑤ Electric Parking Brake Switch → P.546
   Automatic Brake Hold Button → P.550
   Drive Mode Switch → P.429
- 10 Shift Button P. 418
- **①** Driver's Knee Airbag **→**P.66
- **(B)** Bonnet Release Handle →P.598

# **Visual Index**

Right-hand Drive Type

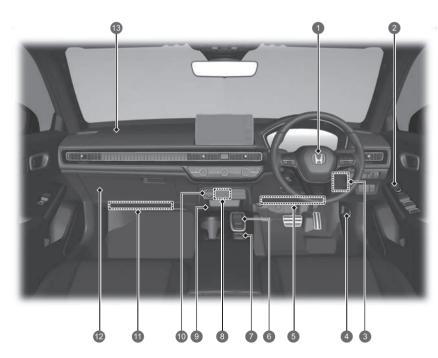

- ① Driver's Front Airbag → P.60
- ② Door Mirror Controls ←>P.249 Master Door Lock Switch ←>P.206 Power Window Switches ←>P.219
- Interior Fuse Box → P. 695
- ⊕ Bonnet Release Handle → P. 598
- **⑤** Driver's Knee Airbag **○** R 66
- 6 Shift Button ←>P. 418
- ② Drive Mode Switch →R.429
  Electric Parking Brake Switch →R.546
  Automatic Brake Hold Button →R.550
- 8 USB Ports P. 293
- Wireless Charger ← P. 275
- Passenger's Knee Airbag 
   P.66

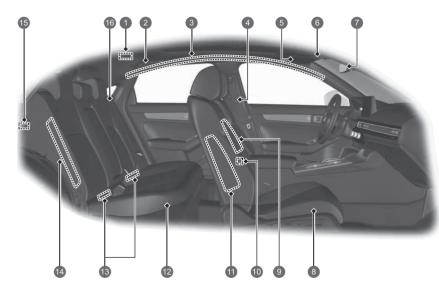


- **1** Interior Light **→**P. 262
- ② Grab Handle Coat Hook ►>P.268
- Side Curtain Airbags → P. 75
- Seat Belts 

  P. 47
- Sun Visors
  Vanity Mirrors
- Map Lights → P.263
  Panoramic Roof Switch\* → P.221
  Ultrasonic/Tilt Sensor OFF Button\* → P.214
  Sunshade Switch\* → P.224
  SOS Button → P.707
  Sunglasses Holder\* → P.272
- Rearview Mirror → P. 248
- 8 Front Seat →P. 250
- **1** USB Ports →P.293
- **①** Front Side Airbags **►>**P.72
- Rear Seat 
   Rear Seat
- Rear Side Airbags 
   → P. 72
- ⑤ Luggage Area Light Accessory Power Socket →P.274
- © Seat Belt (Installing a Child Restraint System) → P.102
  Seat Belt to Secure a Child Restraint System → P.104

# **Visual Index**







- **1** Maintenance Under the Bonnet **►>** P. 597
- 2 Windscreen Wipers P. 241, 620
- Side Turn Signal Lights P. 229, 612
- **⚠** Door Lock/Unlock Control **→**P. 198
- **⑤** Tyres **◯>**P.623,652
- 6 Headlights ←>P. 227, 612 Position/Daytime Running Lights P. 227, 232, 612

Front Turn Signal Lights P. 229, 612

- How to Refuel ► P. 571
- 2 Rear Wiper >P. 243, 622
- **④** Opening/Closing the Hatch **→**P.208 Hatch Release Button →P.209 Rear Licence Plate Light P.617
- **⑤** Multi-View Rear Camera ← P. 568
- 6 Taillights → P.616 Back-Up Lights P. 616 Rear Fog Light P., 617
- Brake/Taillights ← P.613 Rear Turn Signal Lights P.613

# e:HEV

Your e:HEV vehicle uses both an electric motor and a petrol engine as propulsion sources, with the electric motor receiving electricity from an internal High Voltage battery and/or internal generator. The High Voltage battery is charged from the generator driven by the engine or regenerative braking.

When driving, your vehicle is propelled exclusively by the electric motor, exclusively by the petrol engine, or by a combination of the two. The system selects which propulsion source is most appropriate and automatically switches to it.

### Energy efficiency

As with a petrol-powered vehicle, hybrid vehicle fuel efficiency and driving range is most impacted by your driving style. Aggressive acceleration and high-speed driving can easily trigger the system to switch the propulsion source to the petrol-powered engine. In addition, heavy climate control system use negatively affects vehicle range and efficiency. Either of these use patterns will more quickly reduce the High Voltage battery's state of charge.

### Battery types

There are two types of batteries used in this vehicle; a standard 12-volt battery that powers the airbags, the interior and exterior lights, and other standard 12-volt systems; and a High Voltage battery that is used to power the propulsion motor and recharge the 12-volt battery.

### **e:HEV MAIN COMPONENTS**


**Petrol Engine**– Runs the generator and under certain conditions, drives the wheels directly.

**Generator**– Starts the engine and generates electric power when driven by the petrol engine to supply electricity to power the electric motor and/or to charge the High Voltage battery.

**Electric Motor**– Provides propulsion to drive the wheels in conjunction with the petrol engine in certain conditions and provides electricity to the High Voltage battery through regenerative braking.

**High Voltage Battery**– Provides electrical storage and serves as a power source for the electric motor.

Learning about the High Voltage battery's characteristics will help you get the best handling and maximise the range of your electric vehicle.




- High Voltage Battery
- ② Generator & Electric Motor
- 3 Petrol Engine

# Models with A-type meter Vehicle Speed

Time

Operating mode	Electric Vehicle (EV)	Hybrid (HV)	Engine (Direct Drive)	Regeneration
Driving state	Stopped or driven at low speeds:  Only the electric motor provides propulsion to the wheels.	Driven in high-load conditions (e.g., when accelerating, going uphill):  The electric motor provides propulsion to the wheels.  The petrol engine drives the generator, supplying electricity to the electric motor for added propulsion or to the High Voltage battery for charging.	Driven in high-speed, low-load conditions:  The petrol engine provides propulsion to the wheels.  The High Voltage battery supplies electricity to the electric motor for added propulsion.  The electric motor provides electricity to the High Voltage battery through regenerative braking.	The accelerator pedal is released and the vehicle is decelerating.  The electric motor provides electricity to the High Voltage battery through regenerative braking.
Power Flow Monitor		(*************************************	(	(1111)
Electric motor	Stopped/Running	Running	Generating/Running	Regenerating
Generator	Stopped	Generating	No Output	Stopped/No Output
Engine	Stopped	Running	Running	Stopped/No Output
High Voltage battery	Discharge	Charging/Discharge	Charging/Discharge	Charging




Time

Operating mode	Electric Vehicle (EV)	Hybrid (HV)	Engine (Direct Drive)	Regeneration
Driving state	Stopped or driven at low speeds:  Only the electric motor provides propulsion to the wheels.	<ul> <li>Driven in high-load conditions (e.g., when accelerating, going uphill):</li> <li>The electric motor provides propulsion to the wheels.</li> <li>The petrol engine drives the generator, supplying electricity to the electric motor for added propulsion or to the High Voltage battery for charging.</li> </ul>	<ul> <li>Driven in high-speed, low-load conditions:</li> <li>The petrol engine provides propulsion to the wheels.</li> <li>The High Voltage battery supplies electricity to the electric motor for added propulsion.</li> <li>The electric motor provides electricity to the High Voltage battery through regenerative braking.</li> </ul>	The accelerator pedal is released and the vehicle is decelerating.  The electric motor provides electricity to the High Voltage battery through regenerative braking.
Power Flow Monitor				
Electric motor	Stopped/Running	Running	Generating/Running	Regenerating
Generator	Stopped	Generating	No Output	Stopped/No Output
Engine	Stopped	Running	Running	Stopped/No Output
High Voltage battery	Discharge	Charging/Discharge	Charging/Discharge	Charging

### **Regenerative Energy and Regenerative Braking**

When regenerative braking is in operation


Models with A-type meter



- Motor
- 2 High Voltage Battery

When decelerating without the accelerator being depressed or the brake pedal being applied, or while driving downhill, the electric motor acts as a generator that recovers a portion of the electrical energy that was used to accelerate the vehicle. This regenerative braking slows the vehicle in a manner similar to engine braking in a petrol-powered vehicle. You can control the rate of deceleration by using the deceleration paddle selector.

### Models with B-type meter



- Motor
- 2 High Voltage Battery

### **Auto Engine Stop/Start**

Your vehicle's petrol engine automatically stops running during vehicle operation or restarts while the vehicle is stationary when it is appropriate.

In the following cases, however, auto engine stop may not activate.

- The vehicle momentarily needs additional power for aggressive acceleration, or driving uphill or at high speed.
- The climate control system is in heavy use.
- The High Voltage battery temperature is high or low.
- The High Voltage battery is too low on charge.

### Sounds Unique to the e:HEV

When you first start driving this vehicle, you will likely hear some unfamiliar sounds, particularly when you turn on the power system, or while you are driving or accelerating from a stop. Some of these sounds are unique to this vehicle's powertrain, fuel, and climate control, and High Voltage battery cooling systems; others are similar to sounds generated by conventional automobiles that typically are masked by louder noises absent from a vehicle of this design. These sounds are not a cause for concern, and you will soon recognise them as normal and thus be able to detect any new or unusual noise should one develop.

### Predictive Eco Assist\*

Predictive Eco Assist helps you drive more economically to your destination during navigation route guidance. It predicts how much the high voltage battery can be charged by regenerative braking when driving downhill on the way to the destination, and operates in EV mode as much as possible.

If there are any stops on the way to the destination, it works more effectively if they are set as waypoints. If you leave the suggested navigation route, Predictive Eco Assist may not function in a way that is suitable for your route. You can turn Predictive Eco Assist on and off in Vehicle Settings using the audio/information screen.



## **Safety Precautions**



Do not cover the air intake



Air Intake

If the air intake is obstructed during vehicle operation, the High Voltage battery can become too hot. To protect the battery, the system may start to limit the battery's output and cause the power system and 12-volt battery charging system indicators to come on.

### Do not touch the High Voltage system

Attempting to take a High Voltage system component apart or disconnect one of its wires can cause severe electrical shock. Make sure that any maintenance or repairs to the High Voltage system are performed by a Honda dealer.

### If a crash occurs

- Be careful of electric shock hazard.
- ▶If a severe crash damages your vehicle's High Voltage system, there is a possibility of electrical shock due to exposed High Voltage components or wires. If this happens, do not touch any of the High Voltage system components or any of its orange wires.
- Avoid contact with High Voltage battery fluid.
- The High Voltage battery contains a flammable electrolyte that could leak as a result of a severe crash. Avoid skin or eye contact with the electrolyte as it is corrosive. If you accidentally come into contact with the electrolyte, rinse the exposed skin or flush your eyes with copious amounts of water for at least five minutes, and seek medical attention immediately.
- Use a fire extinguisher for an electrical fire.
- Attempting to extinguish an electrical fire with even a small quantity of water, from a garden hose for instance, can be dangerous.
- Any time the vehicle is damaged in a crash, have it repaired by a dealer.

### **Emergency Shutdown System for the High Voltage System**

If the vehicle is involved in a crash, the emergency shutdown system will activate depending on the severity of the impact. When the system activates, the High Voltage system automatically shuts down, and the vehicle can no longer move under its own power. To return the High Voltage system back to normal operation, consult a dealer.

### When the vehicle is disposed

• The High Voltage battery is a Lithium ion battery. Honda collects and recycles used High Voltage batteries – consult with your dealer for proper battery disposal in the event your vehicle is not repairable.

# Safe Driving

## Airbags (\*\*\*)

 Your vehicle is fitted with airbags to help to protect you and your passengers during a moderate-to-severe collision.

# Child Safety RES

- All children 12 and younger should be seated in the rear seat.
- Small children should be properly restrained in a front-facing child restraint system.
- Infants must be properly restrained in a rear-facing child restraint system on a rear seat.

## Exhaust Gas Hazard P. 109

 Your vehicle emits dangerous exhaust gases that contain carbon monoxide. Do not run the engine in confined spaces where carbon monoxide gas can accumulate.

# Seat Belts R47

- Fasten your seat belt and sit upright well back in the seat.
- Check that your passengers are wearing their seat belts correctly.

# Before Driving Checklist >P.402

 Before driving, check that the front seats, head restraints, steering wheel, and mirrors have been properly adjusted.




Fasten your lap belt as low as possible.

# Instrument Panel

## Indicators CR 114 / Gauges CR 149 / Driver Information Interface CR 154, 172, 175


Models with A-type meter

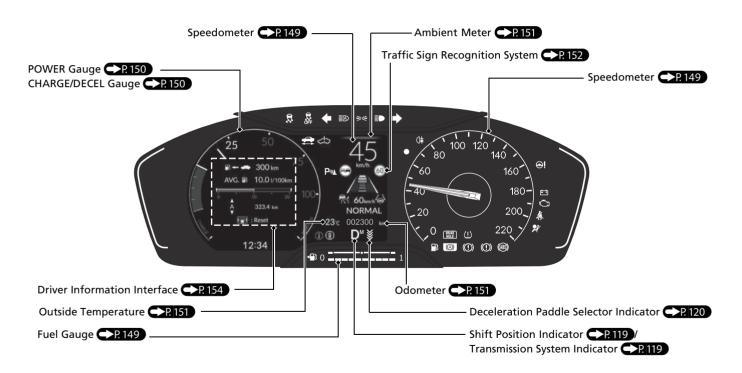

### Models with B-type meter

● You can change the gauge design.

Change gauge design → P. 192

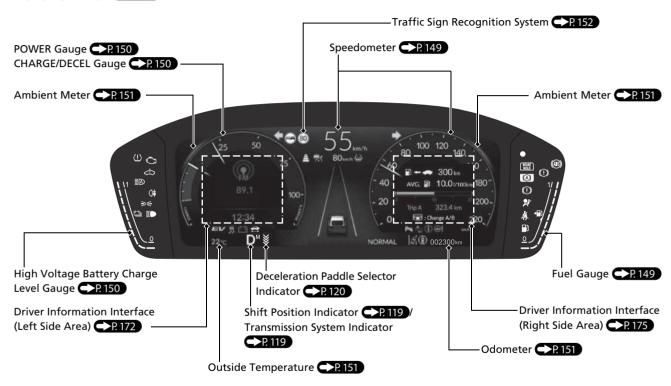

# Controls CARREST

### Clock CXP 194



### POWER Button (TRIZZE)

 Press the button to change the vehicle's power mode.



### Turn Signals P. 229


Turn Signal Control Lever

Right



## Lights P.227

**Light Control Switches** 



## Wipers and Washers

**○**P. 241

Wiper/Washer Control Lever

Adjustment Ring

\_: Low sensitivity +: High sensitivity



Pull towards you to spray washer fluid.

MIST OFF

**AUTO**: Wiper speed varies automatically


LO: Low speed wipe HI: High speed wipe

**AUTO** should always be turned **OFF** before the following situations in order to prevent severe damage to the wiper system:

- Cleaning the windscreen
- Driving through a car wash
- No rain present

# Steering Wheel (\$\)P.247


 To adjust, push the adjustment lever down, adjust to the desired position, then lock the lever back in place.



# Unlocking the Front Doors from the Inside


### →P. 205

• Pull either front door inner handle to unlock and open it at the same time.



### Hatch ←>P.208


 Press the hatch release button to unlock and open the hatch when you carry the keyless remote.



### **Power Door Mirrors**


### **○**P. 249

- With the power mode in ON, move the selector switch to L or R.
- Push the appropriate edge of the adjustment switch to adjust the mirror.
- Press the folding button to fold in and out the door mirrors.



# Power Windows >P.218

- With the power mode in ON, open and close the power windows.
- If the power window lock button is in the off position, each passenger's window can be opened and closed with its own switch.
- If the power window lock button is in the on position, each passenger's window switch is disabled.





**Power Window Lock Button** 

## Climate Control System > 280

- Press the **AUTO** button to activate the climate control system.
- Press the SOFF button to turn the system on or off.
- Press the button to defrost the windscreen.

### Left-hand Drive Type

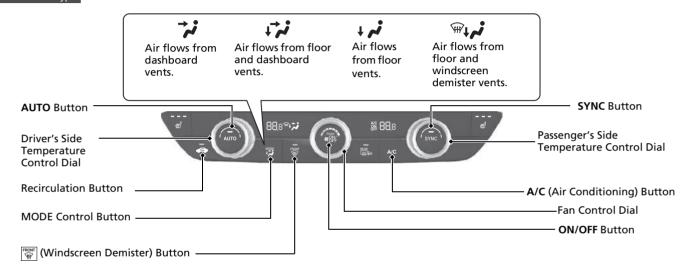

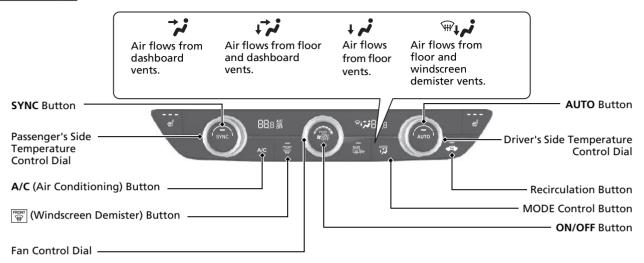

# Features CARREST

# Audio System R288


For navigation system\* operation See the Navigation System Manual




### **Audio Remote Controls**



### Models with A-type meter



#### Models with B-type meter



● VOL+/VOL- (Volume) Switch Press to adjust the volume up/down.

 Left Selector Wheel When selecting the audio mode

### Models with A-type meter

Press the (home) button, then roll up

or down to select **[**] (audio) on the driver information interface, and then press the left selector wheel.

**Roll up or down:** To cycle through the audio modes, roll up or down and then press the left selector wheel:

FM/DAB/AM/USB/Bluetooth/Apps (Apple CarPlay/Android Auto)

#### Models with B-type meter

**Roll up or down:** To cycle through the audio modes, roll up or down and then press the left selector wheel:

Back/Phone/FM/DAB/AM/USB/Bluetooth/ Apps (Apple CarPlay/Android Auto)/ Customize display

Depending on a connected device, the displayed modes may be changed.

Radio: Press | to change the preset radio station.

When listening to the wired connection, USB flash drive, *Bluetooth*® Audio, or Smartphone Connection:

Radio:Press and hold [ ] to change the strong station.

USB flash drive:

Press and hold / Dept to change a folder.

Wired connection:

Press and hold to move rapidly within a song.

Depending on a connected device, operations may be changed.

# Driving (>P.401)

## Transmission ← P.417,418

- Select P and depress the brake pedal when turning on the power.
- Shift selection







Park

Press the P button. Used when parking or turning the power on or off. Transmission is locked.



Reverse

Press back the R button. Used when reversing.



Neutral

Press the N button. Transmission is not locked.



Drive

Press the D button. Used for normal driving. The deceleration paddle selector can be used temporarily. The deceleration paddle selector can

be used when **SPORT** mode is on.

### Deceleration Paddle Selector C P.425

When you release the accelerator pedal, you can control the rate of deceleration without removing your hands from the steering wheel. Using the deceleration paddle selector situated on the steering wheel, you can sequentially shift through four stages of deceleration.

Pull the + selector for a few seconds when you want to cancel the deceleration paddle selector.

- When in a mode other than SPORT mode
  - If you pull back the paddle selector, the rate of deceleration will change temporarily, and the stage will appear in the gauge.
- When SPORT mode is ON

If you pull back the paddle selector, the rate of deceleration will change and the stage along with **M** will appear in the gauge.

### Models with A-type meter

When in a mode other than **SPORT** mode, the deceleration stage

appears.



**Deceleration Stage** 







+ Paddle Selector

When SPORT mode is ON, the deceleration stage and **M** appear.



#### Models with B-type meter

When in a mode other than SPORT mode, the deceleration stage appears.



When SPORT mode is ON, the deceleration stage and **M** appear.





### CMBS On and Off R474

- When a possible frontal collision is likely unavoidable, the Collision Mitigation Braking System (CMBS) can reduce the vehicle speed and the severity of the collision.
- The CMBS is turned on every time you turn the power system on.
- To turn the CMBS on or off, use the driver information interface.

### VSA On and Off R452

- The Vehicle Stability Assist (VSA) system helps to stabilise the vehicle during cornering and helps to maintain traction while accelerating on loose or slippery road surfaces.
- VSA comes on automatically every time you turn the power system on.
- To partially disable or fully restore VSA function, press and hold the (S) (VSA OFF) button until you hear a beep.

# Deflation Warning System R454

- Detects a change in tyre conditions and overall dimensions due to decrease in tyre pressures.
- The Deflation Warning System is turned on automatically every time you turn the power system on.
- A calibration procedure must be performed when certain conditions arise.

# **Adjustable Speed Limiter**

### →P. 436

This system enables you to set a maximum speed that cannot be exceeded even if you are depressing the accelerator pedal.

- To use the adjustable speed limiter, press the 
   button. Select the adjustable speed limiter by pressing the LIM button, then press the RES/+/SET/- switch up or down when your vehicle reaches the desired speed.
- The vehicle speed limit can be set from about 30 km/h (18 mph) to about 250 km/ h (156 mph).

# Refueling P.570

Fuel recommendation: EN 228 standards petrol/gasohol fuel

Unleaded premium petrol/gasohol up to E10 (90% petrol and 10% ethanol), research


octane number 95 or higher

Fuel tank capacity: 40 L (8.8 Imp gal)

Unlock the driver's door.

2 Press the edge of the fuel fill door to make it pop up slightly.

- 3 Turn the fuel fill cap slowly to remove the cap.
- 4 Place the cap in the holder on the fuel fill door.
- **5** After refueling, screw the cap back on until it clicks at least once.



# Honda SENSING

Assists with functions such as acceleration, braking, and steering in order to reduce the burden on the driver, as well as help to avoid or reduce the severity of collisions.

Honda SENSING has the following functions:

# Collision Mitigation Braking System (CMBS)

→P. 469

The system can assist you when it determines there is a possibility of your vehicle colliding with a vehicle (including motorcycles) ahead from behind, an oncoming vehicle in front, a vehicle approaching from the side, a pedestrian, or someone riding a bicycle (moving bicycle). The CMBS is designed to alert you when the potential for a collision is determined, as well as assist in reducing speed, avoiding collisions, and reducing collision severity.

# Road Departure Mitigation System P. 485

Alerts and helps to assist you when the system detects a possibility of your vehicle crossing over detected lane markings, or approaching the outer edge of the pavement (into grass or gravel road shoulder) or a detected oncoming vehicle.

# Adaptive Cruise Control (ACC) with Low Speed Follow (\$\infty\$\text{2493}\$)

Helps to maintain a constant vehicle speed and a set following-interval behind a vehicle detected ahead of yours and, if the detected vehicle comes to a stop, can decelerate and stop your vehicle, without you having to keep your foot on the brake or the accelerator.

# **Intelligent Speed Limiter**

**○**P. 443

Automatically sets the speed limit that the traffic sign recognition system detects. And the speed limit cannot be exceeded even if you are depressing the accelerator pedal. If you fully depress the accelerator the speed limit can be exceeded.

# Lane Keeping Assist System (LKAS)

Provides steering input to help to keep the vehicle in the middle of a detected lane and provides tactile, audible and visual alerts if the vehicle is detected drifting out of its lane.

### Traffic Jam Assist

The Traffic Jam Assist system uses a front wide view camera mounted to the upper portion of the windscreen to detect and monitor left and right white (or yellow) traffic lane lines.

Based on inputs from the camera, the system can apply steering torque to keep your vehicle in the centre of the detected lane.

# 

Reminds you of road sign information, such as the current speed limit and that overtaking is prohibited, and notifies you if your vehicle is exceeding the speed limit.

## Auto High-Beam\*

The front wide view camera detects the light sources ahead of the vehicle such as the lights of a preceding or oncoming vehicle, or street lights. When you are driving at night, the system automatically switches the headlights between low beam and high beam depending on the situation.

## **Adaptive Driving Beam\***

#### **→**P. 238

When driving at night, the front wide view camera detects light sources such as street lights or the lights of an oncoming or preceding vehicle. The system automatically switches the headlights between low and high beam depending on the situation. In addition, the system automatically adjusts the light distribution of the high beams in order to reduce glare for preceding and oncoming vehicles.

# Blind Spot Information System\* R458

When the system detects vehicles approaching from behind in adjacent lanes, the appropriate indicator comes on, providing assistance when you change lanes.

## **Cross Traffic Monitor\***

#### →P. 564

Monitors the rear corner areas using the radar sensors when reversing, and alerts you if a vehicle approaching from a rear corner is detected.

The system is convenient when you are backing out of a parking space.

## **Parking Sensor System**

#### →P. 558

The corner and centre sensors monitor obstacles around your vehicle, and the beeper, driver information interface, and audio/information screen let you know the approximate distance between your vehicle and the obstacle.

## **Driver Attention Monitor**

#### →P. 163, 183

The Driver Attention Monitor analyses steering inputs to determine if the vehicle is being driven in a manner consistent with drowsy or inattentive driving. If it determines that the vehicle is being driven in such a manner, it will display the degree of the driver's attention on the driver information interface.

# Maintenance Castra

## Under the Bonnet ←>P.597

- Check engine oil, engine coolant, and windscreen washer fluid. Add when necessary.
- Check brake fluid and high voltage system coolant.
- Check the 12-Volt battery condition monthly.
- 1 Pull the bonnet release handle under the corner of the dashboard.




2 Locate the bonnet latch lever, push it to the side, and then raise the bonnet. Once you have raised the bonnet slightly, you can release the lever.



When finished, close the bonnet and make sure it is firmly locked in place.

## Wiper Blades (TR620)

- When lifting the front wiper arms, move them into the maintenance position before lifting them.
- Replace blades if they leave streaks across the windscreen or become noisy.



## Tyres P.623

- Inspect tyres and wheels regularly.
- Check tyre pressures regularly.
- Install winter tyres for winter driving.

# Handling the Unexpected (23)649

## Flat Tyre R652

• Park in a safe location and repair the flat tyre using the tyre repair kit.

#### Models with a compact spare tyre

 Park in a safe location and replace the flat tyre with the compact spare tyre in luggage area.



# Power System Won't Start (2)8676

• If the 12-volt battery is dead, jump start using a booster battery.



## Overheating P.683

 Park in a safe location. If you do not see steam under the bonnet, open the bonnet, and let the power system cool down.



## **Indicators Come On**


#### →P. 685

 Identify the indicator and consult the owner's manual.



## Blown Fuse R693

 Check for a blown fuse if an electrical device does not operate.



## **Emergency Towing** →P.700

 Call a professional towing service if you need to tow your vehicle.



## What to Do If

Why does the brake pedal pulsate slightly when applying the brakes?



This can occur when the ABS activates and does not indicate a problem. Apply firm, steady pressure on the brake pedal. Never pump the brake pedal.

Anti-lock Brake System (ABS) → P. 553

The rear door cannot be opened from inside the vehicle. Why?



Check if the childproof lock is in the lock position. If so, open the rear door with the outside door handle.




To cancel this function, slide the lever up to the unlock position.

Why do the doors lock after I unlocked the doors?



If you do not open the doors within 30 seconds, the doors are relocked automatically for security.






The beeper sounds when:

- The power mode is in ACCESSORY.
- The exterior lights are left on.






The beeper sounds when the driver and/or any passenger are not wearing their seat belts.





Press the electric parking brake switch with the brake pedal depressed.





The Deflation Warning System needs attention. If you recently inflated or changed a tyre, you have to recalibrate the system.


**Deflation Warning System P.** 454



Depressing the accelerator pedal does not release the parking brake automatically. Why?




- Fasten the driver's seat belt.
- Check if the transmission is in P or N. If so, select any other position.






- Fasten the driver's seat belt.
- Close the driver's door and manually change the shift position.

When opening the driver's door
 →P. 422





The brake pads may need to be replaced. Have your vehicle inspected by a dealer.





Your vehicle is designed to operate on premium unleaded petrol with a research octane of 95 or higher. If this octane grade is unavailable, regular unleaded petrol with a research octane of 91 or higher may be used temporarily.

The use of regular unleaded petrol can cause metallic knocking noises in the engine and will result in decreased engine performance. The long-term use of regular-grade petrol can lead to engine damage.

# Safe Driving

You can find many safety recommendations throughout this chapter, and throughout this manual.

roi sale briving	
Important Safety Precautions	42
Your Vehicle's Safety Features	4
Safety Checklist	4
Seat Belts	
About Your Seat Belts	4
Fastening a Seat Belt	5
Seat Belt Inspection	50
Anchorage Points	5
Airbags	
Airbag System Components	58
Types of Airbags	60

For Safa Driving

Front Airbags (SRS)	60
Knee Airbags	66
Centre Airbag	70
Side Airbags	72
Side Curtain Airbags	75
Airbag System Indicators	77
Airbag Care	79
Pop-up Hood System	
About the Pop-up Hood System	80
Pop-up Hood System Care	82
Child Safety	
Protecting Child Passengers	83

Safety of Infants and Small Children .	86
Safety of Larger Children	106
xhaust Gas Hazard	
Carbon Monoxide Gas	109
afety Labels	
Label Locations	110

## For Safe Driving

The following pages explain your vehicle's safety features and how to use them properly. The safety precautions below are ones that we consider to be among the most important.

## **Important Safety Precautions**

#### ■ Always wear your seat belt

A seat belt is your best protection in all types of collisions. Airbags are designed to supplement seat belts, not replace them. So even though your vehicle is equipped with airbags, make sure you and your passengers always wear your seat belts, and wear them properly.

#### ■ Restrain all children

Children aged 12 and under should ride properly restrained in a back seat, not the front seat. Infants and small children should be restrained in a child restraint system. Larger children should use a booster seat and a lap/shoulder seat belt until they can use the belt properly without a booster seat.

#### ■ Be aware of airbag hazards

While airbags can save lives, they can cause serious or fatal injuries to occupants who sit too close to them, or are not properly restrained. Infants, young children, and short adults are at the greatest risk. Be sure to follow all instructions and warnings in this manual.

#### ■ Don't drink and drive

Alcohol and driving don't mix. Even one drink can reduce your ability to respond to changing conditions, and your reaction time gets worse with every additional drink. So don't drink and drive, and don't let your friends drink and drive, either.

#### **≥** Important Safety Precautions

Some countries prohibit the use of mobile phones other than hands-free devices by the driver while driving.

#### ■ Pay appropriate attention to the task of driving safely

Engaging in mobile phone conversation or other activities that keep you from paying close attention to the road, other vehicles, and pedestrians could lead to a crash. Remember, situations can change quickly, and only you can decide when it is safe to divert some attention away from driving.

#### **■** Control your speed

Excessive speed is a major factor in crash injuries and deaths. Generally, the higher the speed, the greater the risk, but serious injuries can also occur at lower speeds. Never drive faster than is safe for current conditions, regardless of the maximum speed posted.


#### ■ Keep your vehicle in safe condition

Having a tyre blowout or a mechanical failure can be extremely hazardous. To reduce the possibility of such problems, check your tyre pressures and condition frequently, and perform all regularly scheduled maintenance.

#### ■ Do not leave children unattended in the vehicle

Children, pets, and people needing assistance left unattended in the vehicle may be injured if they activate one or more of the vehicle controls. They may also cause the vehicle to move, resulting in a crash in which they and/or another person(s) can be injured or killed. Also, depending on the ambient temperature, the temperature of the interior may reach extreme levels, which can result in harm or death. Even if the climate control system is on, never leave them in the vehicle unattended as the climate control system can shut off at any time.

## **Your Vehicle's Safety Features**

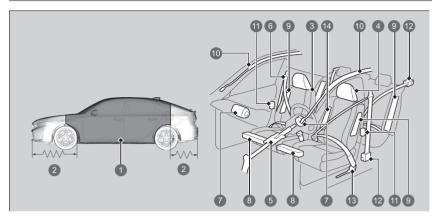

- Safety Cage
- 2 Crush Zones
- Seats and Seat-Backs
- 4 Head Restraints
- **5** Collapsible Steering Column
- 6 Seat Belts
- Front Airbags
- 8 Knee Airbags
- Side Airbags
- Side Curtain Airbags
- Door Locks
- Seat Belt Tensioners
- Outer Lap Pretensioners
- Centre Airbag

#### ∑Your Vehicle's Safety Features

Your vehicle is equipped with many features that work together to help to protect you and your passengers during a crash.

Some features do not require any action on your part. These include a strong steel framework that forms a safety cage around the passenger compartment, front and rear crush zones, a collapsible steering column, and tensioners that tighten the front and rear outer seat belts in a sufficient crash.

However, you and your passengers cannot take full advantage of these features unless you remain seated in the correct position and always wear your seat belts. In fact, some safety features can contribute to injuries if they are not used properly.

The following checklist will help you take an active role in protecting yourself and your passengers.

## **Safety Checklist**

For the safety of you and your passengers, make a habit of checking these items each time before you drive.

Adjust your seat to a position suitable for driving. Be sure the front seats are
adjusted as far to the rear as possible while allowing the driver to control the
vehicle. Sitting too close to a front airbag can result in serious or fatal injury in a
crash.

**Seats** P. 250

Adjust head restraints to the proper position. Head restraints are most effective
when the centre of the head restraint aligns with the centre of your head. Taller
persons should adjust their head restraint to the highest position.

**⚠** Adjusting the Front and Rear Outer Head Restraint Positions P. 258

Always wear your seat belt, and make sure you wear it properly. Confirm that any
passengers are properly belted as well.

Fastening a Seat Belt P. 52

 Protect children by using seat belts or child restraint systems according to a child's age, height, and weight.

Child Safety P. 83

#### **Safety Checklist**

If the door and/or hatch open message appears on the driver information interface, a door and/or the hatch is not completely closed. Close all doors and the hatch tightly until the message disappears.

**Driver Information Interface Warning and Information Messages** P. 135



## **About Your Seat Belts**

Seat belts are the single most effective safety device because they keep you connected to the vehicle so that you can take advantage of many built-in safety features. They also help to keep you from being thrown against the inside of the vehicle, against any passengers, or out of the vehicle. When worn properly, seat belts also keep your body properly positioned in a crash so that you can take full advantage of the additional protection provided by the airbags.

In addition, seat belts help to protect you in almost every type of crash, including:

- frontal impacts
- side impacts
- rear impacts
- rollovers

■ About Your Seat Belts

## **AWARNING**

Not wearing a seat belt properly increases the chance of serious injury or death in a crash, even though your vehicle has airbags.

Be sure you and your passengers always wear seat belts and wear them properly.

**WARNING:** Seat belts are designed to bear upon the bony structure of the body, and should be worn low across the front of the pelvis or the pelvis, chest and shoulders, as applicable; wearing the lap section of the belt across the abdominal area must be avoided.

**WARNING:** Seat belts should be adjusted as firmly as possible, consistent with comfort, to provide the protection for which they have been designed. A slack belt will greatly reduce the protection afforded to the wearer

**WARNING:** Belts should not be worn with straps twisted.

**WARNING:** Each belt assembly must only be used by one occupant; it is dangerous to put a belt around a child being carried on the occupant's lap.

Continued 47

#### **■** Lap/shoulder seat belts

All five seating positions are equipped with lap/shoulder seat belts with emergency locking retractors. In normal driving the retractor lets you move freely while keeping some tension on the belt. During a collision or sudden stop the retractor locks to restrain your body.

The seat belt must be properly secured when using a front-facing child restraint system.

Installing a Child Restraint System with a Lap/Shoulder Seat Belt P. 102

#### ■ Proper use of seat belts

Follow these guidelines for proper use:

- All occupants should sit upright, well back in the seat, and remain in that position for the duration of the trip. Slouching and leaning reduce the effectiveness of the belt and can increase the chance of serious injury in a crash.
- Never place the shoulder part of a lap/shoulder seat belt under your arm or behind your back. This could cause very serious injuries in a crash.
- Two people should never use the same seat belt. If they do, they could be very seriously injured in a crash.
- Do not put any accessories on the seat belts. Devices intended to improve comfort or reposition the shoulder part of a seat belt can reduce the protective capability and increase the chance of serious injury in a crash.

#### About Your Seat Belts

If you extend the seat belt too quickly, it will lock in place. If this happens, slightly retract the seat belt, then extend it slowly.

Seat belts cannot completely protect you in every crash. But in most cases, seat belts can reduce your risk of serious injury.

Most countries require you to wear seat belts. Take time to familiarise with the legal requirements of the countries in which you will drive.

#### Seat Belt Reminder



#### ■ Front seats

The seat belt system includes an indicator on the instrument panel to remind the driver or a front passenger or both to fasten their seat belts. If you set the power mode to ON and a seat belt is not fastened, the indicator will come on.

The beeper will periodically sound and the indicator will blink while the vehicle is moving until the seat belt is fastened.

#### Seat Belt Reminder

The indicator will also come on if a front passenger does not fasten their seat belt within six seconds after the power mode is set to ON.

When no one is sitting in the front passenger's seat, the indicator will not come on and the beeper will not sound.

If the indicator comes on or the beeper sounds with no one sitting in the front passenger's seat. Check if:

- There is nothing heavy placed on the front passenger seat.
- The driver's seat belt is fastened. If the indicator does not light when the passenger is seated and is not fastened, something may be interfering with the occupant detection sensor. Check if:
- A cushion is placed on the seat.
- The front passenger is not sitting properly.

If none of these conditions exist, have your vehicle checked by a dealer.

Continued 49



- Fastened
- Unfastened

#### ■ Rear seats

Your vehicle monitors rear seat belt use. The driver information interface notifies you about the status of the rear seat belts use.

The display appears when:

- Any of the rear passenger seat belts are unfastened when the power mode is set to ON.
- A rear door is opened and then closed.
- Any of the rear passengers fasten or unfasten their seat belt.

The seat belt reminder indicator blinks and the beeper sounds if any rear passenger seat belts has been unfastened while driving.

#### Automatic Seat Belt Tensioners

The front seats and the outer rear seats are equipped with automatic seat belt tensioners to enhance safety.

The tensioners automatically tighten the front seat belts and the outer rear seat belts during a moderate-to-severe frontal collision, sometimes even if the collision is not severe enough to inflate the front airbags or the driver's and passenger's knee airbag.





#### 

The seat belt tensioners can only operate once. If a tensioner is activated, the SRS indicator will come on. Have a dealer replace the tensioner and thoroughly inspect the seat belt system as it may not offer protection in a subsequent crash.

During a moderate-to-severe side impact, the tensioners on both sides of the vehicle also activate.

## **Fastening a Seat Belt**

After adjusting a front seat to the proper position, and while sitting upright and well back in the seat:

**Seats** P. 250



1. Pull the seat belt out slowly.



- **2.** Insert the latch plate into the buckle, then tug on the belt to make sure the buckle is secure.
  - ► Make sure that the belt is not twisted or caught on anything.

#### ■ Fastening a Seat Belt

No one should sit in a seat with an inoperative seat belt or one that does not appear to be working correctly. Using a seat belt that is not working properly may not protect the occupant in a crash. Have a dealer check the belt as soon as possible.

Never insert any foreign objects into the buckle or retractor mechanism.

If the seat belt appears to be locked in a fully retracted position, firmly pull out on the shoulder belt once, then push it back in.

Then, smoothly pull it out of the retractor and fasten. If you are unable to release the seat belt from a fully retracted position, do not allow anyone to sit in the seat, and take your vehicle to a dealer for repair.

- **About Your Seat Belts** P. 47
- Seat Belt Inspection P. 56

1 Latch Plate

2 Buckle



- **3.** Position the lap part of the belt as low as possible across your hips (see illustration), then pull up on the shoulder part of the belt so the lap part fits snugly. This lets your strong pelvic bones take the force of a crash and reduces the chance of internal injuries.
- **4.** If necessary, pull up on the belt again to remove any slack, then check that the belt rests across the centre of your chest and over your shoulder. This spreads the forces of a crash over the strongest bones in your upper body.

>> Fastening a Seat Belt

## **AWARNING**

Improperly positioning the seat belts can cause serious injury or death in a crash.

Make sure all seat belts are properly positioned before driving.

To release the belt, push the red **PRESS** button and then guide the belt by hand until it has retracted completely.

When exiting the vehicle, be sure the belt is properly stowed so that it will not get caught in the closing door.

Continued 53

## ■ Adjusting the Shoulder Anchorage

The front seats have adjustable shoulder anchorages to accommodate taller and shorter occupants.



- **1.** Move the anchorage up and down while holding the release button.
- **2.** Position the anchorage so that the belt rests across the centre of your chest and over your shoulder.

#### ∑Adjusting the Shoulder Anchorage

After an adjustment, make sure that the shoulder anchorage position is secure.

The shoulder anchorage height can be adjusted to four levels. If the belt contacts your neck, lower the height one level at a time.

## Advice for Pregnant Women

#### Consider alternative:

If you are pregnant, the best way to protect yourself and your unborn child when driving or riding in a vehicle is to always wear a seat belt. When positioning the seat belt, wear the shoulder belt section across the chest, avoiding the abdomen, and keep the lap belt portion as low as possible across the hips. (See illustration.)



#### ■ Advice for Pregnant Women

Each time you have a checkup, ask your doctor if it is okay for you to drive.

To reduce the risk of injuries to both you and your unborn child that can be caused by an inflating front airbag:

- When driving, sit upright and adjust the seat as far back as possible while allowing full control of the vehicle.
- When sitting in the front passenger's seat, adjust the seat as far back as possible.

## **Seat Belt Inspection**

Regularly check the condition of your seat belts as follows:

- Pull each belt out fully, and look for frays, cuts, burns, and wear.
- Check that the latch plates and buckles work smoothly and the belts retract easily.
  - ▶ If a belt does not retract easily, cleaning the belt may correct the problem. Only use a mild soap and warm water. Do not use bleach or cleaning solvents. Make sure the belt is completely dry before allowing it to retract.

Any belt that is not in good condition or working properly will not provide proper protection and should be replaced as soon as possible.

A belt that has been worn during a crash may not provide the same level of protection in a subsequent crash. Have your seat belts inspected by a dealer after any collision.

Seat Belt Inspection

## **AWARNING**

Not checking or maintaining seat belts can result in serious injury or death if the seat belts do not work properly when needed.


Check your seat belts regularly and have any problem corrected as soon as possible.

**WARNING:** No modifications or additions should be made by the user which will either prevent the seat belt adjusting devices from operating to remove slack, or prevent the seat belt assembly from being adjusted to remove slack.


**WARNING:** It is essential to replace the entire assembly after it has been worn in a severe impact even if damage to the assembly is not obvious.

**WARNING:** Care should be taken to avoid contamination of the webbing with polishes, oils and chemicals, and particularly battery acid. Cleaning may safely be carried out using mild soap and water. The belt should be replaced if webbing becomes frayed, contaminated or damaged.

## **Anchorage Points**



When replacing the seat belts, use the anchorage points shown in the images. The front seat has a lap/shoulder belt.



The rear seat has three lap/shoulder belts.

## Airbags

## **Airbag System Components**

The front, driver's knee, front passenger's knee, side, front centre and side curtain airbags are deployed according to the direction and severity of impact. The airbag system includes:

- Two SRS (Supplemental Restraint System) front airbags. The driver's airbag is stored in the centre of the steering wheel; the front passenger's airbag is stored in the dashboard. Both are marked SRS AIRBAG.
- Two knee airbags. The driver's knee airbag is stored under the steering column; the front passenger's knee airbag is stored under the glove box.
   Both are marked SRS AIRBAG.
- Four side airbags. One for the driver, one for the front passenger, and two for the rear outboard seating positions. The airbags are stored in the outer edges of the seat-backs. All are marked SIDE AIRBAG.

- Two side curtain airbags, one for each side of the vehicle. The airbags are stored in the ceiling, above the side windows. The front and rear pillars are marked SIDE CURTAIN AIRBAG
- One centre airbag. The airbag is stored in the centre side of driver's seat-back. It is marked CENTER AIRBAG.
- An electronic control unit that, when the power mode is in ON, continually monitors information about the various impact sensors, seat and buckle sensors, airbag activators, seat belt tensioners, and other vehicle information. During a crash event, the unit can record such information.
- Automatic seat belt tensioners for the front seats and outer rear seats.
- Impact sensors that can detect a moderate-to-severe front or side impact.
- An indicator on the centre console that alerts you that the passenger's front airbag has been turned off.

• An indicator on the instrument panel that alerts you to a possible problem with your airbag system or seat belt tensioners.

## Important Facts About Your Airbags

Airbags can pose serious hazards. To do their job, airbags must inflate with tremendous force. So, while airbags help to save lives, they can cause burns, bruises, and other minor injuries, sometimes even fatal ones if occupants are not wearing their seat belts properly and sitting correctly.

**What you should do:** Always wear your seat belt properly and sit upright and as far back from the steering wheel as possible while allowing full control of the vehicle. A front passenger should move their seat as far back from the dashboard as possible.

Remember, however, that no safety system can prevent all injuries or deaths that can occur in a severe crash, even when seat belts are properly worn and the airbags deploy.

**Do not place hard or sharp objects between yourself and a front airbag.** Carrying hard or sharp objects on your lap, or driving with a pipe or other sharp object in your mouth, can result in injuries if your front airbag inflates.

Do not attach or place objects on the front, driver's knee, and front passenger's knee airbag covers. Objects on the covers marked SRS AIRBAG could interfere with the proper operation of the airbags or be propelled inside the vehicle and hurt someone if the airbags inflate.

#### 

Do not attempt to deactivate your airbags. Together, airbags and seat belts provide the best protection.

When driving, keep hands and arms out of the deployment path of the front airbag by holding each side of the steering wheel. Do not cross an arm over the airbag cover.

## **Types of Airbags**

Your vehicle is equipped with five types of airbags:

- Front airbags: Airbags in front of the driver's and front passenger's seats.
- **Knee airbags:** Airbags under the steering column and under the glove box.
- Centre airbags: Airbag in the centre side of driver's seat-back.
- **Side airbags:** Airbags in the driver's and front passenger's outer seat-backs and next to the outer rear seating positions.
- **Side curtain airbags:** Airbags above the side windows.

Each is discussed in the following pages.

## Front Airbags (SRS)

The front SRS airbags inflate in a moderate-to-severe frontal collision to help to protect the head and chest of the driver and/or front passenger.

**SRS** (Supplemental Restraint System) indicates that the airbags are designed to supplement seat belt not replace them. Seat belt is the occupant primary restraint system.

## Housing Locations

The front airbags are housed in the centre of the steering wheel for the driver, and in the dashboard for the front passenger. Both airbags are marked **SRS AIRBAG**.

#### ∑Types of Airbags

The airbags can inflate whenever the power mode is in ON.


After an airbag inflates in a crash, you may see a small amount of smoke. This is from the combustion process of the inflator material and is not harmful. People with respiratory problems may experience some temporary discomfort. If this occurs, get out of the vehicle as soon as it is safe to do so.

## Operation

Front airbags are designed to inflate during moderate-to-severe frontal collisions. When the vehicle decelerates suddenly, the sensors send information to the control unit which signals one or both front airbags to inflate.

A frontal collision can be either head-on or angled between two vehicles, or when a vehicle crashes into a stationary object, such as a concrete wall.

## ■ How the Front Airbags Work



While your seat belt restrains your torso, the front airbag provides supplemental protection for your head and chest.

The front airbags deflate immediately so that they won't interfere with the driver's visibility or the ability to steer or operate other controls.

The total time for inflation and deflation is so fast that most occupants are not aware that the airbags deployed until they see them lying in front of them.

#### ■ When front airbags should not deploy

**Minor frontal crashes:** Front airbags were designed to supplement seat belts and help to save lives, not to prevent minor scrapes, or even broken bones that might occur during a less than moderate-to-severe frontal crash.

**Side impacts:** Front airbags can provide protection when a sudden deceleration causes a driver or front passenger to move towards the front of the vehicle. Side airbags and side curtain airbags have been specifically designed to help to reduce the severity of injuries that can occur during a moderate-to-severe side impact which can cause the driver or passenger to move towards the side of the vehicle.

**Rear impacts:** Head restraints and seat belts are your best protection during a rear impact. Front airbags cannot provide any significant protection and are not designed to deploy in such collisions.

**Rollovers:** Seat belts and side curtain airbags offer the best protection in a rollover. Because front airbags could provide little if any protection, they are not designed to deploy during a rollover.

#### ■ When front airbags deploy with little or no visible damage

Because the airbag system senses sudden deceleration, a strong impact to the vehicle framework or suspension might cause one or more of the airbags to deploy. Examples include running into a curb, the edge of a hole, or other low fixed object that causes a sudden deceleration in the vehicle chassis. Since the impact is underneath the vehicle, damage may not be readily apparent.

#### ■ When front airbags may not deploy, even though exterior damage appears severe

Since crushable body parts absorb crash energy during an impact, the amount of visible damage does not always indicate proper airbag operation. In fact, some collisions can result in severe damage but no airbag deployment because the airbags would not have been needed or would not have provided protection even if they had deployed.

## Passenger Front Airbag Off System

If it is unavoidable to install a rear-facing child restraint system in the front passenger seat, you must manually deactivate the passenger front airbag system, using the built-in key.

#### ■ Passenger front airbag ON/OFF switch



Passenger Front Airbag ON/ OFF Indicator

- System Warning Label
- ON/OFF Switch

When the passenger front airbag **ON/OFF** switch is in:

**OFF:** The passenger front airbag is deactivated. The passenger front airbag does not inflate during a frontal crash that inflates driver's front airbag.

The passenger front airbag off indicator stays on as a reminder.

**ON:** The passenger front airbag is activated. The passenger front airbag on indicator comes on and remains on for about 60 seconds.

▶ Passenger Front Airbag Off System

## **AWARNING**

The passenger front airbag system must be turned off, if it is not avoidable to put a rear-facing child restraint system in the front passenger seat.

If the front passenger airbag inflates, it can hit the rear-facing child restraint system with enough force to kill or cause a very serious injury to the infant.

## **AWARNING**

Make sure to turn on the passenger front airbag system when a rear-facing child restraint system is not used on the front passenger seat.

Leaving the passenger front airbag system deactivated can result in serious injury or death in a crash.

## ■ To deactivate the passenger front airbag system



Passenger Front Airbag ON/ OFF Switch

- **1.** Set the parking brake, and set the power mode to VEHICLE OFF.
- 2. Open the front passenger's door.
- **3.** Insert the built-in key to the passenger front airbag **ON/OFF** switch.
  - ➤ The switch is located at the side panel of the front passenger side instrument panel.
- **4.** Turn the built-in key to **OFF**, and remove it from the switch.

**™**To deactivate the passenger front airbag system

#### NOTICE

- Use your vehicle's built-in key to turn the passenger front airbag ON/OFF switch. If you use a different key, the switch can be damaged, or the passenger front airbag system may not work properly.
- Do not close the door or apply an excessive load on the built-in key while the key is in the passenger front airbag **ON/OFF** switch. The switch or the key can be damaged.

We strongly recommend that you do not install a rear-facing child restraint system in the front passenger seat.

**▶ Protecting Infants** P. 86

It is your responsibility to change the setting of the passenger front airbag system to **OFF** when you put a rear-facing child restraint system on the front passenger seat.

When a rear-facing child restraint system is not in use in the front passenger seat, turn the system back on.

#### ■ Passenger front airbag off indicator

When the passenger front airbag system is activated, the indicator goes off after a few seconds when you set the power mode to ON.

When the passenger front airbag system is deactivated, the indicator stays on, or goes off momentarily and comes back on.

## ■ Passenger front airbag off system label

The label is located at the side panel of the front passenger side instrument panel.



- 1 Infant in a rear-facing child restraint system: May ride in front if it is unavoidable
- Cannot be seated in front
- **3** Passenger front airbag is: Active
- 4 Inactive

## **Knee Airbags**

The knee SRS airbags inflate in a moderate-to-severe frontal collision to help to keep the driver and/or front passenger in the proper position and to help to maximise the benefit provided by the vehicle's other safety features.

**SRS** (Supplemental Restraint System) indicates that the airbags are designed to supplement seat belt not replace them. Seat belt is the occupant primary restraint system.

## Housing Locations



1 Driver's Knee Airbag Location

The knee airbag for the driver and the one for the front passenger are housed under the steering column and the glove box respectively.

Both are marked SRS AIRBAG.

#### 

Do not attach accessories on or near a knee airbag as they can interfere with the proper operation of the airbag, or even hurt someone if the airbag inflates.

The driver and front passenger should not store any items under the seat or behind their feet. The items can interfere with proper airbag deployment in the event of a moderate to severe frontal collision and may result in inadequate protection.



 Passenger's Knee Airbag Location

## Operation



1 Deployed Driver's Knee Airbag

The driver's and front passenger's knee airbag deploy at the same time as the driver's and front passenger's airbag respectively.

Continued 67



Deployed Passenger's Knee Airbag

#### ■ When knee airbags deploy with little or no visible damage

Because the airbag system senses sudden deceleration, a strong impact to the vehicle framework or suspension might cause one or more of the airbags to deploy. Examples include running into a curb, the edge of a hole, or other low fixed objects that cause a sudden deceleration in the vehicle chassis. Since the impact is underneath the vehicle, damage may not be readily apparent.

# ■ When knee airbags may not deploy, even though exterior damage appears severe

Since crushable body parts absorb crash energy during an impact, the amount of visible damage does not always indicate proper airbag operation. In fact, some collisions can result in severe damage but no airbag deployment because the airbags would not have been needed or would not have provided protection even if they had deployed.

## **Centre Airbag**

The centre airbag is designed to help to protect the heads of the driver and front passenger during a moderate-to-severe side impact.

## Housing Location




The centre airbag is housed in the centre side of the driver's seat-back.

It is marked **CENTER AIRBAG**.

Centre Airbag Location

## Operation



When the sensors detect a moderate-tosevere side impact, the control unit signals the centre airbag to deploy.

Centre Airbag

#### ○ Centre Airbag

Make sure you and any front seat passenger always sit upright. Leaning into the path of the centre airbag can prevent the airbag from deploying properly and increases your risk of serious injury.

Do not attach accessories on or near the centre airbag. They can interfere with the proper operation of the airbag, or hurt someone if an airbag inflate.

Do not open the lid of the console compartment while driving.

Do not cover or replace the driver's seat-back cover without consulting a dealer.

Improperly replacing or covering driver's seat-back covers can prevent your centre airbag from properly deploying during a side impact.

#### ■ When the centre airbag deploy with little or no visible damage

Because the airbag system senses sudden acceleration, a strong impact to the side of the vehicle's framework can cause the centre airbag to deploy. In such cases, there may be little or no damage, but the side impact sensors detected a severe enough impact to deploy the airbag.

## ■ When the centre airbag may not deploy, even though visible damage appears severe

It is possible for the centre airbag to not deploy during an impact that results in apparently severe damage. This can occur when the point of impact was towards the far front or rear of the vehicle, or when the vehicle's crushable body parts absorbed most of the crash energy. In either case, the centre airbag would not have been needed nor provided protection even if it had deployed.

## **Side Airbags**

The side airbags help to protect the torso and pelvis of the driver, front passenger, or an outer rear seat occupant during a moderate-to-severe side impact.

## ■ Housing Locations



The side airbags are housed in the outside edge of the driver's and passenger's seatbacks and next to the outer rear seating positions.

Each is marked **SIDE AIRBAG**.

#### Side Airbag Location




Side Airbag Location

#### Side Airbags

Do not attach accessories on or near the side airbags. They can interfere with the proper operation of the airbags, or hurt someone if an airbag inflates.

## Operation



When the sensors detect a moderate-tosevere side impact, the control unit signals the side airbag on the impact side to immediately inflate.

#### Deployed Side Airbag



Deployed Side Airbag

#### Side Airbags

Do not cover or replace the front seat-back covers without consulting a dealer.

Improperly replacing or covering front seat-back covers can prevent your side airbags from properly deploying during a side impact.

Do not let the front passenger lean sideways with their head in the deployment path of the side airbag. An inflating side airbag can strike with strong force and seriously injure the passenger.

#### ■ When a side airbag deploys with little or no visible damage

Because the airbag system senses sudden acceleration, a strong impact to the side of the vehicle's framework can cause a side airbag to deploy. In such cases, there may be little or no damage, but the side impact sensors detected a severe enough impact to deploy the airbag.

## ■ When a side airbag may not deploy, even though visible damage appears severe


It is possible for a side airbag not to deploy during an impact that results in apparently severe damage. This can occur when the point of impact was towards the far front or rear of the vehicle, or when the vehicle's crushable body parts absorbed most of the crash energy. In either case, the side airbag would not have been needed nor provided protection even if it had deployed.

## **Side Curtain Airbags**

The side curtain airbags help to protect the heads of the driver and passengers in outer seating positions during a moderate-to-severe side impact.

of the vehicle

## ■ Housing Locations



Side Curtain Airbag Location

The side curtain airbags are located in the

ceiling above the side windows on both sides


#### Side Curtain Airbags

The side curtain airbags are most effective when an occupant is wearing their seat belt properly and sitting upright, well back in their seat.

Do not attach any objects to the side windows or roof pillars as they can interfere with the proper operation of the side curtain airbags.

Do not put a coat hanger or hard objects on a coat hook. This could result in injuries if your side curtain airbag inflates.

## Operation



The side curtain airbag is designed to deploy in a moderate-to-severe side impact.

Deployed Side Curtain Airbag

■ When side curtain airbags deploy in a frontal collision
One or both side curtain airbags may also inflate in a moderate-to-severe angled frontal collision.

## **Airbag System Indicators**

If a problem occurs in the airbag system, the SRS indicator will come on and a message appears on the driver information interface.

## ■ Supplemental Restraint System (SRS) Indicator



■ When the power mode is set to ON The indicator comes on for a few seconds, then goes off. This tells you the system is working properly.

If the indicator comes on at any other time, or does not come on at all, have the system checked by a dealer as soon as possible. If you don't, your airbags and seat belt tensioners may not work properly when they are needed.

Supplemental Restraint System (SRS) Indicator

## **AWARNING**

Ignoring the SRS indicator can result in serious injury or death if the airbag systems or tensioners do not work properly.

Have your vehicle checked by a dealer as soon as possible if the SRS indicator alerts you to a possible problem.

#### Passenger Front Airbag Off Indicator



## ■ When the passenger airbag off indicator comes on

The indicator stays on while the passenger's front airbag system is deactivated.

When a rear-facing child restraint system is not in use in the front passenger seat, manually turn the system back on. The indicator should go off.

Children age 12 or under should always ride properly restrained in a back seat.

Child Safety P. 83

Supplemental Restraint System (SRS) Indicator

## **AWARNING**

Remove the rear-facing child restraint system immediately from the front passenger seat if the SRS indicator comes on. Even if the passenger front airbag has been deactivated, do not ignore the SRS indicator.

The SRS system may have a fault which could cause the passenger front airbag to be activated, causing serious injury or death.

## **Airbag Care**

You do not need to, and should not, perform any maintenance on or replace any airbag system components yourself. However, you should have your vehicle inspected by a dealer in the following situations:

#### ■ When the airbags have deployed

If an airbag has inflated, the control unit and other related parts must be replaced. Similarly, once an automatic seat belt tensioner has been activated, it must be replaced.

#### ■ When the vehicle has been in a moderate-to-severe collision

Even if the airbags did not inflate, have your dealer inspect the following: the seat belt tensioners for the front seats and outer rear seats, and each seat belt that was worn during the crash.

#### 

The removal of airbag components from the vehicle is prohibited.

In case of malfunction, or shutdown, or after the airbag inflation/seat belt tensioner operation, ask a qualified personnel for handling.

We recommend against the use of salvaged airbag system components, including the airbag, tensioners, sensors, and control unit.

## Pop-up Hood System


## **About the Pop-up Hood System**

The pop-up hood system is designed to help to reduce the possible head injuries of a pedestrian if they experience a frontal impact with your vehicle.

#### ■ The System Activates When

Your vehicle strikes a pedestrian or other objects at moderate or higher speed.

## ■ How the System Works



- Bonnet
- 2 Hinge
- Raises about 100mm
- 4 Power Unit Component
- 6 Pedestrian Impact Sensors

When the pedestrian impact sensors detect a certain amount of impact, the pop-up hood system is activated and the rear of the bonnet will raise.

The raised bonnet can help to reduce pedestrian head injuries.

The power units are located in the vehicle front side of the hinges.

■ About the Pop-up Hood System

## **AWARNING**

After the pop-up hood is activated, the power unit components become extremely hot and can cause burns. Do not touch the power unit components until they have cooled.

#### NOTICE

Do not attempt to open the bonnet after the pop-up hood system has been activated. After the system activation, make sure the raised bonnet does not interfere with visibility, and then drive slowly and carefully.

If the bonnet is not fully closed, it may not work properly. Make sure the bonnet is fully closed before driving.

The following conditions may also activate the system.

- A severe impact on the underside of your vehicle.
- Driving over speed bumps at high speed, or over a large pothole.
- When the objects impact the pedestrian impact sensors.

The system may not activate if your vehicle is:

- Impacted from the rear or side.
- Tipped over or rolled over.
- A pedestrian is struck at an angle.

Other factors, such as where, at which angle, or at what vehicle speed the impact has occurred, may prevent the pop-up hood system from activating.

#### ≥ About the Pop-up Hood System

For the pop-up hood system to work properly:

- Always use the same size tyres as the original. The system may not read your vehicle speed correctly with the different size tyres.
- Never apply force to the system's power unit. It can be damaged if you slam the bonnet shut.
- Do not impact the pedestrian impact sensors in the front bumper.

Pop-up Hood System label is found under the bonnet:

Label Locations P. 110



#### ■ System Warning Message for Pop-up Hood



#### ■ When the power mode is set to ON

A system warning message appears on the driver information interface if there is a potential problem with the pop-up hood system.

System Warning Message for Pop-up Hood

## **AWARNING**

Ignoring the pop-up hood message can result in a malfunction of the pop-up hood. This can result in serious injury or death if your vehicle impacts a pedestrian.

If the pop-up hood message comes on, have your vehicle checked by a dealer as soon as possible.

## **Pop-up Hood System Care**

You do not need to, and should not, perform any maintenance on or replace any pop-up hood system components yourself.

However, if the pop-up hood system has ever activated, you need to have the control unit, and other related parts replaced by a dealer.

#### 

If the front bumper is damaged, have the vehicle checked by a dealer even if the pop-up hood system did not activate

## **Child Safety**

## **Protecting Child Passengers**

Each year, many children are injured or killed in vehicle crashes because they are either unrestrained or not properly restrained. In fact, vehicle crashes are the number one cause of death of children aged 12 and under.

To reduce the number of child deaths and injuries, infants and children should be properly restrained when they ride in a vehicle.

▶ Protecting Child Passengers

Front Passenger's Sun Visor

### **AWARNING**





NEVER use a rearward facing child restraint on a seat protected by an ACTIVE AIRBAG in front of it, DEATH or SERIOUS INJURY to the CHILD can occur.

## **AWARNING**

Children who are unrestrained or improperly restrained can be seriously injured or killed in a crash.

Any child too small for a seat belt should be properly restrained in an approved child restraint system. A larger child should be properly restrained with a seat belt, using a booster seat if necessary.

#### Children should sit properly restrained in a rear seat. This is because:



- An inflating front airbag can injure or kill a child sitting in the front seat.
- A child in the front seat is more likely to interfere with the driver's ability to safely control the vehicle.
- Statistics show that children of all sizes and ages are safer when they are properly restrained in a rear seat.

#### 

In many countries, the law requires all children aged 12 and under, and whose height are shorter than 150 cm (60 inches) be properly restrained in a rear seat.

In many countries, it is required to use an officially approved and suitable child restraint system for transporting a child on any passenger seat. Check your local legal requirement.

We recommend a child restraint system compliant with UN Regulation No. 44 or No. 129, or the regulations of the subject countries.

Selecting a Child Restraint System P. 89

- Never hold a child on your lap because it is impossible to protect them in the event of a collision.
- Never put a seat belt over yourself and a child. During a crash, the belt would likely press deep into the child and cause serious or fatal injuries.
- Never let two children use the same seat belt. Both children could be very seriously injured in a crash.
- Any child who is too small to wear a seat belt must be properly restrained in an approved child restraint system that is properly secured to the vehicle using the seat belt or the child restraint anchorage system.
- Do not allow children to operate the doors, windows, or seat adjustments.
- Do not leave children in the vehicle unattended, especially in hot weather when the inside of the vehicle can get hot enough to kill them. They could also activate vehicle controls causing it to move unexpectedly.

#### 

**WARNING:** Use the power window lock button to prevent children from opening the windows. Using this feature will prevent children from playing with the windows, which could expose them to hazards or distract the driver.

**Opening/Closing the Power Windows** P. 218

**WARNING:** Always take the ignition key with you whenever you leave the vehicle alone or with other occupants.

To remind you of the passenger's front airbag hazard and child safety, your vehicle has the warning label on the passenger's side sun visor.

Please read and follow the instructions on this label.

Safety Labels P. 110

## **Safety of Infants and Small Children**

### Protecting Infants

An infant must be properly restrained in a rear-facing child restraint system until the infant reaches the child restraint system manufacturer's weight or height limit for the seat.



## ■ Positioning a rear-facing child restraint system

Child restraint system must be placed and secured in a rear seating position.

- ➤ We recommend that you install the child restraint system directly behind the front passenger's seat, move the seat as far forward as needed, and leave it unoccupied.
- ► Make sure that there is no contact between the child restraint system and the seat in front of it.

If there is, you may wish to get a smaller rearfacing child restraint system.

▶ Protecting Infants

## **AWARNING**

Placing a rear-facing child restraint system in the front seat can result in serious injury or death if the passenger's front airbag inflates.

Always place a rear-facing child restraint system in the back seat, not the front.

Many experts recommend use of a rear-facing child restraint system for a child up to two years old if the child's height and weight are appropriate for a rear-facing child restraint system.

When properly installed, a rear-facing child restraint system may prevent the driver or a front passenger from moving their seat all the way back, or from locking their seat-back in the desired position.

#### 

Rear-facing child restraint systems should never be installed in a front-facing position.

Always refer to the child restraint system manufacturer's instructions before installation.

If the passenger's front airbag inflates, it can hit the rear-facing child restraint system with great force, which can dislodge or strike the system, and seriously injure the child.

If it is absolutely unavoidable to install a rear-facing child restraint system in the front passenger seat, manually turn off the passenger front airbag system.

**▶** Passenger Front Airbag Off System P. 63

## ■ Protecting Smaller Children

If a child has exceeded the weight and height limitations of a rear-facing child restraint system, the child should be properly restrained in a firmly secured front-facing child restraint system until they exceed the weight and height limitations for the front-facing child restraint system.



# ■ Front-facing child restraint system placement

We strongly recommend placing a frontfacing child restraint system in a rear seating position.

Placing a front-facing child restraint system in the front seat can be hazardous. A rear seat is the safest place for a child.

▶ Protecting Smaller Children

## **AWARNING**

Placing a front-facing child restraint system in the front seat can result in serious injury or death if the front airbag inflates.

If you must place a front-facing child restraint system in front, move the vehicle seat as far back as possible, and properly restrain the child.

Educate yourself about the laws and regulations regarding child restraint system use where you are driving, and follow the child restraint system manufacturer's instructions

#### Selecting a Child Restraint System

Some child restraint systems are lower anchorage compatible. Some have a rigid-type connector while others have a flexible-type connector. Both are equally easy to use. Some existing and previously owned child restraint systems can only be installed using the seat belt. Whichever type you choose, follow the child restraint system manufacturer's use and care instructions including recommended expiration dates as well as the instructions in this manual. Proper installation is key to maximising your child's safety.

The flexible type may not be available in your country.

In seating positions and vehicles not equipped with lower anchorages, install a child restraint system using the seat belt and a top tether for added security. This is because all child restraint systems must be secured with the seat belt when the lower anchorage system is not in use. In addition, the child restraint system manufacturer may advise that a seat belt be used to attach an ISOFIX restraint system once a child reaches a specified weight. Please read the child restraint system owner's manual for proper installation instructions.

#### ■ Important consideration when selecting a child restraint system

Make sure the child restraint system meets the following three requirements:

- The child restraint system is the correct type and size for the child.
- The child restraint system is the correct type for the seating position.
- The child restraint system is compliant with safety standards. We recommend a child restraint system compliant with UN Regulation No. 44 or No. 129, or the regulations of the subject countries. Look for the approval mark on the system and the manufacturer's statement of compliance on the box.

#### Selecting a Child Restraint System

Installation of a lower anchorage-compatible child restraint system is simple.


Lower anchorage-compatible child restraint systems have been developed to simplify the installation process and reduce the likelihood of injuries caused by incorrect installation.

#### **■** Child Restraint Systems Standards

If a child restraint system (whether an i-Size /ISOFIX type or one that is fitted with a seat belt) meets the relevant UN Regulation, it will be affixed with an approval label as shown in the adjacent table. Before purchasing or using any child restraint system, make sure to check the approval label and ensure that it is compatible with your vehicle and the child, and that it complies with the relevant UN Regulation.

#### Selecting a Child Restraint System


Example of UN Regulation No. 44 approval label



- 1 "Mass group"
- Regulation number
- Category
- 4 Approval number
- **6** Country code


#### Selecting a Child Restraint System


Example of UN Regulation No. 129 approval label



- Category
- 2 Size and weight indication
- Approval number
- 4 Regulation number
- **5** Country code

#### Locations for Child Restraint System Installation

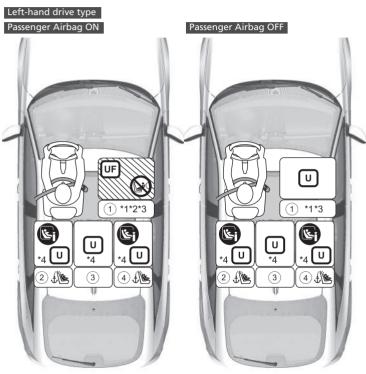





- \*1 When installing a child restraint system, adjust the seat slide to the most rear position. If the child restraint system interferes with the head restraint and cannot be installed stably, raise the head restraint to the highest position. If this interference is unavoidable even after raising, remove the head restraint. Please note that the removed head restraint should be stored in the luggage compartment so that it will not fly during sudden braking or collision.

  Also, if you remove the child restraint system, attach the head restraint to the original seat and make sure it is locked.

  - If you cannot fix the booster child restraint system stably, adjust the seat-back angle to be parallel with the back still keeping it forward of the seat belt shoulder anchorage.
- \*2 Only forward facing child restraint system can be installed when the front passenger airbag is on.
- \*3 For installing the universal belted type, adjust the seat back to the most front lock position.
- \*4 If the child restraint system interferes with the head restraint and cannot be installed stably, when adjustable raise the head restraint to the highest position.
- Child restraint systems with support leg can be installed in seating position where i-Size cannot be installed. However, the centre seat is excluded. The named Child Restraint Systems (CRS) reflect Honda's recommendations at the date of publication. You should speak to an authorised dealer for up to date details relating to our recommended CRSs. Other CRS may also be suitable please consult CRS manufacturers for recommended vehicle lists.

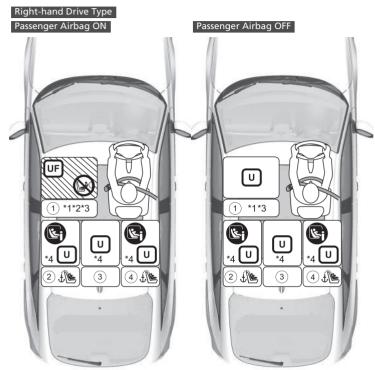



- \*1 When installing a child restraint system, adjust the seat slide to the most rear position. If the child restraint system interferes with the head restraint and cannot be installed stably, raise the head restraint to the highest position. If this interference is unavoidable even after raising, remove the head restraint. Please note that the removed head restraint should be stored in the luggage compartment so that it will not fly during sudden braking or collision. Also, if you remove the child restraint system, attach the head restraint to the original seat and make sure it is locked.
  - If you cannot fix the booster child restraint system stably, adjust the seat-back angle to be parallel with the back still keeping it forward of the seat belt shoulder anchorage.
- \*2 Only forward facing child restraint system can be installed when the front passenger airbag is on.
- \*3 For installing the universal belted type, adjust the seat back to the most front lock position.
- \*4 If the child restraint system interferes with the head restraint and cannot be installed stably, when adjustable raise the head restraint to the highest position.
- Child restraint systems with support legs can be installed on non i-Size seating positions. However, the centre seat is excluded.
- The named Child Restraint Systems (CRS) reflect Honda's recommendations at the date of publication. You should speak to an authorised dealer for up to date details relating to our recommended CRSs. Other CRS may also be suitable please consult CRS manufacturers for recommended vehicle lists.

#### All models

#### Detail information for CRS installation

		c .:	*,*	16	. •		
	Seating position and Seat position number						
	Size groups Weight Stature			1)	2	3	4
			Front passenger*1		2nd row*4		
			Front passenger airbag ON/OFF switch position		Left	Centre	Right
			ON*2	OFF			
Seating position suitable for universal belted (yes/no)	Group 0	Up to 10kg	No	Yes*3	Yes	Yes	Yes
	Group 0+	Up to 13kg					
	Group I	9-18kg	Yes*3	Yes*3	Yes	Yes	Yes
	Group II	15-25kg					
	Group III	22-36kg					
i-Size seating position (yes/no)	≤150cm		No	No	Yes	No	Yes
Seating position suitable for recommended genuine CRS *5	Refer to genuine CRS list		Yes	Yes	Yes	Yes	Yes
Seating position suitable for lateral fixture (L1/L2)	_		No	No	No	No	No
Largest suitable rearward facing fixture (R1/R2X/R2/R3)	Group 0	Up to 10kg	No	No	R3	No	R3
	Group 0+	Up to 13kg					
	Group I	9-18kg					
Largest suitable forward facing fixture (F2X/F2/F3)	Group I	9-18kg	No	No	F3	No	F3
Largest suitable booster fixture (B2/B3)	≤150cm		В3	В3	В3	В3	В3

#### **≥** Locations for Child Restraint System Installation

When purchasing a child restraint systems, make sure to check the ISOFIX size class or the fixture to ensure that the seat is compatible with your vehicle.

Fixture (CRF)	Description			
ISO/L1	Left lateral-facing (carrycot) infant seat			
ISO/L2	Right lateral-facing (carrycot) infant seat			
ISO/R1	Rearward-facing infant seat			
ISO/R2X	Reduced-size rearward-facing child restraint systems			
ISO/R2	Reduced-size rearward-facing child restraint systems			
ISO/R3	Full-size rearward-facing child restraint systems			
ISO/F2X	Reduced-height forward-facing child restraint systems			
ISO/F2	Reduced-height forward-facing child restraint systems			
ISO/F3	Full-height, forward-facing child restraint systems			
ISO/B2	Reduced width forward-facing booster seat			
ISO/B3	Full width forward-facing booster seat			

- \*1 When installing a child restraint system, adjust the seat slide to the most rear position.
  - If the child restraint system interferes with the head restraint and cannot be installed stably, raise the head restraint to the highest position. If this interference is unavoidable even after raising, remove the head restraint. Please note that the removed head restraint should be stored in the luggage compartment so that it will not fly during sudden braking or collision. Also, if you remove the child restraint system, attach the head restraint to the original seat and make sure it is locked.
  - If you cannot fix the booster child restraint system stably, adjust the seat-back angle to be parallel with the back still keeping it forward of the seat belt shoulder anchorage.
- \*2 Only forward facing child restraint system can be installed when the front passenger airbag is on.
- \*3 For installing the universal belted type, adjust the seat back to the most front lock position.
- \*4 If the child restraint system interferes with the head restraint and cannot be installed stably, when adjustable raise the head restraint to the highest position.
- \*5 The named Child Restraint Systems (CRS) reflect Honda's recommendations at the date of publication. You should speak to an authorised dealer for up to date details relating to our recommended CRSs. Other CRS may also be suitable please consult CRS manufacturers for recommended vehicle lists.
- Child restraint systems with support legs can be installed on non i-Size seating positions. However, the centre seat is excluded.

## **■** Europe Genuine CRS List

### **UN R129**

Range of application	Child Restraint System	Category		
40cm to 83cm	Honda baby safe	Universal Belted		
up to 13kg (Birth - 15 months)	Honda baby safe ISOFIX	i-Size Universal ISOFIX		
76cm to 105cm 8kg to 22kg (15 months - 4 years)	Honda ISOFIX	i-Size Universal ISOFIX		
100cm to 150cm 15kg to 36kg (3.5 years - 12 years)	Honda KIDFIX	i-Size Booster seat		

### **■ Installing a Lower Anchorage-Compatible Child Restraint System**

A lower anchorage-compatible child restraint system can be installed in either of the two outer rear seats. A child restraint system is attached to the lower anchorages with either the rigid or flexible type of connectors.



- **1.** Locate the anchorage marks affixed to the base of the seat cushion
- **2.** Pull out the anchorage covers under the marks to expose the lower anchorages.

- Marks
- 2 Cover



Probes


**3.** Place the child restraint system so that the probes are on the cover.

☑Installing a Lower Anchorage-Compatible Child Restraint System


## **AWARNING**

Never attach two child restraint systems to the same anchorage. In a collision, one anchorage may not be strong enough to hold two child restraint system attachments and may break, causing serious injury or death.


Some child restraint systems come with optional guide-cups, which avoid possible damage to the seat surface. Follow the manufacturer's instructions when using the guide-cups, and attach them to the lower anchorages as shown in the image.



- Lower Anchorage
- Q Guide-cup



- 1 Lower Anchorages
- Rigid Type



- 1 Lower Anchorages
- Plexible Type

- **4.** Attach the child restraint system to the lower anchorages according to the instructions that came with the child restraint system.
  - ➤ When installing the child restraint system, make sure that the lower anchorages are not obstructed by the seat belt or any other object.



1 Top Tether Anchorage Symbol


≥ Installing a Lower Anchorage-Compatible Child Restraint System

**WARNING:** Never use a hook that does not come with a Top Tether Anchorage Symbol when securing an installed child restraint system.


For your child's safety, when using a child restraint system installed using the lower anchorage system, make sure that the child restraint system is properly secured to the vehicle.

A child restraint system that is not properly secured will not adequately protect a child in a crash and may cause injury to the child or other vehicle occupants.

The flexible type may not be available in your country.



- 1 Ahead of the Vehicle
- 2 Tether Strap Hook
- Anchorage



- Ahead of the Vehicle
- 2 Tether Strap Hook
- 3 Anchorage

- **5.** Raise the head restraint to its highest position.
  - ► Retract the luggage area cover.
    - **Luggage Area Cover** P. 270
- **6.** Route the tether strap between the head restraint legs.
  - ► Make sure the strap is not twisted.
- **7.** Secure the tether strap hook to the anchorage.
- **8.** Tighten the tether strap as instructed by the child restraint system manufacturer.
- **9.** Make sure the child restraint system is firmly secured by rocking it forward and back, and side to side; little movement should be felt.
- **10.**Make sure any unused seat belt that a child can reach is buckled.




Support Leg

#### Child restraint system with support leg

- **5.** Extend the support leg until it touches the floor as instructed by the child restraint system manufacturer.
  - Confirm that the section of the floor on which the support leg rests is level. If the section is not level, the support leg will not provide adequate support.
  - ► Make sure that there is no contact between the child restraint system and the seat in front of it.

### ■ Installing a Child Restraint System with a Lap/Shoulder Seat Belt





1 Tab

- **1.** Place the child restraint system on the vehicle seat.
- **2.** Route the seat belt through the child restraint system according to the child restraint system manufacturer's instructions, and insert the latch plate into the buckle.
  - ▶ Insert the latch plate fully until it clicks.
- **3.** Push down the tab. Route the shoulder part of the belt into the slit at the side of the restraint.
- **4.** Grab the shoulder part of the belt near the buckle, and pull up to remove any slack from the lap part of the belt.
  - When doing this, place your weight on the child restraint system and push it into the vehicle seat.
- **5.** Position the belt properly and push up the tab. Make sure the belt is not twisted.
  - ➤ When pushing up the tab, pull up the upper shoulder part of the belt to remove any slack from the belt.


≥ Installing a Child Restraint System with a Lap/Shoulder Seat Belt

A child restraint system that is not properly secured will not adequately protect a child in a crash and may cause injury to the child or other vehicle occupants.



- **6.** Make sure the child restraint system is firmly secured by rocking it forward and back, and side to side; little movement should be felt.
- **7.** Make sure any unused seat belt that a child can reach is buckled.

## ■ Adding Security with a Tether



A tether anchorage point is provided behind each rear outer seating position.


If you have a child restraint system that comes with a tether but can be installed with a seat belt, the tether may be used for additional security.

- Anchorage
- 2 Ahead of the Vehicle
- 3 Tether Anchorage Points


#### ■ Adding Security with a Tether

**WARNING:** Child restraint anchorages are designed to withstand only those loads imposed by correctly fitted child restraints. Under no circumstances are they to be used for adult seat belts, harnesses or for attaching other items or equipment to the vehicle.

Always use a tether for front-facing child restraint system whether using the seat belt or lower anchorages.



- 1 Ahead of the Vehicle
- 2 Tether Strap Hook
- Anchorage



- 1 Ahead of the Vehicle
- 2 Tether Strap Hook
- 3 Anchorage

- **1.** Retract the luggage area cover.
  - Luggage Area Cover P. 270
- **2.** Locate the appropriate tether anchorage point.
- **3.** Raise the head restraint to its highest position, then route the tether strap between the head restraint legs.
  - ► Make sure the strap is not twisted.
- **4.** Secure the tether strap hook to the anchorage.
- **5.** Tighten the tether strap as instructed by the child restraint system manufacturer.

## **Safety of Larger Children**

#### ■ Protecting Larger Children

The following pages give instructions on how to check proper seat belt fit, what kind of booster seat to use if one is needed, and important precautions for a child who must sit in front.

#### ■ Checking Seat Belt Fit

When a child is too big for a child restraint system, secure the child in a rear seat using the lap/shoulder seat belt. Have the child sit upright and all the way back, then answer the following questions.



#### ■ Checklist

- Do the child's knees bend comfortably over the edge of the seat?
- Does the shoulder belt cross between the child's neck and arm?
- Is the lap part of the seat belt as low as possible, touching the child's thighs?
- Will the child be able to stay seated like this for the whole trip?

If you answer yes to all these questions, the child is ready to wear the lap/shoulder seat belt correctly. If you answer no to any question, the child needs to ride on a booster seat until the seat belt fits properly without a booster seat.

Safety of Larger Children

## **AWARNING**

Allowing a child aged 12 or under to sit in front can result in injury or death if the passenger's front airbag inflates.

If a larger child must ride in front, move the vehicle seat as far to the rear as possible, have the child sit up properly and wear the seat belt properly, and use a booster seat if needed.

#### ■ Booster Seats



If a lap/shoulder seat belt cannot be used properly, position the child in a booster seat in the rear seat. For the child's safety, check that the child meets the booster seat manufacturer's recommendations.



Guide

A backrest is available for a specific booster seat. Install the backrest to the booster seat and adjust it to the vehicle seat according to the booster seat manufacturer's instructions. Make sure the seat belt is properly routed through the guide at the shoulder of the backrest and the belt does not touch and cross the child's neck.

#### **≫**Booster Seats

When installing a booster seat, make sure to read the instructions that came with it, and install the seat accordingly.

There are high- and low-type booster seats. Choose a booster seat that allows the child to wear the seat belt correctly.

We recommend a booster seat with a backrest as it is easier to adjust the shoulder belt.

Continued 107

#### ■ Protecting Larger Children - Final Checks

Your vehicle has a rear seat where children can be properly restrained. If you ever have to carry a group of children, and a child must ride in front:

- Make sure you read and fully understand the instructions and safety information in this manual.
- Move the front passenger seat as far back as possible.
- Have the child sit upright and well back in the seat.
- Check that the seat belt is properly positioned so that the child is secure in the seat.

#### ■ Monitoring child passengers

We strongly recommend that you keep an eye on child passengers. Even older, more mature children sometimes need to be reminded to fasten their seat belts and sit up properly.

# **Exhaust Gas Hazard**

### **Carbon Monoxide Gas**

The engine exhaust from this vehicle contains carbon monoxide, a colourless, odourless, and highly toxic gas. As long as you properly maintain your vehicle, carbon monoxide gas will not get into the interior.

#### ■ Have the exhaust system inspected for leaks whenever

- The exhaust system is making an unusual noise.
- The exhaust system may have been damaged.
- The vehicle is raised for an oil change.

When you operate a vehicle with the hatch open, airflow can pull exhaust gas into the interior and create a hazardous condition. If you must drive with the hatch open, open all the windows and set the climate control system as shown below.

- **1.** Select the fresh air mode.
- 2. Select the mode.
- 3. Set the fan speed to high.
- **4.** Set the temperature control to a comfortable setting.

Adjust the climate control system in the same manner if you sit in your parked vehicle with the engine running.

○ Carbon Monoxide Gas

# **AWARNING**

Carbon monoxide gas is toxic.

Breathing it can cause unconsciousness and even kill you.

Avoid any enclosed areas or activities that expose you to carbon monoxide.

An enclosed area such as a garage can quickly fill up with carbon monoxide gas.


Do not run the engine with the garage door closed. Even when the garage door is open, drive out of the garage immediately after starting the engine.

# Safety Labels

# **Label Locations**

These labels are in the locations shown. They warn you of potential hazards that can cause serious injury or death. Read these labels carefully.

If a label comes off or becomes hard to read, contact a dealer for a replacement.

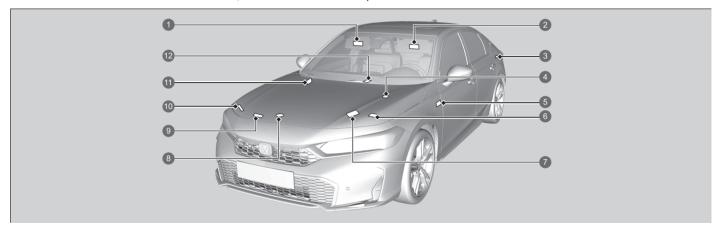

- ① Protecting Child Passenger (Left-hand drive type) ▶ P. 83
- 2 Protecting Child Passenger (Right-hand drive type) 2 P. 83
- 3 Fuel ≥ P. 570
- 4 High Voltage System Coolant Tank Cap
- **⑤** Passenger Front Airbag Off System (Right-hand drive type) **№** P. 65
- 6 Pop-up Hood ₽ P. 80
- **7** 12-volt battery **≥** P. 634
- Radiator Cap 
   P. 606
- Air Conditioner 
   P. 637

- 1 Passenger Front Airbag Off System (Left-hand drive type) P. 65
   2 Wireless Charger P. 275

# **Instrument Panel**


This chapter describes the buttons, indicators, and gauges that are used while driving.

ndicators	. 114
Driver Information Interface Warnin	g and
Information Messages	. 135
Gauges and Driver Information Interface	149
Gauges	. 149
Driver Information Interface (A-ty	oe
Meter)	.154
Driver Information Interface Left Sid	e Area
(B-type Meter)	. 172
Driver Information Interface Right S	
Area (B-type Meter)	. 175

Indicators come on/blink depending on the condition of the vehicle. Messages may display on the driver information interface at the same time. Please take the appropriate action outlined in the message, such as contacting a dealer.

Display messages by setting **Warning message** to ON via the audio/information screen. You can also change the message language.

**■ Customized Features** P. 351

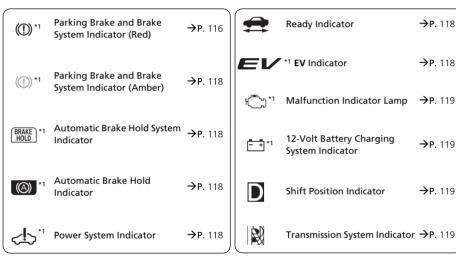

М 😻	Deceleration Paddle Selector Indicator	<b>→</b> P. 120
*	Seat Belt Reminder Indicator	<b>→</b> P. 120
	Low Fuel Indicator	<b>→</b> P. 120
(ABS) *1	Anti-lock Brake System (ABS) Indicator	<b>→</b> P. 120
**1	Supplemental Restraint System Indicator	<b>→</b> P. 121
on <b>⊗</b> *1 off <b>%</b> 2	Passenger Front Airbag On/ Off Indicators	<b>→</b> P. 121

<sup>\*1:</sup> When you set the power mode to ON, these indicators come on to indicate that system checks are being performed. They go off a few seconds later or after the power system has started. If an indicator does not come on or turn off, there may be a malfunction in the corresponding system. To resolve the issue, follow the instructions in the owner's manual.

<b>⊕!</b> *¹	Electric Power Steering (EPS) System Indicator	<b>→</b> P. 121
*1	Vehicle Stability Assist (VSA) System Indicator	<b>→</b> P. 122
OFF *1	Vehicle Stability Assist (VSA) <b>OFF</b> Indicator	<b>→</b> P. 122
<b>(!)</b> *1	Low Tyre Pressure/Deflation Warning System Indicator	<b>→</b> P. 123
P//▲	Parking Sensor Indicator	<b>→</b> P. 123
<b>++</b>	Turn Signal and Hazard Warning Indicators	<b>→</b> P. 124
<del>-</del> 00€	Lights On Indicator	<b>→</b> P. 124
	High Beam Indicator	<b>→</b> P. 124
<b>≣</b> ( <b>△</b> )*1	Auto High-Beam* /Adaptive Driving Beam* Indicator	<b>→</b> P. 124
<b>()</b> ‡	Rear Fog Light Indicator	<b>→</b> P. 124
$\bigcirc$	System Message Indicator	<b>→</b> P. 125

<b>⇔</b> ECON	ECON Mode Indicator	<b>→</b> P. 126
SPORT	SPORT Mode Indicator	<b>→</b> P. 126
NORMAL	NORMAL Mode Indicator	<b>→</b> P. 126
INDIVIDUAL	INDIVIDUAL Mode Indicator	<b>→</b> P. 126
A	Adaptive Cruise Control (ACC) with Low Speed Follow Interval Indicator*	<b>→</b> P. 129
LIM	Adjustable Speed Limiter Indicator (White/Green)	<b>→</b> P. 130
Ŷ <b>LIM</b>	Intelligent Speed Limiter Indicator (White/Green)	<b>→</b> P. 130
0	Immobilizer System Indicator	<b>→</b> P. 127
0	Security System Alarm Indicator	<b>→</b> P. 128
*1	Adaptive Cruise Control (ACC) with Low Speed Follow Indicator (Amber)	<b>→P</b> . 129
	Adaptive Cruise Control (ACC) with Low Speed Follow Indicator (White/Green)	<b>→</b> P. 130

*1	Lane Keeping Assist System (LKAS) Indicator (Amber)	<b>→</b> P. 130
<b>*</b>	Lane Keeping Assist System (LKAS) Indicator (White/ Green)	<b>→</b> P. 130
<b>≯</b> ≥*1	Collision Mitigation Braking System (CMBS) Indicator (Amber)	<b>→</b> P. 131
****	Collision Mitigation Braking System (CMBS) Indicator (Grey)	<b>→</b> P. 131
2	Road Departure Mitigation Indicator (Amber)	<b>→</b> P. 131
	Road Departure Mitigation Indicator (Grey)	<b>→</b> P. 131
S	Road Departure Mitigation System Steering Assist Auto OFF Indicator	<b>→</b> P. 131
	Safety Support Indicator (Amber)	<b>→P</b> . 132
(2)	Safety Support Indicator (Green/Grey)	<b>→</b> P. 134

<sup>\*1:</sup> When you set the power mode to ON, these indicators come on to indicate that system checks are being performed. They go off a few seconds later or after the power system has started. If an indicator does not come on or turn off, there may be a malfunction in the corresponding system. To resolve the issue, follow the instructions in the owner's manual.

115

Indicator	Name	On/Blinking	Explanation
Parking Brake and Brake System	Comes on when the parking brake is applied, and goes off when it is released.	<ul> <li>The beeper sounds and the indicator comes on if you drive with the parking brake applied.</li> <li>Comes on for about 30 seconds when you apply the electric parking brake while the power mode is in ACCESSORY or VEHICLE OFF, then goes off.</li> <li>Stays on for about 30 seconds when you set the power mode to VEHICLE OFF while the electric parking brake is applied, then goes off.</li> </ul>	
	Indicator (Red)	Comes on when the brake fluid level is low.	<ul> <li>Comes on while driving - Make sure the parking brake is released.</li> <li>Stop in a safe place and check the brake fluid level.</li> <li>What to do when the indicator comes on while driving P. 688</li> </ul>

Indicator	Name	On/Blinking	Explanation
(Red)	Parking Brake and Brake System Indicator (Red)	• Comes on if there is a problem with the brake system.	<ul> <li>Comes on along with the Parking Brake and Brake System Indicator (amber) - Immediately stop in a safe place. Contact a dealer for repair. The brake pedal becomes harder to operate. Depress the pedal further than you normally do.</li> <li>▶ If the Brake System Indicator (Red) Comes On or Blinks at the Same Time When the Brake System Indicator (Amber) Comes On P. 690</li> <li>Comes on along with the ABS indicator - Have your vehicle checked by a dealer.</li> <li>▶ If the Brake System Indicator (Red) Comes On or Blinks P. 688</li> <li>Blinks and the Parking Brake and Brake System Indicator (amber) comes on at the same time - There is a problem with the electric parking brake system. The parking brake may not be set. Avoid using the parking brake and have your vehicle checked by a dealer immediately.</li> <li>▶ If the Brake System Indicator (Red) Comes On or Blinks at the Same Time When the Brake System Indicator (Amber) Comes On P. 690</li> </ul>

Indicator	Name	On/Blinking	Explanation
(C) a	Parking Brake and Brake	• Comes on if there is a problem with a system related to braking other than the conventional brake system.	• Comes on while driving - Avoid high speeds and sudden braking. Take the vehicle to a dealer immediately.
(Amber)	System Indicator (Amber)	• Comes on if there is a problem with the electric parking brake system and/or the automatic brake hold system.	• Stays on constantly - Avoid using the parking brake and have your vehicle checked by a dealer immediately.
BRAKE HOLD	Automatic Brake Hold System Indicator	Comes on when the automatic brake hold system is on.	<b>▶ Automatic Brake Hold</b> P. 550
	Automatic Brake Hold Indicator	Comes on when the automatic brake hold is activated.	<b>▶ Automatic Brake Hold</b> P. 550
>	Power System Indicator	Comes on if there is a problem with the electric vehicle system.	<ul> <li>Stays on constantly -Have your vehicle checked by a dealer immediately.</li> <li>Do not drive displays on the driver information interface - Immediately stop in a safe place and contact a dealer.</li> </ul>
	Ready Indicator	Comes on when the vehicle is ready to drive.	<b>▶</b> Turning on the Power P. 411
EV	<b>EV</b> Indicator	• Comes on when the vehicle is moved by the motor, and the engine is not operating.	_

Indicator	Name	On/Blinking	Explanation
( <u> </u>	Malfunction Indicator Lamp	<ul> <li>Comes on if there is a problem with the emissions control systems or electric vehicle system.</li> <li>Blinks when a misfire in the engine's cylinders is detected.</li> </ul>	■ If the Malfunction Indicator Lamp Comes On or Blinks P. 687
= +	12-Volt Battery Charging System Indicator	Comes on when there is a problem with the charging system.	<ul> <li>Stop in a safe place and contact a dealer immediately.</li> <li>☑ Checking the 12-Volt Battery P. 629</li> <li>☑ If the 12-Volt Battery Charging System Indicator Comes On P. 686</li> </ul>
D	Shift Position Indicator	• Indicates the current shift position.	Shifting P. 418
	Transmission System	Blinks if the transmission system has a problem.	<ul> <li>Have your vehicle checked by a dealer immediately.</li> <li>Do not drive displays on the driver information interface - Immediately stop in a safe place and contact a dealer.</li> </ul>
	Indicator	Blinks if you cannot select P due to a transmission system failure.	<ul> <li>Set the parking brake when parking.</li> <li>Have your vehicle checked by a dealer immediately.</li> </ul>

Indicator	Name	On/Blinking	Explanation
м 💸	Deceleration Paddle Selector Indicator	<ul> <li>Comes on when the paddle selector is pulled.</li> <li>Blinks when deceleration does not occur while pulling the paddle selector.</li> <li>Comes on with M when SPORT mode is selected and the paddle selector is pulled.</li> </ul>	Deceleration Paddle Selector P. 425
	Seat Belt Reminder Indicator	<ul> <li>Comes on if you are not wearing a seat belt when you set the power mode to ON.</li> <li>If the front passenger is not wearing a seat belt, the indicator comes on a few seconds later.</li> <li>Comes on for a while when the rear seat belt is unfastened while the power mode in ON.</li> <li>Blinks while driving if you and/or any passenger has not fastened a seat belt. The beeper sounds and the indicator blinks at regular intervals.</li> </ul>	<ul> <li>The beeper stops and the indicator goes off when you and the passengers fasten their seat belts.</li> <li>Stays on after you and/or the passengers have fastened the seat belt(s) - A detection error may have occurred in the sensor. Have your vehicle checked by a dealer.</li> <li>Seat Belt Reminder P. 49</li> </ul>
Low Fuel Indicator		• Comes on when the fuel reserve is running low (approximately 6.0 Litres/1.32 Imp gal left).	Refuel your vehicle as soon as possible.
	indicator	• Blinks if there is a problem with the fuel gauge.	Have your vehicle checked by a dealer.
(ABS)	Anti-lock Brake System ( <b>ABS</b> ) Indicator	• Comes on if there is a problem with the ABS.	• Stays on constantly - Have your vehicle checked by a dealer. With this indicator on, your vehicle still has normal braking ability but no anti-lock function.  ■ Anti-lock Brake System (ABS) P. 553

Indicator	Name	On/Blinking	Explanation
	Supplemental Restraint System Indicator	<ul> <li>Comes on if a problem with any of the following is detected:</li> <li>Supplemental Restraint System</li> <li>Centre airbag system</li> <li>Side airbag system</li> <li>Side curtain airbag system</li> <li>Seat belt tensioner</li> </ul>	• Stays on constantly - Have your vehicle checked by a dealer.
ON <b>⊗</b> OFF <b>∻</b> i₂	Passenger Front Airbag On/Off Indicators	<ul> <li>When the passenger front airbag is active: The on indicator comes back on and remains on for about 60 seconds.</li> <li>When the passenger front airbag is inactive: The off indicator comes back on and stays on. This is a reminder that the passenger front airbag is deactivated.</li> </ul>	<b>▶ Passenger Front Airbag Off System</b> P. 63
⊕!	Electric Power Steering (EPS) System Indicator	Comes on if there is a problem with the EPS system or Driver Attention Monitor System.	<ul> <li>Stays on constantly - Have your vehicle checked by a dealer.</li> <li>Do not drive displays on the driver information interface - Immediately stop in a safe place and contact a dealer.</li> <li>If the Electric Power Steering (EPS) System Indicator Comes On P. 689</li> </ul>

Indicator	Name	On/Blinking	Explanation
		• Blinks when VSA is active.	_
<b>9</b>	Vehicle Stability Assist (VSA) System Indicator	<ul> <li>Comes on if there is a problem with the VSA system, agile handling assist or hill start assist system.</li> </ul>	• Stays on constantly - Have your vehicle checked by a dealer.  ▶ Vehicle Stability Assist (VSA) System P. 451  ▶ Hill start assist system P. 413  ▶ Agile Handling Assist P. 453
		<ul> <li>Comes on if the VSA system is deactivated temporarily after the 12-volt battery has been disconnected, then reconnected.</li> </ul>	Drive a short distance at more than 20 km/h (12 mph). The indicator should go off. If it does not, have your vehicle checked by a dealer.
		• Comes on when you partially disable VSA.	<b>≥ VSA On and Off</b> P. 452
ÖFF	Vehicle Stability Assist (VSA) <b>OFF</b> Indicator	<ul> <li>Models with A-type meter</li> <li>Comes on if the VSA system is deactivated temporarily after the 12-volt battery has been disconnected, then reconnected.</li> </ul>	<ul> <li>Drive a short distance at more than 20 km/h (12 mph). The indicator should go off. If it does not, have your vehicle checked by a dealer.</li> </ul>

Indicator	Name	On/Blinking	Explanation
	Low Tyre Pressure/ Deflation Warning System Indicator	<ul> <li>May come on briefly if the power mode is set to ON and the vehicle is not moved within 45 seconds, to indicate the initialise process is not yet complete.</li> <li>Comes on and stays on when: <ul> <li>One or more tyres' pressures are determined to be significantly low.</li> <li>The system has not been initialised.</li> </ul> </li> </ul>	<ul> <li>Comes on while driving - Stop in a safe place, check tyre pressures, and inflate the tyre(s) if necessary.</li> <li>Stays on after the tyres are inflated to the recommended pressures - The system needs to be initialised.</li> <li>Deflation Warning System Calibration P. 456</li> </ul>
(!)		• Blinks for about one minute, and then stays on if there is a problem with the deflation warning system, or when a compact spare tyre* is temporarily installed.	• Blinks and remains on - Have your vehicle checked by a dealer. If the vehicle is fitted with a compact spare tyre*, get your regular tyre repaired or replaced and put back on your vehicle as soon as you can.
		<ul> <li>Comes on if the deflation warning system is deactivated temporarily after the 12-volt battery has been disconnected, then reconnected.</li> </ul>	Drive a short distance at more than 20 km/h (12 mph). The indicator should go off. If it does not, have your vehicle checked by a dealer.
P'n▲	Parking Sensor Indicator	Blinks if there are obstacles around the sensors.	<b>▶ Parking Sensor System</b> P. 558

Indicator	Name	On/Blinking	Explanation
	Turn Signal and Hazard	<ul> <li>Blinks when you operate the turn signal lever.</li> <li>Blinks along with all turn signals when you press the hazard warning button.</li> </ul>	• Does not blink or blinks rapidly  ▶ Replacing Light Bulbs P. 612
	Warning Indicators	<ul> <li>Blinks along with all turn signals when you depress the brake pedal while the high speed driving.</li> </ul>	Emergency Stop Signal P. 555
<u></u> >0 0∈	Lights On Indicator	• Comes on when the position, tail, and other external lights are on.	<b>➡ Lights</b> P. 227
	High Beam Indicator	<ul> <li>Comes on when the high beam headlights are on.</li> <li>Comes on when the adaptive driving beam* is active.</li> </ul>	<b>▶ Adaptive Driving Beam*</b> P. 238
≣A	Auto High- Beam*/ Adaptive Driving Beam* Indicator	<ul> <li>Comes on when all the operating conditions of the auto high-beam*/adaptive driving beam* are met.</li> </ul>	■ Auto High-Beam* P. 235  Adaptive Driving Beam* P. 238
<b>()</b> ‡	Rear Fog Light Indicator	Comes on when the rear fog light is on.	Rear Fog Light P. 231

Indicator	Name	On/Blinking	Explanation
i	System Message Indicator	Comes on along with a beep when a problem is detected. A system message on the driver information interface appears at the same time.	<ul> <li>Refer to the Indicators information in this chapter when a system message appears on the driver information interface. Take the appropriate action for the message.</li> <li>Models with A-type meter</li> <li>While the indicator is on, press the  (home) button, and select Information to see the message again.</li> <li>Switching the Display P. 154</li> <li>The driver information interface will not return to the normal screen unless the warning is cancelled, or the  (home) button is pressed.</li> <li>Models with B-type meter</li> <li>While the indicator is on, roll the right selector wheel to see the message again.</li> <li>Switching the Display P. 175</li> <li>The driver information interface will not return to the normal screen unless the warning is cancelled, or the right selector wheel is rolled.</li> </ul>

Indicator	Name	On/Blinking	Explanation
<b>\$</b> ECON	<b>ECON</b> Mode Indicator	• Comes on when you set the drive mode to <b>ECON</b> .	<b>⊇ ECON Mode</b> P. 433
SPORT	<b>SPORT</b> Mode Indicator	Comes on when you set the drive mode to SPORT.	Models with A-type meter  • The ambient meter remains lit up in red as long as SPORT mode is selected.  • Drive Mode Switch P. 429  Models with B-type meter  • The ambient meter goes off and gauges in the instrument panel light up in red as long as SPORT mode is selected.  • Drive Mode Switch P. 429
NORMAL	<b>NORMAL</b> Mode Indicator	• Comes on when you set the drive mode to <b>NORMAL</b> .	Drive Mode Switch P. 429
INDIVIDUAL	INDIVIDUAL Mode Indicator	• Comes on when you set the drive mode to <b>INDIVIDUAL</b> .	Drive Mode Switch P. 429

Indicator	Name	On/Blinking	Explanation
Models with A-type meter  Indicator  80 60  Models with B-type meter  Indicator	Immobilizer System Indicator	Blinks if the immobilizer system cannot recognise the key information.	<ul> <li>Blinks - You cannot start the power system. Set the power mode to VEHICLE OFF, then select the ON mode again.         Right-hand drive type         Depress and hold the brake pedal before setting the power mode to ON.     </li> <li>All models</li> <li>Repeatedly blinks - The system may be malfunctioning. Have your vehicle checked by a dealer.</li> <li>Do not attempt to alter this system or add other devices to it. Electrical problems can occur.</li> </ul>

Indicator	Name	On/Blinking	Explanation
Models with A-type meter  Indicator  80 60  Models with B-type meter  Indicator	Security System Alarm Indicator	Blinks when the security system alarm has been set.	<b>■ Security System Alarm</b> P. 212

Indicator	Name	On/Blinking	Explanation
Â	Adaptive Cruise Control (ACC) with Low Speed Follow Interval Indicator*	Comes on when Adaptive Cruise Control (ACC) with Low Speed Follow indicator comes on.	<b>▶ To Set or Change Following-interval</b> P. 508
	Adaptive Cruise Control (ACC) with Low Speed Follow Indicator (Amber)	• Comes on if there is a problem with ACC with Low Speed Follow.	• Comes on while driving - Have your vehicle checked by a dealer.
		• Comes on if the ACC with Low Speed Follow is deactivated temporarily after the 12-volt battery has been disconnected, then reconnected.	• Drive a short distance at more than 20 km/h (12 mph). The indicator should go off. If it does not, have your vehicle checked by a dealer.
·W.		<ul> <li>Indicator may come on temporarily when the maximum permissible weight is exceeded.</li> <li>ACC with Low Speed Follow has been automatically cancelled.</li> </ul>	<ul> <li>Make sure the total load is within the maximum permissible weight.</li> <li>Load Limit P. 405</li> <li>Stays on constantly - Have your vehicle checked by a dealer.</li> </ul>

Indicator	Name	On/Blinking	Explanation
R	Adaptive Cruise Control (ACC) with Low Speed Follow Indicator (White/Green)	<ul> <li>Lights up in white when you press the button.</li> <li>You can switch between indicators by pressing the LIM button.</li> <li>Lights up in green while the system is in</li> </ul>	Adaptive Cruise Control (ACC) with Low Speed Follow P. 493
LIM	Adjustable Speed Limiter Indicator (White/ Green)	operation.	<b>▶ Adjustable Speed Limiter</b> P. 436
<b>PLIM</b>	Intelligent Speed Limiter Indicator (White/Green)		<b>▶ Intelligent Speed Limiter</b> P. 443
	Lane Keeping	• Comes on if there is a problem with the LKAS.	• Stays on constantly - Have your vehicle checked by a dealer.
<b>€</b>	Assist System (LKAS) Indicator (Amber)	Indicator may come on temporarily when the maximum permissible weight is exceeded.	<ul> <li>Make sure the total load is within the maximum permissible weight.</li> <li>▶ Load Limit P. 405</li> <li>Stays on constantly - Have your vehicle checked by a dealer.</li> </ul>
<b>€</b>	Lane Keeping Assist System (LKAS) Indicator (White/Green)	<ul> <li>Lights up in white when you press the LKAS button.</li> <li>Lights up in green when the LKAS is in operation.</li> </ul>	<ul> <li>▶ Lane Keeping Assist System (LKAS) P. 513</li> <li>▶ Traffic Jam Assist P. 526</li> </ul>

Indicator	Name	On/Blinking	Explanation
<b>≸</b>	Collision Mitigation Braking System (CMBS) Indicator (Amber)	<ul> <li>Comes on if there is a problem with the CMBS or it cannot be used temporarily due to issues such as dirt on the windscreen near the camera.</li> </ul>	<ul> <li>The Safety Support Indicator (Amber) comes on at the same time.</li> <li>Safety Support Indicator (Amber) P. 133</li> </ul>
<b>≯</b>	Collision Mitigation Braking System (CMBS) Indicator (Grey)	• Comes on when the CMBS is off.	<b>▶ Safety Support</b> P. 168, 188
	Road Departure Mitigation Indicator (Amber)	<ul> <li>Comes on if there is a problem with the Road Departure Mitigation System or it cannot be used temporarily due to issues such as dirt on the windscreen near the camera.</li> </ul>	<ul> <li>The Safety Support Indicator (Amber) comes on at the same time.</li> <li>Safety Support Indicator (Amber) P. 133</li> </ul>
	Road Departure Mitigation Indicator (Grey)	<ul> <li>Comes on when the Road Departure Mitigation System is off.</li> </ul>	<b>■ Safety Support</b> P. 168, 188
	Road Departure Mitigation System Steering Assist Auto OFF Indicator	<ul> <li>Comes on when the Road Departure Mitigation System steering assist is automatically turned off.</li> </ul>	<b>₽ Road Departure Mitigation System</b> P. 485

Indicator	Name	On/Blinking	Explanation
	Safety Support Indicator (Amber)	<ul> <li>Comes on if there is a problem with the Road Departure Mitigation system, CMBS, or blind spot information system*.</li> </ul>	• Stays on constantly - Have your vehicle checked by a dealer.
		<ul> <li>Comes on if there is a problem with the parking sensor.</li> </ul>	• Check if the area around the sensor(s) is covered with mud, ice, snow, etc. If the indicator stays on even after you clean the area, have the system checked by a dealer.
8		<ul> <li>Indicator may come on temporarily when the maximum permissible weight is exceeded.</li> </ul>	<ul> <li>Make sure the total load is within the maximum permissible weight.</li> <li>➡ Load Limit P. 405</li> <li>Stays on constantly - Have your vehicle checked by a dealer.</li> </ul>
		<ul> <li>Comes on if the Road Departure Mitigation system and CMBS are deactivated temporarily after the 12-volt battery has been disconnected and then reconnected.</li> </ul>	<ul> <li>Drive a short distance at more than 20 km/h (12 mph). The indicator should go off. If it does not, have your vehicle checked by a dealer.</li> </ul>

Indicator	Name	On/Blinking	Explanation
	Safety Support Indicator (Amber)	Comes on when the Road Departure Mitigation system and/or CMBS shuts itself off.	• Stays on - The temperature inside the camera is too high. Use the climate control system to cool down the camera. The system activates when the temperature inside the camera cools down.  ▶ Front Wide View Camera P. 544
(8)			<ul> <li>Stays on - The area around the camera is blocked by dirt, mud, etc. Stop your vehicle in a safe place and wipe the debris off with a soft cloth.</li> <li>Have your vehicle checked by a dealer if the indicator and message are still displayed even after you have cleaned the area around the camera.</li> <li>▶ Front Wide View Camera P. 544</li> <li>It may come on when the ambient conditions are dark, such as when driving in a tunnel, or at night, dawn, or dusk.</li> </ul>
		<ul> <li>Models with blind spot information system</li> <li>Comes on when mud, snow, or ice accumulates in the vicinity of the blind spot information system sensor.</li> <li>Comes on when the temperature of the blind spot information system sensor is high.</li> </ul>	<ul> <li>Comes on while driving - Something may be interfering with the blind spot information system sensor. Check the vicinity of the blind spot information system sensor and remove any obstacles.</li> <li>The system will return to normal when the temperature cools down.</li> <li>Blind Spot Information System* P. 458</li> </ul>

Indicator	Name	On/Blinking	Explanation
(8)	Safety Support Indicator (Green/Grey)	<ul> <li>Lights up in green when the Road Departure Mitigation system, CMBS, blind spot information system*, and parking sensor warning are on.</li> <li>Lights up in green and grey when one or more of the systems above are off.</li> <li>Lights up in grey when all systems above are off.</li> </ul>	<ul> <li>Road Departure Mitigation System P. 485</li> <li>Blind Spot Information System* P. 458</li> <li>Collision Mitigation Braking System (CMBS) P. 469</li> <li>Parking Sensor System P. 558</li> </ul>

# **Driver Information Interface Warning and Information Messages**

The warning and information messages appear only on the driver information interface.

#### Models with A-type meter

Press the (home) button, select **Information**, then press the left selector wheel to see the message again with the system message indicator on.

#### Models with B-type meter

Roll the right selector wheel to see the message again with the system message indicator on

#### ■ Icons

Since messages will not display on the driver information interface when Warning Message is set to OFF, you can check the messages below. Please take the appropriate action outlined in the message, such as contacting a dealer.

Red Icons P. 136

Amber Icons P. 138

Green Icons P. 145

Other Icons P. 145

Display messages by setting **Warning message** to ON via the audio/information screen. You can also change the message language.

Customized Features P. 351

# ■ Red Icons

lcon	Message
	Critical system failure detected. Stop driving when safe
STOP	Steering assist reduced. Stop driving when safe.
	Brake performance reduced. Stop driving when safe.
	Brake fluid low. Do not drive. Check fluid level.
(P)	Parking brake engaged
	Release parking brake
	Cannot set cruise: Parking brake is applied
	Cruise cancelled: Parking brake was applied
(EB)	Brake system problem. Brake performance may be reduced.

lcon	Message
(ES)	Brake system problem. Do not drive.
<b>₽</b> Þ+ <b>D</b>	Fasten seat belt
	Fasten passenger's seat belt
	<b>▶ Seat Belt Reminder</b> P. 49
註	12 volt battery charging system problem. Do not drive.


lcon	Message	Icon	Message
47	Engine oil pressure low.  Stop engine.  Do not drive.  ☐ If the Engine oil pressure low Warning  Appears P. 685	<b>1</b>	Door open
~ <u>E</u>	Engine temperature too hot.  Do not drive.  Allow engine to cool.  ☑ Overheating P. 683		
	Supplemental restraint system problem		Tailgate open
	Check rear seats		Door and tailgate open
			Steering required
			Lane departure

lcon	Message
A. P.	Parking sensor system problem
8	Approaching object

# ■ Amber Icons




lcon	Message
<b></b> ₩ <b>‡</b>	Please wait while vehicle warms up
30 km/h.	<b>₽ Speed Alarm</b> P. 162, 182
	Emissions system problem. Power may be reduced.
H	Emission system problem. Avoid strong acceleration and high speed.
	Emission system problem. Do not drive.
₹	Engine cooling system problem. Power may be reduced.

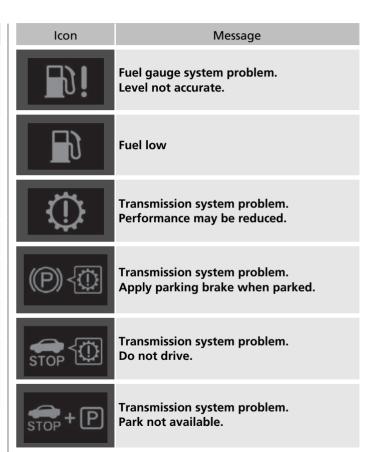

lcon	Message
P	Shift to Park
N→P	Neutral-hold mode ON. Shift to P when done
(ABS)	Anti-lock brake system problem. Brake performance may be reduced.
(VS)	Brake system problem. Brake performance may be reduced.
(BO)	Brake system problem. Do not depress Brake + Accelerator together.
(ES)	Brake system problem. Brake performance may be reduced.




lcon	Message
	Brake hold disabled. Apply brake pedal.
	Cruise cancelled: Depress brake pedal
<b>70+</b> (P)	To release parking brake: Brake + Push
<b>E3!</b>	Pop-up hood system problem
<b>⊕!</b>	Electric power steering system problem. Steering assist reduced.
	Electric power steering system problem. No steering assist. Do not drive.
	Driver attention level low. Take a rest

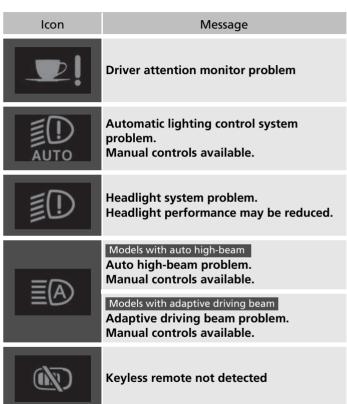

lcon	Message
	Change keyless remote battery  ▶ Replacing the Remote Battery P. 635
~j@	Smart entry system problem
	Digital key system problem
	Carry digital key and switch vehicle OFF when exiting
( <u>!</u> )	Tyre pressure monitor system problem

lcon	Message
(!)	Tyre pressures low. Check pressure in all tyres and initialise deflation warning system in vehicle settings.
	Front right tyre pressure low. Check all tyre pressures and initialise deflation warning system in vehicle settings.
	Front left tyre pressure low. Check all tyre pressures and initialise deflation warning system in vehicle settings.
	Rear right tyre pressure low. Check all tyre pressures and initialise deflation warning system in vehicle settings.
	Rear left tyre pressure low. Check all tyre pressures and initialise deflation warning system in vehicle settings.

lcon	Message
	Adaptive cruise control system problem
\$\tag{\tag{\tag{\tag{\tag{\tag{\tag{	Collision mitigation braking system problem
	Lane keeping assist system problem
	Road departure mitigation system problem
J	Service due soon  ☑ Service Reminder System* P. 581
	Service due now  Service Reminder System* P. 581

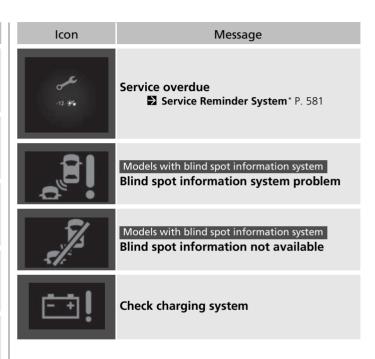

lcon	Message
	Low charge. Power reduced.
	Power system temperature low. Power may be reduced.
	Power system temperature high. Power may be reduced.
	Power system problem. Power may be reduced.
	12 volt battery charging system problem. Power may be reduced.
	Power system problem. Power may be reduced.
	Power system problem. Do not drive.
	Power system problem. Avoid strong acceleration and high speed.

lcon	Message
(()	Acoustic vehicle alerting system problem
	High voltage battery charge too low. Vehicle cannot start


## **■** Green Icons

BRAKE HOLD Brake hold system standby


# **■** Other Icons

lcon	Message
<b>*</b>	Outside temperature low. Road surface may be frozen.
<b>₽</b>	Engine temperature near limit. Avoid strong acceleration and high speed.
\$ <del></del>	Have you checked engine oil level lately? Check and reset in vehicle settings.  ■ Resetting Oil Level Check Reminder P. 611
	To shift: Depress brake pedal
	To shift: Release accelerator pedal
	Gear position is N. Release accelerator pedal

lcon	Message
	Cannot set cruise: Brake pedal is applied
STOP +	To shift: Vehicle must be stopped
	Gear unavailable. Wait and try again
BRAKE HOLD	Brake hold system OFF
►D+BRAKE HOLD	To enable brake hold: Seat belt + Push
BRAKE HOLD	To disable brake hold: Brake + Push

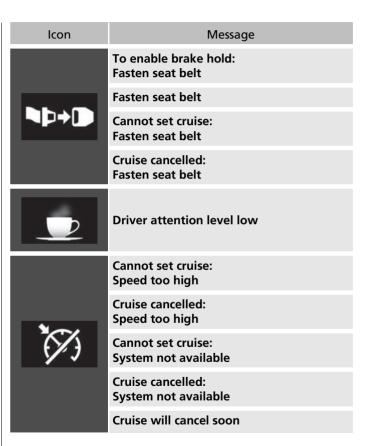

lcon	Message
<b>!</b>	Cannot set cruise: Too close to vehicle ahead
	Cruise cancelled: Too close to vehicle ahead
<b>!</b> •	Cannot set cruise: Slope too steep
	Cruise cancelled: Slope too steep
!	Cannot set cruise: Slope too steep
	Cruise cancelled: Slope too steep
D	Cannot set cruise: Shift to Drive
	Cruise cancelled: Shift to Drive
RES/+	To resume cruise: Use "RES/+" switch

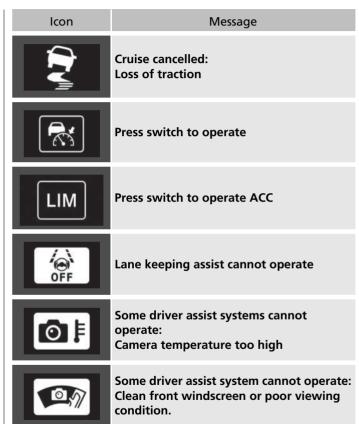

lcon	Message
	Road departure mitigation activated
0	Some driver assist systems available
<b>*</b> ***********************************	To start vehicle: Brake + Push
	Right-hand Drive Type To start vehicle: Fully depress Brake + Push
<ul><li>□</li><li>□</li></ul>	Accessory mode
	To start, touch start button with emblem side of remote  ☑ If the Keyless Remote Battery is Weak P. 677

Icon	Message
→ () HOLD OFF	Pressing button again twice or holding will cause ignition OFF & power loss

# Gauges and Driver Information Interface

# Gauges

Gauges include the speedometer, fuel gauge, and other related indicators. They are displayed when the power mode is in ON.

# Speedometer

Displays your driving speed in km/h or mph.

# ■ Fuel Gauge

Displays the amount of fuel left in the fuel tank.

#### Speedometer

You can change the Speed/Distance units.

- Speed/Distance Units P. 170, 190
- Customized Features P. 351

#### ∑Fuel Gauge

#### NOTICE

You should refuel when the reading approaches ①. Running out of fuel can cause the engine to misfire, damaging the catalytic converter.

After lightly refueling, or depending on your vehicle's condition, the actual amount of remaining fuel may differ from the fuel gauge reading.

# POWER Gauge

Shows the output of the electric motor.

# ■ CHARGE/DECEL Gauge

Shows the degree to which the High Voltage battery is being charged. When the deceleration paddle selector is being used, it shows the strength of deceleration.

#### Models with B-type meter

# ■ High Voltage Battery Charge Level Gauge

Shows the remaining High Voltage battery charge level.

#### 

The High Voltage battery charge level may decrease under the following conditions:

- When the 12-volt battery has been replaced.
- When the 12-volt battery has been disconnected.
- When the High Voltage battery control system corrects its reading.

The charge level reading will be corrected automatically while driving.

Changes in the temperature of the High Voltage battery can cause the number of indicators in the battery charge level gauge to change.

#### Odometer

Shows the total number of kilometres or miles that your vehicle has accumulated.

#### Ambient Meter

Changes to green to indicate that the vehicle is being driven in a fuel-efficient manner with **SPORT** mode off

# Outside Temperature

Shows the outside temperature in Celsius.

If the outside temperature has been below 3°C at the time you set the power mode to ON, the AD Outside temperature low message appears on the driver information interface.

#### ■ Adjusting the outside temperature display

Adjust the temperature reading by up to  $\pm 3^{\circ}\text{C}$  if the temperature reading seems incorrect.

#### Outside Temperature

The temperature sensor is in the front bumper. Road heat and exhaust from another vehicle can affect the temperature reading when your vehicle speed is less than 30 km/h (19 mph).

It may take several minutes for the display to be updated after the temperature reading has stabilised.

∑Adjusting the outside temperature display

You can adjust the temperature reading.


Customized Features P. 351

# ■ Traffic Sign Recognition System

Shows certain detected traffic signs while driving.

The sign icon blinks when the maximum speed of the detected traffic sign is exceeded.

**▶** Traffic Sign Recognition System P. 535

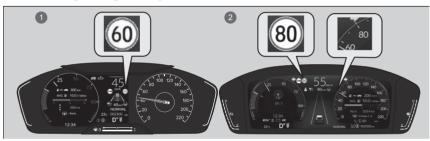

- Models with A-type meter
- 2 Models with B-type meter

## Current Mode for ACC with Low Speed Follow, the LKAS, and Traffic Jam Assist

Shows the current mode for ACC with Low Speed Follow, LKAS, and Traffic Jam Assist.

- **► Adaptive Cruise Control (ACC) with Low Speed Follow** P. 493
- **Lane Keeping Assist System (LKAS)** P. 513
- Traffic Jam Assist P. 526

## Models with A-type meter


#### ■ Clock

Shows the clock.

Current Mode for ACC with Low Speed Follow, the LKAS, and Traffic Jam Assist

#### Models with B-type meter

When you set speed for ACC with Low Speed Follow, a set speed mark will be displayed on the speedometer.



Set Speed

#### Clock

You can adjust the time manually and change the clock display to show the 12 hour clock or 24 hour clock.

**Clock** P. 194

# **Driver Information Interface (A-type Meter)**

The driver information interface shows information such as the estimated travelable distance and fuel economy of the vehicle. It also displays messages such as warnings and other helpful information.

When a warning message displays, please check the message and contact a dealer to have the vehicle inspected if necessary. Please refer to the pages below if the

- Engine oil pressure low, 🔢 Engine temperature too hot or
- Reduced stopping power message is displayed.
  - **If the Engine oil pressure low Warning Appears** P. 685
  - **▶ Overheating** P. 683
  - **☑** If the Reduced Stopping Power Warning Appears P. 686


# **■** Switching the Display

Press the (home) button, then roll the left selector wheel to scroll to the content you want to see. Press the left selector wheel to see detailed information.

#### Switching the Display

You can add or delete the meter contents.

Customize Display P. 171

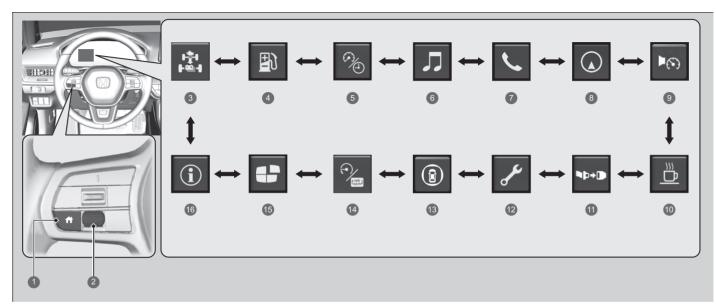


- 1 (Home) Button
- Left Selector Wheel
- Power flow P. 156
- **4** Range & fuel P. 157
- **Speed & time** P. 159
- **6** Audio P. 160
- **Phone** P. 160
- **8** Navigation P. 161

- Speed alarm P. 162
- **10** Driver attention P. 163
- Seat belts P. 167
- **Maintenance** P. 167
- **B** Safety support P. 168
- **No content** P. 170
- (B) Customize display P. 171
- 10 Information P. 171

# Power Flow/Engine Status Display/High Voltage Battery Charge Level Gauge

Displays the power flow of the motor and engine, indicating the vehicle's power source, remaining battery level, and whether the battery is being charged.

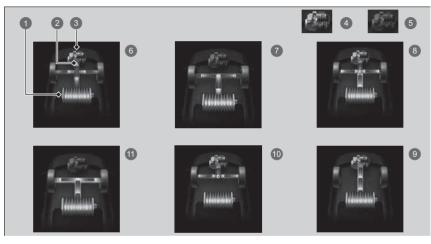

- 1 High Voltage Battery Charge Level Gauge
- 2 Power Flow
- B Engine
- 4 Engine ON
- 6 Engine OFF
- **6 Hybrid (HV)**: Power is supplied by the motor and the engine.

- **DELECTRIC Vehicle (EV)**: Power is supplied by the motor.
- **8 Engine (Direct Drive)**: The engine is running and the motor is charging the High Voltage battery.
- **9** The engine is running and the motor is charging the High Voltage battery.
- 10 Power is being supplied by the engine only.
- **1) Regeneration**: The motor is charging the High Voltage battery.

▶ Power Flow/Engine Status Display/High Voltage Battery Charge Level Gauge

The high voltage battery charge level may decrease under the following conditions:

- When the 12-volt battery has been replaced.
- When the 12-volt battery has been disconnected.
- When the high voltage battery control system corrects its reading.

The charge level reading will be corrected automatically while driving.


Changes in the temperature of the high voltage battery can increase or decrease the battery's charging capacity. If temperature changes cause the battery's capacity to change, the number of indicators in the battery charge level gauge may also change, even if the amount of charge remains the same.

While the vehicle is stationary with the engine running, the following may appear on the driver information interface.



# ■ Range / Fuel / Trip Meter

Roll the left selector wheel to switch between trip meter A and trip meter B.

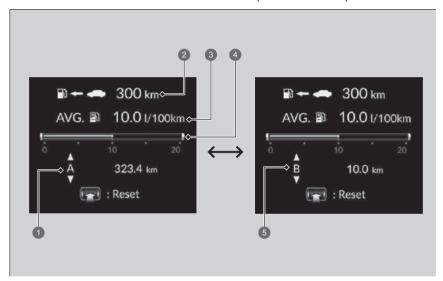

- 1 Trip Meter A
- 2 Range
- Average Fuel Economy
- 4 Instant Fuel Economy
- **5** Trip Meter B

# **■** Trip meter

Shows the total number of kilometres or miles driven since the last reset. Meters A and B can be used to measure two separate trips.

#### Resetting a trip meter

To reset the trip meter, display it, press the left selector wheel, and then select **Reset**.

▶ The trip meter is reset to 0.0.

## **■** Range

Shows the estimated distance you can travel on the remaining power and fuel. This estimated distance is based on the vehicle's current fuel economy.

#### ■ Average fuel economy

Shows the estimated average fuel economy of each trip meter in I/100 km or mpg. The display is updated at set intervals. When a trip meter is reset, the average fuel economy is also reset.

## **■** Instant fuel economy

Shows the instant fuel economy as a bar graph in I/100 km or mpg.

#### 

The driving range displayed is only an estimate and may differ from the actual distance the vehicle can travel.


#### ■ Average fuel economy

You can change when to reset the average fuel economy.

Customized Features P 351

# **■** Speed/Time/Trip Meter

Roll the left selector wheel to switch between trip meter A and trip meter B.

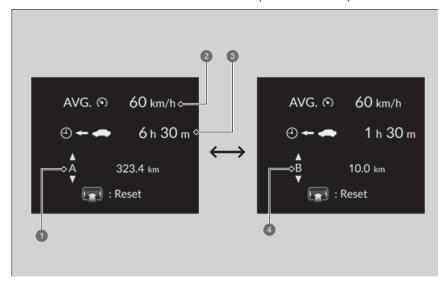

- 1 Trip Meter A
- 2 Average Speed
- 3 Elapsed Time
- 4 Trip Meter B

**■** Trip meter

Trip meter P. 158

## ■ Average speed

Shows the average speed in km/h or mph since Trip A or Trip B was reset.

## **■** Elapsed time

Shows the time elapsed since Trip A or Trip B was reset.

# Audio

Shows the current audio information.

Display Audio P. 290

# Phone

Shows the current phone information.

**▶ Hands-Free Telephone System** P. 369

#### 

You can change when to reset the average speed.

Customized Features P 351

#### Elapsed time

You can change when to reset the elapsed time.

Customized Features P. 351

# Navigation

## **■** Compass

Shows the compass screen.

#### **■** Turn-by-Turn Directions

When driving guidance is provided by the navigation system\*, Android Auto or Apple CarPlay, turn-by-turn directions to your destination appear.

Refer to the Navigation System Manual

■ Android Auto™ P. 345

**■ Apple CarPlay** P. 339

#### Navigation

You can select whether to have the turn-by-turn display come on or not during the route guidance.

Customized Features P. 351

You can control some navigation system\* functions on the driver information interface by scrolling the left selector wheel


#### Refer to the Navigation System Manual

Navigation features may not be available for all devices or apps.

# ■ Speed Alarm

Sets the speed alarm on and changes the speed alarm setting.


Roll the left selector wheel, the speed alarm setting changes as follows:

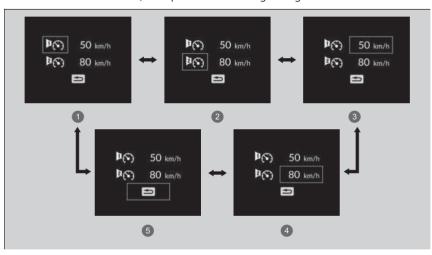

- Speed Alarm 1 On/Off\*1
- 2 Speed Alarm 2 On/Off\*1
- 3 Speed Alarm 1 Speed Setting (50 km/h\*1)
- 4 Speed Alarm 2 Speed Setting (80 km/h\*1)
- Back
- \*1:Default Setting

#### ■ Driver Attention Monitor

The Driver Attention Monitor analyses steering inputs to determine if the vehicle is being driven in a manner consistent with drowsy or inattentive driving. If it determines that the vehicle is being driven in such a manner, it will display the degree of the driver's attention on the driver information interface.

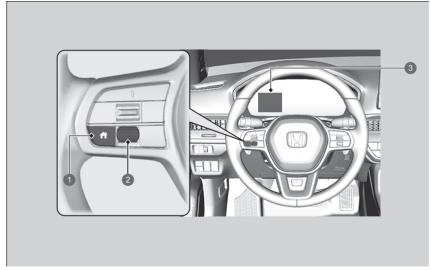

- 1 (Home) Button
- 2 Left Selector Wheel
- Oriver Information Interface

#### Driver Attention Monitor

The Driver Attention Monitor cannot always detect if the driver is tired or inattentive.

Regardless of the system's feedback, if you are feeling tired, stop in a safe location and rest for as long as needed.



When you select **Driver attention** on the driver information interface, bars on it light up in white to indicate the degree of the driver's attention.

Switching the Display P. 154





If two bars light up, the **Driver attention level low** message will appear.



If the number of bars drops to one, a beep will sound, the steering wheel will vibrate, and the coffee cup will turn to amber to warn the driver that he or she needs a break as his or her attention level is too low.

If the coffee cup lights up in amber, stop in a safe location and rest for as long as needed. The amber coffee cup warning will disappear when the left selector wheel is pressed or when the system has determined that the driver is driving normally.

If the driver does not take a break and the monitor continues to detect that the driver is very tired, the coffee cup will light up in amber again after approximately 15 minutes, accompanied by a beep and steering wheel vibrations.

The warnings do not appear when the travelling time is 30 minutes or less.

#### ■ The Driver Attention Monitor resets when:

- The power system is turned off.
- The driver unfastens the seat belt and opens the door while the vehicle is stopped.

#### ■ For the Driver Attention Monitor to function:

- The vehicle must be travelling above 40 km/h (25 mph).
- The electric power steering (EPS) system indicator must be off.

# ■ Depending on driving conditions or other factors, the Driver Attention Monitor may not function in the following circumstances:

- The steering assist function of the Lane Keeping Assist System (LKAS) is active.
   ▶ Lane Keeping Assist System (LKAS) P. 513
- The condition of the road is poor; e.g., the surface is unpaved or bumpy.
- It is windy.
- The driver is frequently operating the vehicle in an assertive manner, such as changing lanes or accelerating.

#### **■** Customizing

You can change the Driver Attention Monitor settings. Select **Tactile and audible alert, Tactile alert only** or **OFF**.

Customized Features P. 351

**Tactile and audible alert** is selected every time you set the power mode to ON, even if you changed the Driver Attention Monitor settings the last time you drove the vehicle.

#### ∑For the Driver Attention Monitor to function:

The bars on the driver information interface remain greyed-out unless the Driver Attention Monitor is functioning.

# ■ Seat Belts

Occurs, under specified conditions, when seat belts are latched or unlatched.

Seat Belt Reminder P. 49

# ■ Maintenance

Show the service reminder system.

Service Reminder System\* P. 581

# Safety Support

Indicates the status of the Road Departure Mitigation system, CMBS, blind spot information system\*, and parking sensor warning, such as On, Off, or Failure, by colour and letters.

The following colours indicate the status of any of the above-mentioned systems:

- Green: The system is on.
- Grey: The system is off.
- Amber: There is a problem with the system.

#### Safety Support

If a system is indicated by the colour amber, have your vehicle checked by a dealer immediately.

To turn each system on or off, first rotate the left selector wheel to switch displays. From the next display, you can select which system to turn on or off.

- **Road Departure Mitigation System** P. 485
- **Blind Spot Information System\*** P. 458
- Collision Mitigation Braking System (CMBS) P. 469
- Parking Sensor System P. 558


You can also confirm the status of each function by the colour of the indicator.

- Collision Mitigation Braking System (CMBS) Indicator (Amber) P. 131
- Collision Mitigation Braking System (CMBS) Indicator (Grey) P. 131
- Road Departure Mitigation Indicator (Amber) P. 131
- Road Departure Mitigation Indicator (Grey) P. 131
- Road Departure Mitigation System Steering Assist Auto OFF Indicator P. 131
- **Safety Support Indicator (Amber)** P. 132
- Safety Support Indicator (Green/Grey)
  P. 134

Even when the parking sensor warning icon is green, if the **Rear sensor setting** is turned off, the rear parking sensor will not operate when reversing.

Customized Features P. 351

169

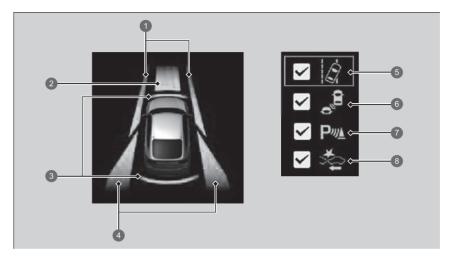

- Area Info for Road Departure Mitigation System
- Area Info for CMBS
- Area Info for Parking Sensor Warning
- 4 Area Info for Blind Spot Information System\*
- 6 Road Departure Mitigation System Icon and Status Info
- Blind Spot Information System Icon and Status Info\*
- Parking Sensor Warning Icon and Status Info
- CMBS Icon and Status Info

# ■ No Content

POWER Gauge P. 150

**≥ CHARGE/DECEL Gauge** P. 150


#### **■** Speed/Distance Units

Enables you to show another unit on the driver information interface and audio/information screen and set the displayed measurements to read in either km and km/h or miles and mph.

Press and hold the left selector wheel when you select **No content** on the driver information interface. Each time you do this, the unit will change from **km**, **km/h** to **miles**, **mph** or vice versa. After this, a confirmation screen will appear for a few seconds.

# Customize Display

You can choose which icons to display on the home screen.



- Roll the left selector wheel until Customize display is selected, then press the left selector wheel.
- **2.** Roll the left selector wheel



**3.** Roll the left selector wheel to scroll between icons, then press the left selector wheel to check or uncheck them.

#### ○ Customize Display

Icons that are grey cannot be removed from the home screen.

When you customize settings, shift to P.

## ■ Information

You can check if there are any active warning messages.

Driver Information Interface Warning and Information Messages P. 135

#### Information

If there are multiple warnings or informations, you can roll the left selector wheel to see other warnings.

# **Driver Information Interface Left Side Area (B-type Meter)**

Shows the current mode for audio and phone information, etc.

- **Audio Remote Controls** P. 294
- **▶ Hands-Free Telephone System** P. 369

# Clock

Shows the clock.

#### 

You can adjust the time manually and change the clock display to show the 12 hour clock or 24 hour clock.

**≥ Clock** P. 194


You can choose whether the clock is displayed on the driver information interface.

**Customize Display** P. 191


# Customize Display

#### ■ Arrange audio source on the left side area

You can choose which sources to display on the audio source screen.



Roll the left selector wheel until **Customize** display is selected, then press the left
 selector wheel



 Roll the left selector wheel to scroll to select Hide/show, then press the left selector wheel




**3.** Roll the left selector wheel to scroll between audio sources, then press the left selector wheel to check or uncheck them.

○ Customize Display


When you customize settings, shift to P.

# ■ Turn the displaying on the left side area on and off


You can select whether the current audio information and clock appear on the left side area.



**1.** Roll the left selector wheel until **Customize display** is selected, then press the left selector wheel.



Roll the left selector wheel to scroll to select Audio & clock, then press the left selector wheel.



**3.** Roll the left selector wheel to scroll to select your desired settings, then press the left selector wheel.

# **Driver Information Interface Right Side Area (B-type Meter)**

The driver information interface shows information such as the estimated travelable distance and fuel economy of the vehicle. It also displays messages such as warnings and other helpful information.

When a warning message displays, please check the message and contact a dealer to have the vehicle inspected if necessary. Please refer to the pages below if the

Engine oil pressure low, 👢 Engine temperature too hot or

Reduced stopping power message is displayed.

If the Engine oil pressure low Warning Appears P. 685

Overheating P. 683

**If the Reduced Stopping Power Warning Appears** P. 686


# Switching the Display

Roll the right selector wheel to view different types of content.

Switching the Display

You can add or delete the meter contents.

Customize Display P. 191

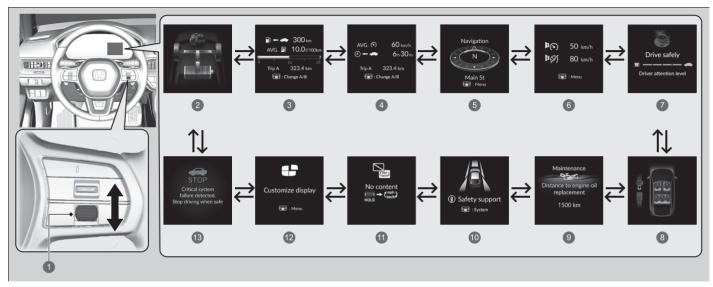


- Right Selector Wheel
- 2 Power Flow P. 177
- 3 Range/Fuel/Trip Meter P. 178
- 4 Speed/Time/Trip Meter P. 180
- **6** Navigation/Compass P. 181
- 6 Speed Alarm P. 182
- 7 Driver Attention Monitor P. 183

- Seat Belts P. 187
- Maintenance P. 187
- Safety Support P. 188
- 1 No Content/Unit Change P. 190
- Customize Display P. 191
- Warning Message P. 192

## ■ Power Flow Monitor


Displays the power flow of the motor and engine, indicating the vehicle's power source and whether the battery is being charged.

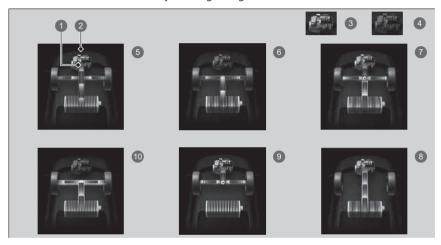

- Power Flow
- 2 Engine
- Engine ON
- 4 Engine OFF
- **5 Hybrid (HV)**: Power is supplied by the motor and the engine.
- 6 Electric Vehicle (EV): Power is supplied by the motor.
- **Engine (Direct Drive)**: The engine is running and the motor is charging the High Voltage battery.
- **18** The engine is running and the motor is charging the High Voltage battery.
- **9** Power is being supplied by the engine only.
- Regeneration: The motor is charging the High Voltage battery.


#### ▶ Power Flow Monitor

While the vehicle is stationary with the engine running, the following may appear on the driver information interface.



# ■ Range / Fuel / Trip Meter

Press the right selector wheel to switch between trip meter A and trip meter B.

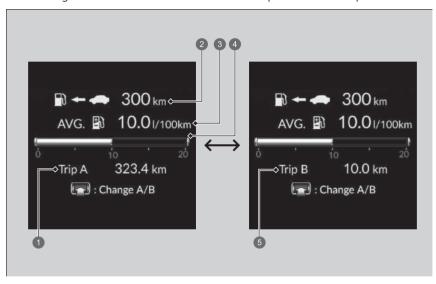

- 1 Trip Meter A
- 2 Range
- 3 Average Fuel Economy
- 4 Instant Fuel Economy
- **5** Trip Meter B

### **■** Trip meter

Shows the total number of kilometres or miles driven since the last reset. Meters A and B can be used to measure two separate trips.

### Resetting a trip meter

To reset the trip meter, display it, press and hold the right selector wheel, and then select **Reset**.

▶ The trip meter is reset to 0.0.

### ■ Range

Shows the estimated distance you can travel on the remaining power and fuel. This estimated distance is based on the vehicle's current fuel economy.

### ■ Average fuel economy

Shows the estimated average fuel economy of each trip meter in I/100 km or mpg. The display is updated at set intervals. When a trip meter is reset, the average fuel economy is also reset.

### ■ Instant fuel economy

Shows the instant fuel economy as a bar graph in I/100 km or mpg.

#### **≥** Range

The driving range displayed is only an estimate and may differ from the actual distance the vehicle can travel.


#### ■ Average fuel economy

You can change when to reset the average fuel economy.

Customized Features P 351

# ■ Speed/Time/Trip Meter

Press the right selector wheel to switch between trip meter A and trip meter B.

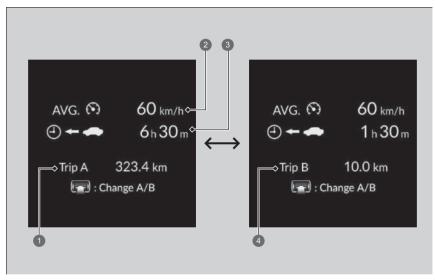

- 1 Trip Meter A
- 2 Average Speed
- B Elapsed Time
- 4 Trip Meter B

### **■** Trip meter

Trip meter P. 179

### ■ Average speed

Shows the average speed in km/h or mph since Trip A or Trip B was reset.

### **■** Elapsed time

Shows the time elapsed since Trip A or Trip B was reset.

### Navigation

### **■** Compass

Shows the compass screen.

### **■** Turn-by-Turn Directions

When driving guidance is provided by the navigation system\*, Android Auto or Apple CarPlay, turn-by-turn directions to your destination appear.

- Refer to the Navigation System Manual
- Android Auto™ P. 345
- Apple CarPlay P. 339

#### 

You can change when to reset the average speed.

Customized Features P. 351

#### Elapsed time

You can change when to reset the elapsed time.

Customized Features P. 351

#### 

You can select whether to have the turn-by-turn display come on or not during the route guidance.

Customized Features P. 351

You can control some navigation system\* functions on the driver information interface by pressing the right selector wheel.


Refer to the Navigation System Manual

Navigation features may not be available for all devices or apps.

# ■ Speed Alarm

Sets the speed alarm on and changes the speed alarm setting.

Press the right selector wheel to display the setting screen, then roll it, the speed alarm setting changes as follows:

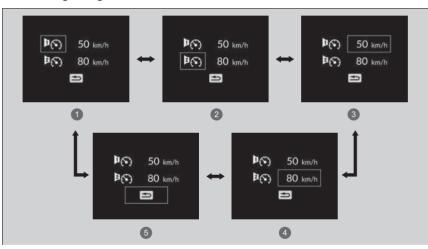


- Speed Alarm 1 On/Off\*1
- 2 Speed Alarm 2 On/Off\*1
- 3 Speed Alarm 1 Speed Setting (50 km/h\*1)
- 4 Speed Alarm 2 Speed Setting (80 km/h\*1)
- Back

<sup>\*1:</sup>Default Setting

### ■ Driver Attention Monitor

The Driver Attention Monitor analyses steering inputs to determine if the vehicle is being driven in a manner consistent with drowsy or inattentive driving. If it determines that the vehicle is being driven in such a manner, it will display the degree of the driver's attention on the driver information interface.

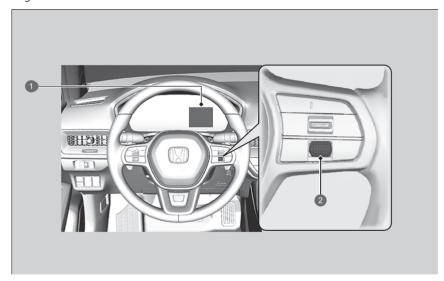

- Driver Information Interface
- Right Selector Wheel

#### Driver Attention Monitor

The Driver Attention Monitor cannot always detect if the driver is tired or inattentive.

Regardless of the system's feedback, if you are feeling tired, stop in a safe location and rest for as long as needed.



When you select Driver Attention Monitor on the driver information interface, bars on it light up in white to indicate the degree of the driver's attention.

Switching the Display P. 175





If two bars light up, the **Driver attention level low** message will appear.



If the number of bars drops to one, a beep will sound, the steering wheel will vibrate, and the coffee cup will turn to amber to warn the driver that he or she needs a break as his or her attention level is too low

If the coffee cup lights up in amber, stop in a safe location and rest for as long as needed. The amber coffee cup warning will disappear when the right selector wheel is rolled or when the system has determined that the driver is driving normally.

If the driver does not take a break and the monitor continues to detect that the driver is very tired, the coffee cup will light up in amber again after approximately 15 minutes, accompanied by a beep and steering wheel vibrations.

The warnings do not appear when the travelling time is 30 minutes or less.

#### ■ The Driver Attention Monitor resets when:

- The power system is turned off.
- The driver unfastens the seat belt and opens the door while the vehicle is stopped.

#### ■ For the Driver Attention Monitor to function:

- The vehicle must be travelling above 40 km/h (25 mph).
- The electric power steering (EPS) system indicator must be off.

# ■ Depending on driving conditions or other factors, the Driver Attention Monitor may not function in the following circumstances:

- The steering assist function of the Lane Keeping Assist System (LKAS) is active.
   ▶ Lane Keeping Assist System (LKAS) P. 513
- The condition of the road is poor; e.g., the surface is unpaved or bumpy.
- It is windy.
- The driver is frequently operating the vehicle in an assertive manner, such as changing lanes or accelerating.

### **■** Customizing

You can change the Driver Attention Monitor settings. Select **Tactile and audible alert, Tactile alert only,** or **OFF**.

Customized Features P. 351

**Tactile and audible alert** is selected every time you set the power mode to ON, even if you changed the Driver Attention Monitor settings the last time you drove the vehicle.

#### ∑For the Driver Attention Monitor to function:

The bars on the driver information interface remain greyed-out unless the Driver Attention Monitor is functioning.

### ■ Seat Belts

Occurs, under specified conditions, when seat belts are latched or unlatched.

Seat Belt Reminder P. 49

### ■ Maintenance

Show the service reminder system.

Service Reminder System\* P. 581

### Safety Support

Indicates the status of the Road Departure Mitigation system, CMBS, blind spot information system\*, and parking sensor warning, such as On, Off, or Failure, by colour and letters.

The following colours indicate the status of any of the above-mentioned systems:

- Green: The system is on.
- Grey: The system is off.
- Amber: There is a problem with the system.

### Safety Support

If a system is indicated by the colour amber, have your vehicle checked by a dealer immediately.

To turn each system on or off, first press the right selector wheel to switch displays. From the next display, you can select which system to turn on or off.


- **▶ Road Departure Mitigation System** P. 485
- **Blind Spot Information System**\* P. 458
- Collision Mitigation Braking System (CMBS) P. 469
- Parking Sensor System P. 558

You can also confirm the status of each function by the colour of the indicator.

- Collision Mitigation Braking System (CMBS) Indicator (Amber) P. 131
- Collision Mitigation Braking System (CMBS) Indicator (Grey) P. 131
- Road Departure Mitigation Indicator (Amber) P. 131
- Road Departure Mitigation Indicator (Grey) P. 131
- Road Departure Mitigation System Steering Assist Auto OFF Indicator P. 131
- Safety Support Indicator (Amber) P. 132
- Safety Support Indicator (Green/Grey)
  P. 134

Even when the parking sensor warning icon is green, if the **Rear sensor setting** is turned off, the rear parking sensor will not operate when reversing.

**≧** Customized Features P. 351

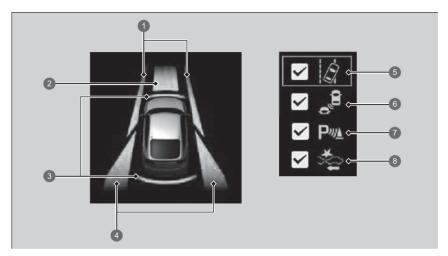

- Area Info for Road Departure Mitigation System
- Area Info for CMBS
- 3 Area Info for Parking Sensor Warning
- 4 Area Info for Blind Spot Information System\*
- 6 Road Departure Mitigation System Icon and Status Info
- 6 Blind Spot Information System Icon and Status Info\*
- Parking Sensor Warning Icon and Status Info
- CMBS Icon and Status Info

### ■ Speed/Distance Units




Enables you to show another unit on the driver information interface and set the displayed measurements to read in either km and km/h or miles and mph.

Press and hold the right selector wheel when you select the **No content** screen on the driver information interface. Each time you do this, the unit will change from km and km/h to miles and mph or vice versa. After this, a confirmation screen will appear for a few seconds.


### Customize Display

#### ■ Arrange content on the right side area

You can choose which contents to display on the right side area.



- **1.** Press the right selector wheel when you select the **Customize display** on the driver information interface.
- 2. Roll the right selector wheel to scroll to select **Hide/show**, then press the right selector wheel



**3.** Roll the right selector wheel to scroll between contents, then press the right selector wheel to check or uncheck them.


#### ★ Arrange content on the right side area

Contents that are grey cannot be removed from the right side area.


When you customize settings, shift to P.

### **■** Change gauge design

You can change the gauge design.



- **1.** Press the right selector wheel when you select the **Customize display** on the driver information interface.
- **2.** Roll the right selector wheel to scroll to select **Gauge design**, then press the right selector wheel.



**3.** Roll the right selector wheel to scroll to select your desired settings, then press the right selector wheel.

### 

When using the **Round (Cruise)** or **Bar (Cruise)** gauge design, a simplified display is used when ACC with Low Speed Follow is in operation.

### Warnings

You can check if there are any active warning messages.

Driver Information Interface Warning and Information Messages P. 135

### **≫**Warnings

If there are multiple warnings or informations, you can roll the right selector wheel to see other warnings.

# Controls

This chapter explains how to operate the various controls necessary for driving.

CIOCK	. 194
Locking and Unlocking the Doors	
Key	. 195
Low Keyless Remote Signal Strength	197
Locking/Unlocking the Doors from t	he
Outside	. 198
Locking/Unlocking the Doors from t	he
Inside	. 205
Childproof Door Locks	. 207
Hatch	. 208
Security System	. 211
Windows	. 218

noramic Roof*	
perating the Switches Around t	ne
teering Wheel	
POWER Button	225
Lights	227
Wipers and Washers	241
Models with A-type meter	
Brightness Control	244
Models with B-type meter	
Brightness Control	245
Rear Demister/Heated Door Mirr	or
Button	246

Adjusting the Steering Wheel	. 247
/lirrors	
Interior Rearview Mirror	. 248
Power Door Mirrors	. 249
eats	. 250
nterior Convenience Items	
Interior Lights	. 262
Storage Items	264
Other Interior Convenience Items	. 273
Climate Control System	. 280

\* Not available on all models

# **Adjusting the Clock**



1 Clock

You can adjust the time manually or change the clock display to show the 12 hour clock or 24 hour clock on the by using the audio/ information screen.

**Customized Features** P. 351

### ■ Adjusting the Clock

The clock is automatically updated through the audio system.

The clock in the instrument panel also changes when the audio/information screen clock is adjusted.

# Locking and Unlocking the Doors

# Key

This vehicle comes with the following key:



Use the keys to turn on and off the power system, and lock and unlock all the doors, hatch, and fuel fill door.

### 

All the keys have an immobilizer system. The immobilizer system helps to protect against vehicle theft.

#### Immobilizer System P. 211


Follow the advice below to prevent damage to the keys:

- Do not leave the keys in direct sunlight, or in locations with high temperature or high humidity.
- Do not drop the keys or set heavy objects on them.
- Keep the keys away from liquids, dust and sand.
- Do not take the keys apart except to replace the battery.

If the circuits in the keys are damaged, the power system may not activate, and the remote transmitter may not work.

If the keys do not work properly, have them inspected by a dealer.

### ■ Built-in Key



The built-in key can be used to unlock the doors when the keyless remote battery becomes weak and the power door unlock operation is disabled.

To remove the built-in key, push the release button and then pull out the key. To reinstall the built-in key, push the built-in key into the keyless remote until it clicks.

- Release Button
- 2 Built-in Key

# ■ Key Number Tag



Contains a number that you will need if you purchase a replacement key.

#### 

Keep the key number tag separate from the key in a safe place outside of your vehicle.

If you wish to purchase an additional key, contact a dealer.

If you lose your key and you cannot activate the power system, contact a dealer.

# **Low Keyless Remote Signal Strength**

The vehicle transmits radio waves to locate the keyless remote to activate the power system; lock and unlock all the doors, hatch and fuel fill door.

In the following cases, activating the power system, locking/unlocking the doors, hatch and fuel fill door may be inhibited, or operation may be unstable:

- Strong radio waves are being transmitted by nearby equipment.
- You are carrying the keyless remote together with telecommunications equipment, laptop computers, mobile phones, or wireless devices.
- A metallic object is touching or covering the keyless remote.

#### ∑Low Keyless Remote Signal Strength


Communication between the keyless remote and the vehicle consumes the keyless remote's battery. Battery life is about two years, but this varies depending on regularity of use.

The battery is consumed whenever the keyless remote is receiving strong radio waves. Avoid placing it near electrical appliances such as televisions and personal computers.

It is possible to reduce battery consumption by turning off radio wave reception. When you hold down the lock and unlock buttons at the same time for approximately three seconds, the LED will blink twice and radio wave reception will turn off. If you press any button on the keyless remote once, it will begin receiving radio waves again.

# **Locking/Unlocking the Doors from the Outside**

# **■ Using the Keyless Access System**



When you carry the keyless remote, you can lock/unlock the doors, fuel fill door and hatch. You can lock/unlock the doors, fuel fill door and hatch within a radius of about 80 cm (32 inches) from the outside door handle or hatch release button.

#### ∑Locking/Unlocking the Doors from the Outside

If the interior light switch is in the door activated position, the interior light comes on when you unlock the doors and hatch.

No doors opened: The light fades out after 30 seconds.

Doors and hatch relocked: The light goes off immediately.

Interior Lights P. 262

#### ∑Using the Keyless Access System


If you do not open a door or the hatch within 30 seconds of unlocking the vehicle with the keyless access system, the doors and hatch will automatically relock.

You can lock or unlock doors using the keyless access system only when the power mode is in VEHICLE OFF.


#### Right-hand Drive Type

The keyless access system will not lock the vehicle when a door is open.

### ■ Locking the doors and hatch



1 Door Lock Sensor



1 Lock Button

Touch the door lock sensor on the front door or press the lock button on the hatch.

➤ Some exterior lights flash three times; all the doors and hatch lock; and the security system sets.


#### Right-hand drive type


▶ The super locking function is activated.

#### 

- Do not leave the keyless remote in the vehicle when you get out. Carry it with you.
- Even if you are not carrying the keyless remote, you can lock/unlock the doors and the hatch while someone else with the remote is within range.
- The door may be unlocked if the door handle is covered with water in heavy rain or in a car wash if the keyless remote is within range.
- If you grip a front door handle or touch a door lock sensor wearing gloves, the door sensor may be slow to respond or may not respond by unlocking or locking the doors.
- After locking the door, you have up to two seconds during which you can pull the door handle to confirm whether the door is locked. If you need to unlock the door immediately after locking it, wait at least two seconds before gripping the handle, otherwise the door will not unlock.
- The door may not open if you pull it immediately after gripping the door handle. Grip the handle again and confirm that the door is unlocked before pulling the handle.
- Even within the 80 cm (32 inches) radius, you may not be able to lock/unlock the doors and the hatch with the keyless remote if it is above or below the outside handle.
- The keyless access system may not operate if it is too close to the door, door glass, and hatch.

### ■ Unlocking the doors and hatch





1 Hatch Release Button

Grab the driver's door handle:

- ➤ The driver's door and fuel fill door unlocks.
- Some exterior lights flash once.

Grab the front passenger's door handle:

- ► All doors and the hatch unlock.
- ➤ Some exterior lights flash once.

Press and hold the hatch release button.


- ► The hatch unlocks.
- ► Some exterior lights flash once.

### **≥**Using the Keyless Access System

The light flash and door unlock mode settings can be customized using the audio/information screen.

Customized Features P. 351

# Lock Presetting\*



Door Lock Sensor

The vehicle will automatically lock after you lock the doors in advance then close the doors and hatch.

Activate lock presetting after closing the driver's door.

- Touch the door lock sensor on the driver's door or press the lock button on the remote transmitter.
  - ► Alert sounds and lock presetting is activated
- 2. Close all doors and the hatch.
  - Some exterior lights flash and a beeper sounds when vehicle locks.

Make sure the doors and hatch are locked before moving away from the vehicle.

### ∑Lock Presetting \*


Lock presetting will be reset if a door is opened before the vehicle has locked completely.

Before locking a door, make sure that the key is not inside the vehicle.

You can turn this function on and off.

Customized Features P. 351

### Using the Remote Transmitter



### ■ Locking the doors and hatch

Press the lock button.

➤ Some exterior lights flash three times, all the doors, hatch, and fuel fill door lock, and the security system sets.

### Right-hand drive type

► The super locking function is activated.

- 1 Lock Button
- 2 Unlock Button



### ■ Unlocking the doors and hatch

Press the unlock button.

#### Once:

Some exterior lights flash once, and the driver's door and fuel fill door unlocks.

#### Twice:

► The remaining doors and hatch unlock.

#### Substitute States St

If you do not open a door or the hatch within 30 seconds of unlocking the vehicle with the remote transmitter, the doors and hatch will automatically relock.

You can lock or unlock doors using the remote transmitter only when the power mode is in VEHICLE OFF.

#### Right-hand Drive Type

You cannot lock any doors from the outside when the keyless remote is inside the vehicle, and the beeper sounds. If you want to lock a door while the remote is still in the vehicle, do any of the following four times:

- Press the lock button on the keyless remote.
- Turn the key in the cylinder to lock.
- Touch the door lock sensor on the door handle or press the lock button on the hatch.

The remote transmitter uses low-power signals, so the operating range may vary depending on the surroundings.

#### Right-hand Drive Type

The remote will not lock the vehicle when a door is open.

If the distance at which the remote transmitter works varies, the battery is probably low.

If the LED does not come on when you press a button, the battery is dead.

Replacing the Remote Battery P. 635

You can customize the door unlock mode setting.

**≧** Customized Features P. 351

# Unlocking the Doors Using a Key

If the unlock button of the keyless remote does not work, use the built-in key instead

The keyhole is behind the door handle.



Pull and hold the outer handle. Insert the built-in key into the key cylinder from below the handle and then turn it.

#### Right-hand drive type

The super locking function is cancelled and then the driver's door is unlocked.

#### ■ Unlocking the Doors Using a Key

When unlocking, the driver's door unlocks first. Turning the key a second time within a few seconds does not unlock the remaining doors and the hatch.

If you unlock a door with the built-in key while the security system is activated, the alarm will sound.

You can customize the door unlock mode setting.


Customized Features P. 351

It can be locked without using the remote transmitter.

Locking a Door Without Using a Key P. 204

### Locking a Door Without Using a Key

If you do not have the key on you, or if for some reason you cannot lock a door using the key, you can lock the door without it.



### ■ Locking the driver's door

Push the lock tab forward ① or push the master door lock switch in the lock direction ②, then pull and hold the outside door handle ③. Close the door, then release the handle.

### ■ Locking the passenger's doors

Push the lock tab forward and close the door.

### **■** Lockout prevention system

The doors and hatch cannot be locked when the keyless remote is inside the vehicle.

#### ∑Locking a Door Without Using a Key

When you lock the driver's door, all the other doors and hatch lock at the same time.

Before locking a door, make sure that the key is not inside the vehicle.

# **Locking/Unlocking the Doors from the Inside**

### ■ Using the Lock Tab



### ■ Locking a door

Push the lock tab forward.

### ■ Unlocking a door

Pull the lock tab rearward.

# **≥**Using the Lock Tab

When you lock the door using the lock tab on the driver's door, all the other doors and the hatch lock at the same time.

When you unlock the door using the lock tab on the driver's door, only the driver's door will unlock.

- 1 To Lock
- 2 To Unlock

# Unlocking Using the Front Door Inner Handle



Pull the front door inner handle.

► The door unlocks and opens in one motion

### ■Unlocking Using the Front Door Inner Handle

The front door inner handles are designed to allow front seat occupants to open the door in one motion. However, this feature requires that front seat occupants never pull a front door inner handle while the vehicle is in motion.

Children should always ride in a rear seat where childproof door locks are provided.

Childproof Door Locks P. 207

1 Inner Handle

# ■ Using the Master Door Lock Switch



Press the master door lock switch in as shown to lock or unlock all the doors, hatch and fuel fill door.

### **≥** Using the Master Door Lock Switch

When you lock/unlock either of the front doors using the master door lock switch, all the other doors, hatch and fuel fill door lock/unlock at the same time.

2 To Unlock

# **Childproof Door Locks**

The childproof door locks prevent the rear doors from being opened from the inside regardless of the position of the lock tab.

# ■ Setting the Childproof Door Locks



Slide the lever in the rear door to the lock position, and close the door.

### ■ When opening the door

Open the door using the outside door handle.

### 

To open the door from the inside when the childproof door lock is on, put the lock tab in the unlock position, lower the rear window, put your hand out of the window, and pull the outside door handle.

1 Lock

Unlock

# **Precautions for Opening/Closing the Hatch**

Always make sure individuals and objects are clear of the hatch before opening or closing it.

- Open the hatch all the way.
  - If it is not fully opened, the hatch may begin to close under its own weight.
- Be careful when it is windy. The wind may cause the hatch to close.

Keep the hatch closed while driving to:

- Avoid possible damage.
- ▶ Prevent exhaust gas from leaking into the vehicle.
  - Carbon Monoxide Gas P. 109

# **AWARNING**

Anyone caught in the path of a hatch that is being opened or closed can be seriously injured.


Make sure that all people are clear of the hatch before opening or closing it.

Be careful not to hit your head on the hatch or to put your hands between the hatch and the luggage area when closing the hatch.

When you are storing or picking up luggage from the luggage area while the engine is idling, do not stand in front of the exhaust pipe. You may get burned.

Do not allow any passenger in the luggage space. They may get hurt during hard braking, a sudden acceleration, or a crash.

# **Opening/Closing the Hatch**



When all the doors are unlocked or you press the hatch unlock button on the remote transmitter, the hatch is unlocked. Press the hatch release button and lift open the hatch.

If you are carrying the keyless remote, you do not have to unlock the hatch before opening it.

1 Hatch Release Button



1 Inner Handle

To close the hatch, grab the inner handle, pull the hatch down, and push it closed from outside.


If you close the hatch when the driver's door is locked, the hatch locks automatically.

► Some exterior lights flash three times.

#### ∑Opening/Closing the Hatch

- Do not leave the keyless remote in the vehicle when you get out. Carry it with you.
- Even if you are not carrying the keyless remote, you can unlock the hatch while someone else with the remote is within range.
- Do not leave the keyless remote inside the luggage area and close the hatch. The beeper sounds and the hatch cannot be closed.

# **■** Using the Remote Transmitter



Hatch Unlock Button

Press the hatch unlock button to unlock the hatch.

### **≥**Using the Remote Transmitter

If you have unlocked and opened the hatch using the remote transmitter, when closing, the hatch locks automatically.

# **Security System**

# **Immobilizer System**

This system prevents a key that has not been pre-registered from starting the power system.

Pay attention to the following when pressing the **POWER** button:

- Do not allow objects that emit strong radio waves near the **POWER** button.
- Make sure the key is not covered by or touching a metal object.
- Do not bring a key from another vehicle's immobilizer system near the POWER button.
- Do not put the key near magnetic items. Electronic devices, such as televisions and audio systems, emit strong magnetic fields. Note that even a key chain can become magnetic.

#### 

#### NOTICE

Leaving the key in the vehicle can result in theft or accidental movement of the vehicle.

Always take the key with you whenever you leave the vehicle unattended.

Do not alter the system or add other devices to it. Doing so may damage the system and make your vehicle inoperable.

If the system repeatedly does not recognise the coding of your key, contact a dealer. If you have lost your key and cannot start your vehicle, contact a dealer.

#### Right-hand Drive Type

Apply and hold the brake pedal before turning the vehicle on the first time after the 12-volt battery has been disconnected.

# **Security System Alarm**

The security system alarm activates when the hatch, bonnet, or doors are forcibly opened. The alarm does not activate if the hatch or doors are opened with the remote transmitter or keyless access system.

### ■ When the security system alarm activates

The horn sounds intermittently, and some exterior lights flash.

### ■ To deactivate the security system alarm

Unlock the vehicle using the remote transmitter or keyless access system, or turn the power mode to ON. The system, along with the horn and flashing lights, is deactivated.

### ■ Setting the security system alarm

The security system alarm automatically sets when the following conditions have been met:

- The power mode is set to VEHICLE OFF.
- The bonnet is closed.
- All doors and the hatch are locked from outside with the remote transmitter or keyless access system.

### ■ When the security system alarm sets

The security system alarm indicator in the instrument panel blinks and the blinking interval changes after about 15 seconds.

### ■ To cancel the security system alarm

The security system alarm is cancelled when the vehicle is unlocked using the remote transmitter or keyless access system, or when the power mode is set to ON. The security system alarm indicator goes off at the same time.

#### Security System Alarm

Do not alter the system or add other devices to it. Doing so may damage the system and make your vehicle inoperable.

The security system alarm will continue for approximately 5 minutes before the security system deactivates.

The system will go through ten 30-second cycles, during which the horn will sound and an emergency indicator will flash.

Depending on circumstances, the security system may continue operating for more than 5 minutes.

Do not set the security system alarm when someone is in the vehicle or a window is open. The system can accidentally activate when:

- Unlocking the door with the lock tab.
- Opening the bonnet with the bonnet release handle.

If the 12-volt battery goes dead after you have set the security system alarm, the security alarm may sound once the 12-volt battery is recharged or replaced. If this occurs, deactivate the security system alarm by unlocking a door using the remote transmitter or keyless access system.

If you unlock a door with the built-in key while the security system is activated, the alarm will sound.

### Security System Alarm Battery Information

Manufacturer Information:

FDK CORPORATION

Trade name: FDK

Postal address: Shibaura Crystal Shinagawa, 1-6-41 Konan, Minato-ku, Tokyo 108-

8212 Japan

### Handling:

Do not short-circuit, disassemble, deform, heat or incinerate. Do not place battery on metal case, metal plate or antistatic material. In case of multi cell application, replace all batteries to new at once when replacing used batteries. Do not mix the different type of batteries, the new and old batteries of the same type, or the different manufacture of the same type batteries. Do not use batteries for unspecified purposes.

### Storage:

Be sure to store batteries in well-ventilated, dry and cool conditions. Keep away from water, rain, snow, frost or dew condensation. Do not store batteries near source of heat or nozzle of hot air. Do not store batteries in direct sunshine. Take care not to get wet packing by dew condensation when packing is removed from cold to warm and humid condition. Enough number of fire fighting apparatuses should be installed in warehouse. Keep batteries out of reach of children.

Note: This content is based on the law and is subject to change without notice.

#### Security System Alarm

#### Right-hand Drive Type

The system may accidentally activate such as when:


- The vehicle is parked in an automated garage.
- The vehicle is being washed with highly pressurized water or being put through an automated car wash.
- The vehicle is being transported by train, ferry or trailer.
- The vehicle is subjected to heavy rain or stormy weather.
- Ice is being removed from the vehicle. You can use ultrasonic/tilt sensor **OFF** button not to accidentally activate the security system alarm.

Ultrasonic Sensors\* P. 214

### **Ultrasonic Sensors\***

The ultrasonic sensors activate only when the security system alarm is set. If the sensors detect an intruder moving around inside or entering the interior of the vehicle through a window, the sensor will activate the alarm.

### ■ To set the security system alarm without activating the ultrasonic sensors



- Ultrasonic/Tilt Sensor OFF Button
- 2 Indicator

You can set the security system without activating the ultrasonic sensor.

To turn off the ultrasonic sensor system, set the power mode to VEHICLE OFF by pressing the **POWER** button and then press the ultrasonic/tilt sensor **OFF** button.

► The indicator is on in red.

To turn it on again, press the ultrasonic/tilt sensor **OFF** button.

Ultrasonic sensors are turned on every time you set the security system alarm, even if you turned it off the last time

#### 

Whether the ultrasonic sensors have been activated or not, the security system can only be turned off by the remote transmitter or keyless access system, not the key.

It is possible to confirm whether the vehicle security system was activated without your knowledge. If the security system has been activated, the indicator will blink for 5 minutes after you unlock the door and disable the system.

If, however, you turn the power system on, the indicator will stop blinking after 5 seconds.

If the ultrasonic sensor is malfunctioning or there is another problem, the indicator will come on for 5 minutes after you unlock the door and disable the system.

If, however, you turn the power system on, the indicator will shut off.

The security system may accidentally activate by ultrasonic sensors such as when:

- Someone is in the vehicle
- A window is open
- Accessories or clothes are hanging in the vehicle

## Tilt Sensor\*

The tilt sensor activates only when the security system alarm is set. If someone raises the vehicle in an attempt to tow the vehicle or remove the wheels etc., the sensor will activate the alarm.

## ■ To set the security system alarm without activating the tilt sensor



1 Ultrasonic/Tilt Sensor **OFF**Button

2 Indicator

You can set the security system without activating the tilt sensor.

To turn off the tilt sensor system, set the power mode to VEHICLE OFF by pressing the **POWER** button and then press the ultrasonic/ tilt sensor **OFF** button

► The indicator is on in red.

To turn it on again, press the ultrasonic/tilt sensor **OFF** button.

Tilt sensor is turned on every time you set the security system alarm, even if you turned it off the last time.

#### ∑Tilt Sensor \*

Whether the tilt sensor has been activated or not, the security system can only be turned off by the remote transmitter or keyless access system, not the key.

It is possible to confirm whether the vehicle security system was activated without your knowledge. If the security system has been activated, the indicator will blink for 5 minutes after you unlock the door and disable the system.

If, however, you turn the power system on, the indicator will stop blinking after 5 seconds.

If the tilt sensor is malfunctioning or there is another problem, the indicator will come on for 5 minutes after you unlock the door and disable the system. If, however, you turn the power system on, the indicator will shut off.

Do not set the tilt sensor when the vehicle is lifted or jacked up.

## **Super Locking\***

The super locking function disables the lock tabs on all doors for better theft protection.

Doors cannot be opened from the inside once super locking has been enabled.

## ■ Locking the doors without super locking when using a master lock switch

- 1. Keep the driver's door closed.
- **2.** Open the passenger door or rear door and push either the driver or passenger side master lock door switch in the lock direction.
- **3.** Close the passenger door or rear door without touching the door handle.



- 1 To Lock
- Driver's Door Master Door Lock Switch
- 3 Passenger's Door Master Door Lock Switch

Super Locking \*

## **AWARNING**

No one must be inside the vehicle with the super locking set. Persons locked in can get seriously sick or die from the heat built inside the vehicle if left in the sun.

Make sure there is no one inside the vehicle before setting the super locking.


If you unlock a door with the built-in key while the security system is activated, the alarm will sound.

Once the super locking function has been enabled, it will remain enabled even if you unlock the hatch.

## ■ Locking the doors without super locking when using the built-in key

The built-in key can be used to lock the doors without activating super locking even if you are not carrying the keyless remote.

- **1.** With the driver's door open, pull out the door handle and lock the door with the built-in key.
- **2.** Take out the built-in key and close the door while still pulling on the door handle.



## Windows

## **Opening/Closing the Power Windows**

The power windows can be opened and closed when the power mode is in ON, using the switches on the doors.

The driver's side switches can be used to open and close all the windows. The power window lock button on the driver's side must be switched off to open and close the windows from anywhere other than the driver's seat.

When the power window lock button is pushed in, the indicator comes on and you can only operate the driver's window. Turn the power window lock button on if a child is in the vehicle.

■Opening/Closing the Power Windows

## **AWARNING**

Closing a power window on someone's hands or fingers can cause serious injury.


Make sure your passengers are away from the windows before closing them.

**WARNING:** Always take the ignition key with you whenever you leave the vehicle alone or with other occupants.

The power windows can be operated for up to 10 minutes after you set the power mode to VEHICLE OFF.

Closing driver's door cancels this function.

## ■ Opening/Closing the Windows with Auto-Open/Close Function



- Indicator
- 2 Power Window Lock Button
- Oriver's Window Switch
- 4 Front Passenger's Window Switch
- Switch
  Switch

## ■ Manual operation

**To open:** Push the switch down lightly, and hold it until the desired position is reached. **To close:** Pull the switch up lightly, and hold it until the desired position is reached.

## **■** Automatic operation

**To open:** Push the switch down firmly. **To close:** Pull the switch up firmly.

The window opens or closes completely. To stop the window at any time, push or pull the switch briefly.

#### ■ Opening/Closing the Power Windows

#### **Auto Reverse**


If a power window senses resistance when closing automatically, it will stop closing and reverses direction.

The driver's window auto reverse function is disabled when you continuously pull up the switch.

The auto reverse function stops sensing when the window is almost closed to ensure that it fully closes.

Continued 219

## ■ Opening/Closing the Windows with the Remote



**To open:** Press the unlock button, and then within 10 seconds, press it again and hold it.

**To close:** Press the lock button, and then within 10 seconds, press it again and hold it.

If the windows stop midway, repeat the procedure.

1 Lock Button

2 Unlock Button

## ■Opening/Closing the Windows with the Remote

If you open/close the windows with the remote, the panoramic roof\* will open/close automatically along with them.

You can turn off or on to open the windows with the remote transmitter setting using the audio/information screen.

Customized Features P. 351

## **Opening/Closing the Panoramic Roof**

You can operate the panoramic roof and sunshade when the power mode is in ON. Use the switch in the front of the ceiling to open and close the panoramic roof and sunshade.

**≥** Opening/Closing the Panoramic Roof

## **AWARNING**

Opening or closing the panoramic roof and sunshade on someone's hands or fingers can cause serious injury.

Make sure all hands and fingers are clear of the panoramic roof and sunshade before opening or closing it.

**WARNING:** Always take the ignition key with you whenever you leave the vehicle alone or with other occupants.

#### NOTICE

Opening the panoramic roof in below freezing temperature or when it is covered with snow or ice can damage the panoramic roof panel or motor.

The panoramic roof and sunshade can be operated for up to 10 minutes after you set the power mode to OFF.

Closing the driver's door cancels this function.

## ■Opening/Closing the Panoramic Roof

When resistance is detected, the auto reverse function causes the panoramic roof to change directions, then stop. Auto reverse stops sensing when the panoramic roof is almost closed to ensure that it fully closes.

You can use the remote transmitter to operate the panoramic roof.

**②** Opening/Closing the Windows with the Remote P. 220

## Using the Panoramic Roof Switch



- OpenClose
- 6 Tilt

## **■** Automatic operation

**To open:** Pull the switch back firmly. **To close:** Push the switch forward firmly.

The panoramic roof automatically opens or closes all the way. To stop the panoramic roof midway, push the switch briefly.

## **■** Manual operation

**To open:** Pull the switch back lightly, and hold it until the desired position is reached. **To close:** Push the switch forward lightly, and hold it until the desired position is reached.

## **■** Tilting the panoramic roof up

**To tilt:** Push on the centre of the panoramic roof switch. The sunshades will open automatically and the panoramic roof will start to tilt up.

**To close:** Push the switch forward firmly, then release.

#### **≥** Using the Panoramic Roof Switch

Whenever the panoramic roof is opening, the sunshade moves along with it. However, when the panoramic roof is closing, the sunshade does not move.

When you tilt open the panoramic roof, the sunshade opens slightly to let in fresh air. When you close the panoramic roof from this position, the sunshade returns to its closed position.

Continued 223

## ■ Using the Sunshade Switch



Open

2 Close

## ■ Automatic operation

**To open:** Pull the switch back firmly. **To close:** Push the switch forward firmly.

The sunshade automatically opens or closes all the way. To stop the sunshade midway, pull or push the switch briefly.

## ■ Manual operation

**To open:** Pull the switch back lightly, and hold it until the desired position is reached. **To close:** Push the switch forward lightly, and hold it until the desired position is reached.

#### Sunshade Switch Sunshade Switch

The sunshade can be opened or closed to adjust the amount of light that enters the cabin.

When you use the sunshade switch to open the sunshade, the panoramic roof does not move.

The sunshade cannot be fully closed if the panoramic roof is open. When you close the sunshade with the panoramic roof opened, the sunshade stops slightly before the panoramic roof glass. When you push the switch forward again, the sunshade and the panoramic roof close together.

## Operating the Switches Around the Steering Wheel

## **POWER Button**

## Changing the Power Mode



If you carry the keyless remote and press **POWER** button without depressing the brake pedal, the power mode will change in this order: VEHICLE OFF→ACCESSORY→ON→ VEHICLE OFF.

#### **VEHICLE OFF:**

Vehicle power is turned OFF.

#### ACCESSORY:

The audio system and some accessories can be used.

#### ON:

All accessories can be used.

## ■ Automatic Power Off

If you leave the vehicle for 30 to 60 minutes with the transmission in  $\boxed{\mathbf{P}}$  and the power mode in ACCESSORY, the vehicle automatically goes into the mode similar to VEHICLE OFF to avoid draining the 12-volt battery.

## Power Mode Reminder


If you open the driver's door when the power mode is set to ACCESSORY, a warning beep sounds.

#### **≫**POWER Button

If the keyless remote is set in a storage box or another place where its signal can be interrupted, the power mode may not change.

Continued 225

## Keyless Remote Reminder



When the power mode is set to any mode other than OFF and you remove the keyless remote from the vehicle and shut the door, an alarm will sound. If the alarm continues to sound, place the keyless remote in another location.

## ■ When the power mode is in ACCESSORY

The alarm will sound from outside the vehicle.

#### ■ When the power mode is in ON

An alarm will sound both inside and outside the vehicle. In addition, a warning indicator will appear on the instrument panel.

#### 

When the keyless remote is within the system's operational range, and the driver's door is closed, the warning function cancels.

If the keyless remote is taken out of the vehicle after the power system has been started, you can no longer change the **POWER** button mode or restart the power system. Always make sure that the remote is in your vehicle when you operate the **POWER** button.


Removing the keyless remote from the vehicle through a window does not activate the warning buzzer.

Do not put the keyless remote on the dashboard or in the glove box. It may cause the warning buzzer to sound. Under some other conditions that can prevent the vehicle from locating the remote, the warning buzzer may also sound even if the remote is within the system's operational range.

## Lights

## ■ Headlights/Position Lights

The lights will turn on automatically depending on the ambient brightness. They can also be switched on and off manually.



The exterior lights will switch on automatically when the light switch is set to **AUTO** while the power mode is in ON.

## ■ Manual operation Headlights/position lights:

Turn the light switch to **≣**○.

#### **Position lights:**

Turn the light switch to 3005

## Headlight/position lights off:

Turn the light switch to **OFF** and release it while the transmission is in **P** or the parking brake is applied.

- ▶ The lights will come back on automatically when:
- The light switch is turned to **OFF** again and released.
- The transmission is changed out of **P** and the parking brake is released.

#### ≥Lights

When the lights are on, the lights on indicator in the instrument panel will be on.

**≧** Lights On Indicator P. 124

The headlights are suitable for only left-hand or only right-hand drive. When driving on roads with different traffic rules, the headlight beam must be adjusted.

**■ Adjusting Headlight Distribution** P. 464

#### 

When the position lights are on, the tail and rear licence plate lights will also switch on.

When the light switch is turned to 505 or 50 and the power is turned to OFF, a beeper sounds when the driver's door is opened.


When the light switch is turned to **AUTO** and the ambient light levels are low, the headlights and position lights will switch on if you unlock a door. They will switch off when the door is locked.

Do not leave the lights on when the power system is off because it will cause the 12-volt battery to discharge.

Your vehicle is equipped with the automatic headlight adjusting system that automatically adjusts the vertical angle of the low beam headlights. If you find a significant change in the vertical angle of the headlights, there may be a problem with the system. Have your vehicle checked by a dealer.


#### 

The light sensor is in the location shown below. Do not cover the light sensor.



## ■ High Beams

When the headlights are on, push the lever forward. Pull the lever back to return to low beams.




## **■** Flashing the high beams

Pull the lever back to switch on the high beams.

▶ Release the lever to return to low beams.

## ■ Turn Signals



The turn signals can be used when the power mode is in ON

## **■** (1): Turn signal

Push the lever up or down based on the direction you want to turn, and the turn signal will blink.

## ■ ②: One-touch turn signal

When you lightly push the lever up or down and release it, the turn signal will blink 3 times.

► If you lightly push the lever in the opposite direction while it is blinking, the blinking will stop.

#### ∑Turn Signals

The turn signal indicator on the instrument panel will blink when the external turn signal blinks.

Turn Signal and Hazard Warning Indicators
P. 124

Continued 229

## Headlight Integration with Wipers

The headlights automatically come on when the wipers are used several times within a certain number of intervals with the headlight switch in **AUTO**.

The headlights automatically go off a few minutes later if the wipers are stopped.

#### 

This feature activates while the headlights are off in **AUTO**. The instrument panel brightness does not change when the headlights come on.

At dark ambient light levels, the automatic lighting control feature turns on the headlights, regardless of the number of wiper sweeps.

You can turn the headlight integration with wipers function on and off.

Customized Features P. 351

## Automatic Lighting Off Feature

The headlights, all other exterior lights, and the instrument panel lights turn off 15 seconds after you set the power mode to VEHICLE OFF, take the remote with you, and close the driver's door.

However, when the switch is in  $\frac{1}{2000}$  the position lights remain on.

If you set the power mode to VEHICLE OFF with the headlight switch on, but do not open the door, the lights turn off after 10 minutes (3 minutes, if the switch is in the **AUTO** position).


The lights turn on again when you unlock or open the driver's door. If you unlock the door, but do not open it within 15 seconds, the lights go off. If you open the driver's door, you will hear a reminder chime alerting you that the lights are on.

## 

You can change the headlight auto off timer setting.

Customized Features P. 351

## ■ Rear Fog Light



Can be used when the headlights are on.

■ To turn the rear fog light on Rotate the switch to (‡. The ()‡ indicator comes on.

Continued

## ■ Daytime Running Lights

The daytime running lights come on when the following conditions have been met:

- The power mode is in ON.
- The headlight switch is **AUTO**.
- The ambient light is bright.

While the vehicle is stopped, if you turn the light switch to **OFF** and release it, the daytime running lights will turn off. When the transmission is changed out of P and the parking brake is released, the lights will come on again. Otherwise, if the light switch is once more turned to **OFF**, the lights will come on again.

#### **≥** Daytime Running Lights

Daytime running lights and the position lights share the same light source.


Daytime running lights are brighter than the position lights.

The daytime running lights will not switch on if the position lights have been turned on manually.

## **Active Cornering Lights\***

Enhance the visibility of the corner(s) when making a turn. With the power mode in ON, the headlights on, and the vehicle speed at less than 40 km/h (25 mph), the cornering light(s) comes on either when operating the turn signals or the steering wheel, or put the transmission into  $\boxed{\mathbf{R}}$ .


■ The corner you are making a turn towards is illuminated when:

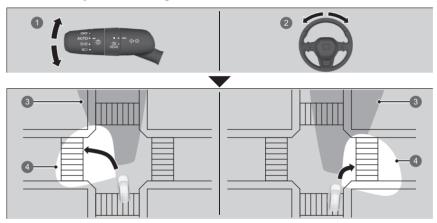


- 1 You operate the turn signal lever.
- 2 You turn the steering wheel around 70 degrees or more.
- 3 Headlight beam coverage
- 4 Cornering light beam coverage

#### ■ Active Cornering Lights \*

The active cornering lights go off automatically after five minutes. To resume the lights on, recreate the same condition; putting the turn signal lever or steering wheel in the centre position, then operate it again, or if the transmission has been in  $\boxed{\mathbb{R}}$ , move it to another position momentarily.



Active Cornering Lights



# ■ Both front corners are illuminated when:

You put the transmission into  $\overline{\mathbf{R}}$ .

- Headlight beam coverage
- 2 Cornering light beam coverage


## Auto High-Beam\*

The front wide view camera detects the light sources ahead of the vehicle such as the lights of a preceding or oncoming vehicle, or street lights. When you are driving at night, the system automatically switches the headlights between low beam and high beam depending on the situation.

## How to Use the Auto High-Beam

## ■ Activating the system

When all of the following conditions have been met, the auto high-beam indicator comes on and automatically switches between the high beam and low beam, depending on the situation.



- The power mode is in ON.
- The light switch is in **AUTO**.
- The lever is in the low beam position.
- The headlights have been automatically activated.
- It is dark outside the vehicle.

- 1 Light Switch
- 2 Auto High-Beam Indicator

If the auto high-beam indicator does not come on even when all the conditions have been met, carry out either of the procedures below and the indicator will come on.

- Pull the lever towards you and release it.
- Turn the light switch to **D** then turn the light switch to **AUTO**.

#### 

The auto high-beam system does not always operate in every situation. This system is just for assisting the driver. Always observe your surroundings and manually switch the headlights between high beam and low beam if necessary.

The range and the distance at which the camera can recognise light sources varies depending on conditions surrounding your vehicle.

Regarding the handling of the camera mounted to the inside of the windscreen, refer to the following.

Front Wide View Camera P. 544

For the auto high-beam to work properly:

- Do not place an object that reflects light on the dashboard.
- Keep the windscreen around the camera clean.
   When cleaning the windscreen, be careful not to apply the windscreen cleanser to the camera lens.
- Do not attach an object, sticker, or film to the area around the camera.
- Do not touch the camera lens.

If the camera receives a strong impact, or repairing of the area near the camera is required, consult a dealer.

How to turn off the Auto High-Beam System
You can turn the auto high-beam system on and off.

■ Customized Features P. 351

## ■ Automatic switching between high-beam and low-beam

When auto high-beam is active, the headlights switch between high beam and low beam based on the following conditions.

#### High beam

All of the following conditions must be met before the high beams turn on.

- Your vehicle speed is 40 km/h (25mph) or more.
- There are no preceding or oncoming vehicles with headlights or taillights turned on.
- There are few street lights on the road ahead.

#### Low beam

One of the following conditions must be met before the low beams turn on.



- Your vehicle speed is 24 km/h (15mph) or less.
- There is a preceding or oncoming vehicles with headlights or taillights turned on.
- There are many street lights on the road ahead.

#### ∑How to Use the Auto High-Beam

In the following cases, the auto high-beam system may not switch the headlights properly or the switching timing may be changed. If the automatic switching operation does not fit for your driving habits, please switch the headlights manually.

- The brightness of the lights from a preceding or oncoming vehicle is intense or poor.
- Visibility is poor due to the weather (rain, snow, fog, windscreen frost, etc.).
- Surrounding light sources like street lights, electric billboards and traffic lights are illuminating the road ahead.
- The brightness level of the road ahead constantly changes.
- The road is bumpy or has many curves.
- A vehicle suddenly appears in front of you, or a vehicle in front of you is not in the preceding or oncoming direction.
- Your vehicle is tilted with a heavy load in the rear.
- A traffic sign, mirror, or other reflective object ahead is reflecting strong light towards the vehicle.
- The oncoming vehicle frequently disappears under roadside trees or behind median barriers.
- The preceding or oncoming vehicle is a motorcycle, bicycle, mobility scooter, or other small vehicle.

The auto high-beam system keeps the headlight low beam on when:

- Windscreen wipers are operating at a high speed.
- The camera has detected a dense fog.

## ■ Manual switching between high-beam and low-beam

If you want to manually switch the headlights between high beam and low beam, follow either of the procedures below. Note that when you do this, the auto high-beam indicator will turn off and the auto high-beam will be deactivated.

#### Using the lever:

Pull the lever towards you for flashing the high beams then release it.


- ➤ To reactivate the auto high-beam, follow either of the procedures below and the auto high-beam indicator will come on.
- Pull the lever towards you and release it.
- Turn the light switch to and then to **AUTO** when the lever is in the low beam position.

## Using the light switch:

Turn the light switch to **EO**.

➤ To reactivate the auto high-beam, turn the light switch to **AUTO** when the lever is in the low beam position, and the auto high-beam indicator will come on.

## **Adaptive Driving Beam\***



When driving at night, the front wide view camera detects light sources such as street lights or the lights of an oncoming or preceding vehicle. The system automatically switches the headlights between low and high beam depending on the situation. In addition, the system automatically adjusts the light distribution of the high beams in order to reduce glare for preceding and oncoming vehicles.

The system also increases the coverage of the low beams when the low beams are on and the vehicle speed is 40 km/h or less, improving visibility to the left and right.

#### ■ Adaptive Driving Beam \*

The adaptive driving beam system does not always operate in every situation. This system is just for assisting the driver. Always observe your surroundings and switch the headlights between high beam and low beam manually if necessary.

The range and the distance at which the camera can recognise varies depending on conditions surrounding your vehicle.

Regarding the handling of the camera mounted to the inside of the windscreen, refer to the following.

Front Wide View Camera P. 544

For the adaptive driving beam to work properly:

- Do not place an object that reflects light on the dashboard.
- Keep the windscreen around the camera clean.
   When cleaning the windscreen, be careful not to apply the windscreen cleanser to the camera lens.
- Do not attach an object, sticker or film to the area around the camera.
- Do not touch the camera lens.

If the camera receives a strong impact, or repairing of the area near the camera is required, consult a dealer.

## ■ How to Use the Adaptive Driving Beam

## ■ Activating the system

The adaptive driving beam indicator comes on, and the system begins adjusting the light distribution of the high beams when all of the following conditions are met.



- The power mode is in ON.
- The light switch is in **AUTO**.
- The lever is in the low beam position.
- The headlights have been automatically activated.
- It is dark outside the vehicle.

- 1 Light Switch
- 2 Adaptive Driving Beam Indicator

If the adaptive driving beam indicator does not come on even when all the conditions have been met, carry out either of the procedures below and the indicator will come on.

- Pull the lever towards you and release it.
- Turn the light switch to Turn the light switch to **AUTO**.

#### ■Adaptive Driving Beam\*

In the following cases, the adaptive driving beam system may not switch the headlights properly or the switching timing may be changed. In case of the automatic switching operation does not fit for your driving habits, please switch the headlights manually.

- The brightness of the lights from the preceding or oncoming vehicle is intense or poor.
- Visibility is poor due to the weather (rain, snow, fog, windscreen frost, etc.).
- Surrounding light sources, such as street lights, electric billboards, and traffic lights are illuminating the road ahead.
- The brightness level of the road ahead constantly changes.
- The road is bumpy or has many curves.
- A vehicle suddenly appears in front of you, or a vehicle in front of you is not in the preceding or oncoming direction.
- Your vehicle is tilted with a heavy load in the rear.
- A traffic sign, mirror, or other reflective object ahead is reflecting strong light towards the vehicle.
- The oncoming vehicle frequently disappears under roadside trees or behind median barriers.
- The preceding or oncoming vehicle is a motorcycle, bicycle, mobility scooter, or other small vehicle.

The adaptive driving beam system keeps the headlight low beam when:

- Windscreen wipers are operating at a high speed.
- The camera has detected a dense fog.

## ■ Automatically adjusting the light distribution

The system starts to automatically adjust the light distribution of the high beams once the vehicle speed is 40 km/h (25mph) or higher, and the light distribution changes depending on vehicle speed, or under the following conditions:

- There is a preceding or oncoming vehicle with headlights or taillights turned on.
- There are many street lights on the road ahead.

If the vehicle speed slows to 24 km/h (15mph) or lower, the system stops automatically adjusting the light distribution and switches the headlights to low beam.

## ■ Manual switching between high-beam and low-beam

If you want to manually switch the headlights between high beam and low beam, follow either of the procedure below. Note that when you do this, the adaptive driving beam indicator will turn off and the adaptive driving beam will be deactivated.

## Using the light switch:

Turn the light switch to EO.

➤ To reactivate the adaptive driving beam, turn the light switch to **AUTO** when the lever is in the low beam position, and the adaptive driving beam indicator will come on.

■ Adaptive Driving Beam \*


## How to turn off the Adaptive Driving Beam System

You can turn the adaptive driving beam system on and off.

**■ Customized Features** P. 351

## **Wipers and Washers**

## ■ Windscreen Wipers/Washers



- MIST
- OFF
- AUTO
- **4 LO:** Low speed wipe
- **6** HI: High speed wipe

Washer

The windscreen wipers and washers can be used when the power mode is in ON.

#### **■** MIST

The wipers run at high speed until you release the lever.

■ Wiper switch (OFF, AUTO, LO, HI) Move the lever up or down to change the wiper settings.

#### ■ Washer

Sprays while you pull the lever towards you. When you release the lever for more than one second, the spray stops, the wipers sweep two or three more times to clear the windscreen, and then stop.

#### Wipers and Washers ■

#### NOTICE

When lifting the front wiper arms, move them into the maintenance position before lifting them.

Lifting the Front Wiper Arms P. 620

#### NOTICE

Do not use the wipers when the windscreen is dry. The windscreen will get scratched, or the rubber blades will get damaged.

#### NOTICE

Turn the washers off if no washer fluid comes out. The pump may get damaged.

The wiper motor may stop motor operation temporarily to prevent an overload. Wiper operation will return to normal within a few minutes.

#### NOTICE


In cold weather, the blades may freeze to the windscreen.

Operating the wipers in this condition may damage the wipers. Use the demister to warm the windscreen, then turn the wipers on.

If the wipers stop operating due to an obstacle such as the buildup of snow, park the vehicle in a safe place.

Rotate the wiper switch to **OFF**, set the power mode to ACCESSORY or VEHICLE OFF, then remove the obstacle.

## Automatic Intermittent Wipers



- Adjustment Ring
  - -: Low Sensitivity
  - +: High Sensitivity

When you push the lever down to **AUTO**, the windscreen wipers sweep once, and go into the automatic mode.


The wipers operate intermittently, at low speed, or at high speed and stop in accordance with the amount of rainfall the rainfall sensor detects.

## ■ AUTO sensitivity adjustment

When the wiper function is set to **AUTO**, you can adjust the sensitivity of the rainfall sensor (using the adjustment ring) so that wipers will operate in accordance with your preference.

#### 

The rainfall sensor is in the location shown below.




#### NOTICE

**AUTO** should always be turned **OFF** before the following situations in order to prevent severe damage to the wiper system:

- Cleaning the windscreen
- Driving through a car wash
- No rain present

## ■ Rear Wiper/Washer



- OFF
- 2 INT (Intermittent)
- **3 ON** (Continuous wipe)
- Washer

The rear wipers and washers can be used when the power mode is in ON.

## ■ Wiper switch (OFF, INT, ON)

Change the wiper switch setting according to the amount of rain.

## ■ Washer (🛱)

Sprays while you rotate the switch to this position.

Hold it to activate the rear wiper and to spray the washer. Once released, the washer spray will stop and the rear wiper will return to its selected switch setting after a few sweeps.


## **■** Operating in reverse

When you put the transmission into  ${\Bbb R}$  with the windscreen wipers activated, the rear wiper operates automatically as follows even if its switch is off.

Windscreen Wiper Operation	Rear Wiper Operation
Intermittent	Intermittent
Low speed wipe High speed wipe	Continuous

### Models with A-type meter

## **Brightness Control**



When the power mode is in ON, you can use the brightness control dial to adjust instrument panel brightness.

**Brighten:** Turn the dial up. **Dim:** Turn the dial down.

Several seconds after adjusting the brightness, you will be returned to the previous display.

1 Control Dial



## **■** Brightness level indicator

The brightness level is shown on the display while you are adjusting it.

#### ■ Brightness Control


The brightness of the instrument panel will be reduced when the following conditions:

- The power mode is in ON.
- The position lights are turned on and it is dark outside.

The brightness can be set differently for when the exterior lights are on, and when they are off.

#### Models with B-type meter

## **Brightness Control**



1 Control Dial

The brightness of the gauge is automatically adjusted depending on the ambient brightness.

- The brightness becomes darker when the ambient light is dark.
- The brightness becomes brighter when the ambient light is bright.

## ■ Adjusting the brightness manually

You can use the control dial to adjust instrument panel brightness.
Brighten: Turn the dial up.

Dim: Turn the dial down.

➤ You can change the setting even when the ambient lighting is bright, but the brightness of the gauge won't change.

## ■ Brightness level indicator

The brightness level is shown on the display while you are adjusting it.



Several seconds after you have adjusted the brightness, you will be returned to the previous screen



## **Rear Demister/Heated Door Mirror Button**

Press the rear demister and heated door mirror button to demist the rear window and mirrors when the power mode is in ON.



The rear demister and heated door mirrors automatically switch off after 10-30 minutes depending on the outside temperature. However, if the outside temperature is 0°C or below, they do not automatically switch off.

#### ■ Rear Demister/Heated Door Mirror Button

This system consumes a lot of power, so turn it off when the window has been demisted. Also, do not use the system for a long time while the power system is stopped. This may weaken the 12-volt battery, making it difficult to turn the power system on.

When the power mode is set to ON and the outside temperature is below 5°C, the heated door mirror may automatically activate for 10 minutes.

## **Adjusting the Steering Wheel**

The steering wheel height and distance from your body can be adjusted so that you can comfortably grip the steering wheel in an appropriate driving posture.



- Release
- 2 Adjust
- 3 Lock

- **1.** While the vehicle is stopped, push the steering wheel adjustment lever down.
  - ► The steering wheel adjustment lever is under the steering column.
- **2.** Move the steering wheel up or down, and in or out.
  - ► Make sure you can see the instrument panel gauges and indicators.
- **3.** Pull the steering wheel adjustment lever up to lock the steering wheel in position.
  - ➤ After adjusting the position, make sure you have securely locked the steering wheel in place by trying to move it up, down, in, and out.

∑Adjusting the Steering Wheel

## **AWARNING**


Adjusting the steering wheel position while driving may cause you to lose control of the vehicle and be seriously injured in a crash.

Adjust the steering wheel only when the vehicle is stopped.

## **Interior Rearview Mirror**

Adjust the angle of the rearview mirror when you are sitting in the correct driving position.

## Automatic Dimming Rearview Mirrors



When you are driving after dark, the automatic dimming rearview mirror reduces the glare from headlights behind you. Press the AUTO button to turn this function on and off. When activated, the AUTO indicator comes on.

- AUTO Button
- 2 AUTO Indicator
- Sensor

#### >> Mirrors

Keep the inside and outside mirrors clean and adjusted for best visibility.

Adjust the mirrors before you start driving.

Front Seats P. 250

The auto dimming function cancels when the transmission is in R.

## **Power Door Mirrors**



- Selector Switch
- 2 Adjustment Switch
- S Folding Button

You can adjust the door mirrors when the power mode is in ON.

## ■ Mirror position adjustment

**L/R selector switch:** Select the left or right mirror. After adjusting the mirror, return the switch to the centre position.

**Mirror position adjustment switch:** Press the switch left, right, up, or down to move the mirror.

## **■** Folding door mirrors

Press the folding button to fold in and out the door mirrors

## Automatic Folding Door Mirror Function

#### ■ Folding in the door mirrors

Press the lock button on the keyless remote, or touch the door lock sensor on the front door.

▶ The mirrors start folding in automatically.

## ■ Folding out the door mirrors

Unlock all doors and the hatch using the remote transmitter or keyless access system.

▶ The mirrors start folding out automatically.

#### ■ Automatic Folding Door Mirror Function


You cannot turn the automatic folding out automatically if they have been folded in using the folding button.

You can turn the automatic folding door mirror function on and off.

**Customized Features** P. 351

Door mirrors will not fold automatically when locking from inside the vehicle using lock tab or master door lock switch.

## **Front Seats**



Move back to allow sufficient space.

Adjust the driver's seat as far back as possible while allowing you to maintain full control of the vehicle. You should be able to sit upright, well back in the seat and be able to adequately press the pedals without leaning forward, and grip the steering wheel comfortably. The passenger's seat should be adjusted in a similar manner so that it is as far back from the front airbag in the dashboard as possible.

#### Seats

Always make seat adjustments before driving.

≫ Front Seats

## **AWARNING**


Sitting too close to a front airbag can result in serious injury or death if the front airbags inflate.

Always sit as far back from the front airbags as possible while maintaining control of the vehicle.

In addition to the seat adjustment, you can adjust the steering wheel up and down, in and out. Allow at least 25 cm (10 inches) between the centre of the steering wheel and the chest.


## ■ Adjusting the Seat Positions

■ Adjusting the front power seats\*

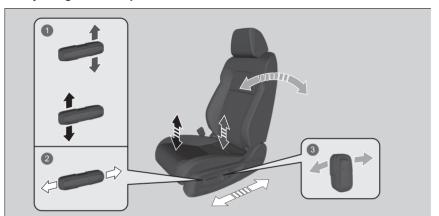

- Height Adjustment (Driver's seat only)
- 2 Horizontal Position Adjustment
- 3 Seat-back Angle Adjustment

### ■ Adjusting the front manual seats\*

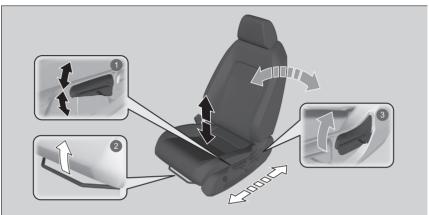

- Height Adjustment (Driver's side only)
  Pull up or push down the lever to raise or lower the seat.
- **2** Horizontal Position Adjustment
  Pull up on the bar to move the seat, then release the bar.
- **3 Seat-back Angle Adjustment**Pull up the lever to change the angle.

#### ∑Adjusting the front manual seats\*

Once a seat is adjusted correctly, rock it back and forth to make sure it is locked in position.

253



1 Lumbar Support Adjustment Switch




1 Lumbar Support Adjustment Switch

### **■** Lumbar support adjustment switch

**Press the front:** To increase the entire lumbar support.

**Press the rear:** To decrease the entire lumbar support.

### Adjusting the Seat-Backs



Adjust the driver's seat-back to a comfortable, upright position, leaving ample space between your chest and the airbag cover in the centre of the steering wheel.

The front seat passenger should also adjust their seat-back to a comfortable, upright position.

Reclining a seat-back so that the shoulder part of the belt no longer rests against the occupant's chest reduces the protective capability of the belt. It also increases the chance of sliding under the belt in a crash and being seriously injured. The farther a seat-back is reclined, the greater the risk of injury.

■ Adjusting the Seat-Backs

## **AWARNING**

Reclining the seat-back too far can result in serious injury or death in a crash.

Adjust the seat-back to an upright position, and sit well back in the seat.

Do not put a cushion, or other object, between the seat-back and your back.

Doing so may interfere with proper seat belt or airbag operation.

If you cannot get far enough away from the steering wheel and still reach the controls, we recommend that you investigate whether some type of adaptive equipment may help.

### **Rear Seats**

### ■ Folding Down the Rear Seats

The rear seats can be folded down separately to allow for additional storage space.



- Release Lever
- 2 Tab

- **1.** Lower the head restraints to their lowest position. Put the armrest back into the seatback.
- **2.** Pull the release lever and fold down the seat-back.

∑Folding Down the Rear Seats

## **AWARNING**

Make sure the seat-backs are latched securely before driving.

The rear seat-back(s) can be folded down to accommodate bulkier items in the luggage area.

To lock a seat-back upright, push it backwards until it locks, so that the tabs in the release lever go down. When returning the seat-back to its original position, push it firmly back.

Make sure all items in the luggage area or items extending to the rear seats are properly secured. Loose items can fly forward if you have to brake hard.

Remove any items from the rear seat cushion and floor before you fold down the rear seat.

The front seat(s) must be far enough forward so they do not interfere with the rear seats as they fold down.

When returning the seat-back to its original position, push it firmly back. Also, make sure all rear shoulder belts are positioned in front of the seat-back.

#### ■ Rear Seat Reminder

This feature alerts you to the possible presence of passengers or items in the rear seats before you exit the vehicle. It activates when the power mode is set to VEHICLE OFF if the rear doors were opened shortly before or after the power mode was set to ON.



A reminder appears on the driver information interface and an alert will sound when the power mode is set to VEHICLE OFF.

#### 

When the power mode is set to VEHICLE OFF, the reminder will go off and the function will terminate.

The reminder will not work if the power mode has not been set to ON within 10 minutes of operating the rear doors.

The system does not detect passengers in the rear seats. Instead, it can detect when a rear door is opened and closed, indicating that there may be something in the rear seats.

You can turn off the notification setting.

Customized Features P. 351

## **Maintain a Proper Sitting Position**

After all occupants have adjusted their seats and head restraints\*, and put on their seat belts, it is very important that they continue to sit upright, well back in their seats, with their feet on the floor until the vehicle is safely parked and the power system off.

Sitting improperly can increase the chance of injury during a crash. For example, if an occupant slouches, lies down, turns sideways, sits forward, leans forward or sideways, or puts one or both feet up, the chance of injury during a crash is greatly increased.

In addition, an occupant who is out of position in the front seat can be seriously or fatally injured in a crash by striking interior parts of the vehicle or being struck by an inflating front airbag.

Maintain a Proper Sitting Position

## **AWARNING**

Sitting improperly or out of position can result in serious injury or death in a crash.


Always sit upright, well back in the seat, with your feet on the floor.

\* Not available on all models

### **Head Restraints**


Your vehicle is equipped with head restraints in all seating positions.

## Adjusting the Front and Rear Outer Head Restraint Positions



Position head in the centre of the head restraint

Head restraints are most effective for protection against whiplash and other rearimpact crash injuries when the centre of the back of the occupant's head rests against the centre of the restraint. The tops of the occupant's ears should be level with the centre height of the restraint.



### To raise the head restraint:

Pull it upward.

### To lower the head restraint:

Push it down while pressing the release button.

## **AWARNING**


Improperly positioning head restraints reduces their effectiveness and increases the likelihood of serious injury in a crash.

Make sure head restraints are in place and positioned properly before driving.

In order for the head restraint system to work properly:

- Do not hang any items on the head restraints, or from the restraint legs.
- Do not place any objects between an occupant and the seat-back.
- Install each restraint in its proper location.

259



### ■ Removing and Reinstalling the Front and Rear Outer Head Restraints

Head restraints can be removed for cleaning or repair.

#### To remove a head restraint:

Pull the restraint up as far as it will go. Then, push the release button and pull the restraint up and out.

#### To reinstall a head restraint:

Insert the legs back in place, then adjust the head restraint to an appropriate height while pressing the release button. Pull up on the restraint to make sure it is locked in position.

Removing and Reinstalling the Front and Rear Outer Head
Restraints


## **AWARNING**

Failure to reinstall or correctly reinstall, the head restraints can result in severe injury during a crash.

Always replace the head restraints before driving.

## **Armrest**

## ■ Using the Front Seat Armrest



The console lid can be used as an armrest.

# **■** Using the Rear Seat Armrest



Pull down the armrest in the centre backrest.


## **Interior Convenience Items**

# **Interior Lights**

## ■ Interior Light Switches



- 1 On
- 2 Door Activated Position
- Off



- 1 On
- 2 Door Activated Position
- Off

#### ON

The interior lights come on regardless of whether the doors are open or closed.

#### **■** Door activated

The interior lights come on in the following situations:

- When any doors are opened.
- When the driver's door is unlocked.
- When the power mode is set to VEHICLE OFF.

#### ■ OFF

The interior lights remain off regardless of whether the doors are open or closed.

#### ■Interior Light Switches

In the door activated position, the interior lights fade out and turn off about 30 seconds after the doors are closed.

The lights turn off after about 30 seconds in the following situations:

- When you unlock the driver's door but do not open it.
- When you set the power mode to VEHICLE OFF but do not open a door.

You can change the interior light dimming time.

#### Customized Features P. 351

The interior lights turn off immediately in the following situations:

- When you lock the driver's door.
- When you close the driver's door in ACCESSORY mode.
- When you set the power mode to ON.

If you leave any of the doors open in VEHICLE OFF mode, the interior lights go off after about 15 minutes.

To avoid draining the 12-volt battery, do not leave the interior light on for an extended length of time when the power system is off.

## ■ Map Light Switches



The map lights can be turned on and off by pressing the buttons.


### Map Light Switches

#### Models with panoramic roof

When the front interior light switch is in the door activated position and any door is open, the map light will not go off when you press the switches.

# **Storage Items**

### ■ Glove Box



Pull the handle to open the glove box.

Solve Box

# **AWARNING**

An open glove box can cause serious injury to your passenger in a crash, even if the passenger is wearing the seat belt.

Always keep the glove box closed while driving.

## **■** Console Compartment



Pull the handle to open the console compartment.



### **■** Removable tray

The tray in the console compartment is detachable. To remove the tray, simply pull it up.

## ■ Beverage Holders



### **■** Front seat beverage holders

Located in the console between the front seats.



### ■ Door beverage holders

Located on both of the front and rear door side pockets.


#### ■ Beverage Holders

### NOTICE

Spilled liquids can damage the upholstery, carpeting, and electrical components in the interior.

Be careful when you are using the beverage holders. Hot liquid can scald you.





## ■ Rear seat beverage holders

Fold the armrest down to use the rear seat beverage holders.

### ■ Coat Hooks



There are coat hooks on the rear left and right grab handles.

# ■ Luggage Hook



The luggage hook in the luggage area can be used to hang a light items.

#### Coat Hooks


The coat hooks are not designed for large or heavy items.

#### ∑Luggage Hook

#### NOTICE

Do not hang a large object or an object that weighs more than 3 kg on the luggage hook. Hanging heavy or large objects may damage the hook.

## **■** Tie-down Anchorages



The tie-down anchorages on the luggage area floor can be used to install a net for securing items.

#### ∑Tie-down Anchorages

Do not let anyone access items in the luggage area while driving. Loose items can cause injury if you have to brake hard.

### ■ Luggage Area Cover



The luggage area cover can be used to cover the luggage space.

### ■ To pull out

Pull the cover handle straight out, and hang both ends on the hooks.

When storing, remove it from the hook and gently put it back.

Handle



Hooks

#### ∑Luggage Area Cover

Do not access parcels in the luggage area while driving.

This may cause injury if you have to brake hard.

Do not stack objects higher than the top of the seat in the luggage area. They could block your view and be thrown about the vehicle during a sudden stop.

To prevent luggage area cover damage:


- Do not place items on the luggage area cover.
- Do not put weight on the luggage area cover.



#### ■ To remove:

Slide the lever on the luggage area cover case and remove it while pulling it towards you.

Lever



# ■ Luggage area cover extension

The extension is attached at the back of the hatch by four clips. It extends the covering area when you close the hatch. To remove, unclip the extension from the hatch. When reinstalling the extension, make sure that the tabs come to the near side

- Extension
- 2 Clips
- Tab

## Sunglasses Holder\*



To open the sunglasses holder, press and release the indent. To close, press it again until it latches.


You can store eyeglasses and other small items in this holder.

### Sunglasses Holder \*

Keep the holder closed while driving except when accessing stored items.

# **Other Interior Convenience Items**

## Sun Visor



### Models with panoramic roof

The sun visor can be extended horizontally.

### Accessory Power Sockets

The accessory power sockets can be used when the power mode is in ACCESSORY or ON.



### ■ Console panel

Open the cover to use it.



### **■** Luggage area

Open the console lid and the cover to use it.

#### ■ Accessory Power Sockets

Do not insert an automotive type cigarette lighter element. This can overheat the accessory power socket.

The accessory power socket is designed to supply power for 12-volt DC accessories that are rated 180 watts (15 amps) or less.

To prevent 12volt-battery drain, only use the accessory power socket with the power system on.

When the accessory power socket is not in use, close the cover to prevent any small foreign objects from getting into the accessory power socket.

### ■ Wireless Charger



- ① (Power) Button
- 2 Green Indicator
- Amber Indicator
- 4 Charging Area

- 1. To turn the system on and off, press and hold the (b) (power) button.
  - ► When the system is activated, the green indicator light comes on.
- **2.** Place the device you want to charge on the charging area.
  - ➤ The system will automatically start charging the device, and the amber indicator light will come on.
  - ▶ Make sure that the device is compatible with the system, and placed with the chargeable side in the centre of the charging area.
- **3.** When charging is completed, the green indicator light will come on.
  - ➤ Depending on the device, the amber indicator light will stay on.

Wireless Charger

## **ACAUTION**

Metal objects between the charge pad and the device to be charged will get hot and can burn you.

- Always remove foreign objects from the charge pad before charging the device.
- Be sure the surface is clear of dust and other debris before charging.
- Do not spill liquids (i. e. water, drinks, etc.) on the charger and the device.
- Do not use oil, grease, alcohol, benzine or thinner for cleaning the charge pad.
- Do not cover the system with towels, clothing, or other objects while charging etc.
- Avoid spraying aerosols which may come in contact with the charge pad surface.

This system consumes a lot of power. Do not use the system for a long time when the power system is off. This may weaken the 12-volt battery, making it difficult to turn the power system on.

When using the wireless charger, check the user's manual that came with the compatible device you want to charge.

### ■ When charging does not start

Perform one of the solutions in the following table.

Indicator		Cause	Solution
Green & Amber	Blinking simultaneously	There is an obstacle(s) between the charging area and the device.	Remove the obstacle(s).
		The device is not within the charging area.	Pick up and reset the device to the centre of the charging area where 👺 is located.
		The temperature of the wireless charger pad increases.	Temporarily suspend charging the device. Wait for the temperature to drop and attempt to charge the device again.
Amber	Blinking	The wireless charger is faulty.	Contact a dealer for repairs.

#### 

The wireless charger can support up to 15W, but the charging rate varies based on the device and other conditions.

#### NOTICE

Do not place any magnetic recording media or precision machines within the charge area while charging. The data on your cards such as credit cards can be lost because of the magnetic effect. Also, precision machines such as watches can be affected.

"Qi" and \$\Pi\$ marks are the registered trademarks owned by Wireless Power Consortium (WPC).

In the following cases, charging may stop or not start:

- The device is already fully charged.
- The temperature of the device is extremely high while charging.
- You are at a place that emits strong electromagnetic waves or noises, such as TV station, electric power plant, or petrol station.
- The device has a cover, case, or accessories which are not compatible with wireless charging.

A device may not charge if the size or shape of its chargeable side is not appropriate for use with the charging area.

Not all devices are compatible with the system.

During the charging phase, it is normal for the charging area and device to heat up.

#### 

Charging may be briefly interrupted when:

- All the doors and the hatch are closed
- to avoid interference with the proper functioning of the keyless access system.
- The position of the device is altered.

Do not charge more than one device at a time on a charging area.

#### Burn risk:

Any metal objects placed between pad and device may become hot.

If the device becomes too hot and its battery protection function activates, it may charge extremely slowly or no longer charge. The temperature at which the battery protection function activates depends on the device.

## Heated Steering Wheel\*



The heated steering wheel can be used when the power mode is in ON.

Press the button on the lower side of the steering wheel.

When a comfortable temperature is reached, press the button again to turn it off.

The heated steering wheel is turned off every time you turn the power system on, even if you turned it on the last time you drove the vehicle.


#### ➤ Heated Steering Wheel\*

Do not use the heated steering wheel continuously when the power system is off. Under such conditions, the 12-volt battery may be weakened, making the power system difficult to turn on.

#### ■ Front Seat Heaters



The seat heaters can be used when the power mode is in ON.



**1** AUTO button

Press the seat heater button:

Once - The HI setting (three indicators on)
Twice - The MID setting (two indicators on)
Three times - The LO setting (one indicator on)
Four times - The OFF setting (no indicators on)

When the power mode is turned on after it is turned off, the previous setting is maintained.

#### Press the **AUTO** button:

Both the air conditioner and seat temperature will automatically change to the setting most suitable to the ambient environment.

► When any seat heater button is pressed, settings will switch to manual mode.

∑Front Seat Heaters

## **AWARNING**

Heat induced burns are possible when using seat heaters.

Persons with a diminished ability to sense temperature (e.g., persons with diabetes, lowerlimb nerve damage, or paralysis) or with sensitive skin should not use seat heaters.

Do not use the seat heaters even in LO when the power system is off. Under such conditions, the 12-volt battery may be weakened, making the power system difficult to start.

After a certain period of time, the strength setting for the front seat heaters will automatically be reduced by one level at a time until the front seat heaters shuts off. The elapsed time varies according to the interior environment.

As time passes, the set temperature will fall, and eventually the seat heater will shut off.

To prevent automatic activation, you can turn off automatic climate control for the front seat.

Customized Features P. 351


# **Climate Control System**

# **Using Automatic Climate Control**

The automatic climate control system maintains the interior temperature you select. The system also selects the proper mix of heated or cooled air that raises or lowers the interior temperature to your preference as guickly as possible.

Use the system when the power system is on.

- **1.** Press the **AUTO** button.
- **2.** Adjust the interior temperature using the driver's side or passenger's side temperature control dial.
- **3.** Press the SON/OFF button to cancel.

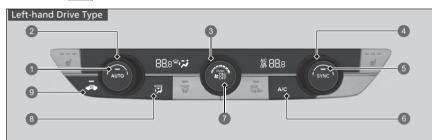

- **1 AUTO** Button
- 2 Driver's Side Temperature Control Dial
- 3 Fan Control Dial
- Passenger's Side Temperature Control Dial
- **6** SYNC Button
- 6 A/C (Air Conditioning) Button

- ON/OFF Button
- **8** MODE Control Button
  - 🔀 Dashboard vents
  - Dashboard and floor vents
  - J Floor vents
  - Floor and windscreen demister vents
- Recirculation Button

#### 

If any buttons are pressed while using the climate control system in auto, the function of the button that was pressed will take priority.

The auto button indicator will go off, but functions unrelated to the button that was pressed will be controlled automatically.

To prevent cold air from blowing in from outside, the fan may not start immediately when the **AUTO** button is pressed.

If the interior is very warm, you can cool it down more rapidly by partially opening the windows, turning the system on auto, and setting the temperature to low. Change the fresh air mode to recirculation mode until the temperature cools down.


When you set the temperature to the lower or upper limit,  ${\bf Lo}$  or  ${\bf Hi}$  is displayed.

Pressing the STE button switches the climate control system between on and off. When turned on, the system returns to your last selection.

While ECON mode is active, the climate control system may have reduced cooling performance.

For directions on the proper handling of the front seat heaters refer to the following page.

Front Seat Heaters P. 279

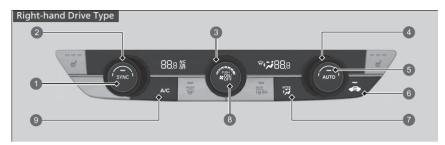

- **1** SYNC Button
- 2 Passenger's Side Temperature Control Dial
- Fan Control Dial
- 4 Driver's Side Temperature Control Dial
- **6** AUTO Button
- **6** Recirculation Button

- MODE Control Button
  - 📆 Dashboard vents
  - Dashboard and floor vents
  - 🚜 Floor vents
  - Floor and windscreen demister vents
- ON/OFF Button
- **9 A/C** (Air Conditioning) Button


### ■ Switching between the recirculation and fresh air modes


Press the (recirculation) button and switch the mode depending on environmental conditions.

Recirculation mode (indicator on): Recirculates air from the vehicle's interior through the system.

Fresh air mode (indicator off): Maintains outside ventilation. Keep the system in fresh air mode in normal situations.

## Defrosting the Windscreen and Windows





Pressing the (windscreen demister) button turns the air conditioning system on and automatically switches the system to fresh air mode.

Press the button again to turn off, the system returns to the previous settings.


Defrosting the Windscreen and Windows


For your safety, make sure you have a clear view through all the windows before driving.

Do not set the temperature near the upper or lower limit.

When cold air hits the windscreen, the outside of the windscreen may fog up.

### **■** To rapidly defrost the windows






### 

**2.** Press the button.

After defrosting the windows, switch over to fresh air mode. If you keep the system in recirculation mode, the windows may fog up from humidity. This impedes visibility.

### ■ Synchronization Mode

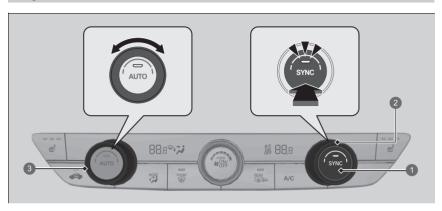

- **11 SYNC** Button
- Passenger's Side Temperature Control Dial
- 3 Driver's Side Temperature Control Dial

You can set the temperature synchronously for the driver's side and the passenger's side in synchronization mode.

- 1. Press the SYNC button.
  - ▶ The system switches to synchronization mode.
- **2.** Adjust the temperature using the driver's side temperature control dial.


Press the **SYNC** button or change the passenger's side temperature setting to return to dual mode.

#### Synchronization Mode

When you press the  $\begin{tabular}{l} \hline \ref{main} \\ \hline \end{tabular}$  button, the system changes to synchronization mode.

When the system is in dual mode, the driver's side temperature and the passenger's side temperature can be set separately.

# **Automatic Climate Control Sensors**



The automatic climate control system is equipped with sensors. Do not cover or spill any liquid on them.

Sensor



Sensor



Audio System	288
Display Audio	290
Audio Error Messages	387
General Information on the Audio	
System	389
Refuel Recommend*	300


\* Not available on all models 287

# **Audio System**

# **About Your Audio System**

The audio system features FM/AM radio and Digital Audio Broadcasting (DAB) service. It can also play USB flash drives, iPod, iPhone, *Bluetooth*® devices, and smartphone.

You can operate the audio system from the buttons and knobs on the panel, the remote controls on the steering wheel or the icons on the touchscreen interface.

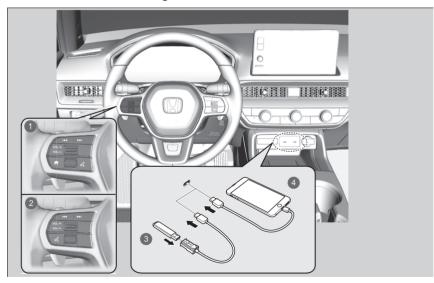

- Remote Controls (Models with A-type meter)
- 3 USB Flash Drive
- Remote Controls (Models with B-type meter)
- 4 Device

# **Audio System Theft Protection**

The audio system is disabled when it is disconnected from the power source, such as when the 12-volt battery is disconnected or goes dead. In certain conditions, the system may display a code entry screen. If this occurs, reactivate the audio system.

### ■ Reactivating the audio system

- 1. Set the power mode to ON.
- **2.** Turn on the audio system.
- **3.** Press and hold the **VOL**/ **AUDIO** (Volume/Power) knob for more than two seconds.
  - ► The audio system is reactivated when the audio control unit establishes a connection with the vehicle control unit. If the control unit fails to recognise the audio unit, you must go to a dealer and have the audio unit checked.

# **Display Audio**

# **Start Up**

The Display Audio starts automatically when you set the power mode to ACCESSORY or ON. At start-up, the following screen about the data upload will be displayed.





#### Select Start.

- ▶ If you do not select **Start**, the system will automatically be switched the home screen after a certain period of time.
- ▶ If there is no registered device, select Start and the Bluetooth® pairing screen will be displayed.
- If you want to change the settings for data upload, select **Settings**, then select the ON/OFF settings on the **Location** and vehicle data sharing screen.
- To pair a mobile phone (when there is no phone paired to the system)
- **1.** Make sure your phone is in search or discoverable mode.
- **2.** Select **Honda HFT** from your phone.
  - ▶ If you want to pair a phone from this Display Audio, select Search for Devices, and then select your phone when it appears on the list.
  - ► If you check the box with Do not show this again, this screen will not be displayed.

#### Start Up

#### **Except Turkish models**

Location and vehicle data sharing

**ON**: Data communication available.

**OFF**: Data communication unavailable.

# **Basic Operation**

# Audio System Function

To use the audio system function, the power mode must be in ACCESSORY or ON.



- All Apps
- Status Icons
- 3 App Shortcut Icons
- Arrow
- **5** \* Display Mode Icon

- **6** Mode Change Switch Icons
- **8 VOL/ D AUDIO** (Volume/Power) Knob
- (Back) Button
- (Home) Button

#### 

This screen is shown for the left-hand drive models. For the right-hand drive models, these are located at the symmetrically opposite to the left-hand drive model.

#### **Key Off Operation**

After you set the power mode to VEHICLE OFF (LOCK), you can use the audio system for up to 30 minutes per driving cycle. However, whether you can continue using the audio system depends on the battery condition. Repeatedly using this feature may drain the battery.

All Apps: Displays all apps.

Status Icons: Show the indicators of the information for the vehicle, connected

phones, etc. in the header area.

**App Shortcut Icons**: Display the app shortcut icons.

**Arrow**: Displays the next pages on the audio/information screen.

**☀ ) Display Mode Icon**: Changes the audio/information screen brightness. Select

\* ) once and select or to make an adjustment.

Mode Change Switch Icons: Display icons to change the mode directly.


[◄◄] / ▶►] (Seek/Skip) Buttons: Press to change station, song or file.

**VOL/ (b) AUDIO (Volume/Power) Knob**: Turns the audio system on and off and turns to adjust the volume.

(Back) Button: Presses to go to back to the previous screen.

(Home) Button: Presses to go to the home screen.

#### **USB Ports**



- Playing audio files and connecting compatible phones
- Only for charging devices



### ■ USB charging/connector port ( )



The USB port (3.0A) is for charging devices, playing audio files, and connecting compatible phones with Apple CarPlay or Android Auto

To prevent any potential issues, be sure to use an Apple MFi Certified Lightning Connector for Apple CarPlay. For Android Auto, the USB cables should be certified by USB-IF to be compliant with USB 2 0 Standard

## ■ USB charging port ( )



The USB ports (3.0A) are only for charging devices

You cannot play music even if you have connected music players to them.

#### ■USB Ports


- Do not leave the iPod or USB flash drive in the vehicle. Direct sunlight and high temperatures may damage it.
- We recommend that you use a USB cable if you are attaching a USB flash drive to the USB port.
- Do not connect the iPod or USB flash drive using a hub
- Do not use a device such as a card reader or hard disk drive, as the device or your files may be damaged.
- We recommend backing up your data before using the device in your vehicle.
- Displayed messages may vary depending on the device model and software version.

### USB charge

The USB port can supply up to 3.0A of power. It does not output 3.0A unless requested by the device. For amperage details, read the operating manual of the device that needs to be charged.

Under certain conditions, a device connected to the port may generate noise in the radio you are listening to.

### Audio Remote Controls



Allow you to operate the audio system while driving. The information is shown on the driver information interface.

- 1 (Home) Button
- 2 (Seek/Skip)
  Buttons
- **3 VOL +**/**VOL −** (Volume) Switch
- 4 Left Selector Wheel


#### 

Some modes appear only when an appropriate device or medium is used.

Depending on the *Bluetooth*® device you connect, some functions may not be available.

#### Models with A-type meter

Press the (home) button to go back to the home screen of the driver information interface.



- Idd / Idd (Seek/Skip)
  Buttons
- **2 VOL** +/VOL (Volume) Switch
- 3 Left Selector Wheel

**Press Up:**To increase the volume.

**Press Down:**To decrease the volume.

### **Left Selector Wheel**

• When selecting the audio mode

### Models with A-type meter

Press the f (home) button, then roll up or down to select (audio) on the driver information interface, and then press the left selector wheel.

### Models with B-type meter

Roll up or down to select **Audio** on the driver information interface, and then press the left selector wheel.

#### Roll up or down:

To cycle through the audio modes, roll up or down and then press the left selector wheel:

#### Models with A-type meter

FM/DAB/AM/USB/Bluetooth/Apps (Apple CarPlay/Android Auto)

#### Models with B-type meter

Back/Phone/FM/DAB/AM/USB/Bluetooth/Apps (Apple CarPlay/

### Android Auto)/Customize display

▶ Depending on a connected device, the displayed modes may be changed.

## |◀◀/▶▶| (Seek/Skip) Buttons

- When listening to the radio
  - **Press** To select the next preset radio station.
  - **Press** To select the previous preset radio station.
  - **Press and hold** To select the next strong station.
  - **Press and hold** To select the previous strong station.
- When listening to a wired connection, USB flash drive, Bluetooth® Audio, or Smartphone Connection
  - ▶ Depending on a connected device, operations may be changed.
  - **Press** To skip to the next song.
  - **Press** To go back to the previous song.
- When listening to a USB flash drive
  - **Press and hold** To skip to the next folder.
  - **Press and hold** To go back to the previous folder.
- When listening to a wired connection
  - **Press and hold** To fast forward a song.
  - **Press and hold [44**: To rewind a song.

# **Voice Control Operation**

Your vehicle has a voice control system that allows hands-free operation.

The voice control system uses the  $\undeta \undeta$  (talk) button on the steering wheel and a microphone near the map lights on the ceiling.

# Voice Recognition

To achieve optimum voice recognition when using the voice control system:

• Make sure the correct screen is displayed for the voice command that you are using.

The system recognises only certain commands.

Available voice commands.

Voice Portal Screen P 299


- Close the windows and panoramic roof\*.
- Adjust the dashboard and side vents so air does not blow onto the microphone on the ceiling.
- Speak clearly in a clear, natural speaking voice without pausing between words.
- Reduce any background noise if possible. The system may misinterpret your command if more than one person is speaking at the same time.

#### **≥**Voice Control Operation

When you press the button, a helpful prompt asks what you would like to do. Press and release the button again to bypass this prompt and give a command.

Languages that the voice control system recognises are English, German, French, Spanish, and Italian.

### ■ Voice Portal Screen



When the (ctalk) button is pressed, available voice commands appear on the screen.

For a complete list of commands, say "Help" after the beep.

Depending on the selected mode, the displayed commands are different on the voice portal screen. The commands recognised are the same regardless of which screen is selected.

Normal Mode: A list of example commands is displayed to quickly complete your desired function.

Assist Mode: A list of basic commands is displayed to guide you step by step through the voice menu.

You can change the mode on the **General Settings** screen.

**▶ Voice Control** P. 360

The system only recognises the commands on the following pages, at certain screens. Free form voice commands are not recognised.

### General Commands

When the voice portal screen is displayed, it will change to the top screen of each function by using the global commands.

- Music Search
- AM
- FM
- Navigation
- Phone

## Phone Commands

This can be only used when the phone is connected. When the system recognises the Phone command, the screen will change the dedicated screen for the voice recognition of the phone.

#### ■ Phone Commands

- Call <name>
- Call <number>

The system recognises an only contact name in the stored phonebook of your phone. If full name is registered in first name field, the system will recognise the first name and last name as one contact name.

Phone commands are not available if using Apple CarPlay.

## Audio Commands

When the system recognises the Audio command, the screen will change the dedicated screen for the voice recognition of the audio.

#### **■ FM Commands**

• Tune to <FM frequency>

### **■** AM Commands

• Tune to <AM frequency>

### **■** iPod Commands

- List Album <name>
- List Artist <name>
- List Genre <name>
- List Playlist <name>
- Play <artist> <album>
- Play
- Play Album <name>
- Play Artist <name>
- Play Genre <name>
- Play Music <text:media\_combo>
- Play Playlist <name>
- Play Song <name>

#### **■ USB Commands**

- List Album <name>
- List Artist <name>
- List Playlist <name>
- Play <artist> <album>
- Play
- Play Album <name>
- Play Artist <name>
- Play Music <text:media\_combo>
- Play Playlist <name>
- Play Song <name>

# ■ Navigation Commands\*

The screen changes to the navigation screen.

Refer to the Navigation System Manual

### Standard Commands

- Voice Help
- Cancel
- Back

Voice Help are readout voice guidance for Help on current screen.

### List Commands

- Previous
- Next
- Yes
- No

# **Audio/Information Screen**

Displays the audio status and clock. From this screen, you can go to various setup options.



>> Audio/Information Screen


#### **Touchscreen Operation**

- Use simple gestures including touching, swiping, and scrolling - to operate certain audio functions.
- Some items may be greyed-out during driving to reduce the potential for distraction.
- You can select them when the vehicle is stopped or use voice commands.
- Wearing gloves may limit or prevent touchscreen response.

You can change the touchscreen sensitivity setting.

Customized Features P. 351

## ■ App Shortcut Function

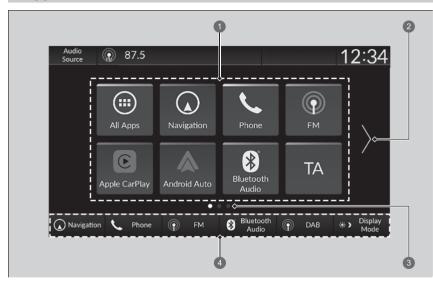

- 1 App Shortcut Icons
- 2 Arrow
- 3 Page Indicator
- **4** Mode Change Switches

### ■ To move to the next screen

Selecting < or >, or swiping the screen left or right changes to the next screen.

#### ■ App Shortcut Function

You can add up to six pages to the home screen.

Press the button to go directly back to the first page of the home screen from any page.

### ■ To add/remove app icons on the home screen

App icons can be added or deleted on the home screen.



- **1.** Press the toutton.
- 2. Select All Apps.
- **3.** Select an app to check or uncheck them.

### ■ To move/remove icons on the home screen

You can change location on the home screen.



- 1. Press the toutton.
- 2. Select and hold an icon.
  - ► The screen switches to the customization screen.
- **3.** Drag and drop the icon to where you want it to be.
  - ▶ Drag and drop the icon to **Hide** to remove from the home screen.
- 4. Select Done.
  - ► The screen will return to the home screen.

∑To move/remove icons on the home screen

You cannot delete the **All Apps** icon.

Apps will not be deleted by deleting the icon on the home screen.

Select **Tips** to show tips. To hide them, select it again.

#### ■ To shortcut icons on the home screen

You can store up to six icons on the bottom of the home screen.



Mode Change Switches

- **1.** Press the toutton.
- 2. Select and hold an icon.
  - ► The screen switches to the customization screen.
- **3.** Drag and drop the icon you want to store to the bottom of the home screen.
  - ► The icon is stored on the mode change switch area.
- 4. Select Done.
  - ► The screen will return to the home screen.

#### ∑To shortcut icons on the home screen

Select **Tips** to show tips. To hide them, select it again.

### ■ Status Bar

Shows the indicators of the information for the vehicle, connected phones, etc. in the header area. You can confirm the detail information shown in the status area by selecting the status bar.



Status Bar

# ■ Selecting an Audio Source

You can select an audio source on the audio/information screen.



- **1.** Select **Audio Source** of the audio/ information screen.
- **2.** Select an icon on the source list to switch the audio source.

# **Clock Setup**

# Adjusting the Clock

You can adjust the time manually and set the wallpaper of the clock in the audio/information screen.

- **1.** Press the button.
- 2. Select General Settings.
- 3. Select System.
- 4. Select Date & Time.
- 5. Select Set Date & Time.
- **6.** Select **Automatic Date & Time**, then select **OFF**.

To adjust date:

- 7. Select Set Date.
- **8.** Select **▲**/▼.
- 9. Select Save to set the date.

To adjust time:

- 7. Select Set Time.
- **8.** Select **▲**/▼.
- **9.** Select **Save** to set the time.

### ■ Adjusting the Clock

The clock is automatically updated through the audio system.

You can also adjust the clock by touching the clock displayed on the header area of the audio/information screen, **Clock** displayed on the home screen, or **All Apps**.

- 1. Touch the clock on the screen.

  The clock screen of the face-type appears.
- 2. Select Settings.
- 3. Select Date & Time.
- 4. Select Set Date & Time.
- 5. Select Automatic Date & Time, then select OFF.
- 6. Select Set Date or Set Time.
- 7. Adjusting the dates, hours and minutes by selecting ▲/▼.
- 8. Select **Save** to set the time.

You can customise the clock display.

**System** P. 352

# Clock Wallpaper Setup

### **■** Import clock wallpaper

1. Connect the USB flash drive to the USB port.

USB Ports P. 293

- 2. Press the toutton.
- 3. Select Clock.
  - ▶ If **Clock** is not displayed on the home screen, select **All Apps**.
- 4. Select Settings.
- 5. Select Clock Faces.
- **6.** Select **Add More**.
  - The image of the pictures stored in the USB flash drive are displayed on the list.
- **7.** Select a desired picture to import.
  - ▶ Multiple pictures can be selected at the same time.
- 8. Select OK.
  - ► The selected pictures are displayed.
- 9. Select Transfer.
  - ► It will return to the clock wallpaper setting screen.

### ■ Select clock wallpaper

- 1. Press the button.
- 2. Select Clock.
  - ▶ If **Clock** is not displayed on the home screen, select **All Apps**.
- 3. Select Settings.
- 4. Select Clock Faces.
- **5.** Select a desired picture to set.
  - ► The preview is displayed on the screen.
- 6. Select Save.
  - The clock screen which the wallpaper has been set is displayed.

#### 

- When importing wallpaper files, the image must be in the USB flash drive's root directory.
   Images in a folder cannot be imported.
- The file name must be less than 64 bytes.
- The file format of the image that can be imported is BMP (bmp) or JPEG (jpg).
- The individual file size limit is less than 10 MB.
- If the USB flash drive does not have any pictures, the message appears.
- Up to 11 pictures can be imported.
- The maximum image size is 4,096 x 2,304 pixels. If the image size is less than 1,280 x 720 pixels, the image is displayed in the middle of the screen with the extra area appearing in black.

## ■ Delete clock wallpaper

- 1. Press the note button.
- 2. Select Clock.
  - ▶ If **Clock** is not displayed on the home screen, select **All Apps**.
- 3. Select Settings.
- 4. Select Clock Faces.
- 5. Select Delete Photos.
- **6.** Select a desired picture to delete.
  - ► Multiple pictures can be selected at the same time.
- 7. Select OK.
  - ► The selected pictures are displayed.
- 8. Select Delete.
  - ▶ It will return to the clock wallpaper setting screen.

# **Adjusting the Sound**

- 1. Select an audio source.
- 2. Select Sound.
- **3.** Select the setting you want.

Select an item from the following choices:

- Bass / Treble: Treble, Midrange, Bass
- Balance / Fader\*¹/Audio Zones & Balance / Fader\*²: Balance, Fader, Audio Zones\*
- Bose Centerpoint\*2: Turns the Bose Centerpoint on and off.
- **Speed Volume Compensation**\*1: Sets the amount of volume increase.
- **Bose Dynamic Speed Compensation**\*2: Sets the amount of volume increase.

#### ■ Adjusting the Sound

The **Speed Volume Compensation** (SVC) adjusts the volume level based on the vehicle speed. As you go faster, audio volume increases. As you slow down, audio volume decreases.

You can also adjust the sound the following procedure.

- 1. Press the ton.
- 2. Select General Settings.
- 3. Select Sound.

To reset each setting for Bass / Treble, Balance / Fader\*1, Audio Zones & Balance / Fader\*2, Bose Centerpoint\*2, Speed Volume Compensation\*1, and Bose Dynamic Speed Compensation\*2, select Default on each setting screen.

<sup>\*1:</sup> Models without panoramic roof

<sup>\*2:</sup> Models with panoramic roof

# **Display Setup**

You can change the brightness of the audio/information screen.

# **■** Changing the Screen Brightness

- **1.** Press the button.
- 2. Select General Settings.
- 3. Select Display.
- **4.** Select the setting you want.

### ○ Changing the Screen Brightness

You can change the **Contrast** and **Black Level** settings in the same manner.

To reset the settings, select **Default**.

# **System Updates**

The audio system's firmware can be updated with a Wi-Fi connection, or with a USB device

#### Models with TCU

The audio system's firmware can be also updated with the telematics control unit (TCU) through the subscription-based service.

# How to Update

When the audio system update is available, the notification is shown on the status area. Use the following procedure to update the system.

- **1.** Press the button.
- 2. Select System Updates.
  - ▶ If **System Updates** is not displayed on the home screen, select **All Apps**.
  - ▶ The system will check for updates.
  - ► If the update icon is appeared on the home screen, select the status icon. 

    ► Status Bar P. 305
- 3. Select Download.
  - ▶ A notification appears on the screen if need to user acceptance for download.
- 4. Select Install Now or Install While Vehicle Off.
  - A notification appears on the screen if the update is successful.

#### 

You can update the system via Wi-Fi, but cannot use the captive portal that require login or agreement the terms of use on the browser.


Your download will be cancelled if:

- Your Wi-Fi connection is severed.
- You turn off the power system when the 12-volt battery is low on power.

Your download will recommence the next time a Wi-Fi connection is established

For the 12-volt battery protection, **Install While Vehicle Off** cannot be selected when the battery is low on power. If you want to install the updated data, recharge the battery or select **Install Now**.

## System Updates Settings



The following settings can be set.

- Automatic Download
- Version Status
- Connection Setup
- Automatic Update
- Update History

### ■ Automatic download settings

Use the following procedure to change to the automatic download setting.

- 1. Press the button.
- 2. Select System Updates.
  - ▶ If **System Updates** is not displayed on the home screen, select **All Apps**.
- 3. Select Settings.
- 4. Select Automatic Download.
- **5.** Select the access point, then select **Enable**.
  - ▶ If you do not want to system update automatically, select **Disable**.

### ■ View a version and update status

Use the following procedure to confirm the version and update status.

- **1.** Press the toutton.
- 2. Select System Updates.
  - ▶ If **System Updates** is not displayed on the home screen, select **All Apps**.
- 3. Select Settings.
- 4. Select Version Status.

### ■ Connection setup

Use the following procedure to connect to the Internet via a Wi-Fi network.

- **1.** Press the toutton.
- 2. Select System Updates.
  - ▶ If **System Updates** is not displayed on the home screen, select **All Apps**.
- 3. Select Settings.
- 4. Select Connection Setup.
- **5.** Select **OK**.
- **6.** Select **Change Mode**.
- 7. Select Network.
  - ► If the vehicle's Wi-Fi is turned off, select **OFF**.

### ■ Automatic update settings

Use the following procedure to change to the automatic update setting.

- **1.** Press the toutton.
- 2. Select System Updates.
  - ▶ If **System Updates** is not displayed on the home screen, select **All Apps**.
- 3. Select Settings.
- 4. Select Automatic Update.
- 5. Select Accept.
  - If you do not want to system update automatically, select **Decline**.

## ■ View the update history

Use the following procedure to confirm the update history.

- **1.** Press the button.
- 2. Select System Updates.
  - ▶ If **System Updates** is not displayed on the home screen, select **All Apps**.
- 3. Select Settings.
- 4. Select Update History.

## ■ How to Update Wirelessly

## ■ Wireless connection mode setup

- 1. Press the button.
- 2. Select System Updates.
  - ▶ If **System Updates** is not displayed on the home screen, select **All Apps**.
- 3. Select Settings.
- 4. Select Connection Setup.
- 5. Select OK.
- 6. Select Change Mode.
- 7. Select **Network**.
  - It will return to the network list.
- 8. Select an access point from the network list.
  - ▶ If the audio system requires a password, enter a password.
- 9. Select Connect.

## ■ How to update

- 1. Press the toutton.
- 2. Select System Updates.
  - ▶ If **System Updates** is not displayed on the home screen, select **All Apps**.
- 3. Select via Wireless.
- 4. Select **Download**.
  - ▶ A notification appears on the screen if need to user acceptance for download.
- 5. Select Install Now or Install While Vehicle Off.
  - A notification appears on the screen if the update is successful.

## How to Update with a USB Device

### ■ Download the update files from the server

- 1. Press the button.
- 2. Select System Updates.
  - ▶ If **System Updates** is not displayed on the home screen, select **All Apps**.
- 3. Select Other Methods.
- 4. Select Via USB.
  - A notification appears on the screen.
- 5. Connect a USB device into the USB port.
  - ▶ The inventory data is copied into the USB device.

**■ USB Ports** P. 293

- **6.** Remove the USB device from the USB port.
- 7. Connect the USB device into your computer, and then download the update files.
  - ► Follow the link to download the required software update files. Refer to https://usb.honda.com for instructions.

### **■** Update the audio system

- **1.** Press the button.
- 2. Select System Updates.
- 3. Select Other Methods.
- 4. Select Via USB.
  - A notification appears on the screen.
- **5.** Connect the USB device with the update files into the USB port.
  - A notification appears on the screen.

USB Ports P. 293


- 6. Select Install Now.
  - A notification appears on the screen if the update is successful.

#### ■ How to Update with a USB Device

A FAT32-formatted USB device between 8GB and 32GB in size with at least 8GB of free space is recommended.

Be sure to delete any previous inventory or update files from the USB before starting the USB update process.

# **Playing FM/AM Radio**

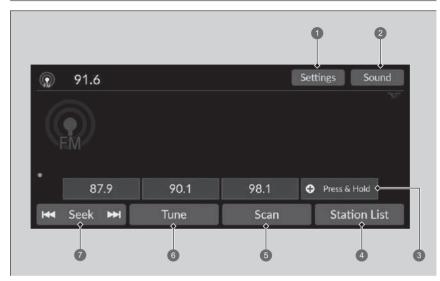

- Settings Icon
- Sound Icon
- Preset Icons
- 4 Station List Icon

- **6** Scan Icon
- **6** Tune Icon
- Seek Icon

# Preset Memory

Tunes the radio frequency for preset memory.

To store a station:

- **1.** Tune to the selected station.
- **2.** Select and hold the preset icon to store that station.
  - ► Selecting **Press & Hold** can be set a new preset station.

### ■ Station List

Lists the strongest stations on the selected band.

- **1.** Select **Station List** to display a list.
- 2. Select the station.

## ■ Manual update

Updates your available station list at any time.

- **1.** Select **Station List** to display a list.
- 2. Select Refresh.

### Scan

Samples each of the strongest stations on the selected band for 10 seconds. To begin scanning, select **Scan**, and to turn it off, select **Stop** or press the button.

### Seek

Selects or by to search the selected band up or down for a station with a strong signal.

#### 

The **ST** indicator appears on the display indicating stereo FM broadcasts.

Switching the Audio Mode
Roll up or down to select (audio) on the left selector wheel.

**■ Audio Remote Controls** P. 294

You can store 12 AM/FM stations into preset memory.

### Sound

Adjusts the sound settings.

Adjusting the Sound P. 309


# ■ Radio Frequency Manual Tune Screen

Selects to use the on-screen keyboard for entering the radio frequency directly.

- 1. Select Tune.
- **2.** Enter the desired radio frequency using the on-screen keyboard.
- **3.** Select **Enter** to tune into the frequency.



1 On-screen Keyboard





Select ◀ or ▶ to tune the radio frequency.

## Radio Data System (RDS)

Provides text data information related to your selected RDS-capable FM station.

#### ■ To find an RDS station from Station List

- **1.** Select **Station List** to display a list while listening to an FM station.
- 2. Select the station.

## ■ Manual update

Updates your available station list at any time.

- **1.** Select **Station List** to display a list while listening to an FM station.
- 2. Select Refresh.

### ■ Traffic announcement (TA)

The TA standby function allows the system to stand by for traffic announcements in any mode while the function is on. The last tuned station must be an RDS-capable traffic program station.

**To turn the function on:** Select **TA**. When a traffic announcement begins, the information screen appears on the audio/information screen. The system returns to your last selected mode after the traffic announcement is finished.

▶ If you want to go back to your last selected mode during the traffic announcement, select **Stop**.

To turn the function off: Select TA again.

#### 

When you select an RDS-capable FM station, the RDS automatically turns on, and the frequency display changes to the station name. However, when the signals of that station become weak, the display changes from the station name to the frequency.

#### ∑Traffic announcement (TA)

The **TA** indicator appears on the header area while the TA standby function is on.

If you select **Scan** while the TA standby function is on, the system searches TP station only.


Selecting **TA** while the traffic announcement is on does not cancel the TA standby function.

# Settings

Changes the RDS settings.

- 1. Select Settings.
- 2. Select an option.
- TA-Information: Turns on and off the traffic information. (ON/OFF\*1)
- **AF:** Turns on and off to automatically change the frequency of the same program you enter different regions. **(ON**\*1/**OFF)**
- **REG:** Turns on and off to keep the same stations within that region even if the signal gets weak. (**ON**\*1/**OFF**)
- NEWS: Turns on and off to automatically to tune to the news program. (ON/ OFF\*1)

# Playing DAB (Digital Audio Broadcasting)

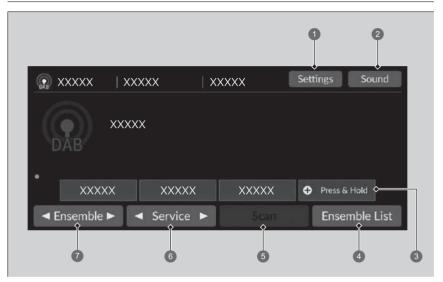

- Settings Icon
- Sound Icon
- Preset Icons
- 4 Ensemble List Icon

- **6** Scan Icon
- **6** Service Icons
- Ensemble Icons

## ■ Preset Memory

Tunes the preset frequency.

To store a service:

- 1. Tune to the selected service.
- 2. Select and hold the preset icon to store that station.
  - ► Selecting **Press & Hold** can be set a new preset station.

### Ensemble List

Lists the receivable ensembles on the selected service.

- 1. Select Ensemble List to display a list.
- 2. Select the ensemble.

## ■ Manual update

Updates your available ensemble list at any time.

- 1. Select Ensemble List to display a list.
- 2. Select Refresh.

### Ensemble

Tunes the ensemble.

- **1.** Select **◄** or **▶** the tune ensemble.
- 2. Select and hold or to search the selected service up to down for an ensemble until a receivable ensemble is found.

# Service

Tunes the service component.

To tune it, select **◄** or **▶**.

#### 

Switching the Audio Mode
Roll up or down to select (audio) on the left selector wheel.

**Audio Remote Controls** P. 294

You can store 12 DAB stations into preset memory.

### ■ Scan

Samples each of the receivable ensemble or service on the selected service for 10 seconds.

To begin scanning, select **Scan**, and to turn it off, select **Cancel** or press the button.

### Sound

Adjusts the sound settings.

**■ Adjusting the Sound** P. 309

# Settings


Changes the DAB settings.

- **1.** Select **Settings**.
- 2. Select the option you want to change.

# **Music Playback via Wired Connection**

Using your USB connector, connect the device to the USB port, then select the USB mode.

USB Ports P. 293

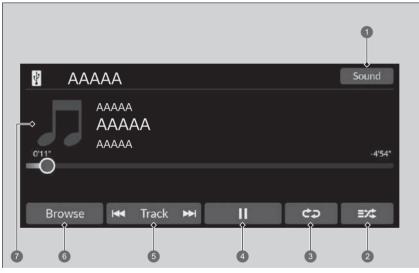

- Sound Icon
- Shuffle Icon
- Repeat Icon
- 4 Play/Pause Icon

- Track Icons
- **6** Browse Icon
- Cover Art

#### Music Playback via Wired Connection

Available operating functions vary on models or versions. Some functions may not be available on the vehicle's audio system.

If a smartphone is connected via Apple CarPlay or Android Auto, the USB source will be unavailable and audio files on the phone will be playable only within Apple CarPlay or Android Auto.

### ■ How to Select a Song from the Music Search List

You can select to display the music search list screen.

- 1. Select Browse.
- 2. Select a search category.
- **3.** Continue making selections until you find the song of your choice.

# ■ How to Select a Play Mode

You can select shuffle and repeat modes when playing a song.

### **■** Shuffle/Repeat

Repeatedly select the shuffle or repeat icon until you find a play mode option of your preference.

(shuffle off): Shuffle mode to off.

(shuffle all songs): Plays all available songs in a selected list in random order.

(repeat off): Repeat mode to off.

(repeat song): Repeats the current song.

(repeat all): Repeats all songs.

# ■ How to Change a Song

You can select or by to change songs. Select and hold to move rapidly within a song.

#### Sound


You can adjust the sound settings.

Adjusting the Sound P. 309

# Media Playback via USB Flash Drive

Your audio system reads and plays sound and video files on a USB flash drive. Connect your USB flash drive to the USB port, then select the USB mode.

**■ USB Ports** P. 293

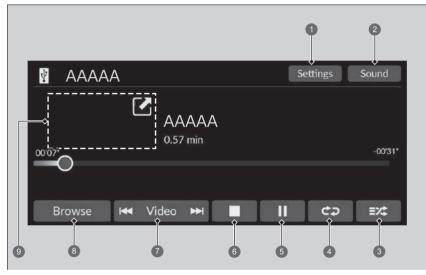

- Settings Icon\*3
- Sound Icon
- Random Icon
- 4 Repeat Icon
- **6** Play/Pause Icon

- 6 Stop Icon\*3
- Browse Icon
- Ocover Art\*2/Mini Player\*3

#### \*2: When playing a music file

#### Media Playback via USB Flash Drive

You can use the following formats to play sound or video files on a USB flash drive.

When playing a sound file: MP3, WMA, AAC\*1, FLAC. PCM/WAVE

When playing a video file: MP4, AVI, MKV, ASF/ WMV

Use the recommended USB flash drives.

**☑** General Information on the Audio System
P. 389

WMA and AAC files protected by digital rights management (DRM) cannot be played. The audio system displays **Unplayable File**, then skips to the next file.

\*1: Only AAC format files recorded with iTunes are playable on this unit.

<sup>\*3:</sup> When playing a video file

#### ■ How to Select a File from the Music Search List

You can select to display the music search list screen.

- 1. Select Browse.
- 2. Select Current Playlist, Music, or Video.
- **3.** Continue making selections until you find the file or video of your choice.

### How to Select a Play Mode

You can select random and repeat modes when playing a file.

#### ■ Random/Repeat

Repeatedly select the random or repeat icon until you find a play mode option of your preference.

(random off): Random mode to off.

(random all files): Plays all files in random order.

(random in folder): Plays all files in the current folder in random order.

(repeat off): Repeat mode to off.

(repeat file): Repeats the current playing file.

(repeat folder): Repeats all files in the current folder.

### ■ When playing a video file\*

(stop): Select to stop a file.

[4] / [4]: Select [5] to shrink a video screen. Select [6] to expand a video screen.

# ■ How to Change a File

Track\*1/Video\*2 Icons

You can select or by to change files. Select and hold to move rapidly within a file.

### Sound

You can adjust the sound settings.

**■ Adjusting the Sound** P. 309

<sup>\*1:</sup> When playing a music file \*2: When playing a video file

# Settings

Changes the USB settings when playing a video file.


- 1. Select Settings.
- 2. Select an option.
- Image Settings: Changes the brightness of the audio/information screen. To reset the settings, select Default. (Brightness/Contrast/Black Level/Colour/ Tint).
- **Aspect Ratio:** Selects the display mode with a different aspect ratio. (**Original/Normal\***1/**Full/Zoom**)
- Overlay Clock Location: Changes the clock display layout. (Upper right\*1/ Upper left/Lower right/Lower left/OFF)

# Playing Bluetooth® Audio

Your audio system allows you to listen to music from your *Bluetooth*-compatible phone.

This function is available when the phone is paired and connected to the vehicle's Hands-Free Telephone (HFT) system.

Phone Setup P. 376

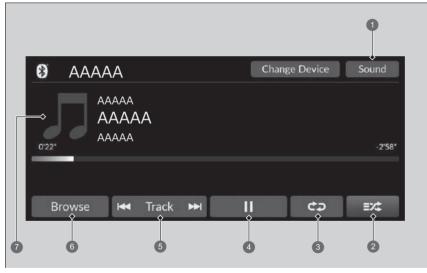

- Sound Icon
- Shuffle Icon
- Repeat Icon
- 4 Play/Pause Icon

- Track Icons
- 6 Browse Icon
- Cover Art

#### 

Not all *Bluetooth*-enabled phones with streaming audio capabilities are compatible with the system. To check if your phone is compatible, ask a dealer.

It may be illegal to perform some data device functions while driving.

Only one phone can be used with HFT at a time. When there are more than two paired phones in the vehicle, the latest paired phone the system finds is automatically connected.

If more than one phone is paired to the HFT system, there may be a delay before the system begins to play.

In some cases, the name of the artist, album, or track may not appear correctly.

Some functions may not be available on some devices.

If a phone is currently connected via Apple CarPlay or Android Auto, *Bluetooth*® Audio from that phone will be unavailable.

**▶ Phone Setup** P. 376

# ■ To Play *Bluetooth®* Audio Files

- 1. Make sure that your phone is paired and connected to the system. 

  ▶ Phone Setup P. 376
- 2. Select the Bluetooth® Audio mode.

If the phone is not recognised, another HFT-compatible phone, which is not compatible for *Bluetooth*® Audio, may already be connected.

# ■ How to Select a Play Mode

You can select shuffle and repeat modes when playing a song.

#### ■ Shuffle/Repeat

(shuffle off): Shuffle mode to off.

(shuffle all songs): Plays all available songs in a selected list in random order.

(repeat off): Repeat mode to off.

(repeat song): Repeats the current song.

(repeat all): Repeats all songs.

# Searching for Music

- 1. Select Browse.
- 2. Select a search category.
- 3. Select an item.
  - ► The selection begins playing.

#### ∑To Play Bluetooth® Audio Files

To play the audio files, you may need to operate your phone. If so, follow the phone manufacturer's operating instructions.

Switching to another mode pauses the music playing from your phone.

You can change the connected phone by selecting **Change Device**.

**▶ Phone Setup** P. 376

#### Searching for Music

Depending on the *Bluetooth*® device you connect, some or all of the lists may not be displayed.

# Sound

You can adjust the sound settings.

Adjusting the Sound P. 309

# Message

**Message** connects you to the latest information from Honda.

# ■ Message Menu



- 1. Press the button.
- 2. Select Message.
  - ► If **Message** is not displayed on the home screen, select **All Apps**.
  - ► Messages display helpful and important information from Honda.

#### Message

When the telematics control unit (TCU) is not available, use **Message** through Wi-Fi.

The **Message** connect app is compatible with most iPhone and Android phones.

Some mobile phone carriers charge for tethering and smartphone data use. Check your phone's data subscription package.

Continued 333

# ■ To Set Up to Connect Message Service

Use the following procedure to connect to **Message** service.

### **■** To enable the Message service



- **1.** Press the button.
- 2. Select General Settings
- 3. Select System.
- 4. Select Location and vehicle data sharing.
- **5.** Select **ON**.

# ■ Message from Honda Tips

You can check the messages that are received quickly in the shortcut operation.



**1.** A notification appears and notifies you of a new message on the header area.



**2.** A notification icon is continuously displayed in the header area until the new message is read.

**3.** Select the notification icon to see the messages.

Notification

Continued 335



**4.** Select a new message to open.

### **Wi-Fi Connection**

This vehicle is equipped with Wi-Fi connectivity. You can connect to an external Wi-Fi hotspot or communication device. In addition, the vehicle can be used by other communication devices as a Wi-Fi hotspot via the telematics control unit (TCU)\*.

- Connect the vehicle to a Wi-Fi hotspot
- Use Wi-Fi inside the vehicle

# Connect the Vehicle to a Wi-Fi Hotspot

- **1.** Press the toutton.
- 2. Select General Settings.
- 3. Select Connections.
- 4. Select Wi-Fi.
- 5. Select OK.
- 6. Select Change Mode.
- 7. Select Network.
  - ▶ If the data sharing settings is to **OFF**, the message will be displayed on the screen. You need to change to **ON**.

**System** P. 352

- ▶ If you want to turn off the Wi-Fi mode, select **OFF**.
- **8.** Select the access point you want to connect to the system.
  - To add a new network or select the saved networks, select **Options**.
  - ▶ If **Options** is selected, **Add Network** and **Saved Networks** can be registered.

#### Wi-Fi Connection ■ Wi-Fi Connection ■ The connection The connection ■ The connection The connecti

Wi-Fi and Wi-Fi Direct are registered trademarks of Wi-Fi Alliance®.



#### ○ Connect the Vehicle to a Wi-Fi Hotspot

You cannot go through the setting procedure while the vehicle is moving. Park in a safe place to set the audio system in Wi-Fi mode.

Some mobile phone carriers charge for tethering and smartphone data use. Check your phone's data subscription package.

Check your phone manual to find out if the phone has Wi-Fi connectivity.

You can confirm whether Wi-Fi connection is on or off with the icon on the system status area. Transmission speed and others will not be displayed on this screen.

Status Bar P. 305

In case of Wi-Fi connection with your phone, make sure your phone's Wi-Fi setting is in access point (tethering) mode.

# ■ Setting the Audio System as a Wi-Fi Hotspot\*

You can set the network as a Wi-Fi Hotspot of this audio system.

Use the following steps to setup.

- 1. Press the button.
- 2. Select Wi-Fi Hotspot.
  - ▶ If Wi-Fi Hotspot is not displayed on the home screen, select All Apps.
- **3.** Turn on the hotspot.
- 4. Select Settings.
  - ▶ **Network SSID** and **Password** are displayed, and you can change the settings.

The following settings are available for the setup.

- Network SSID: Set this network name.
- **Password:** Set password for require entering password when connecting Wi-Fi device to this network.
  - Passwords can be created with alphanumeric characters and some special characters.

#### Setting the Audio System as a Wi-Fi Hotspot<sup>⋆</sup>

Special characters that can be used in passwords.

!	)	i	]
II .	*	<	^
#	+	II	-
\$	,	>	`
%	-	?	{
&		@	
1	/	[	}
(		~	

# **Apple CarPlay**

If you connect an Apple CarPlay-compatible iPhone to the system via the USB port or wirelessly, and the **Apple CarPlay** icon is selected, you can use Apple CarPlay on the audio/information screen.

USB Ports P. 293



Apple CarPlay

#### ■ Apple CarPlay

We recommend that you update iOS to the latest version when using Apple CarPlay.

Park in a safe place before connecting your iPhone to Apple CarPlay and when launching any compatible apps.

While connected to Apple CarPlay, it is not possible to use the *Bluetooth*® Audio or Hands-Free Telephone (HFT) system. Calls or music playback are only made through Apple CarPlay. Other previously paired phones can use the *Bluetooth*® Audio.

When using Hands Free, you can only control it with Siri.

Operating Apple CarPlay with Siri P. 344

Apple CarPlay and Android Auto cannot run at the same time.

For details on countries and regions where Apple CarPlay is available, as well as information pertaining to function, refer to the Apple homepage.

Use of Apple CarPlay will result in the transmission of certain user and vehicle information (such as vehicle location, speed, and status) to your iPhone to enhance the Apple CarPlay experience. You will need to consent to the sharing of this information on the audio/information screen.

# ■ Apple CarPlay Menu

The following items are only representative examples. Applications displayed on the screen can be changed on your iPhone.

#### • Phone

Access the contact list, make phone calls, or listen to voice mail.

#### • Music

Play music stored on your iPhone.

#### Maps

Display Apple Maps and use the navigation function just as you would on your iPhone.

#### Messages

Check and reply to text messages, or have messages read to you.

#### Honda

Select the **Honda** icon to go back to the audio screen.

#### ■ Apple CarPlay

Apple CarPlay Operating Requirements & Limitations Apple CarPlay requires a compatible iPhone with an active mobile connection and data plan. Your carrier's rate plans will apply.

Changes in operating systems, hardware, software, and other technology integral to providing Apple CarPlay functionality, as well as new or revised governmental regulations, may result in a decrease or cessation of Apple CarPlay functionality and services. Honda cannot and does not provide any warranty or guarantee of future Apple CarPlay performance or functionality.

It is possible to use 3rd party apps if they are compatible with Apple CarPlay. Refer to the Apple homepage for information on compatible apps.

Only initialize Apple CarPlay when you are safely parked. When Apple CarPlay first detects your iPhone, you will need to set up your iPhone. Refer to the instruction manual that came with your iPhone.

You can also use the method below to set up Apple CarPlay: Select **General Settings** → **Select General Settings** → **Apple CarPlay** → Select device

in the second selection to be a second to

#### Use of user and vehicle information

The use and handling of user and vehicle information transmitted to/from your iPhone by Apple CarPlay is governed by the Apple iOS terms and conditions and Apple's Privacy Policy.

# ■ Connecting Apple CarPlay Using the USB Cable to the USB Port

**1.** Connect the iPhone to the USB port using the USB cable.

USB Ports P 293

- ► The confirmation screen will be displayed.
- 2. Select Yes.
  - ▶ If you do not want to connect Apple CarPlay, select **No**.

You may change the consent settings under the **Smartphone Connection** settings menu.

# ■ Connecting Apple CarPlay Wirelessly

### ■ Connect Apple CarPlay wirelessly on the home screen

- **1.** Press the button.
- 2. Select Apple CarPlay.
- 3. Select + Connect New Device.
- **4.** Pair the iPhone to the vehicle's Hands-Free Telephone (HFT) system.

**Phone Setup** P. 376

- 5. Select Yes.
  - ▶ If your iPhone asks for permission to accept an Apple CarPlay connection, accept to connect.

#### ○ Connecting Apple CarPlay Wirelessly

Wireless Apple CarPlay and Hotspot cannot be used at the same time. When using Apple CarPlay and Hotspot at the same time, connect to Apple CarPlay with a USB cable.

Continued 341

### ■ Connect Apple CarPlay wirelessly on the Apple CarPlay device list

- **1.** Press the button.
- 2. Select General Settings.
- 3. Select Smartphone Connection.
- 4. Select Apple CarPlay.
- 5. Select + Connect New Device.
- **6.** Pair the iPhone to the vehicle's Hands-Free Telephone (HFT) system.
  - **Phone Setup** P. 376 **Phone Setup** P. 376
- 7. Select Yes.
  - ▶ If your iPhone asks for permission to accept an Apple CarPlay connection, accept to connect.

### ■ Connect Apple CarPlay wirelessly on the *Bluetooth®* device list

- **1.** Press the button.
- 2. Select General Settings.
- 3. Select Connections.
- 4. Select Bluetooth.
- 5. Select + Connect New Device.
- **6.** Pair the iPhone to the vehicle's Hands-Free Telephone (HFT) system.
  - Phone Setup P. 376
- 7. Select Yes.
  - ▶ If your iPhone asks for permission to accept an Apple CarPlay connection, accept to connect.

### ■ Connect Apple CarPlay wirelessly with the steering wheel

- 1. Press and hold the 🖟 (talk) button on the steering wheel.
- **2.** Pair the iPhone to the vehicle's Hands-Free Telephone (HFT) system.
  - Phone Setup P. 376
- 3. Select Yes.
  - ▶ If your iPhone asks for permission to accept an Apple CarPlay connection, accept to connect.

# ■ Connect Apple CarPlay wirelessly at start-up (when there is no phone paired to the system)

- **1.** Set the power mode to ACCESSORY or ON.
- 2. Select OK.
  - ▶ If there is no registered device, the *Bluetooth*® pairing screen will be displayed.
  - ▶ If you check the box with **Do not show this again**, this screen will not be displayed.
- **3.** Pair the iPhone to the vehicle's Hands-Free Telephone (HFT) system.
  - Phone Setup P. 376
- 4. Select Yes.
  - ▶ If your iPhone asks for permission to accept an Apple CarPlay connection, accept to connect.

# **■** Operating Apple CarPlay with Siri

Press and hold the 🖟 (talk) button to activate Siri.

Press the 🖟 (talk) button again to deactivate Siri.

Press and release the 🖟 (talk) button to activate standard voice recognition system.

#### ■Operating Apple CarPlay with Siri

Below are examples of questions and commands for Siri:

- What movies are playing today?
- Call dad at work.
- What song is this?
- How's the weather tomorrow?
- Read my latest email.

For more information, please visit www.apple.com/ios/siri.

### Android Auto™

When you connect an Android™ phone to the audio system via the USB port, and the **Android Auto** icon is selected, you can use Android Auto on the audio/information screen.

We recommend that you complete the tutorial while safely parked before using Android Auto.

USB Ports P 293



Android Auto

#### Android Auto™

We recommend that you update Android OS to the latest version when using Android Auto.

\*Bluetooth\* A2DP cannot be used while your phone is connected to Android Auto.

To use Android Auto on a smartphone with Android 9.0 (Pie) or earlier, you need to download the Android Auto app from Google Play to your smartphone.

Park in a safe place before connecting your Android phone to Android Auto and when launching any compatible apps.

When your Android phone is connected to Android Auto, it is not possible to use the *Bluetooth*® Audio. However, other previously paired phones can stream audio via *Bluetooth*® while Android Auto is connected.

Phone Setup P. 376

Android and Android Auto are trademarks of Google IIC

Android Auto and Apple CarPlay cannot run at the same time.

To use each of Android Auto's features: say a wakeup word while the Android Auto screen is displayed, or press and hold the (talk) button to activate Google Assistant.

**D** Operating Android Auto with Voice Recognition P. 347

#### Android Auto Menu

The following items are only representative examples. Applications displayed on the screen can be changed on your smartphone.

#### Maps

Display Google Maps on your car display and use the navigation function just as you would with your Android phone. When the vehicle is in motion, it is not possible to make keyboard entries. Stop the vehicle in a safe location to undertake a search or provide other inputs.

#### • Phone

Make and receive phone calls as well as listen to voicemail.

#### Honda

Select the **Honda** icon to go back to the audio screen.

#### 

For details on countries and regions where Android Auto is available, as well as information pertaining to function, refer to the Android Auto homepage.

Screens may differ depending on the version of the Android Auto app you are using.

# Android Auto Operating Requirements & Limitations

Android Auto requires a compatible Android phone with an active mobile connection and data plan. Your carrier's rate plans will apply.

Changes in operating systems, hardware, software, and other technology integral to providing Android Auto functionality, as well as new or revised governmental regulations, may result in a decrease or cessation of Android Auto functionality and services. Honda cannot and does not provide any warranty or guarantee of future Android Auto performance or functionality.

It is possible to use 3rd party apps if they are compatible with Android Auto. Refer to the Android Auto homepage for information on compatible apps.

# ■ Enabling Android Auto

To enable Android Auto after connecting an Android phone to the system, select **Yes** on the screen.

You may change the consent settings under the **Smartphone Connection** settings menu.

# Operating Android Auto with Voice Recognition

Press and hold the  $\underightarrow$  (talk) button to operate Android Auto with your voice. Press and release the  $\underightarrow$  (talk) button to activate standard voice recognition system.

#### ■ Enabling Android Auto

Only initialise Android Auto when you are safely parked. When Android Auto first detects your phone, you will need to set up your phone so that auto pairing is possible. Refer to the instruction manual that came with your phone.

You can use the method below to change Android Auto settings after you have completed the initial setup:

Select **General Settings** →

Smartphone Connection → Android Auto →

Select device

#### Use of user and vehicle information

The use and handling of user and vehicle information transmitted to/from your phone by Android Auto is governed by Google's Privacy Policy.

▶ Operating Android Auto with Voice Recognition


Below are examples of commands you can give with voice recognition:

- Reply to text.
- Call my wife.
- Navigate to Honda.
- Play my music.
- Send a text message to my wife.
- Call flower shop.

For more information, please refer to the Android Auto homepage.

# **Power Flow**

The power flow screen shows the vehicle's power flow, average fuel economy, and range.

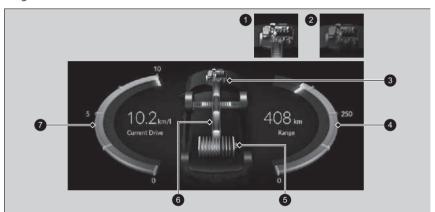

- 1 Engine ON
- 2 Engine OFF
- Engine
- 4 Driving Range
- **5** High Voltage Battery Level Gauge
- 6 Power Flow
- Average Fuel Economy (Current Drive)

Shows the power flow, indicating what is supplying power to the vehicle and/or charging the battery.

▶ The indicator for the power transmission appears in blue, and for the battery charging operation, in green.

Display	Colour of indicators	Vehicle's Condition
144664111	Blue	Power is being supplied by the High Voltage battery and the engine-driven generator.
1111001111	Blue	Power is being supplied by the High Voltage battery.
	Blue and Green	Power is being supplied directly by the engine and the High Voltage battery is being charged by the engine-driven generator.

Continued

Display	Colour of indicators	Vehicle's Condition
	Green	The High Voltage battery is being charged by the engine-driven generator.
#	Blue	Power is being supplied by the engine-driven generator.
	Green	The High Voltage battery is being charged through regenerative braking.


351

# **Customized Features**

Use the audio/information screen to customize certain features.

# How to Customize the General Settings

With the power mode in ON, select **General Settings**, then select a setting item.

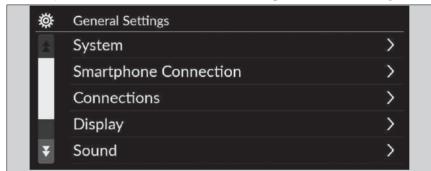

- **System** P. 352
- Smartphone Connection **≥** P. 355
- Connections P. 356
- **Display P**. 357
- **Sound** ▶ P. 359
- **Camera** P. 360
- Voice Control ₽ P. 360

#### ○ Customized Features

When you customize settings, make sure that the vehicle is at a complete stop and shift to  $\boxed{P}$ .

Continued

# **■** System

Custon	Customizable Features		Description	Selectable Settings
Date & Time	Set Date & Set Time	Automatic Date & Time	Selects <b>ON</b> to have the GPS automatically adjust the clock. Select <b>OFF</b> to cancel this function.	ON*1/OFF
		Set Date	Adjusts date.  Adjusting the Clock P. 306	Day/Month/Year
		Set Time	Adjusts time.  Adjusting the Clock P. 306	Hour/Minute AM/PM
	Time me Zone -	Automatic Time Zone	Sets the audio system to automatically adjust the clock when driving through different time zones.	Models with navigation system  ON*1/OFF  Models without navigation system  ON/OFF*1
		(Select time zone)	Changes the time zone manually.	-
	Auto Day Time	ylight Saving	Sets the clock to update based on daylight savings time.	ON*1/OFF
	Date Format		Select a date format.	MM/DD/YYYY/ DD/MM/YYYY <sup>*1</sup> / YYYY/MM/DD
	Time For	mat	Select a time format.	12-H* <sup>1</sup> /24-H

<sup>\*1:</sup>Default Setting

Customiza	able Features	Description	Selectable Settings	
Language		Changes the driver information interface and audio/ information screen language separately.	English*1 or Turkish*1 Some languages may not be available in all regions. Check the audio/ information screen for available options.	
Touch Panel Sensitivity		Sets the sensitivity of the touch panel screen.	High/Normal*1	
	System Sounds	Sets the system sound volume level.	<del>_</del>	
System Volumes	Text-to-Speech	Sets the text-to-speech volume level.	_	
	Navigation Guidance	Sets the navigation guidance volume level.	_	
	Phone Calls	Sets the phone call volume level.	_	
	Default	Resets all <b>System Volumes</b> settings to default values.		
Location and vehicle data sharing*	Location and vehicle data sharing	Turns the data sharing setting on and off. <b>Start Up</b> P. 290	ON/OFF*1	
Refuel Recommend*		Turns the refuel recommend function on and off.  ▶ Refuel Recommend* P. 399	ON*1/OFF	

<sup>\*1:</sup>Default Setting

\* Not available on all models

Customizable Features		Description	Selectable Settings	
	Status			
About	Legal Information			
	Model Number	Displayed the Amelysish settings it ages	_	
	Android Version	— Displays the Android setting items.		
	Kernel Version			
	Build Number			
Factory Data Reset		Resets all the settings to their factory default.  ▶ Defaulting All the Settings P. 368	Continue/Cancel	
Detail Information	App Manager	Displays the Android system memory and apps information.	_	

# **■** Smartphone Connection

Customizable Features		Description	Selectable Settings
Apple Carplay	+ Connect New Device	Pairs a new phone to Apple CarPlay.  ▶ Phone Setup P. 376	_
Apple CarPlay	(Saved Devices)	Connects, disconnects, or deletes a paired phone.  ▶ Phone Setup P. 376	_
Android Auto	+ Connect New Device	Pairs a new phone to Android Auto.  ▶ Phone Setup P. 376	_
	(Saved Devices)	Connects, disconnects, or deletes a paired phone.  ▶ Phone Setup P. 376	_

### **■** Connections

Customizable Features		Features	Description	Selectable Settings
	Change Mode		Changes the Wi-Fi mode.	Network*1/ Smartphone*2/OFF
Wi-Fi	(Available I Devices)	Networks/Connected	Displays the available network(s) or current connected device(s).	_
	Ontions	Add Network	Adds a new network to connect Wi-Fi.	_
	Options	Saved Networks	Saves the connected network.	_
	Options	Bluetooth	Turns the Bluetooth® on and off.	ON*1/OFF
		Priority Device	Sets a device as the priority device.	_
Bluetooth	+ Connect New Device		Pairs a new phone to HFT.  ▶ Phone Setup P. 376	-
(Saved		rices)	Connects, disconnects, or deletes a paired phone.  ▶ Phone Setup P. 376	-

<sup>\*1:</sup>Default Setting
\*2:Appears only when Apple CarPlay is connected.

# **■** Display

Models with A-type meter

Customiz	able Features	Description	Selectable Settings
	Brightness	Changes the brightness of the audio/information screen.	_
Day Mode	Contrast	Changes the contrast of the audio/information screen.	_
	Black Level	Changes the black level of the audio/information screen.	_
	Default	Resets all customized settings for the brightness, contrast, and black level.	_
Night Mode E	Brightness	Changes the brightness of the audio/information screen.	<del>_</del>
	Contrast	Changes the contrast of the audio/information screen.	
	Black Level	Changes the black level of the audio/information screen.	
	Default	Resets all customized settings for the brightness, contrast, and black level.	_

### Models with B-type meter

Customizable Features	Description	Selectable Settings
Brightness	Changes the brightness of the audio/information screen.	_
Contrast	Changes the contrast of the audio/information screen.	_
Black Level	Changes the black level of the audio/information screen.	_
Default	Resets all customized settings for the brightness, contrast, and black level.	_

### **■** Sound

Customizab	le Features	Description	Selectable Settings
	Treble		
Bass / Treble	Midrange	•	
	Bass	Adicate the cattions of the social appearance	
Balance / Fader*1/Audio Zones & Balance / Fader*2		<ul> <li>Adjusts the settings of the audio speakers' sound.</li> <li>Adjusting the Sound P. 309</li> </ul>	_
Bose Centerpoint*2			
Speed Volume Compensation*1/Bose Dynamic Speed Compensation*2			

<sup>\*1:</sup>Models without panoramic roof \*2:Models with panoramic roof

### **■** Camera

Customizable Features		Description	Selectable Settings
Fixed Guideline Rear Camera		Shows the guideline that does not move with the steering wheel.  Multi-View Rear Camera P. 568	ON*1/OFF
Rear Camera	Dynamic Guideline	Shows the guideline that moves with the steering wheel.  Multi-View Rear Camera P. 568	ON*1/OFF
Cross Traffic Monitor*		Shows arrows on the rear camera image to indicate vehicles approaching from the sides.  ▶ Cross Traffic Monitor* P. 564	ON*1/OFF

<sup>\*1:</sup>Default Setting

### **■** Voice Control

Customizable Features	Description	Selectable Settings
Voice Control Mode	Selects a mode of the voice portal screen.  ▶ Voice Control Operation P. 298	Assist/Normal*1

<sup>\*1:</sup>Default Setting

## ■ How to Customize the Vehicle Settings

With the power mode in ON, select **Vehicle Settings**, then select a setting item.



- **Deflation warning system ▶** P. 362
- Driver assist system setup 

   P. 362
- Meter setup ₽. 363
- Keyless access setup 

  P. 365
- Lighting setup 
  ▶ P. 365
- Door/window setup 
  ▶ P. 366
- Predictive Eco Assist<sup>\*</sup> 

  P. 366
- Climate control setup 
   P. 366
- INDIVIDUAL Settings 
  ▶ P. 367
- Maintenance info.\* ► P. 367
- Engine oil level check reminder ₽ P. 367

#### 

If **Vehicle Settings** is not displayed on the home screen, select **All Apps**. You can change the displayed icons on the home screen.

**▶** App Shortcut Function P. 302

# **■** Deflation warning system

Customizable Features	Description	Selectable Settings
Deflation warning system	Cancels/Calibrates Deflation Warning System.  Deflation Warning System P. 454	Calibrate/Cancel

### **■** Driver assist system setup

E Dilver assist system setup		
<b>Customizable Features</b>	Description	Selectable Settings
Preceding vehicle proximity warning distance	Changes the distance at which Collision Mitigation Braking System (CMBS) alerts.  ▶ Collision Mitigation Braking System (CMBS) P. 469	Far/Normal* <sup>1</sup> /Near
ACC vehicle ahead detected beep	Turns On/Off audible notification when vehicle has moved in/out of adaptive cruise control range.  ▶ Adaptive Cruise Control (ACC) with Low Speed Follow P. 493	ON/OFF*1
Road departure mitigation setting	Selects operating mode of the Road Departure Mitigation system.  ▶ Road Departure Mitigation System P. 485	Early/Normal/Delayed*1
Lane keep assist beep	Switches the LKAS and Traffic Jam Assist suspend alert beeps on and off.  Lane Keeping Assist System (LKAS) P. 513 Traffic Jam Assist P. 526	ON/OFF*1
Blind spot information	Selects On/Off the blind spot information system audible alert.  ■ Blind Spot Information System* P. 458	Audible and visual alert*1/ Visual alert only

<sup>\*1:</sup>Default Setting

Customizable Features	Description	Selectable Settings
Traffic sign recognition system display	Displays the traffic sign recognition system on the instrument panel.  Traffic Sign Recognition System P. 535	Display*¹/None
Speed limit sign change beep	Turns on/off the audible notification when speed limit sign information is changed.	ON/OFF*1
Driver attention monitor	Selects alert type for Driver Attention Monitor.  Driver Attention Monitor P. 163, 183	OFF/Tactile alert only/ Tactile and audible alert*1
Rear sensor setting	Turns the rear parking sensor on or off.  ▶ Parking Sensor System P. 558	ON*1/OFF

# \*1:Default Setting

# ■ Meter setup

Customizable Features	Description	Selectable Settings
Warning message	Selects whether to display the warning message.  Driver Information Interface Warning and Information Messages P. 135	ON/OFF*1
Adjust outside temp. display	Selects to adjust outside temperature reading by a few degrees.  Outside Temperature P. 151	-3°C ~ ±0°C*1 ~ +3°C

<sup>\*1:</sup>Default Setting

Customizable Features	Description	Selectable Settings
Trip A reset timing	Selects the timing to reset Trip A.  Range / Fuel / Trip Meter P. 157, 178  Speed/Time/Trip Meter P. 159, 180	When fully refueled/When ignition is turned OFF/Manual reset*1
Trip B reset timing	Selects the timing to reset Trip B.  ■ Range / Fuel / Trip Meter P. 157, 178  ■ Speed/Time/Trip Meter P. 159, 180	When fully refueled/When ignition is turned OFF/Manual reset*1
Alarm volume control	Changes volume level of all system warnings, door opening warning and indicator.	Max/Mid* <sup>1</sup> /Min
Reverse position alert tone	Turns on/off the reverse alert sound.	ON*1/OFF
Fuel efficiency backlight	Turns the ambient meter feature on and off.	ON*1/OFF
Turn by turn display	Turns on/off the pop-up warning in the turn-by-turn navigation in the driver information interface.  ☐ Turn-by-Turn Directions P. 161, 181	ON*1/OFF
Speed/distance units	Selects the trip computer units. <b>▶ Speed/Distance Units</b> P. 170, 190	Left-hand drive type km/h·km*1/mph·miles Right-hand drive type km/h·km/mph·miles*1
Rear seat reminder	Turns the Rear Seat Reminder feature on and off.  ▶ Rear Seat Reminder P. 256	ON*1/OFF

<sup>\*1:</sup>Default Setting

# ■ Keyless access setup

Customizable Features	Description	Selectable Settings
Door unlock mode	Selects which door unlocks when grabbing the driver's door handle.	Driver door only*1/All doors
Keyless access light flash	Causes some exterior lights to flash when you unlock/lock the doors.	ON*1/OFF

<sup>\*1:</sup>Default Setting

# **■** Lighting setup

Customizable Features	Description	Selectable Settings
Auto High Beam*	Turns on/off auto high beam function.  ▶ Auto High-Beam* P. 235	ON*1/OFF
Adaptive driving beam*	Turns on or off adaptive driving beam function.	ON*1/OFF
Interior light dimmer duration	Selects the length of time the interior lights stay on after doors are closed.  ▶ Interior Lights P. 262	60sec/30sec*1/15sec
Headlight auto OFF timer	Selects the length of time the exterior lights stay on after you close the driver's door.  Automatic Lighting Off Feature P. 230	60sec/30sec/15sec*1/0sec
Headlight integration with wipers	Selects On/Off headlight function and wiper operation when the headlight is in <b>AUTO</b> setting.  → Headlight Integration with Wipers P. 230	ON*1/OFF

<sup>\*1:</sup>Default Setting

\* Not available on all models

# ■ Door/window setup

Customizable Features	Description	Selectable Settings
Key and remote unlock mode	Selects which door unlocks when using the key or keyless access remote.	Driver door only*1/All doors
Keyless lock notification	Turns On/Off flash of exterior lights when doors are locked/unlocked by remote.	ON*1/OFF
Auto folding door mirror	Selects door mirror auto folding operation.	ON*1/OFF
Lock presetting*	Changes the settings for the lock presetting function.	ON*1/OFF
Remote Window Control	Changes the settings for the remote window control function.	ON*1/OFF

<sup>\*1:</sup>Default Setting

#### ■ Predictive Eco Assist\*

Customizable Features	Description	Selectable Settings
Predictive Eco Assist	Turns Predictive Eco Assist On and Off.	ON*1/OFF

<sup>\*1:</sup>Default Setting

# **■** Climate control setup

Customizable Features	Description	Selectable Settings
Driver seat automatic climate control	Automatic climate control of Driver Seat with automatic air conditioner. Changes the interlocking control setting.	ON*1/OFF
Passenger seat automatic climate control	Automatic climate control of Passenger Seat with automatic air conditioner. Changes the interlocking control setting.	ON*1/OFF

<sup>\*1:</sup>Default Setting

<sup>\*</sup> Not available on all models

## **■ INDIVIDUAL Settings**

<b>Customizable Features</b>	Description	Selectable Settings
Powertrain	Changes the responsiveness of the powertrain.   ▶ Customizing the INDIVIDUAL Settings P. 435	ECON/NORMAL*1/SPORT
Steering	Changes the level of steering effort.  ☑ Customizing the INDIVIDUAL Settings P. 435	NORMAL*1/SPORT
Engine Sound	Changes the effect of the engine sound.  ☑ Customizing the INDIVIDUAL Settings P. 435	NORMAL*1/SPORT
Gauge*	Selects the gauges to be displayed in the Driver Information Interface.  Customizing the INDIVIDUAL Settings P. 435	NORMAL*1/SPORT

<sup>\*1:</sup>Default Setting

### ■ Maintenance info.\*

Customizable Features	Description	Selectable Settings
Maintenance info.	Resets the maintenance information.  Service Reminder System* P. 581	Selects Reset Items

# ■ Engine oil level check reminder

Customizable Features	Description	Selectable Settings
Engine oil level check reminder	Resets the engine oil level check reminder.	Reset/Cancel

\* Not available on all models

# **Defaulting All the Settings**

Reset all the menu and customized settings as the factory defaults.

# **■** Defaulting General Settings

- 1. Press the button.
- 2. Select General Settings.
- 3. Select System.
- 4. Select Factory Data Reset.
  - ► A confirmation message appears on the screen.
- **5.** Select **Continue** to reset the settings.
- **6.** Select **Continue** again to reset the settings.
  - ► The system will reboot.

# ■ Defaulting Vehicle Settings

- **1.** Press the toutton.
- 2. Select Vehicle Settings.
- 3. Select **Default**.
- 4. Select Yes.

### Defaulting All the Settings

When you transfer the vehicle to a third party, reset all settings to default and delete all personal data.

If you perform **Factory Data Reset**, it will reset the preinstalled apps to their factory default.

# **Hands-Free Telephone System**

Hands-Free Telephone (HFT) system allows you to place and receive phone calls using your vehicle's audio system, without handling your mobile phone.

#### ■ HFT Buttons



- Models with A-type meter
- 2 Models with B-type meter
- **3 VOL** +/**VOL** − (Volume) Switch
- 4 Left Selector Wheel
- (Talk) Button
- (Home) Button (Models with A-type meter)

#### 

Place your phone where you can get good reception.

To use HFT, you need a *Bluetooth*-compatible mobile phone. For a list of compatible phones, pairing procedures, and special feature capabilities, ask a dealer or your local Honda.

To use the system, the  ${\bf Bluetooth}$  setting must be  ${\bf ON}$ .

Phone Setup P. 376

Voice control tips

- Aim the vents away from the ceiling and close the windows, as noise coming from them may interfere with the microphones.
- Press the m button when you want to call a number using a phonebook name or a number.
   Speak clearly and naturally after a beep.
- If the microphone picks up voices other than yours, the command may be misinterpreted.
- To change the volume level, the volume level is able to change by the audio system's volume.

If there is no Favourite contacts entry in the system, the pop-up notification appears on the screen.

Favourite Contacts P. 381

(Talk) button: Press to access Voice Portal.

(Home) button\*: Press to go back to the home screen of the driver information interface.

### Models with A-type meter

**Left Selector Wheel:** Press the (home) button, then roll up or down to select (phone) on the driver information interface, and then press the left selector wheel.

#### Models with B-type meter

**Left Selector Wheel:** Roll up or down to select **Phone** on the driver information interface, and then press the left selector wheel.

While receiving a call, the incoming call screen is displayed on the driver information interface. You can pick up the call using the left selector wheel.

Receiving a Call P. 385

#### 

### Bluetooth® Wireless Technology


The *Bluetooth*® word mark and logos are registered trademarks owned by *Bluetooth* SIG, Inc., and any use of such marks by Honda Motor Co., Ltd., is under licence. Other trademarks and trade names are those of their respective owners.

#### **HFT Limitations**

An incoming call on HFT will interrupt the audio system when it is playing. It will resume when the call is ended.

# ■ HFT Status Display

The audio/information screen notifies you when there is an incoming call.

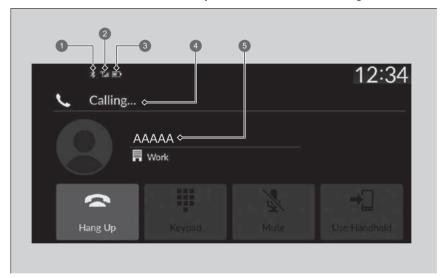

- Bluetooth® Indicator
   Appears when your phone is connected to HFT.
- Signal Strength
- Battery Level Status
- 4 HFT Mode
- **5** Caller's Name (If registered)/Caller's Number (If not registered)

#### ► MFT Status Display

The information that appears on the audio/ information screen varies between phone models.

# **■ Limitations for Manual Operation**


Certain manual functions are disabled or inoperable while the vehicle is in motion. You cannot select a greyed-out option until the vehicle is stopped.

Only previously stored phonebook names, or numbers can be called using voice commands while the vehicle is in motion.

Favourite Contacts P. 381

#### ■ HFT Menus

The power mode must be in ACCESSORY or ON to use the system. Select **Phone** to display the phone screen.

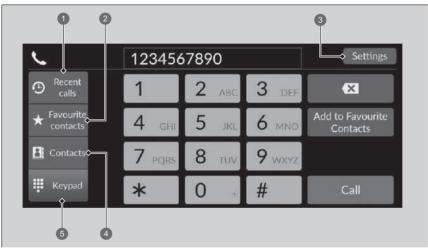

- Recent calls
- Pavourite contacts
- Settings
- 4 Contacts
- 6 Keypad

#### >> HFT Menus

Some functions are limited while driving.

**Recent calls:** Displays the last outgoing, incoming, and missed calls.

**▶** To make a call using the recent calls P. 383

**Favourite contacts:** Dials the selected number in the Favourite contacts entry.

To make a call using a Favourite contacts entry P. 383

**Settings:** Changes the phone settings.

**▶ Phone Settings Screen** P. 375

**Contacts:** Displays the phonebook of the paired phone. **▶ To make a call using the imported phonebook** P. 384

**Keypad:** Enters a phone number to dial.

To make a call using a phone number P. 384

375

### ■ Phone Settings Screen

To display the phone settings screen, select **Settings** on the phone screen.



**Change Devices:** Pairs a new phone to the system and connect, disconnect, or delete a paired device.

Phone Setup P. 376

**Auto Sync Phone:** Sets phonebook and recent calls data to be automatically imported when a phone is paired to HFT.

**■** Automatic Import of Mobile Phonebook and Recent calls P. 379

**Auto Phone Call Transfer:** Sets calls to automatically transfer from your phone to HFT when you enter the vehicle.

**■ Automatic Transferring** P. 380

**Ringtone:** Selects the ringtone.


Ringtone P. 380

# ■ Phone Setup

## ■ Bluetooth® setup

You can turn Bluetooth® function on and off.

- **1.** Press the toutton.
- 2. Select General Settings.
- 3. Select Connections.
- 4. Select Bluetooth.
- **5.** Select **Options**.
- **6.** Select **Bluetooth**, then select **ON**.



- To pair a mobile phone (when there is no phone paired to the system)
- 1. Select Phone.
- 2. Select Connect New Device.
- **3.** Make sure your phone is in search or discoverable mode.
- **4.** Select **Honda HFT** from your phone.
  - ▶ If you want to pair a phone from this audio system, select Search for Devices, and then select your phone when it appears on the list.
- **5.** The system gives you a pairing code on the audio/information screen.
  - Confirm if the pairing code on the screen and your phone match. This may vary by a phone.
- **6.** Select desired functions and then select **Connect**.
- **7.** A notification appears on the screen if pairing is successful.
- 8. Select OK.

#### ▶ Phone Setup

Your *Bluetooth*-compatible phone must be paired to the system before you can make and receive handsfree calls.

#### Phone Pairing Tips:

- You cannot pair your phone while the vehicle is moving.
- Up to six phones can be paired.
- Your phone's battery may drain faster when it is paired to the system.

Once you have paired a phone, you can see it displayed on the screen with the following icons.

- **I**: The phone is compatible with *Bluetooth*® Audio.
- : The phone can be used with HFT.
- E: The phone is compatible with Apple CarPlay.

If there is an active connection to Apple CarPlay pairing of additional *Bluetooth®* compatible devices is unavailable.



### ■ To change the currently paired phone

- 1. Select Phone.
- 2. Select Settings.
- 3. Select Change Devices.
- **4.** Select a phone to connect.
  - ► HFT disconnects the connected phone and starts searching for another paired phone.
  - ➤ You can set the connected phone priority. Select the box checked on the phone you want to prioritize.
- **5.** Select (audio), (phone), or (Apple CarPlay).

  - ► If you want to cancel the automatic Bluetooth® connection, uncheck all icons.
- 6. Select Apply.

#### ■ To delete a paired phone

- 1. Select Phone.
- 2. Select Settings.
- 3. Select Change Devices.
- 4. Select a phone you want to delete.
- 5. Select **Delete**.
- **6.** A confirmation message appears on the screen. Select **Delete**.

#### ∑To change the currently paired phone

If no other phones are found or paired when trying to switch to another phone, HFT will inform you that the original phone is connected again.

To pair other phones, select **+ Connect New Device** from the **Bluetooth** screen.

## ■ Automatic Import of Mobile Phonebook and Recent calls


When your phone is paired, the contents of its phonebook and recent calls are automatically imported to the system.

- 1. Select Phone.
- 2. Select Settings.
- 3. Select Auto Sync Phone.
- 4. Select ON or OFF.
  - ► The default setting is **ON**.

#### Malandaric Import of Mobile Phonebook and Recent calls

On some phones, it is necessary to set up it enabled to be imported the mobile phonebook.

When you select a name from the list in the mobile phonebook, you can see a category icon. The icons indicate what types of numbers are stored for that name.



On some phones, it may not be possible to import the category icons to the system.

The phonebook is updated after every connection. Recent calls are updated after every connection or call.

# Automatic Transferring

If you get into the vehicle while you are on the phone, the call can be automatically transferred to HFT.

- 1. Select Phone.
- 2. Select Settings.
- 3. Select Auto Phone Call Transfer.
- 4. Select ON or OFF.
  - ► The default setting is **ON**.

# Ringtone

You can change the ringtone setting.


- 1. Select Phone.
- 2. Select Settings.
- 3. Select Ringtone.
- **4.** Select **Vehicle** or **Phone**.
  - ► The default setting is **Phone**.

#### **≥** Ringtone


**Vehicle**: The fixed ringtone sounds from the speakers.

Phone: Depending on the make and model of the mobile phone, the ringtone stored in the phone will sound if the phone is connected.

### ■ Favourite Contacts



Star Icon



Star Icon

#### ■ To add a Favourite contacts

- 1. Select Phone.
- 2. Select Recent calls, Contacts, or Keypad.

#### On the Recent calls or Contacts screen

**3.** Select the star icon.

### On the Keypad screen

- 3. Select Add to Favourite Contacts.
  - ➤ A notification appears on the screen if the Favourite contacts is successfully stored.
  - ➤ To remove the Favourite contacts, select the star icon again.



- Add to Favourite Contacts
- **■** To edit a Favourite contacts
- 1. Select Phone.
- 2. Select Favourite contacts.
- 3. Select **Edit** on the Favourite contacts entry you want to edit.
- **4.** Select a setting you want.
- 5. Select Done.

#### ■ To delete a Favourite contacts

- 1. Select Phone.
- 2. Select Favourite contacts.
- **3.** Select **Edit** on the Favourite contacts entry you want to delete.
- 4. Select Remove.
- **5.** A confirmation message appears on the screen. Select **Yes**.

## ■ Making a Call



You can make calls by inputting any phone number, or by using the imported **Recent calls**, **Favourite contacts**, and **Contacts** entries.

## ■ To make a call using the recent calls

Recent calls are stored by All, Dialled, Missed, and Received.

- 1. Select Phone.
- 2. Select Recent calls.
  - ➤ You can sort by **All**, **Dialled**, **Missed**, or **Received**. Select the icon on the upper right of the screen.
- 3. Select a number.
  - ▶ Dialling starts automatically.

### ■ To make a call using a Favourite contacts entry

- 1. Select Phone.
- 2. Select Favourite contacts.
  - ➤ You can change the order of Favourite contacts entries by selecting **Reorder**.
- 3. Select a number.
  - ▶ Dialling starts automatically.

#### 

Once a call is connected, you can hear the voice of the person you are calling through the audio speakers.

While there is an active connection with Apple CarPlay, phone calls cannot be made with Hands-Free Telephone (HFT) system and are only made from Apple CarPlay.

#### ∑To make a call using the recent calls

The recent calls appear only when a phone is connected to the system.

**All:** Displays the last outgoing, incoming, and missed calls.

**Dialled:** Displays the last outgoing calls. **Missed:** Displays the last missed calls. **Received:** Displays the last incoming calls.

### ■ To make a call using the imported phonebook

- 1. Select Phone.
- 2. Select Contacts.
- 3. Select a name.
  - ➤ You can sort by **First Name** or **Surname**. Select the icon on the upper right of the screen.
- 4. Select a number.
  - ▶ Dialling starts automatically.

### ■ To make a call using a phone number

- 1. Select Phone.
- 2. Select Keypad.
- 3. Select a number.
  - ▶ Use the keyboard on the touch screen for entering numbers.
- 4. Select Call.
  - ▶ Dialling starts automatically.

# Receiving a Call



When there is an incoming call, an audible notification sounds (if activated) and the **Incoming Call...** screen appears.

You can answer the call using the left selector wheel.

To pick up the call, roll up or down to select (answer) on the driver information interface and then press the left selector wheel.

▶ If you want to decline or end the call, select (ignore) on the driver information interface using the left selector wheel.

#### ■ Receiving a Call

### Call Waiting

Select (answer) to put the current call on hold to answer the incoming call.


Select using the left selector wheel to return to the current call.

Select (ignore) to ignore the incoming call if you do not want to answer it.

Select fi you want to hang up the current call.

You can select the icons on the audio/information screen instead of and on the driver information interface.

## Options During a Call



The following options are available during a call.

**Keypad:** Send numbers during a call. This is useful when you call a menu-driven phone system.

Mute: Mute your voice.

**Use Handheld:** Transfer a call from the system to your phone.

The available options are shown on the lower half of the screen.

Select the option.

▶ The mute icon appears when **Mute** is selected when the other source screen other than the phone screen is displayed. Select **Mute** again to turn it off.

#### **≥**Options During a Call

You can select the icons on the audio/information screen.

# **Audio Error Messages**

The following error messages are just examples. If you see an error message not listed below, follow the on-screen instructions to clear it.

# iPod/USB Flash Drive

If an error occurs while playing an iPod or USB flash drive, you may see the following error messages. If you cannot clear the error message, contact a dealer.

Error Message	Solution
Connect Retry	Appears when the system does not acknowledge the iPod. Reconnect the iPod.
Unplayable File	Appears when the files in the USB flash drive are copyright protected or an unsupported format. This error message appears for about a few seconds, then plays the next file.
No Data	iPod Appears when the iPod is empty.  USB flash drive Appears when the USB flash drive is empty or there are no MP3, WMA, AAC, FLAC, or WAV files in the USB flash drive.  iPod and USB flash drive Check that compatible files are stored on the device.
Unsupported	Appears when an unsupported device is connected. If it appears when a supported device is connected, reconnect the device.
No response from device	Appears when the system does not communicate with a connected device. If it appears when a device is connected, contact your place of device purchase.
USB hub not supported	Appears when only a HUB is connected. If it appears, connect a USB flash drive to the HUB.

Error Message	Solution
A charging error has occurred with the connected USB device. When safe please check the compatibility of the device and USB cable and try again.	Appears when an incompatible device is connected. Disconnect the device. Then turn the audio system off, and turn it on again. Do not reconnect the device that caused the error.

# General Information on the Audio System

# Compatible iPod, iPhone, and USB Flash Drives

### ■ iPod and iPhone Model Compatibility

#### Model

Made for iPod touch (6th to 7th generation) released between 2015 and 2019 Made for iPhone 5s/iPhone 6/iPhone 6 Plus/iPhone 6s/iPhone 6s Plus/iPhone SE/iPhone 7/iPhone 7 Plus/iPhone 8/iPhone 8 Plus/iPhone XI/iPhone XR/iPhone XS/iPhone XS Max/iPhone 11/iPhone 11 Pro/iPhone 11 Pro Max/iPhone SE (2nd generation)/iPhone 12 mini/iPhone 12/iPhone 12 Pro/iPhone 13 Pro/iPhone 13 Pro/iPhone 13 Pro/iPhone 14 Plus/iPhone 14 Pro/iPhone 14 Pro Max/iPhone 14 Pro/iPhone 14 Pro Max

### USB Flash Drives

- Please use a recommended USB flash drive of 256 MB or higher formatted with FAT16 or FAT32.
- Some digital audio players may not be compatible.
- Some USB flash drives (e.g., a device with security lockout) may not work.
- Some software files may not allow for audio play or text data display.
- Each audio system is compatible the following formats. Some versions of the formats may be unsupported.

MP3, WMA, AAC, FLAC, PCM/WAVE, MP4, AVI, MKV, ASF/WMV

#### 

This system may not work with all software versions of these devices.

#### **™**USB Flash Drives

Files on the USB flash drive are played in their stored order. This order may be different from the order displayed on your PC or device.

# ■ Recommended Devices

#### ■ MP4 File

Media	USB Flash Drive		
Profile (MP4 version)	BaselineProfile/Level 3,  MailProfile/Level 3.1  (MPEG4-AVC)  SimpleProfile/Level 5 (MPEG4)		
File extension (MP4 version)	.mp4/.m4v		
Compatible audio codec	AAC, MP3		
Compatible video codec	MPEG4-AVC (H.264)	MPEG4 (ISO/IEC 14496 Part.2)	
Bit rate	10 Mbps, 14 Mbps (MPEG4-AVC) 8 Mbps (MPEG4)		
Maximum image	1,280 × 720 pixels (MPEG4-AVC)	720 × 576 pixels (MPEG4)	

# ■ AVI File

Media	USB Flash Drive		
Profile (AVI version)	BaselineProfile/Level 3, MailProfile/Level 3.1 (MPEG4-AVC)	SimpleProfile/Level 5 (MPEG4)	AdvancedProfile/Level 2, MainProfile/Level Medium, SimpleProfile/Level Medium (VC-1)
File extension (AVI version)		.avi	
Compatible audio codec		AAC, MP3, WMA	
Compatible video codec	MPEG4-AVC (H.264)	MPEG4 (ISO/IEC 14496 Part.2)	VC-1
Bit rate	10 Mbps, 14 Mbps (MPEG4-AVC) 8 Mbps (MPEG4) 20 Mbps, 10 Mbps, 384 (VC-1)		20 Mbps, 10 Mbps, 384 kbps (VC-1)
Maximum image	1,280 × 720 pixels (MPEG4-AVC)	720 × 576 pixels (MPEG4)	1,280 × 720 pixels, 720 x 480 pixels, 352 x 288 pixels (VC-1)

### ■ MKV File

Media	USB Flash Drive		
Profile (MKV version)	BaselineProfile/Level 3, MailProfile/Level 3.1 (MPEG4-AVC)	SimpleProfile/Level 5 (MPEG4)	AdvancedProfile/Level 2, MainProfile/Level Medium, SimpleProfile/Level Medium (VC-1)
File extension (MKV version)		.mkv	
Compatible audio codec	AAC, MP3		
Compatible video codec	MPEG4-AVC (H.264) MPEG4 (ISO/IEC 14496 Part.2) VC-1		VC-1
Bit rate	10 Mbps, 14 Mbps (MPEG4-AVC) 8 Mbps (MPEG4) 20 Mbps, 10 Mbps, 384 k (VC-1)		20 Mbps, 10 Mbps, 384 kbps (VC-1)
Maximum image	1,280 × 720 pixels (MPEG4-AVC)	720 × 576 pixels (MPEG4)	1,280 × 720 pixels, 720 x 480 pixels, 352 x 288 pixels (VC-1)

#### ■ ASF/WMV File

Media	USB Flash Drive		
Profile (ASF/WMV version)	BaselineProfile/Level 3, MailProfile/Level 3.1 (MPEG4-AVC)	AdvancedProfile/Level 2, MainProfile/Level Medium, SimpleProfile/Level Medium (VC-1)	
File extension (ASF/WMV version)	.asf/.wmv		
Compatible audio codec	WMA		
Compatible video codec	MPEG4-AVC (H.264)	VC-1	
Bit rate	10 Mbps, 14 Mbps (MPEG4-AVC)	20 Mbps, 10 Mbps, 384 kbps (VC-1)	
Maximum image	1,280 × 720 pixels (MPEG4-AVC)	1,280 × 720 pixels, 720 x 480 pixels, 352 x 288 pixels (VC-1)	

# **About Open Source Licences**

To see the open source licence information, follow these steps.

- 1. Select General Settings.
- 2. Select System.
- 3. Select About.
- **4.** Select **Legal Information**.

### **Licence Information**

#### Bluetooth

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Panasonic Automotive Systems Co., Ltd. is under license. Other trademarks and trade names are those of their respective owners.

https://www.bluetooth.com/develop-with-bluetooth/marketing-branding/



### Windows Media

This product is protected by certain intellectual property rights of Microsoft. Use or distribution of such technology outside of this product is prohibited without a license from Microsoft.

# Apple

"Made for iPod," and "Made for iPhone," mean that an electronic accessory has been designed to connect specifically to iPod, or iPhone, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, or iPhone, may affect wireless performance.

Apple, the Apple Logo, iPhone, iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Apple CarPlay, iPod, iPhone, iTunes, Siri and Lightning are trademarks of Apple Inc. App Store is a service mark of Apple Inc.



### MPEG

### Mpeq4 Visual

THIS PRODUCT IS LICENSED UNDER THE MPEG-4 VISUAL PATENT PORTFOLIO LICENSE FOR THE PERSONAL AND NON-COMMERCIAL USE OF A CONSUMER FOR (i) ENCODING VIDEO IN COMPLIANCE WITH THE MPEG-4 VISUALA STANDARD ("MPEG-4 VIDEO") AND/OR (ii) DECODING MPEG-4 VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL AND NONCOMMERCIAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED BY MPEG LA TO PROVIDE MPEG-4 VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION INCLUDING THAT RELATING TO PROMOTIONAL, INTERNAL AND COMMERCIAL USES AND LICENSING MAY BE OBTAINED FROM MPEG LA, LLC. SEE HTTP://WWW.MPEGLA.COM.

### VC-1

THIS PRODUCT IS LICENSED UNDER THE VC-1 PATENT PORTFOLIO LICENSE FOR THE PERSONAL AND NON-COMMERCIAL USE OF A CONSUMER TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE VC-1 STANDARD ("VC-1 VIDEO") AND/OR (ii) DECODE VC-1 VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL AND NON-COMMERCIAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE VC-1 VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE.

ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE HTTP://WWW MPEGLA COM

### AVC/H.264

THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL AND NONCOMMERCIAL USE OF A CONSUMER TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL AND NON-COMMERCIAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE.

ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE HTTP://WWW.MPEGLA.COM.

# **Legal Information on Apple CarPlay/Android Auto**

### ■ OWNER'S MANUAL LICENSE/LIABILITY STATEMENTS

USE OF APPLE CARPLAY IS SUBJECT TO YOUR AGREEMENT TO THE CARPLAY TERMS OF USE, WHICH ARE INCLUDED AS PART OF THE APPLE IOS TERMS OF USE. IN SUMMARY, THE CARPLAY TERMS OF USE DISCLAIM APPLE AND ITS SERVICE PROVIDERS' LIABILITY IF THE SERVICES FAIL TO PERFORM CORRECTLY OR ARE DISCONTINUED, STRICTLY LIMIT APPLE AND ITS SERVICE PROVIDERS' OTHER LIABILITIES, DESCRIBE THE KINDS OF USER INFORMATION (INCLUDING, FOR EXAMPLE, VEHICLE LOCATION, VEHICLE SPEED, AND VEHICLE STATUS) BEING GATHERED AND STORED BY APPLE AND ITS SERVICE PROVIDERS, AND DISCLOSE CERTAIN POSSIBLE RISKS ASSOCIATED WITH THE USE OF CARPLAY, INCLUDING THE POTENTIAL FOR DRIVER DISTRACTION. SEE APPLE'S PRIVACY POLICY FOR DETAILS REGARDING APPLE'S USE AND HANDLING OF DATA UPLOADED BY CARPLAY.

USE OF ANDROID AUTO IS SUBJECT TO YOUR AGREEMENT TO THE ANDROID AUTO TERMS OF USE WHICH MUST BE AGREED TO WHEN THE ANDROID AUTO APPLICATION IS DOWNLOADED TO YOUR ANDROID PHONE. IN SUMMARY, THE ANDROID AUTO TERMS OF USE DISCLAIM GOOGLE AND ITS SERVICE PROVIDERS' LIABILITY IF THE SERVICES FAIL TO PERFORM CORRECTLY OR ARE DISCONTINUED, STRICTLY LIMIT GOOGLE AND ITS SERVICE PROVIDERS' OTHER LIABILITIES, DESCRIBE THE KINDS OF USER INFORMATION (INCLUDING, FOR EXAMPLE, VEHICLE LOCATION, VEHICLE SPEED, AND VEHICLE STATUS) BEING GATHERED AND STORED BY GOOGLE AND ITS SERVICE PROVIDERS, AND DISCLOSE CERTAIN POSSIBLE RISKS ASSOCIATED WITH THE USE OF ANDROID AUTO, INCLUDING THE POTENTIAL FOR DRIVER DISTRACTION. SEE GOOGLE'S PRIVACY POLICY FOR DETAILS REGARDING GOOGLE'S USE AND HANDLING OF DATA UPLOADED BY ANDROID AUTO.

### ■ DISCLAIMER OF WARRANTIES; LIMITATION ON LIABILITY

YOU EXPRESSLY ACKNOWLEDGE AND AGREE THAT USE OF APPLE CARPLAY OR ANDROID AUTO ("THE APPLICATIONS") IS AT YOUR SOLE RISK AND THAT THE ENTIRE RISK AS TO SATISFACTORY QUALITY, PERFORMANCE, ACCURACY AND EFFORT IS WITH YOU TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW. AND THAT THE APPLICATIONS AND INFORMATION ON THE APPLICATIONS IS PROVIDED "AS IS" AND "AS AVAILABLE," WITH ALL FAULTS AND WITHOUT WARRANTY OF ANY KIND, AND HONDA HEREBY DISCLAIMS ALL WARRANTIES AND CONDITIONS WITH RESPECT TO THE APPLICATIONS AND INFORMATION ON THE APPLICATIONS, EITHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES AND/OR CONDITIONS OF MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY, QUIET ENJOYMENT, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS. NO ORAL OR WRITTEN INFORMATION OR ADVICE GIVEN BY HONDA OR AN AUTHORISED. REPRESENTATIVE SHALL CREATE A WARRANTY. AS EXAMPLES, AND WITHOUT LIMITATION, HONDA DISCLAIMS ANY WARRANTY REGARDING THE ACCURACY OF DATA PROVIDED BY THE APPLICATIONS, SUCH AS THE ACCURACY OF DIRECTIONS, ESTIMATED TRAVEL TIME, SPEED LIMITS, ROAD CONDITIONS, NEWS, WEATHER, TRAFFIC, OR OTHER CONTENT PROVIDED BY APPLE, GOOGLE, THEIR AFFILIATES. OR THIRD PARTY PROVIDERS: HONDA DOES NOT GUARANTEE AGAINST LOSS OF APPLICATION DATA. WHICH MAY BE LOST AT ANY TIME; HONDA DOES NOT GUARANTEE THAT THE APPLICATIONS OR ANY SERVICES PROVIDED THROUGH THEM WILL BE PROVIDED AT ALL TIMES OR THAT ANY OR ALL SERVICES WILL BE AVAILABLE AT ANY PARTICULAR TIME OR LOCATION. FOR EXAMPLE. SERVICES MAY BE SUSPENDED OR INTERRUPTED WITHOUT NOTICE FOR REPAIR. MAINTENANCE, SECURITY FIXES, UPDATES, ETC., SERVICES MAY BE UNAVAILABLE IN YOUR AREA OR LOCATION, ETC. IN ADDITION, YOU UNDERSTAND THAT CHANGES IN THIRD PARTY TECHNOLOGY OR GOVERNMENT REGULATION MAY RENDER THE SERVICES AND/OR APPLICATIONS OBSOLETE AND/OR UNUSABLE.

TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT SHALL HONDA OR ITS AFFILIATES BE LIABLE FOR PERSONAL INJURY, OR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES WHATSOEVER, INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, CORRUPTION OR LOSS OF DATA, FAILURE TO TRANSMIT OR RECEIVE ANY DATA, BUSINESS INTERRUPTION OR ANY OTHER COMMERCIAL DAMAGES OR LOSSES, ARISING OUT OF OR RELATED TO THE APPLICATIONS OR YOUR USE OF OR INABILITY TO USE THE APPLICATIONS OR INFORMATION ON THE APPLICATIONS, HOWEVER CAUSED, REGARDLESS OF THE THEORY OF LIABILITY (CONTRACT, TORT OR OTHERWISE) AND EVEN IF HONDA WERE ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. SOME REGIONS AND JURISDICTIONS MAY DISALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR DAMAGES, SO THESE LIMITATIONS AND EXCLUSIONS MAY NOT APPLY TO YOU. THE FOREGOING LIMITATIONS WILL APPLY EVEN IF THE ABOVE STATED REMEDY FAILS OF ITS ESSENTIAL PURPOSE.

Your vehicle is equipped with a feature that automatically calculates when to refuel. This feature will notify you when refueling is recommended as well as enable you to search for petrol stations that are located in the vicinity of your vehicle.



- 1. When it is time to refuel the vehicle, a notification is displayed and a notification icon is displayed in the header.
- **2.** Touch the box that contains the icon

Notification Icon



- 3. Select Find Petrol Station Now.

Search Results for "Petrol Station"

12:34

4.0km 5.5km 6.2km

- **4.** Choose a petrol station from the search screen of the navigation system.
  - For instructions on how to use the navigation system, refer to the navigation system manual.

Refuel Recommend'

You can turn the **Refuel Recommend** function on and off

Customized Features P. 351


When you turn off this feature, the refuel recommend notification will not display.

This feature can only be used when the fuel level in the tank is below 30 percent.

If you select Find Petrol Station Now or put more than 5 litres of petrol into the fuel tank, the notification for refueling will disappear. If you prefer not to be notified, select **OFF** in the settings for Refuel Recommend.

When you drive on a rough road or ascend or descend a hill for an extended period of time, the notification may disappear or may not be displayed at all.

\* Not available on all models

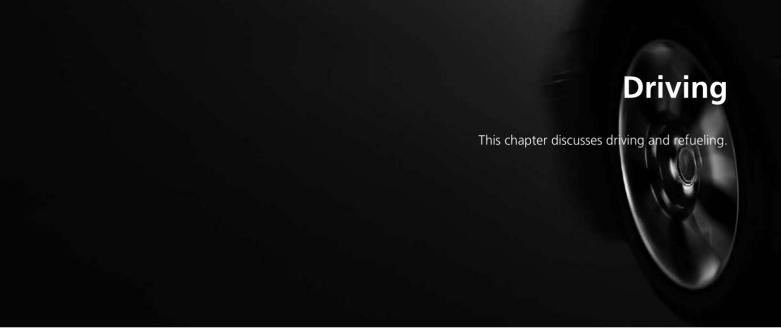

Before Driving	402
Towing a Trailer	406
When Driving	
Turning on the Power	411
Precautions While Driving	415
Transmission	417
Shifting	418
Deceleration Paddle Selector	425
Acoustic Vehicle Alerting System	428
Drive Mode Switch	429
Adjustable Speed Limiter	436
Intelligent Speed Limiter	443

Vehicle Stability Assist (VSA) System 451 Agile Handling Assist
Blind Spot Information System* 458
High Voltage Battery463
Adjusting Headlight Distribution 464
Honda SENSING 465
Collision Mitigation Braking System
(CMBS) 469
Road Departure Mitigation System 485
Adaptive Cruise Control (ACC) with Low
Speed Follow493

Lane Keeping Assist System (LKAS)	513
Traffic Jam Assist	526
Traffic Sign Recognition System	535
Front Wide View Camera	544
raking	546
Brake System	546
Anti-lock Brake System (ABS)	553
Brake Assist System	554
arking Your Vehicle	556
Iulti-View Rear Camera	568
efueling	570
uel Economy and CO <sub>2</sub> Emissions	573

<sup>\*</sup> Not available on all models

# **Before Driving**

# **Driving Preparation**

Check the following items before you start driving.

### Exterior Checks

- Make sure there are no obstructions on the windows, door mirrors, exterior lights, or other parts of the vehicle.
  - Remove any frost, snow, or ice.
  - Remove any snow on the roof, as this can slip down and obstruct your field of vision while driving or fall off and impact other road users. If frozen solid, remove ice once it has softened.
  - ▶ When removing ice from around the wheels, be sure not to damage the wheel or wheel components.
- Make sure the bonnet is securely closed.
  - ▶ If the bonnet opens while driving, your front view will be blocked.
- Make sure the tyres are in good condition.
  - ▶ Check air pressures, and check for damage and excessive wear.

### **► Checking and Maintaining Tyres** P. 623

- Make sure there are no people or objects behind or around the vehicle.
  - ▶ There are blind spots from the inside.

#### 

### NOTICE

When doors are frozen shut, use warm water around the door edges to melt any ice. Do not try to force them open, as this can damage the rubber trim around the doors. When done, wipe dry to avoid further freezing.

Do not pour warm water into the key cylinder. You will be unable to insert the key if the water freezes in the hole.

Heat from the engine and exhaust can ignite flammable materials left under the bonnet, causing a fire. If you've parked your vehicle for an extended period, inspect and remove any debris that may have collected, such as dried grass and leaves that have fallen or have been carried in for use as a nest by a small animal. Also, check under the bonnet for leftover flammable materials after you or someone else has performed maintenance on your vehicle.

### ■ Interior Checks

- Store or secure all items on board properly.
  - ➤ Carrying too much luggage, or improperly storing it, can affect your vehicle's handling, stability, stopping distance, and tyres, and make it unsafe.
    - Load Limit P. 405
- Do not pile items higher than the seatback height.
  - ► They can block your view and may be thrown forward in the event of sudden braking.
- Do not place anything in the front seat footwells. Make sure to secure the floor mat.
  - An object or unsecured floor mat can interfere with your brake and accelerator pedal operation while driving.
- If you have any animals on board, do not let them move around in the vehicle.
  - ▶ They may interfere with driving and a crash could occur.
- Securely close all doors and the hatch.
- Adjust your seating position properly.
  - Adjust the head restraint, too.
    - **Seats** P. 250
    - **⚠** Adjusting the Front and Rear Outer Head Restraint Positions P. 258
- Adjust the mirrors and steering wheel properly.
  - Adjust them while sitting in the proper driving position.
    - Mirrors P. 248
    - **Adjusting the Steering Wheel** P. 247

#### 

The headlight aim is set by the factory, and does not need to be adjusted. However, if you regularly carry heavy items in the luggage area or tow a trailer, have the aiming readjusted at a dealer or by a qualified technician.

Your vehicle is equipped with the automatic headlight adjusting system that automatically adjusts the vertical angle of the low beam headlights.

- Be sure items placed on the floor behind the front seats cannot roll under the seats.
  - ▶ They can interfere with the driver's ability to operate the pedals, or the operation of the seats.
- Everyone in the vehicle must fasten their seat belt.
  - Fastening a Seat Belt P. 52
- Make sure that the indicators in the instrument panel come on when you start the vehicle, and go off soon after.
  - ▶ Always have a dealer check the vehicle if a problem is indicated.
    - Indicators P. 114

# **Load Limit**

When you load luggage, the total weight of the vehicle, all passengers, and luggage must not exceed the maximum permissible weight.

**Specifications** P. 710

The load for the front and rear axles also must not exceed the maximum permissible axle weight.

**Specifications** P. 710

#### Load Limit

# **AWARNING**

Overloading or improper loading can affect handling and stability and cause a crash in which you can be hurt or killed.


Follow all load limits and other loading guidelines in this manual.

# Towing a Trailer

# **Towing Preparation**

### ■ Towing Load Limits

Your vehicle can tow a trailer if you carefully observe the load limits, use the proper equipment, and follow the towing guidelines. Check the load limits before driving.



### **■** Total trailer weight

Do not exceed the maximum towing weight of the trailer and towbar (with/without brakes), luggage and everything in or on it.

Towing loads in excess of the maximum towing weight can seriously affect vehicle handling and performance and can damage the engine and drivetrain.

Total Load

>> Towing Load Limits

# **AWARNING**

Exceeding any load limit or improperly loading your vehicle and trailer can cause a crash in which you can be seriously hurt or killed.

Check the loading of your vehicle and trailer carefully before starting to drive.


Check if all loads are within limits at a public scale. If a public scale is not available, add the estimated weight of your luggage load to the weight of your trailer (as quoted by the manufacturer), and then measure the tongue load with an appropriate scale or tongue gauge or estimate it based on luggage distribution.

Refer to the trailer owner's manual for additional information.

Break-in Period.

Avoid towing a trailer during your vehicle's first 1,000 km (600 miles).

When using a detachable towing device, always remove the towing device when not in use and only install it when towing so that it does not cover or hide anything on the rear of your vehicle, such as the exterior lights or licence plate.



### **■** Trailer nose load

The trailer nose load should never exceed 75 kg (165 lbs). This is the amount of weight the trailer puts on the towbar when it is fully-loaded. As a rule of thumb for trailer weights of less than 750 kg (1,654 lbs), the trailer nose load should be 10 percent of the total trailer package.

### Trailer Nose Load

- Excessive trailer nose load reduces front tyre traction and steering control. Too little trailer nose load can make the trailer unstable and cause it to sway.
- To achieve a proper trailer nose load, start by loading 60% of the load towards the front of the trailer and 40% towards the rear. Readjust the load as needed.

### ∑Towing Load Limits

Never exceed the maximum towing weight and specified load limit.

**Specifications** P. 710

If you tow a trailer in mountainous conditions, remember to reduce 10% of the combined vehicle weights from the maximum towing weight for every 1,000 metres of elevation.

# Towing Equipment and Accessories

Towing equipment varies by the size of your trailer, how much load you are towing, and where you are towing.

### **■** Towbars

The towbar must be of an approved type and properly bolted to the underbody.

### **■** Safety chains

Always use safety chains when you tow a trailer. Leave enough slack to allow the trailer to turn corners easily, but do not allow the chains to drag on the ground.

#### ■ Trailer brakes

If you are thinking of getting a trailer that has brakes, be sure they are electronically actuated. Do not attempt to tap into your vehicle's hydraulic system. No matter how successful it may seem, any attempt to attach trailer brakes to your vehicle's hydraulic system will lower braking effectiveness and create a potential hazard.

### ■ Additional towing equipment

There may be laws requiring special outside mirrors when towing a trailer. Even if mirrors are not required in your locale, you should install special mirrors if visibility is restricted in any way.

### ■ Trailer light

Trailer lights and equipment must comply with the regulations of the country where you are driving. Check with your local trailer sales or rental agency for the requirements in the area where you plan to tow.

#### ∑Towing Equipment and Accessories

Make sure that all equipment is properly installed and maintained, and that it meets the regulations of the country where you are driving.

Consult your trailer sales or rental agency if any other items are recommended or required for your towing situation.

Consult your trailer maker for proper installation and setup of the equipment.

Improper installation and setup can affect the electrical components, handling, stability, and braking performance of your vehicle.

The lighting and wiring of trailers can vary by type and brand. If a connector is required, it should only be installed by a qualified technician.

### ■ Sway control

This device can be used if your trailer tends to sway. Your trailer maker can tell you what kind of sway control you need and how to install it. Improper installation could degrade the handling and stability of your vehicle.

### **■** Trailer mirrors

There may be laws requiring special outside mirrors when towing a trailer. Even if mirrors are not required in your locale, you should install special mirrors if visibility is restricted in any way.

# **Driving Safely with a Trailer**

# ■ Things You Need To Know Before Towing a Trailer

- Have the trailer properly serviced and keep it in good condition.
- Make sure that all the weights and load in the vehicle and trailer are within limits.
   Towing Load Limits P. 406
- Securely attach the towbar, safety chains, and other necessary parts to the trailer.
- Securely store all the items in and on the trailer so that they do not shift while driving.
- Check if the lights and brakes on the trailer are working properly.
- Check the pressure of the trailer tyres, including the spare.
- Check regulations concerning the maximum speed or driving restrictions for vehicles towing trailers. If you are driving across several countries, check each country's requirements before leaving home, because regulations may vary.
- Turn off the rear parking sensor system. It may alert if it detects the towed object as an obstacle.

Customized Features P. 351

#### □ Driving Safely with a Trailer

Operating speed when towing a trailer must not exceed 100 km/h (62 mph).

### Parking

In addition to the normal precautions, place wheel chocks at each of the trailer's tyres.

When towing a trailer, we recommend that you carry a full-size spare wheel and tyre for both your vehicle and trailer. If you use the compact spare tyre\* that came with your vehicle, it could adversely affect vehicle handling.

Remember to unhitch the trailer before changing a flat tyre. Ask the trailer sales or rental agency where and how to store the trailer's spare tyre.

We recommend you drive uphill of less than 12% slope. Follow the trailer association's recommendations for suitable roads.

Winds caused by passing large vehicles can sway your trailer, keep a constant speed and steer straight ahead.

Always drive slowly and have someone guide you when reversing.

### Towing Speeds and Gears

- Drive slower than normal.
- Obey posted speed limits for vehicles with trailers.
- Use the **D** position when towing a trailer on level roads.

### ■ Turning and Braking

- Turn more slowly and with a wider turning arc than normal.
- Allow more time and distance for braking.
- Do not brake or turn suddenly.

# ■ Driving in Hilly Terrain

- If the (white) message appear on the driver information interface, turn off the climate control system and reduce speed.
- If the message appear on the driver information interface, pull to the side of the road safely to cool down the power system.

### ∑Towing Speeds and Gears


When towing a fixed-sided trailer (e.g., camper), do not exceed 88 km/h (55 mph). At higher speeds, the trailer may sway or affect vehicle handling.

# When Driving

# **Turning on the Power**



Electric Parking Brake Switch



Brake Pedal

- 1. Make sure the parking brake is applied.
  - ► The parking brake and brake system indicator (red) comes on for 30 seconds when you pull up the electric parking brake switch.

2. Depress the brake pedal.

### >> Turning on the Power

Keep your foot firmly on the brake pedal when starting the power system.

The engine is harder to start in cold weather and in thinner air found at altitudes above 2,400 metres (8,000 feet).

When turning on the power system in cold weather, turn off all electrical accessories such as the lights, climate control system, and rear demister in order to reduce the 12-volt battery drain.

If the exhaust system sounds abnormal or you can smell exhaust gas inside the vehicle, have your vehicle checked by a dealer. There may be a problem with the engine or exhaust system.

Bring the keyless remote close to the **POWER** button if the battery in the keyless remote is weak.


**▶ If the Keyless Remote Battery is Weak** P. 677

The power system may not activate if the keyless remote is subjected to strong radio waves.

Do not hold the **POWER** button to turn on the power system. If the power system does not start, wait at least 30 seconds before trying again.



**3.** Without depressing the accelerator pedal, press the **POWER** button while depressing the brake pedal.



1 Indicator

- **4.** Check the (Ready) indicator.
  - ► Keep depressing the brake pedal until the indicator comes on.
  - ➤ The 🚅 indicator comes on when the power system is on and you can start driving.
  - ▶ If the outside temperature is extremely low, you cannot drive until conditions are improved. In this case, the indicator does not come on and a warning message appears on the driver information interface.
    - **Driver Information Interface Warning and Information Messages** P. 135

### ∑Turning on the Power

The engine may not run when the vehicle is ready for driving.

You can start driving with the indicator on. If you press the **POWER** button while depressing the brake pedal with the indicator on, the power mode is set to VEHICLE OFF and you cannot start driving.

Indicators P. 114

The immobilizer system protects your vehicle from theft.

If an improperly coded key (or other device) is used, the power system does not activate.

Immobilizer System P. 211

When you set the power mode to ON, you may feel the brake pedal slightly sink down. This is normal.

# ■ Starting to Drive

- **1.** Keeping your right foot on the brake pedal, check that the indicator is on, then put the transmission into D. Select R when reversing.
- **2.** With the electric parking brake applied, release the brake pedal and gently depress the accelerator pedal.
  - ▶ Make sure the parking brake and brake system indicator (red) goes off.
    - Parking Brake P. 546
    - ▶ If the Transmission System Indicator Blinks along with the Warning Message P. 692

### ■ Hill start assist system

Hill start assist keeps the brake engaged briefly to help to prevent the vehicle from rolling on inclines as you move your foot from the brake pedal to the accelerator. Put the transmission into  $\boxed{\textbf{D}}$  when facing uphill, or  $\boxed{\textbf{R}}$  when facing downhill, then release the brake pedal.

### Starting to Drive

You can also release the parking brake by pressing the electric parking brake switch while depressing the brake pedal. When facing downhill, you can start your vehicle more smoothly by manually releasing it with the electric parking brake switch than by releasing it with the accelerator pedal.

As a hybrid vehicle, the sounds and vibrations from the engine may be absent even though the vehicle is ready for driving. It also makes you fail to recognise that you can start.

Make sure to check if the indicator is on before you start to drive.

### 

Hill start assist may not prevent the vehicle from rolling downhill on a very steep or slippery slope, and will not operate on small inclines.

Hill start assist will operate even when VSA is switched off.

Hill start assist is not a replacement for the parking brake.

# ■ Stopping the Power System

You can turn the power system off when the vehicle is completely stopped.

- **1.** Depress the brake pedal and change the shift position to **P**.
  - ▶ Do not release the brake pedal until you have confirmed that P is shown on the shift position indicator.
- 2. Press the **POWER** button.

# **Precautions While Driving**

### In a Fog

Visibility becomes low when it is foggy. When you drive, turn on the low beam headlights even during the daytime. Slow down, using the road line in the centre, guard rails, and the taillights of the vehicle ahead of you as your driving guide.

# ■ In a Strong Wind

If a strong side wind drifts your vehicle while driving, hold the steering wheel tight. Slowly decelerate your vehicle and keep your vehicle in the middle of the road. Be careful with wind gusts especially when your vehicle is exiting a tunnel, driving on a bridge or river bank, and driving through an open area like a quarry, and when a large lorry is passing by.

### ▶ Precautions While Driving

**CAUTION:** Do not drive on the road where water is deep. Driving through deep water will cause damage to the engine and electrical equipment and the vehicle will break down.

#### NOTICE

Do not select a shift button while pressing the accelerator pedal. You could damage the transmission.

#### NOTICE

If you repeatedly turn the steering wheel at an extremely low speed, or hold the steering wheel in the full left or right position for a while, the electric power steering (EPS) system heats up. The system goes into a protective mode and limits its performance. The steering wheel becomes harder and harder to operate. Once the system cools down, the EPS system is restored.

Repeated operation under these conditions can eventually damage the system.

If the power mode is set to ACCESSORY while driving, the power system will shut down and all steering and brake power assist functions will stop, making it difficult to control the vehicle.

Do not select  $\overline{\mathbb{N}}$  while driving as you will lose regenerative braking (and acceleration) performance.

### ■ In Rain

The road is slippery when raining. Avoid hard braking, rapid acceleration, and abrupt steering and be more cautious when driving. It is likely to experience hydroplaning phenomenon if you are driving on a rutted road with puddles. Do not drive in deep water and on flooded roads. This can damage the engine or driveline, or cause electrical component failure.

### Other Precautions

If there is a strong impact with something under the vehicle, stop in a safe location. Check the underside of the vehicle for damage or any fluid leaks.

### ▶ Precautions While Driving

During the first 1,000 km (600 miles) of operation, avoid sudden acceleration or full throttle operation so as not to damage the engine or powertrain.

Avoid hard braking for the first 300 km (200 miles) after purchasing your new vehicle or replacing the brake pads or rotors, to allow for proper break-in.

### NOTICE

The following can damage the under spoiler:

- Parking the vehicle by a parking block
- Parallel parking along the road shoulder
- Driving towards the bottom of a hill
- Driving up or down to a different surface level (such as a road shoulder)
- Driving on a rutted or bumpy road
- Driving on a road with potholes

#### >> In Rain

Be careful when hydroplaning phenomenon occurs. When you drive on a road covered with water at excessive speed, a layer of water builds between the tyres and the road surface. If this occurs, the vehicle cannot respond to control inputs such as steering, and braking.

Slowly decelerate when you increase the deceleration rate with the deceleration paddle selector. If the road is slippery, sudden regenerative braking can cause the tyres to skid.

### **Transmission**

# Creeping

As with a conventional petrol-powered vehicle with an automatic transmission, this vehicle will creep.

Keep the brake pedal firmly depressed when stopped or ensure that brake-hold is engaged.

### ■ Kickdown

Quickly depressing the accelerator pedal while driving uphill may cause the vehicle to react similarly to an automatic transmission vehicle, unexpectedly increasing vehicle speed. Depress the accelerator pedal carefully, especially on slippery roads and curves.

# **Shifting**

Change the shift position in accordance with your driving needs.

### ■ Shift Button Positions



### P Park

Used when parking or turning the power on or off.

Transmission is locked.

### R Reverse

Used when reversing.

### N Neutral

Transmission is not locked.

### D Drive

- Used for normal driving.
- The deceleration paddle selector can be used temporarily.
- The deceleration paddle selector can be used when **SPORT** mode is on.

### **≥**Shifting

# **AWARNING**

The vehicle can roll away if left unattended without confirming that Park is engaged.

A vehicle that rolls away could cause a crash resulting in serious injury or death.


Always keep your foot on the brake pedal until you have confirmed that  $\boxed{P}$  is shown on the shift position indicator.

To prevent malfunction and unintended engagement:

- Do not spill any liquids on or around shift buttons.
- Do not place or drop any objects on or around shift buttons.
- Do not let passengers or children operate the shift buttons.

While the High Voltage battery level is full, or the High Voltage battery temperature is low, regenerative braking may become less effective.

### ■ P (park) button



The shift position changes to  $\boxed{\textbf{P}}$  when you press the  $\boxed{\textbf{P}}$  button while the vehicle is parked with the power mode in ON. The indicators on the sides of the  $\boxed{\textbf{P}}$  button come on.

### **≥**Shifting


The beeper sounds and the message appears on the driver information interface when you depress the accelerator pedal with the shift position in [N].

# **Driver Information Interface Warning and Information Messages** P. 135

Change the shift position to  $\boxed{\textbf{D}}$  or  $\boxed{\textbf{R}}$  with the brake pedal depressed.

1 P Button

# Shift Operation

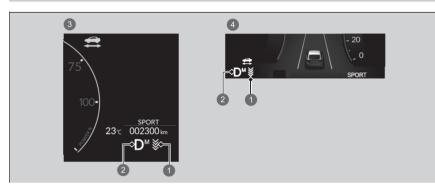

- Deceleration Paddle Selector Indicator
- 2 Shift Position Indicator (Transmission System Indicator)
- Models with A-type meter
- 4 Models with B-type meter

#### Shift Operation

### NOTICE

When you change D to R and vice versa, come to a complete stop and keep the brake pedal depressed. Operating the shift position before the vehicle has come to a complete standstill can damage the transmission.

When changing the shift position to  $\boxed{\mathbf{P}}$ , always keep your foot on the brake pedal until you have confirmed that  $\boxed{\mathbf{P}}$  is shown on the shift position indicator.

Use the shift position indicator and the shift button indicator to check the shift position before and after selecting a shift button.


If the indicator of the currently selected shift position, or all the shift position indicators are blinking simultaneously, there is a problem with the transmission.

Avoid sudden acceleration and have the transmission checked by a dealer as soon as possible.

When shifting positions in extremely low temperatures (–30°C), there may be a short delay before the shift position is displayed. Always confirm you are in the correct shift position before driving.

The beeper sounds once when you change to **R**.

**Customized Features** P. 351



Shift Button Indicator

- P: Press the P button.
- **R**: Press back the **R** button.
- N: Press the N button.
- **D**: Press the **D** button.

### ■ When opening the driver's door

If you open the driver's door under the following conditions, the shift position automatically changes to  $\boxed{\textbf{P}}$ .

- ▶ If you manually change the shift position from P with the brake pedal depressed, the shift position will automatically return to P once you release the brake pedal.
- The vehicle is stationary with the power mode in ON, or moving at 2 km/h (1 mph) or slower.
- The transmission is in other than **P**.
- You have unfastened the driver side seat belt.

### ■ When turning off the power mode

If you turn the power system off while the vehicle is stationary, and the transmission is in other than  $\boxed{P}$ , the shift position automatically changes to  $\boxed{P}$ .

### 

While the system is designed to automatically change the shift position to  $\boxed{P}$  under the described conditions, in the interest of safety you should always select  $\boxed{P}$  before opening the driver's door. Make sure to park the vehicle in a safe place.

### ₩hen Stopped P. 556

If you want to drive the vehicle after the shift position has automatically changed to P under the described conditions, close the door, fasten the seat belt, depress the brake pedal, then change the shift position.

If you leave the vehicle, turn off the power system and lock the doors.

### ■ If you want to keep the transmission in N position (car wash mode)

With the power system on:

- 1. Press and hold the brake pedal.
- 2. Select N.
- **3.** Within five seconds, press **POWER** button.
  - ➤ This puts the vehicle in car wash mode which must be used when your vehicle is pulled through a conveyor type automatic car wash where you or an attendant do not remain in the vehicle.
  - ▶ The shift position remains in N with the power mode in ACCESSORY for 15 minutes, then, it automatically changes to P.

Manually changing to  ${\bf P}$  cancels ACCESSORY mode. The  ${\bf P}$  indicator comes on and the power mode changes to OFF.

# ■ Restrictions on selecting a shift position


You cannot select a shift position under certain circumstances that may lead to a crash.

When the transmission is in:	1. Under these circumstances:	2. If you try to change to the following:	3. The shift position remains in/changes to:	How to change the shift position
P	The brake pedal is not depressed.		shift position	Release the accelerator pedal and depress the brake pedal.
	The accelerator pedal is depressed.			
M	The vehicle is moving at low speed without the brake pedal depressed.	Other shift position		
N	The vehicle is moving at low speed with the accelerator pedal depressed.			
N or D	The vehicle is moving forward.	R		
R or N	The vehicle is moving backward.	D		Park your vehicle in a safe place.
R, N or D	The vehicle is moving.	P		
P or N	The findicator is not on.	A shift position other than $\boxed{\textbf{P}}$ or $\boxed{\textbf{N}}$	P or N	Make sure that the indicator comes on.

### **Deceleration Paddle Selector**

When you release the accelerator pedal, you can control the rate of deceleration without removing your hands from the steering wheel. Using the deceleration paddle selector situated on the steering wheel, you can sequentially shift through four stages of deceleration.

When descending a hill, you can use the deceleration paddle selector to help maintain the rate of deceleration, thereby allowing you to keep a safe distance between your vehicle and the vehicle ahead.



The default deceleration stage is w. Each paddle selector operation makes a single stage deceleration change.

▶ The deceleration stage may not change if you keep the paddle selector pulled back.

- Decrease
- 2 Increase
- 3 Deceleration Stage

### To select the different stages of deceleration:

- Pull back the 🕂 selector (right side) to decrease the deceleration stage.
- Pull back the selector (left side) to increase the deceleration stage.

Pull the  $\pm$  selector for a few seconds when you want to cancel the deceleration paddle selector.

**≥** Deceleration Paddle Selector

# **ACAUTION**

Rapidly increasing the deceleration rate by quickly shifting the deceleration paddle selector can cause the tyres to skid, resulting in a crash that could injure or kill someone.


Always maintain a reasonable rate of deceleration.

If you pull back the right and left paddle selector at the same time, the deceleration stage may not change.

In the following situations, the stage may not change and the stage icon will blink even if you pull back the selector. The deceleration stage may decrease or cancel automatically:

- The High Voltage battery is fully charged or its temperature is too cold or too hot.
- The speed of the vehicle is beyond the deceleration range.
- Hybrid system protection is needed.
- The paddle selector is operated while your vehicle is stopped automatically by ACC with low speed follow.
- The brake pad temperature is too hot.
- Change the shift position to P, R, or N.

If either paddle selector is operated while driving, ACC with low speed follow will cancel automatically.

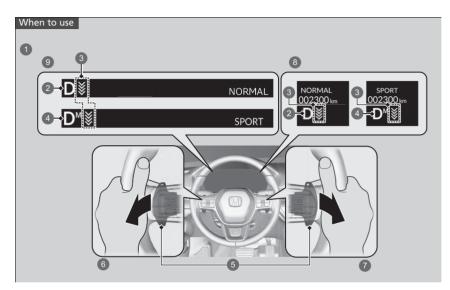

- 1 Shift position is in D
- ② When in a mode other than **SPORT** mode, the deceleration stage appears.
- 3 Deceleration Stage
- **4** When **SPORT** mode is ON, the deceleration stage and **M** appear.
- Paddle Selector
- 6 Increase the deceleration stage when pulling the ☐ paddle selector (left side)
- Decrease the deceleration stage when pulling the + paddle selector (right side)
- Models with A-type meter
- Models with B-type meter

### ■ When in a mode other than SPORT mode

If you pull back the paddle selector, the rate of deceleration will change temporarily, and the stage will appear in the gauge.

When you want to cancel the deceleration paddle selector, pull the  $\pm$  selector (right side) for a few seconds.

The deceleration paddle selector will cancel automatically and the deceleration stage in the gauge disappear when you drive with constant speed or accelerate, or just before your vehicle stops.

#### ■ When SPORT mode is ON

If you pull back the paddle selector, the rate of deceleration will change and the stage along with **M** will appear in the gauge. The deceleration stage will not cancelled automatically while **SPORT** mode is ON.

When you want to cancel the deceleration paddle selector, turn the **SPORT** mode OFF or pull the + selector (right side) for a few seconds. When cancelled, deceleration stage in the gauge disappears.

# **Acoustic Vehicle Alerting System**

Alerts pedestrians when a vehicle is propelled solely by electricity, approaching at speeds around 25 km/h (16 mph) or less.

### **Drive Mode Switch**


Press the **DRIVE MODE** switch to select the appropriate mode. The mode you select appears on the driver information interface and audio/information screen.

#### Drive Mode Switch

The mode may not be able to be changed under some driving conditions.

If there is a vehicle system failure, a message will also appear on the driver information interface, and you cannot change the mode.

# ■ Selecting the Drive Mode

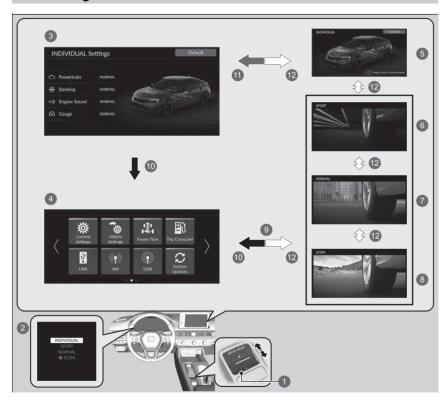

- **1 DRIVE MODE** Switch
- Changing modes by **DRIVE MODE** switch alters the screen on the driver information interface.
- **3 INDIVIDUAL Settings** Screen
- Audio/Information Screen
- **6 INDIVIDUAL** Mode
- **6** SPORT Mode
- NORMAL Mode
- ECON Mode
- The display returns to audio/information screen a few seconds after pressing the DRIVE MODE switch up or down.
- 10 Press the RACK or home button
- Press the DRIVE MODE switch up and hold or select Customise

   □ Customizing the INDIVIDUAL Settings P. 435
- Press the **DRIVE MODE** switch up or down


# **■ INDIVIDUAL Mode**



Each category can be customized separately to suit the driver's preference.

Customizing the INDIVIDUAL Settings
P. 435

# SPORT Mode



Enhances responsiveness to the driver's input.

## **■ NORMAL Mode**



Optimizes the balance between operability and comfort.

# **■ ECON Mode**



Facilitates fuel-efficient driving.

#### **≫**ECON Mode

While in **ECON** mode, the climate control system will be less effective and the vehicle will be slower to accelerate.

# ■ Next Start-Up Mode

The mode for the next start-up is saved according to the following chart.

Last Drive Mode	Next Drive Mode
INDIVIDUAL Mode	NORMAL Mode
SPORT Mode	NORMAL Mode
NORMAL Mode	NORMAL Mode
ECON Mode	ECON Mode

# ■ Customizing the INDIVIDUAL Settings





- 1. Select INDIVIDUAL mode.
- 2. Press the **DRIVE MODE** switch up and hold or select **Customise** to open the **INDIVIDUAL Settings**.
  - ➤ You can also select from customized features on the audio/information screen.
    - **Selecting the Drive Mode** P. 430
    - Customized Features P. 351
- **3.** Select the setting category.
- **4.** Select the desired setting.


#### 

When you select **Default** on the **INDIVIDUAL Settings** screen, all **INDIVIDUAL** settings are reset to their factory defaults.

# **Adjustable Speed Limiter**

This system enables you to set a maximum speed that cannot be exceeded even if you are depressing the accelerator pedal.

The vehicle speed limit can be set from about 30 km/h (18 mph) to about 250 km/h (156 mph).

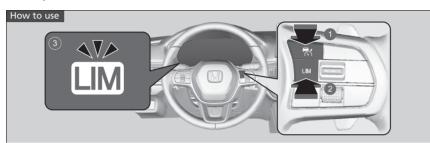

- 1 Press the ky button on the steering wheel.
- If a different indicator comes on, press the LIM button to switch to the adjustable speed limiter.
- **3** The Adjustable Speed Limiter Indicator (White) is on in the gauge. Adjustable speed limiter is ready to use.

■ Adjustable Speed Limiter

# **AWARNING**

Adjustable Speed Limiter has limitations. It is always your responsibility to adjust the vehicle speed to obey the actual speed limit, and safely operate the vehicle.

# **AWARNING**

Do not depress the accelerator pedal more than necessary.

Maintain an appropriate accelerator pedal position depending on the vehicle speed.


The adjustable speed limiter may not hold the set speed limit when driving downhill, especially if you are carrying a heavy load or towing a trailer. If this occurs, slow down by depressing the brake pedal.

When not using the adjustable speed limiter: Turn off the adjustable speed limiter by pressing the button.

You cannot use the Adjustable Speed Limiter and below systems at the same time.

-Adaptive cruise control (ACC) with low speed follow -Intelligent speed limiter

# ■ To Set the Speed Limit

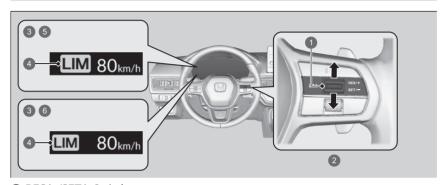

- **1 RES/+/SET/-** Switch
- 2 Up or down
- 3 On when the adjustable speed limiter is set.
- 4 Adjustable Speed Limiter Indicator (Green)
- **6** Models with A-type meter
- 6 Models with B-type meter
- Take your foot off the pedal and press the RES/+/SET/- switch up or down when
  you reach the desired speed.
  - The moment you release the **RES/+/SET/-** switch, the speed limit is fixed, and the adjustable speed limiter is set. The speed limit is displayed.
- You can set the previously set speed limit by pressing the **RES/+/SET/-** switch up.

#### ■To Set the Speed Limit

If you set the speed limit while travelling at less than 30 km/h (18 mph), the speed limit is set to 30 km/h (18 mph).


The adjustable speed limiter is set to the current speed if it is higher than the previously set speed limit when you press the **RES/+/SET/-** switch up.

You can switch the displayed set speed measurements between km/h and mph on the driver information interface or audio/information screen.

- **Speed/Distance Units** P. 170, 190
- **≥ Customized Features** P. 351

# ■ To Adjust the Speed Limit

Increase or decrease the speed limit by using the **RES/+/SET/-** switch on the steering wheel.

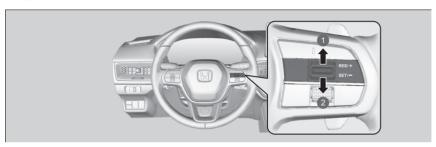

- 1 To increase speed
- 2 To decrease speed
- Each time you press the **RES/+/SET/-** switch up or down, the speed limit increases or decreases by 1 km/h or 1 mph accordingly.
- If you keep the **RES/+/SET/-** switch pressed up or down, the speed limit increases or decreases in increments of 10 km/h or 10 mph every 0.5 seconds until system limit is reached.
- The vehicle may accelerate or decelerate until the set speed is reached.

# **■** Exceeding the Speed Limit Temporarily

The speed limit can be exceeded by depressing the accelerator pedal completely.


- ► The displayed limit speed blinks.
- ▶ The beeper sounds once the speed limit has been exceeded.

#### Exceeding the Speed Limit Temporarily

The beeper sounds when the vehicle speed goes higher than the set speed limit with the accelerator pedal depressed completely.

The adjustable speed limiter resumes working once the vehicle speed goes lower than the set speed limit.

#### ■ To Cancel



- CANCEL Button
- 2 🕏 Button
- 3 LIM Button

To cancel the adjustable speed limiter, do any of the following:

- Press the **CANCEL** button.
- Press the 🕏 button.
- Press the **LIM** button.

#### ∑To Cancel


The adjustable speed limiter changes into adaptive cruise control (ACC) with Low Speed Follow or intelligent speed limiter if the **LIM** button is pressed.

Resuming the prior set speed:

Press the **CANCEL** button to display the prior set speed (grey) and press the **RES/+/SET/-** switch up to resume the prior set speed.


If you are driving at a speed faster than the prior set speed (grey), the adjustable speed limiter is set to the current speed by pressing the **RES/+/SET/-** switch up.

If you press the **RES/+/SET/-** switch up when no prior set speed (in grey) is displayed, the speed will be set to your vehicle's current speed.




- Adjustable Speed Limiter Indicator (White)
- Prior Set Speed (Grey)

#### ∑To Cancel




- Adjustable Speed Limiter Indicator (White)
- Prior Set Speed (Grey)

If there is a problem with the system when you are using the adjustable speed limiter, the beeper sounds and **OFF** comes on. The adjustable speed limiter will be turned off.



 Adjustable Speed Limiter Indicator (White)

#### ∑To Cancel




 Adjustable Speed Limiter Indicator (White)

# **Intelligent Speed Limiter**

Automatically sets the speed limit that the traffic sign recognition system detects. And the speed limit cannot be exceeded even if you are depressing the accelerator pedal. If you fully depress the accelerator the speed limit can be exceeded.

Traffic Sign Recognition System P. 535

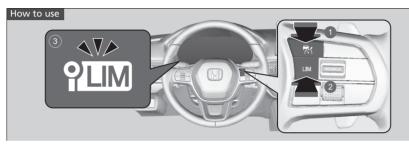

- 1 Press the steering wheel.
- 2 If a different indicator comes on, press the **LIM** button to change it to the intelligent speed limiter.
- 3 The Intelligent Speed Limiter Indicator (White) is on in the gauge. Intelligent speed limiter is ready to use.

# **AWARNING**

Intelligent Speed Limiter has limitations. The Intelligent Speed Limiter may set itself to a speed above or below the actual speed limit, or may not work, particularly where the traffic sign recognition system does not operate correctly or where a road has no speed limit signs. It is always your responsibility to adjust the speed to obey the actual speed limit and to safely operate the vehicle

Depending on the amount of depression of the accelerator pedal, the vehicle will accelerate until it reaches the speed identified by the traffic sign recognition system.

The system is designed to detect signs that follow the Vienna Convention standards. Not all signs may be detected, but any signs posted on roadsides should not be ignored. The system does not work on the designated traffic signs of all the countries you travel, nor in all situations.

Traffic Sign Recognition System P. 535

#### ≥ Intelligent Speed Limiter

If the intelligent speed limiter is set to the wrong speed limit, try one of the following:

To cancel

- Press the **CANCEL** button.
- Press the state button.
- Press the **LIM** button.

To exceed the speed limit temporarily


• Depressing the accelerator pedal fully.

The intelligent speed limiter may not hold the set speed limit when driving downhill, especially if you are carrying a heavy load or towing a trailer. If this occurs, slow down by depressing the brake pedal.

When not using the intelligent speed limiter, turn off the intelligent speed limiter by pressing the button.

You cannot use the intelligent speed limiter and adaptive cruise control (ACC) with Low Speed Follow or adjustable speed limiter at the same time.

# ■ To Set the Speed Limit

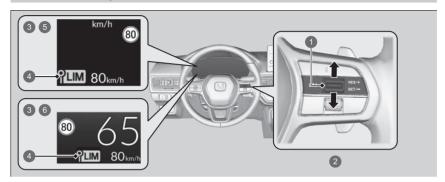

- RES/+/SET/- Switch
- 2 Up or down
- 3 On when the intelligent speed limiter is set to the speed limit that the traffic sign recognition system detects.
- 4 Intelligent Speed Limiter Indicator (Green)
- Models with A-type meter
- 6 Models with B-type meter
- The moment you release the RES/+/SET/- switch, the intelligent speed limiter is set to the speed limit that the traffic sign recognition system detects. The speed limit is displayed.

#### 

Do not use the intelligent speed limiter in areas of different units from the display unit of the intelligent speed limiter.

Change the displayed measurement of the set vehicle speed to the same units as the driving areas.

- Speed/Distance Units P. 170, 190
- **Customized Features** P. 351


#### **™**To Set the Speed Limit

If you set the intelligent speed limiter when the speed limit that the traffic sign recognition system detects is less than 30 km/h (18 mph), the speed limitation function may switch to pause.

If your vehicle speed is higher than the speed limit that the traffic sign recognition system detects, your vehicle decelerates slowly to the speed limit or less. If necessary, slow down by depressing the brake pedal.

### ■ When the traffic sign recognition system detects the new speed limit sign


The intelligent speed limiter is set to the new speed limit that the traffic sign recognition system detects.

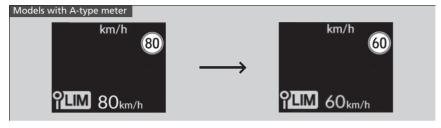




#### ≥ To Set the Speed Limit


The intelligent speed limiter may also switch to pause when the traffic sign recognition system detects only additional speed limit signs.





# ■ The speed limitation function may switch to pause if there is no speed limit sign in the screen of the traffic sign recognition system when:


- The end of speed limit or other designated limit is detected.
- Your vehicle enters/exits motorway or highway.
- You make a turn with a turn signal to change direction at an intersection.

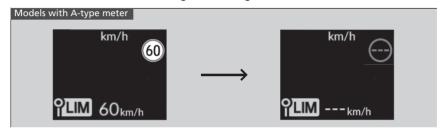



# ■ When the traffic sign recognition system detects the speed limit sign while the intelligent speed limiter is paused

The speed limitation function and warning function will be resumed automatically.

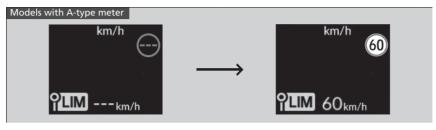



# Exceeding the Speed Limit Temporarily

The speed limit can be exceeded by depressing the accelerator pedal fully.

► The displayed speed limit blinks.

The beeper sounds once the speed limit has been exceeded.

### ■ To Cancel



To cancel the intelligent speed limiter, do any of the following:

- Press the **CANCEL** button.
- Press the 🔂 button.
- Press the **LIM** button.

### CANCEL Button

- Button
- B LIM Button


#### ■ Exceeding the Speed Limit Temporarily

The beeper sounds when the vehicle speed goes higher than the set speed limit with the acceleration pedal depressed completely.

The intelligent speed limiter resumes working once the vehicle speed goes lower than the set speed limit.


#### ∑To Cancel

The intelligent speed limiter changes into adaptive cruise control (ACC) with Low Speed Follow or adjustable speed limiter if the **LIM** button is pressed.



 Intelligent Speed Limiter Indicator (White)

#### ∑To Cancel



1 Intelligent Speed Limiter Indicator (White)

If there is a problem with the system or traffic sign recognition system when you are using the intelligent speed limiter, the beeper sounds and **OFF** comes on. The intelligent speed limiter will be turned off.

**▶ Traffic Sign Recognition System** P. 535

# **Vehicle Stability Assist (VSA) System**

VSA helps to stabilise the vehicle during cornering if the vehicle turns more or less than what was intended. It also assists in maintaining traction on slippery surfaces. It does so by regulating engine and motor output and selectively applying the brakes.

# VSA Operation



VSA System Indicator

When VSA activates, you may notice that the engine and motor do not respond to the accelerator. You may also notice some noise from the hydraulic brake system. You will also see the indicator blink.

#### ■ Vehicle Stability Assist (VSA) System

The VSA may not function properly if tyre type and size are mixed. Make sure to use the same size and type of tyre, and the air pressures as specified.

When the VSA system indicator comes on and stays on while driving, there may be a problem with the system. While this may not interfere with normal driving, have your vehicle checked by a dealer immediately.

VSA cannot enhance stability in all driving situations and does not control the entire braking system. You still need to drive and corner at speeds appropriate for the conditions and always leave a sufficient margin of safety.

The main function of the VSA system is generally known as Electronic Stability Control (ESC). The system also includes a traction control function.

The indicators for the adaptive cruise control (ACC) with low speed follow, safety support, vehicle stability assist (VSA) system, vehicle stability assist (VSA) **OFF**\*, Collision Mitigation Braking System, Road Departure Mitigation may come on after reconnecting the 12-volt battery. Drive a short distance at more than 20 km/h (12 mph). Each indicator should go off. If it does not, have your vehicle checked by a dealer.

#### ■ VSA On and Off



VSA OFF Indicator

This button is on the driver side control panel. To partially disable VSA functionality/ features, press and hold it until you hear a beep.

Your vehicle will have normal braking and cornering ability, but traction control function will be less effective.

To restore VSA functionality/features, press the (VSA **OFF**) button until you hear a beep.

VSA is turned on every time you turn the power system on, even if you turned it off the last time you drove the vehicle.

#### 

In certain unusual conditions when your vehicle gets stuck in shallow mud or fresh snow, it may be easier to free it with the VSA temporarily switched off.

When the B button is pressed, the traction control function becomes less effective. This allows for the wheels to spin more freely at low speed. You should only attempt to free your vehicle with the VSA off if you are not able to free it when the VSA is on.

Immediately after freeing your vehicle, be sure to switch VSA on again. We do not recommend driving your vehicle with the VSA system switched off.

You may hear a motor sound coming from the engine compartment while system checks are being performed immediately after turning the power system on or while driving. This is normal.

# **Agile Handling Assist**

Lightly brakes the front wheels, as needed, when you turn the steering wheel, and helps support the vehicle's stability and performance during cornering.

### ■ Agile Handling Assist

The agile handling assist cannot enhance stability in all driving situations. You still need to drive and corner at speeds appropriate for the conditions and always leave a sufficient margin of safety.

When the VSA system indicator comes on and stays on while driving, the agile handling assist does not activate.

You may hear a sound coming from the engine compartment while the agile handling assist is activated. This is normal.

# **Deflation Warning System**

Instead of directly measuring the pressure in each tyre, the deflation warning system on this vehicle monitors and compares the rolling radius and rotational characteristics of each wheel and tyre while you are driving to determine if one or more tyres are significantly under-inflated.



Low Tyre Pressure/Deflation
 Warning System Indicator

This will cause the low tyre pressure/deflation warning system indicator to come on and a message to appear on the gauge.

#### Deflation Warning System

The system does not monitor the tyres when driving at low speed.

Conditions such as low ambient temperature and altitude change directly affect tyre pressure and can trigger the low tyre pressure/deflation warning system indicator to come on.

Tyre pressure checked and inflated in:

- Warm weather can become under-inflated in colder weather.
- Cold weather can become overinflated in warmer weather.

The low tyre pressure/deflation warning system indicator will not come on as a result of overinflation.

The deflation warning system may not function properly if tyre type and size are mixed.

Make sure to use the same size and type of tyre.

Checking and Maintaining Tyres P. 623

The low tyre pressure/deflation warning system indicator may come on with a delay or may not come on at all when:

- You rapidly accelerate, decelerate, or turn the steering wheel.
- You drive on snowy or slippery roads.
- Tyre chains are used.
- The tyre loses air pressure rapidly.

#### Deflation Warning System

The low tyre pressure/deflation warning system indicator may come on under the following conditions:

- A compact spare tyre\* is used.
- There is a heavier and uneven load on the tyres, such as when towing a trailer, than the condition at calibration.
- Tyre chains are used.

The indicators for the adaptive cruise control (ACC) with low speed follow (amber), vehicle stability assist (VSA) system, vehicle stability assist (VSA) OFF\*, Collision Mitigation Braking System, Road Departure Mitigation, low tyre pressure/deflation warning system, and safety support (amber) may come on along with a message in the gauge after reconnecting the 12-volt battery. Drive a short distance at more than 20 km/h (12 mph). Each indicator should go off. If it does not, have your vehicle checked by a dealer.

## Deflation Warning System Calibration

You must start deflation warning system calibration every time you:

- Adjust the pressure in one or more tyres.
- Rotate the tyres.
- Replace one or more tyres.

Before calibrating the deflation warning system:

• Set the cold tyre pressure in all four tyres.

**E** Checking Tyres P. 623

#### Make sure:

- The vehicle is at a complete stop.
- The transmission is in **P**.
- The power mode is in ON.

#### 

The deflation warning system cannot be calibrated if a compact spare tyre\* is installed.

The calibration process requires approximately 30 minutes of cumulative driving at speeds between 40-100 km/h (25-62 mph).

During this period, if power mode is set to ON and the vehicle is not moved within 45 seconds, you may notice the low tyre pressure/deflation warning system indicator comes on briefly. This is normal and indicates that the calibration process is not yet complete.

If the tyre chains are installed, remove them before calibrating the deflation warning system.

If the low tyre pressure/deflation warning system indicator comes on even when the properly inflated specified regular tyres are installed, have your vehicle checked by a dealer.

We recommend that the tyres be replaced with the same brand, model, and size as the originals. Ask a dealer for details.



When you calibrate the deflation warning system, do the following.

Display Audio P. 290

- 1. Set the power mode to ON.
- 2. Press the button.
- 3. Select Vehicle Settings.



4. Select **Deflation warning system**.



- 5. Select Calibrate or Cancel.
  - If the **Calibration Failed to Start.** message appears, repeat step 5.
  - The calibration process finishes automatically.

# **Blind Spot Information System\***

When the system detects vehicles approaching from behind in adjacent lanes, the appropriate indicator comes on, providing assistance when you change lanes.

#### **Important Safety Reminder**

Like all assistance systems, the blind spot information system has limitations. Always look in your mirrors, to either side of your vehicle, and behind you for other vehicles before changing lanes. Overreliance on the blind spot information system may result in a collision.


Have your vehicle checked by a dealer in the following situations:

- The rear bumper or area around the radar sensors is strongly impacted.
- The indicator does not come on even if a vehicle in the alert zone should have been detected.
- The rear bumper or any system components need to be repaired.

If the rear bumper or any system components are repaired, the system will revert to alert zone 1 only until it is able to adapt and expand to alert zone 1 and 2.

# How the System Works

The system activates when your vehicle is moving forward at about 20 km/h (12 mph) or above.

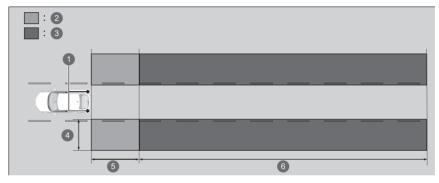

- Radar Sensors: underneath the rear bumper corners
- Alert Zone 1
- Alert Zone 2
  Alert zone range
- 4 Approx. 0.5 and 3 metres (1.6 and 10 ft.) from vehicle side.
- **5** Approx. 3 metres (10 ft.) from rear bumper.
- 6 Approx. 3 and 25 metres (10 and 82 ft.) behind from rear bumper. (The faster the approaching vehicle, the further away it will be detected.)


The initially set alert zone is alert zone 1. Over time, after the vehicle has been driven on straight roads with traffic and roadside objects, the system will adapt and expand the alert zone (alert zone 1 and 2).

#### ➤ How the System Works

Turn the system off when towing a trailer. The system may not work properly for the following reasons:

- The added mass tilts the vehicle and changes the radar coverage.
- The trailer itself can be detected by the radar sensors, causing the blind spot information system alert indicators to come on.

### ■ When the system detects a vehicle



- 1 Comes On
- Blinks

Blind spot information system alert indicator: Located on the outside door mirror on both sides.

#### Comes on when:

- A vehicle approaches you from behind to overtake you at a speed difference of no more than about 50 km/h (31 mph).
- You pass a vehicle at a speed difference of no more than about 20 km/h (12 mph).

### Blinks and a beeper sounds when:

You use the turn signal lever to signal a turn in the direction of the detected vehicle while the blind spot information system alert indicator is on.

► The beeper sounds three times.

#### ≫Blind Spot Information System \*

For proper blind spot information system operation:

- Always keep the rear bumper and area around the radar sensors clean.
- Do not cover the rear bumper corner area with labels or stickers of any kind.

The system is for your convenience only. Even if an object is within the alert zone, the following situations may occur:

- The blind spot information system alert indicator does not come on and the Blind spot information not available message appears on the driver information interface.
- The blind spot information system alert indicator may come on even with the message displayed.

The adaptive cruise control (ACC) with low speed follow (amber), vehicle stability assist (VSA) system, vehicle stability assist (VSA) **OFF**\*, Collision Mitigation Braking System, Road Departure Mitigation, low tyre pressure/deflation warning system, and safety support indicators may come on in amber along with a message in the gauge when you set the power mode to ON after reconnecting the battery. Drive a short distance at more than 20 km/h (12 mph). Each indicator should go off. If any do not, have your vehicle checked by a dealer.

# ■ Blind Spot Information System On and Off

You can turn the system on and off using the driver information interface.

Switching the Display P. 154, 175

**■ Safety Support** P. 168, 188

The blind spot information system will stay on the previously selected on or off setting each time you turn the power system on.

#### Blind Spot Information System \*

You can change the setting for the blind spot information system.

Customized Features P. 351

# Blind Spot Information System Conditions and Limitations

The blind spot information system alert indicator may not come on under the following conditions:

- There is a large speed difference between your vehicle and the vehicle in the adjacent lane.
- A vehicle is parked in a side lane.
- An object not detected by the radar sensors approaches or passes your vehicle.
- The vehicle driving in the adjacent lane is a motorcycle or other small vehicle.

The blind spot information system may not operate correctly under the following conditions:

- Making a turn at an intersection.
- Objects (guard rails, poles, trees, etc.) are detected.
- An object that does not reflect radio waves well or a motorcycle is in the alert zone.
- Driving on a curved road.
- A vehicle is moving from a far lane to the adjacent lane.
- The system picks up signal interference such as other radar sensors from another vehicle or strong radio wave transmitted from a facility nearby.
- The rear bumper or the area around the radar sensors is covered by dirt, mud, snow, ice, etc.
- The rear bumper or the area around the radar sensors has been damaged or deformed.
- In bad weather (heavy rain, snow, and fog).
- Making a short turn or driving on a bumpy road that slightly tilts the vehicle.
- An object such as a bicycle rack is attached to the rear of the vehicle.

# **High Voltage Battery**


The High Voltage battery gradually discharges even if the vehicle is not in use. As a result, if your vehicle is parked for an extended period of time, the battery charge level will become low. Extended periods of time at a low state of charge will shorten battery life. To maintain the battery state of charge, drive your vehicle for more than 30 minutes at least once every three months.

Extreme high temperatures can affect the battery life. You can minimise the effects by parking the vehicle in the shade during the summer.

#### 

Be careful not to let the High Voltage battery drain too much. If the battery level becomes close to zero, it will make it impossible to start the power system.

High voltage batteries are accompanied by a label with the following information (The illustration is an example).




- 1 Name and address of the manufacturer
- Name and address of the importer
- Battery model and Batch number XXXXX##

XXXXX: Battery model ##: Batch number

# **Adjusting Headlight Distribution**

Driving the right-hand type vehicle in right-hand traffic, or the left-hand type vehicle in left-hand traffic causes headlight glare to oncoming vehicles. You need to alter the headlight beam distribution using masking tape.

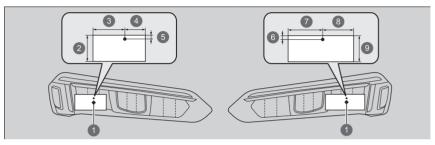

- Centre point
- **2** 40 mm (1.57 inches)
- **3** 48 mm (1.89 inches)
- **4** 32 mm (1.26 inches)
- **5** 10 mm (0.39 inches)

- **6** 10 mm (0.39 inches)
- **7** 52 mm (2.05 inches)
- **8** 48 mm (1.89 inches)
- **9** 40 mm (1.57 inches)
- **1.** Prepare for two rectangular pieces of masking tape, measuring 40 mm (1.57 inches) wide and 100 mm (3.94 inches)\*1 or 80 mm (3.15 inches)\*2 long.
  - ▶ Use masking tape that can shut out light, such as seal type waterproof vinyl.
- **2.** Affix the tape to the lens as shown.

#### ∑Adjusting Headlight Distribution

Be careful not to adhere the tape to an incorrect location. If the headlight beam is distributed incorrectly, it may not comply with your country's legal requirements. Ask your dealer for details.

<sup>\*1:</sup> For the driver's side headlight

<sup>\*2:</sup> For the passenger's side headlight

Assists with functions such as acceleration, braking, and steering in order to reduce the burden on the driver, as well as help to avoid or reduce the severity of collisions.

Honda SENSING has the following functions:

### ■ The functions that do not require switch operations to activate

- Collision Mitigation Braking System (CMBS) ≥ P. 469
- Road Departure Mitigation System **▶** P. 485
- Traffic Sign Recognition System **≥** P. 535
- Auto High-Beam\* ₽ P. 235
- Adaptive Driving Beam\* ▶ P. 238
- Blind Spot Information System\* ▶ P. 458
- Cross Traffic Monitor\* ▶ P. 564
- Parking Sensor System 
  ▶ P. 558
- Driver Attention Monitor ▶ P. 163, 183

#### ■ The functions that require switch operations to activate


- Adaptive Cruise Control (ACC) with Low Speed Follow ▶ P. 493
- Intelligent Speed Limiter **▶** P. 443
- Lane Keeping Assist System (LKAS) ₽. 513
- Traffic Jam Assist 
   P. 526

#### 

Make sure that all the tyres are of the same specified size, type, and brand, and that they are evenly worn. If you use tyres of different sizes, types, brands, or degree of wear, the system may not work properly.

Do not modify the suspension. Altering the height of the vehicle may prevent the system from working properly.

# Operation Switches for the Adaptive Cruise Control (ACC) with Low Speed Follow/Lane Keeping Assist System (LKAS)/Traffic Jam Assist



### **⊕** Button

Press to activate standby mode for ACC with Low Speed Follow.
Or press to cancel the system.

#### LKAS Button

Press to activate standby mode for LKAS and Traffic Jam Assist.
Or press to cancel these systems.

#### **⚠** Interval Button

Press to change the ACC with Low Speed Follow following-interval.

#### CANCEL Button

Press to cancel ACC with Low Speed Follow.


#### RES/+/SET/- Switch

Press the **RES/+/SET/-** switch up to set or resume the ACC with Low Speed Follow or increase the vehicle speed.

Press the **RES/+/SET/-** switch down to set the ACC with Low Speed Follow or decrease the vehicle speed.

## **■** Gauge Content

You can see the current state of ACC with Low Speed Follow, LKAS, and Traffic Jam Assist.



- Indicates that ACC with Low Speed Follow is ready to be activated.
  - Green: The system is on.
  - White: The system is standby.
  - Amber: There is a problem with the system.
- Indicates that LKAS or Traffic Jam Assist is ready to be activated.
  - Green: The system is operating.
  - White: The system is standby.
  - Amber: There is a problem with the system.
- Indicates that LKAS or Traffic Jam Assist is activated and whether or not traffic lane lines are detected.
  - Green lines: The system is operating.
  - White lines: Traffic lane lines are detected.
  - Amber line: Lane departure is detected.



4 Indicates whether or not a vehicle is detected ahead.

## Models with B-type meter

- Control target vehicle: White and outlined in green
- Outside of control target vehicle: Grey
- (5) Indicates that ACC with Low Speed Follow shows the set vehicle speed.
- 6 Indicates that ACC with Low Speed Follow shows the set vehicle interval.

# **Collision Mitigation Braking System (CMBS)**

The system can assist you when it determines there is a possibility of your vehicle colliding with a vehicle (including motorcycles) ahead from behind, an oncoming vehicle in front, a vehicle approaching from the side, a pedestrian, or someone riding a bicycle (moving bicycle). The CMBS is designed to alert you when the potential for a collision is determined, as well as assist in reducing speed, avoiding collisions, and reducing collision severity.

○ Collision Mitigation Braking System (CMBS)

#### **Important Safety Reminder**

The CMBS is designed to reduce the severity of an unavoidable collision. It does not prevent collisions nor stop the vehicle automatically. It is still your responsibility to operate the brake pedal and steering wheel appropriately according to the driving conditions.

The CMBS may not activate or may not detect a vehicle in front of your vehicle under certain conditions:


**CMBS Conditions and Limitations** P. 476

You can read about handling information for the front wide view camera equipped with this system.

Front Wide View Camera P. 544

When the CMBS is activated, it will continue to operate even if the accelerator pedal is partially depressed. However, it will be cancelled if the accelerator pedal is fully depressed.

## ■ How the system works

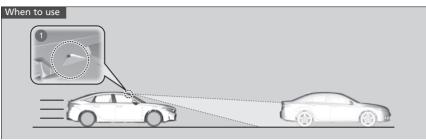

1 The front wide view camera is located behind the rearview mirror.

The system starts monitoring the roadway ahead when your vehicle speed is about 5 km/h (3 mph) or above and will search for a vehicle (including motorcycles), pedestrian, or moving bicycle in front of you.

The CMBS activates when:

- The speed difference between your vehicle and a vehicle (including motorcycles), pedestrian, or moving bicycle detected in front of you becomes about 5 km/h (3 mph) and over with a chance of a collision.
- Your vehicle drives at about 30 km/h (18 mph) or less and there is a chance of a frontal collision with a detected oncoming vehicle (including motorcycles), pedestrian, or moving bicycle when you turn left\*1/right\*2 at an intersection.

#### ➤ How the system works

The front wide view camera in the CMBS is also designed to detect pedestrians.

However, this pedestrian detection feature may not activate or may not detect a pedestrian in front of your vehicle under certain conditions.

Refer to the ones indicating the pedestrian detection limitations from the list.

**CMBS Conditions and Limitations** P. 476

<sup>\*1:</sup> Left-hand Drive Type

<sup>\*2:</sup> Right-hand Drive Type

- Your vehicle speed is about 100 km/h (62 mph) or less and the system determines there is a chance of a collision with:
- An oncoming or stationary vehicle detected in front of you.
- A pedestrian or moving bicycle detected in front of you.
- A vehicle approaching from the side in front of you.

The CMBS will be cancelled when your vehicle stops or the system determines there no longer is the potential for a collision.

The CMBS may also be cancelled when a driver operates the steering wheel and the brake or accelerator pedal to avoid a collision.

## ■ When the system activates



The system provides visual and audible alerts of a possible collision, and stops if the collision is avoided.

► Take appropriate action to prevent a collision (apply the brakes, change lanes, etc.)

- Visual Alerts
- 2 Audible Alert

You can change the distance (**Far/Normal/Near**) between vehicles at which the system's earliest collision alert will come on.

**■ Customized Features** P. 351

When in **Far**, visual and audible alerts come on at a longer distance from a vehicle ahead than in **Normal** setting, and in **Near**, at a shorter distance than in **Normal**.

# **■** Collision Alert Stages

The system has three alert stages for a possible collision. However, depending on circumstances, the CMBS may not go through all of the stages before initiating the last stage.

Distance between vehicles		CMBS		
		The sensors detect a vehicle	Audible & Visual WARNINGS	Braking
Stage one	3 4 6	There is a risk of a collision with the vehicle ahead of you.	The visual alert flashes.  If the distance between your vehicle and the vehicle in front of you continues to decrease, the audible alert sounds in addition to the visual alert flashing.  ▶ The collision warning distance can be changed.  ▶ Customized Features P. 351	_
Stage two	1 2	The risk of a collision has increased, time to respond is reduced.	Visual and audible alerts.	Lightly applied
Stage three	0 2	The CMBS determines that a collision is unavoidable.		Forcefully applied

- Your Vehicle
- A Normal 6 Near
- Vehicle Ahead
- Far

## CMBS On and Off

You can turn the system on and off using the driver information interface.

Switching the Display P. 154, 175

**■ Safety Support** P. 168, 188

The CMBS is turned on every time you turn the power system on, even if you turned it off the last time you drove the vehicle.

#### 

You cannot turn the CMBS off while driving.

The CMBS may automatically shut off, and the safety support indicator (amber) and collision mitigation braking system (CMBS) indicator (amber) will come and stay on under certain conditions.

**CMBS Conditions and Limitations** P. 476

The CMBS is not activated for about 15 seconds after the power system is turned on.

The Vehicle Stability Assist (VSA) system, Vehicle Stability Assist (VSA) **OFF**\*, Collision Mitigation Braking System, Road Departure Mitigation, Adaptive Cruise Control (ACC) with Low Speed Follow, low tyre pressure/deflation warning system and safety support indicators may come on in amber along with a message in the gauge when you set the power mode to ON after reconnecting the 12-volt battery. Drive a short distance at more than 20 km/h (12 mph). Each indicator should go off. If any do not, have your vehicle checked by a dealer.

## 

Have your vehicle checked by a dealer if you find any unusual behaviour of the system (e.g., the warning message appears too frequently).

## CMBS Conditions and Limitations

In the following situations, the front wide view camera may be unable to correctly detect vehicles, pedestrians, moving bicycles, or road conditions, potentially causing the CMBS to operate improperly.

Front Wide View Camera P. 544

#### **■** Environmental conditions

- Driving in bad weather (rain, fog, snow, etc.).
- Sudden changes between light and dark, such as the entrance or exit of a tunnel or the shadows of trees, buildings, etc.
- There is little contrast between objects and the background.
- Driving into low sunlight (e.g., at dawn or dusk).
- Strong light is reflected onto vehicles (including motorcycles), pedestrians, moving bicycles, or road surfaces.
- Roadway objects or structures are misinterpreted as vehicles and pedestrians.
- Water is sprayed by or snow blown from a vehicle ahead.
- Driving at night or in a dark place such as a tunnel (due to low-light conditions, vehicles [including motorcycles], pedestrians, or moving bicycles may not be illuminated).

## ■ Roadway conditions

- Driving on a snowy or wet roadway (obscured lane marking, vehicle tracks, reflected lights, road spray, high contrast).
- Driving on curvy, winding, or undulating roads.
- The road is hilly or the vehicle is approaching the crest of a hill.
- Your vehicle is strongly shaken on uneven road surfaces.

#### ■ Vehicle conditions

- Tyre chains are installed.
- Driving at night or in a dark place (e.g., a tunnel) with the headlights off.
- The front of the camera is obstructed by dirt, fog, rain, mud, wet snow, accessories, decals, stickers, film, etc.
- The inside of the windscreen is fogged.
- There is residue on the windscreen from the windscreen wipers.
- When lighting is weak due to dirt covering the headlight lenses, or there is poor visibility in a dark place due to the headlights being improperly adjusted.
- An abnormal tyre or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tyre\*, etc.).
- The vehicle is tilted due to heavy luggage in the luggage area or rear seats.
- The suspension has been modified.
- Driving with the parking brake applied.
- Camera vision is blocked by drops of water from the window washer, or by the wiper blades.
- Operation of the vehicle is unstable due to a slippery road, etc.
- The vehicle is towing a trailer.

- Examples of limitations on the correct detection of the front wide view camera due to the condition of the vehicle ahead of you, oncoming vehicles, vehicles approaching from the side, pedestrians, or moving bicycles
- The distance between your vehicle and the vehicle (including motorcycles) ahead of you, oncoming vehicle, vehicle approaching from the side, pedestrian, or moving bicycle ahead of you is too short.
- The vehicle (including motorcycles) ahead of you, oncoming vehicle, vehicle approaching from the side, pedestrian, or moving bicycle suddenly cuts in front of or jumps out in front of you.
- A bicycle is stopped.
- The oncoming vehicle or vehicle (including motorcycles) ahead of you is sideways or facing diagonally.
- When the vehicle (including motorcycles) ahead of you, oncoming vehicle, vehicle approaching from the side, pedestrian, or moving bicycle blends in with the background, preventing the system from recognising them.
- When several pedestrians are moving ahead of you in a group.
- When several bicycles are moving ahead of you in a group.
- When a pedestrian or moving bicycle crosses the road too quickly.
- A pedestrian or moving bicycle approaches from the opposite direction.
- The headlights of the vehicle ahead of you or oncoming vehicle are lit on one side or not lit on either side in a dark place.
- When part of a pedestrian (heads, limbs, etc.) is hidden by a carried object.
- When a pedestrian is bent over or squatting, when their hands are raised, or they are running.
- When the pedestrian is shorter than about 1 metre (3.3 feet) or taller than about 2 metres (6.6 feet) in height.
- When the pedestrian is pushing a stroller or bicycle.
- A vehicle is approaching diagonally from the side.

- A specially-shaped vehicle (such as a tank lorry or a lorry without a load) is approaching from the side.
- A vehicle approaching from the side is driving on a curve or hill.

## **■** Examples of other limitations on detection or system operation

- When the vehicle (including motorcycles) ahead of you is a small motorcycle, motorcycle with a sidecar, wheelchair, or other specially shaped vehicle.
- When a vehicle is lower in the rear than the front such as lorries that are not carrying a load, or a narrow vehicle.
- When the vehicle (including motorcycles) ahead of you, oncoming vehicle, pedestrian or moving bicycle is not in front of the vehicle.
- The speed difference between your vehicle and the vehicle (including motorcycles) ahead of you, oncoming vehicle, pedestrian, or moving bicycle is significantly large.
- The speed difference between your vehicle and the vehicle (including motorcycles) ahead of you, oncoming vehicle, pedestrian, or moving bicycle is too small and the distance between your vehicle and them is too short.
- The speed difference between your vehicle and a vehicle, pedestrian, or moving bicycle approaching from the side is significantly large.
- When the vehicle (including motorcycles) or moving bicycle in front of you slows suddenly.
- When the driver operates the brake pedal and steering wheel to avoid a collision.
- When you approach the vehicle (including motorcycles) ahead of you, oncoming vehicle, pedestrians, or moving bicycles while accelerating rapidly or operating the steering wheel (except when turning left\*1/right\*2 at an intersection etc.)\*3.
- When the moving bicycle is a child-sized bicycle, folding bicycle, three-wheeler or other bicycle with small tyres, or a long bicycle like a tandem bicycle.

<sup>\*1:</sup> Left-hand Drive Type

<sup>\*2:</sup> Right-hand Drive Type

<sup>\*3:</sup> When there is a possibility of a frontal collision with the oncoming vehicle while turning left\*1/right\*2, the CMBS is activated. However, it may not be activated if you suddenly turn the steering wheel.

- When the front wide view camera cannot correctly identify the shape of the vehicle (including motorcycles) ahead of you, oncoming vehicle, vehicle approaching from the side, pedestrian, or moving bicycle.
- When a vehicle (including motorcycles) that has an extremely high minimum ground clearance is ahead of you or approaching from the side.

#### ■ Automatic shutoff

The CMBS may automatically shut itself off and the safety support indicator (amber) and collision mitigation braking system (CMBS) indicator (amber) come and stay on when:


- You drive off-road or on a mountain road, or curved and winding road for an extended period.
- Driving in bad weather (rain, fog, snow, etc.).
- Driving with the parking brake applied.
- The front wide view camera temperature gets too high.
- The front of the camera is obstructed by dirt, fog, rain, mud, wet snow, accessories, decals, stickers, film, etc.
- An abnormal tyre condition is detected (incorrect tyre size, flat tyre, etc.). Once the conditions that caused the CMBS to shut off improve or are addressed (e.g., cleaning), the system comes back on.

## ■ With Little Chance of a Collision


Even if there is little chance of a collision, the CMBS may activate under the following conditions.

Also, the system may activate if it detects a possibility of collision with pedestrians, moving bicycles, or vehicles.


- Your vehicle approaches or passes another vehicle that is making a left or right turn.
- Your vehicle approaches another vehicle ahead of you and you change lanes to pass.

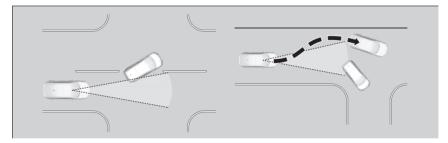

- When your vehicle approaches vehicles, pedestrians, or moving bicycles.
- When vehicles, pedestrians, or moving bicycles are passing in front of you.
- When you drive under a low structure or through a narrow gate at high speed.
- When there are traffic signs or structures such as guard rails beside the road along a curve.



• When driving through curves, your vehicle comes to a point where the oncoming vehicle is right in front of you.




• When approaching stationary vehicles or walls, such as when parking.

- A vehicle approaches from the side as it is driving through a curve.
- You pass by a vehicle (including motorcycles), pedestrian, or bicycle that is turning left or right.
- You pass in front of a vehicle (including motorcycles), pedestrian, or bicycle that is approaching from the side.
- A vehicle (including motorcycles), pedestrian, or bicycle turns left or right while approaching your vehicle from the side.
- You attempt to pass in front of a vehicle (including motorcycles) or bicycle while you are turning left or right.
- A vehicle (including motorcycles) or bicycle is attempting to pass in front of your vehicle while you are turning left or right.
- A vehicle (including motorcycles), pedestrian, or bicycle enters the path of your vehicle and stops in front of you.
- When you are turning left or right, a crossing pedestrian enters the path of your vehicle and stops in front of you.
- You pass close by the side of a vehicle parked on the street.

# **Road Departure Mitigation System**

Alerts and helps to assist you when the system detects a possibility of your vehicle crossing over detected lane markings, or approaching the outer edge of the pavement (into grass or gravel road shoulder) or a detected oncoming vehicle.

## How the System Works



- Amber Line
- Models with A-type meter
- Models with B-type meter

The front wide view camera behind the rearview mirror monitors left and right lane markings in white or yellow, the outer edge of the pavement (into grass or gravel road shoulder) or a detected oncoming vehicle. If your vehicle approaches any detected lane markings, the outer edge of the pavement (into grass or gravel road shoulder) or a detected oncoming vehicle when the turn signals have not been engaged, the system activates.

▶ If the system cannot detect lane markings (in white or yellow), no assistance will be provided to avoid approaching oncoming vehicles. In addition to a visual alert, the system assists with steering and alerts you with rapid steering wheel vibrations to help you remain within the detected lane.

Customized Features P. 351

■ Road Departure Mitigation System

#### **Important Safety Reminder**

Like all assistance systems, the Road Departure Mitigation system has limitations.

Overreliance on the Road Departure Mitigation system may result in a collision. It is always your responsibility to keep the vehicle within your driving lane.

The Road Departure Mitigation system alerts you when the system detects that you are approaching the outer edge of the pavement (into grass or gravel road shoulder), an oncoming vehicle, or drifting into another lane without using a turn signal.

The Road Departure Mitigation system may not detect all lane markings or every instance of lane drift.

The Road Departure Mitigation system may not detect that you are approaching the outer edge of the pavement (into grass or gravel road shoulder) or an oncoming vehicle.

The Road Departure Mitigation system may not be able to assist you depending on weather, speed, or road conditions.

The Road Departure Mitigation system is not activated for about 15 seconds after the power system is turned on.

You can read about handling information for the camera equipped with this system.

Front Wide View Camera P. 544

The system cancels assisting operations when you turn the steering wheel to avoid crossing over detected lane markings or approaching the outer edge of the pavement (into grass or gravel road shoulder) or an oncoming vehicle.



Road Departure Mitigation System Steering Assist Auto OFF indicator If the system operates several times without detecting driver response, the system beeps to alert you. After that, the Road Departure Mitigation System Steering Assist Auto OFF indicator comes on, the Road Departure Mitigation steering assist is temporarily stopped, and the system will only alert you with the warning sound.

After a few minutes, the Road Departure Mitigation System Steering Assist Auto OFF indicator goes off and the Road Departure Mitigation system is fully restored.

## 

The Road Departure Mitigation system may not work properly or may work improperly under the certain conditions:

# Road Departure Mitigation system Conditions and Limitations P. 489

There are times when you may not notice the Road Departure Mitigation system functions due to your operation of the vehicle, or road surface conditions.

You can change the settings for the Road Departure Mitigation system.

If LKAS is off, the message below may appear if the system has determined that there is a possibility of your vehicle crossing over detected lane markings, the outer edge of the pavement (into a grass or gravel road shoulder) or oncoming vehicle.

Customized Features P. 351



## ■ How the System Activates

The system activates when all of the following conditions are met:

- The vehicle is on a straight or slightly curved road.
- The turn signals are off.
- The system makes a determination that the driver is not actively accelerating, braking, or steering.
- The lane markings are white (yellow).

The vehicle is travelling between about 72 and 180 km/h (45 and 112 mph).

► When oncoming vehicles are running

The vehicle is travelling between about 30 and 180 km/h (18 and 112 mph).

• The outer edge of the pavement is grass or gravel road shoulder.

The vehicle is travelling between about 30 and 180 km/h (18 and 112 mph).

#### 

The Road Departure Mitigation system may automatically shut off and the safety support indicator (amber) and road departure mitigation indicator (amber) come and stay on.

Indicators P. 114

The Road Departure Mitigation system function can be impacted when the vehicle is:

- Driven on the inside edge of a curve, or outside of a lane.
- Driven in a narrow lane.

## Road Departure Mitigation system On and Off

You can turn the system on and off using the driver information interface.

Switching the Display P. 154, 175

**Safety Support** P. 168, 188

The Road Departure Mitigation system is turned on every time you turn the power system on, even if you turned it off the last time you drove the vehicle.

## ■ Road Departure Mitigation system On and Off

The Vehicle Stability Assist (VSA) system, Vehicle Stability Assist (VSA) **OFF**\*, Collision Mitigation Braking System, Road Departure Mitigation, Adaptive Cruise Control (ACC) with Low Speed Follow, low tyre pressure/deflation warning system and safety support indicators may come on in amber along with a message in the gauge when you set the power mode to ON after reconnecting the 12-volt battery. Drive a short distance at more than 20 km/h (12 mph).

Each indicator should go off. If any do not, have your vehicle checked by a dealer.

## ■ Road Departure Mitigation system Conditions and Limitations

The system may not properly detect lane markings (in white or yellow), the outer edge of the pavement (into grass or gravel road shoulder) or an oncoming vehicle under certain conditions. Some examples of these conditions are listed below.

#### ■ Environmental conditions

- There is little contrast between lane lines and the roadway surface.
- Driving in bad weather (rain, fog, snow, etc.).
- Driving on a snowy or wet roadway.
- Driving into low sunlight (e.g., at dawn or dusk).
- Shadows of adjacent objects (trees, buildings, guard rails, vehicles, etc.) are parallel to white (or yellow) lines.
- Sudden changes between light and dark, such as the entrance or exit of a tunnel or the shadows of trees, buildings, etc.
- Strong light is reflected onto the roadway.
- Driving at night or in a dark place such as a tunnel (due to low-light conditions, lane lines, the road surface, or oncoming vehicles may not be illuminated).
- The distance between your vehicle and the vehicle ahead of you is too short, and lane lines and the road surface are not visible.
- The outer edge of the road is bordered by objects, materials, etc. other than grass or gravel.

## **■** Roadway conditions

- Driving on a road with temporary lane markings.
- Faint, multiple, or varied lane markings are visible on the roadway due to road repairs or deteriorated lane markings.
- The roadway has merging, split, or crossing lines, such as at an intersection or crosswalk.
- The lane markings are extremely narrow, wide, or changing.
- Part of the lane markings are hidden by an object, such as a vehicle.
- The road is hilly or the vehicle is approaching the crest of a hill.
- Your vehicle is strongly shaken on uneven road surfaces.
- When objects on the road (curb, guard rail, pylons, etc.) are recognised as white (or yellow) lines.
- Driving on rough or unpaved roads, or over bumpy surfaces.
- Driving on roads with double lane lines.
- Driving on snowy or slippery roads.
- Passing through a junction.
- The pavement is only partially visible due to snow or puddles on the road.
- Driving on unpaved or rutted roads.
- White (or yellow) lines are not recognised correctly due to road conditions such as curves, twists, or hills.

#### ■ Vehicle conditions

- When lighting is weak due to dirt covering the headlight lenses, or there is poor visibility in a dark place due to the headlights being improperly adjusted.
- The front of the camera is obstructed by dirt, fog, rain, mud, wet snow, accessories, decals, stickers, film, etc.
- Driving at night or in a dark place (e.g., a tunnel) with the headlights off.
- When the driver operates the brake pedal and steering wheel.
- There is residue on the windscreen from the windscreen wipers.
- An abnormal tyre or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tyre\*, etc.).
- The vehicle is tilted due to heavy luggage in the luggage area or rear seats.
- Tyre chains are installed.
- The suspension has been modified.
- The vehicle is towing a trailer.

# ■ Examples of limitations on detection due to the condition of oncoming vehicles

- The oncoming vehicle or vehicle ahead of you is sideways.
- The oncoming vehicle jumps out in front of you.
- When the oncoming vehicle blends in with the background, preventing the system from recognising it.
- The headlights of an oncoming vehicle are lit on one side or not lit on either side in a dark place.
- The distance between your vehicle and the oncoming vehicle is too short.
- Part of the oncoming vehicle is not visible due to the vehicle ahead of you.
- There are multiple oncoming lanes or turning lanes.
- The vehicle in the adjacent lane is parked or moving at an extremely slow speed.

## **■** Examples of other limitations on detection or system operation

- When the oncoming vehicle is specially-shaped.
- When the camera cannot correctly identify the shape of the oncoming vehicle.

#### ■ With Little Chance of a Collision


The Road Departure Mitigation system may activate in the below conditions.

• When driving through curves, your vehicle comes to a point where an oncoming vehicle is right in front of you.

# Adaptive Cruise Control (ACC) with Low Speed Follow

Helps to maintain a constant vehicle speed and a set following-interval behind a vehicle detected ahead of yours and, if the detected vehicle comes to a stop, can decelerate and stop your vehicle, without you having to keep your foot on the brake or the accelerator.

When ACC with Low Speed Follow slows your vehicle by applying the brakes, your vehicle's brake lights will illuminate.

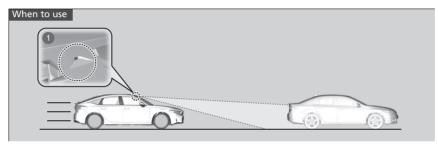

- 1 The front wide view camera is located behind the rearview mirror.
- Vehicle speed for ACC with Low Speed Follow: A vehicle is detected ahead within ACC with Low Speed Follow range – ACC with Low Speed Follow operates at speeds up to 180 km/h (112 mph).

No vehicle is detected within ACC with Low Speed Follow range – ACC with Low Speed Follow operates at the speed of 30 km/h (18 mph) or above.

• Shift position for ACC with Low Speed Follow: In D.

Madaptive Cruise Control (ACC) with Low Speed Follow

## **AWARNING**

Improper use of ACC with Low Speed Follow can lead to a crash.


Use ACC with Low Speed Follow only when driving on motorways and in good road and weather conditions.

## **AWARNING**

ACC with Low Speed Follow has limited braking capability and may not stop your vehicle in time to avoid a collision with a vehicle that quickly stops in front of you.

Always be prepared to apply the brake pedal if the conditions require.

## ■ How to activate the system

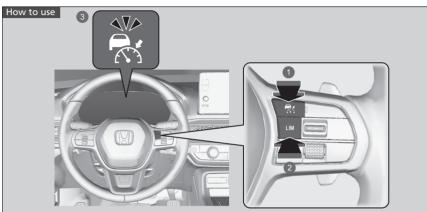

- Button

  Press the button on the steering wheel.
- **2 LIM** Button
  If a different indicator comes on, press the **LIM** button to change it to ACC with Low Speed Follow.
- (White) is on in the gauge.

  ACC with Low Speed Follow is ready to use.

Madaptive Cruise Control (ACC) with Low Speed Follow

## **AWARNING**

Exiting a vehicle that has been stopped while the ACC with Low Speed Follow system is operating can result in the vehicle moving without operator control.

A vehicle that moves without operator control can cause a crash, resulting in serious injury or death.

Never exit a vehicle when the vehicle is stopped by ACC with Low Speed Follow.

## **Important Reminder**

As with any system, there are limits to ACC with Low Speed Follow. Use the brake pedal whenever necessary, and always keep a safe interval between your vehicle and other vehicles.

ACC with Low Speed Follow may not work properly under certain conditions.

ACC with Low Speed Follow Conditions and Limitations P. 503

When not using ACC with Low Speed Follow: Turn off adaptive cruise by pressing the 🔣 button.

## ■ To Set the Vehicle Speed



- **1 RES/+/SET/-** Switch Up or down
- 2 On when ACC with Low Speed Follow begins
- (Green)
- 4 Set Vehicle Speed (White)
- Models with A-type meter
- 6 Models with B-type meter

## ■ Adaptive Cruise Control (ACC) with Low Speed Follow

You can read about handling information for the camera equipped with this system.

Front Wide View Camera P. 544

#### **™**To Set the Vehicle Speed

Do not use ACC with Low Speed Follow under the following conditions:

- On roads with frequent lane change or continuous stop and go traffic, ACC with Low Speed Follow cannot keep an appropriate distance between your vehicle and the vehicle ahead of you.
- On roads with sharp turns.
- On roads with toll collection facilities or other objects between lanes of traffic, or in parking areas, or facilities with drive through access.
- On roads with bad weather (rain, fog, snow, etc.), ACC with Low Speed Follow may not detect the distance between your vehicle and the vehicle ahead of you properly.
- On roads with slippery or icy surfaces. The wheels may spin out and your vehicle may lose the control on the condition.
- On roads with steep uphill or steep downhill slopes.
- On roads with undulating slopes.

When driving at about 30 km/h (18 mph) or above: Take your foot off the pedal and press the RES/+/SET/- switch up or down when you reach the desired speed. The moment you release the switch, the set speed is fixed, and ACC with Low Speed Follow begins.

When you use ACC with Low Speed Follow, Straight Driving Assist (a feature of the Electric Power Steering system) is activated.

By enabling the steering system to automatically compensate for natural steering pull, Straight Driving Assist makes it easier for you to keep your vehicle in a straight line.

When driving slower than about 30 km/h (18 mph): If the vehicle is moving and the brake pedal is not depressed, pressing the switch fixes the set speed to about 30 km/h (18 mph) regardless of current vehicle speed.


If your vehicle is stationary, you can set the vehicle speed even with the brake pedal depressed.

## ∑To Set the Vehicle Speed

The indicators for the adaptive cruise control (ACC) with low speed follow, low tyre pressure/deflation warning system, safety support, vehicle stability assist (VSA) system, vehicle stability assist (VSA) OFF\*, Collision Mitigation Braking System, Road Departure Mitigation, may come on along with a message in the gauge when you set the power mode to ON after reconnecting the 12-volt battery. Drive a short distance at more than 20 km/h (12 mph). Each indicator should go off. If any do not, have your vehicle checked by a dealer.


You can switch the displayed set speed measurements on the driver information interface or audio/information screen between km/h and mph.

- Speed/Distance Units P. 170, 190
- Customized Features P. 351



When ACC with Low Speed Follow starts operating, the vehicle icon, interval bars, and set speed appear on the gauge.

- Set Vehicle Interval
- 2 Set Vehicle Speed
- 3 🤼 (Green)




- 1 Set Vehicle Interval
- 2 Set Vehicle Speed
- **③** ★ (Green)

# ■ When in Operation

## ■ There is a vehicle ahead

ACC with Low Speed Follow monitors if a vehicle ahead of you enters the ACC with Low Speed Follow range. If a vehicle is detected doing so, the ACC with Low Speed Follow system maintains or decelerates your vehicle's set speed in order to keep the vehicle's set following-interval from the vehicle ahead.


**≥** To Set or Change Following-interval P. 508

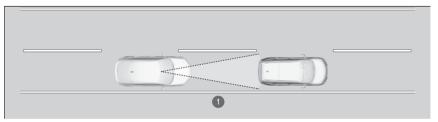

1 ACC with Low Speed Follow Range: 120 m (394 ft.)

## When in Operation ■


If the vehicle ahead of you slows down abruptly, or if another vehicle cuts in front of you, the beeper sounds and a message appears on the driver information interface.



Depress the brake pedal, and keep an appropriate interval from the vehicle ahead.




1 Audible Alert



When a vehicle whose speed is slower than your set speed comes in or cuts in front of you and is detected by the camera, your vehicle starts to slow down.

 A vehicle icon appears on the gauge.



- Control target vehicle
- Outside of control target vehicle

A vehicle icon appears on the gauge.

Control target vehicle: White and outlined in green

Outside of control target vehicle: Grey

## When in Operation ■

Even if the interval between your vehicle and the vehicle detected ahead is short, ACC with Low Speed Follow may start accelerating your vehicle under the following circumstances:

- The vehicle ahead of you is going at almost the same speed as, or faster than, your vehicle.
- A vehicle that cuts in front of you is going faster than your vehicle, gradually increasing the interval between the vehicles.

You can also set the system to beep when a vehicle detected in front of you comes in and goes out of the ACC with Low Speed Follow detecting range. A vehicle detect beep on and off can be selected.

**≧** Customized Features P. 351

#### Limitations

You may need to use the brake to maintain a safe interval when using ACC with Low Speed Follow. Additionally, ACC with Low Speed Follow may not work properly under certain conditions.

ACC with Low Speed Follow Conditions and Limitations P. 503

#### ■ There is no vehicle ahead



 A vehicle icon with line contour appears on the gauge. Your vehicle maintains the set speed without having to keep your foot on the brake or accelerator pedal.

If there previously was a vehicle detected ahead that kept your vehicle from travelling at the set speed, ACC with Low Speed Follow accelerates your vehicle to the set speed, and then maintains it.



While driving down steep hills, ACC with Low Speed Follow brakes to inhibit excessive acceleration for maintaining the set speed. However, the vehicle speed may become faster than the set speed.

## ■ When you depress the accelerator pedal


You can temporarily increase the vehicle speed. In this case, there is no audible or visual alert even if a vehicle is in the ACC with Low Speed Follow range.

ACC with Low Speed Follow stays on unless you cancel it.

Once you release the accelerator pedal, the system resumes an appropriate speed for keeping the following-interval while a vehicle ahead is within the ACC with Low Speed Follow range.


## When in Operation ■ When in Operation

 ACC with Low Speed Follow may temporarily control the interval between your vehicle and the vehicle in adjacent lane or surroundings of your vehicle depending on the road conditions (e.g., curves) or vehicle conditions (e.g., operating the steering wheel or the vehicle location in the lane).




 When the vehicle ahead of you moves away, such as when entering an interchange or rest area, ACC with Low Speed Follow may continue to maintain the set following-interval for a short time.

# ■ A vehicle detected ahead is within ACC with Low Speed Follow range and slows to a stop




Your vehicle also stops automatically. The **Stopped** message appears on the gauge. When the vehicle ahead of you starts again, if you press the **RES/+/SET/-** switch up or down, or depress the accelerator pedal, ACC with Low Speed Follow operates again within the previously set speed.






1 (Green)



If no vehicle is ahead of you before you resume driving, depress the accelerator pedal and ACC with Low Speed Follow will operate again within the prior set speed.





# ACC with Low Speed Follow Conditions and Limitations

The system may automatically shut off under certain conditions. Some examples of these conditions are listed below. Other conditions may reduce some of the ACC with Low Speed Follow functions.


Front Wide View Camera P. 544

#### ■ Environmental conditions

- Driving in bad weather (rain, fog, snow, etc.).
- Sudden changes between light and dark, such as the entrance or exit of a tunnel or the shadows of trees, buildings, etc.
- Strong light is reflected onto vehicles or road surfaces.
- Water is sprayed by or snow blown from a vehicle ahead.
- Driving at night or in a dark place such as a tunnel (due to low-light conditions, the whole vehicle may not be illuminated).
- Driving into low sunlight (e.g., at dawn or dusk).

# **■** Roadway conditions

• Driving on curvy, winding, undulating, or sloping roads.

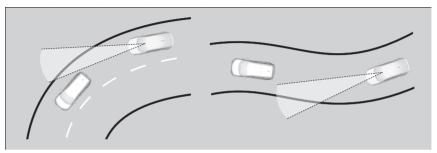

- Driving on rutted roads (snowy or unpaved roads, etc.).
- Puddles or a film of water is on the road surface.
- Your vehicle is strongly shaken on uneven road surfaces.

#### **■** Vehicle conditions


- The vehicle is tilted due to heavy luggage in the luggage area or rear seats.
- Tyre chains are installed.
- The front of the camera is obstructed by dirt, fog, rain, mud, wet snow, accessories, decals, stickers, film, etc.
- Driving at night or in a dark place (e.g., a tunnel) with the headlights off.
- There is residue on the windscreen from the windscreen wipers.
- When lighting is weak due to dirt covering the headlight lenses, or there is poor visibility in a dark place due to the headlights being improperly adjusted.
- An abnormal tyre or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tyre\*, etc.).
- The suspension has been modified.
- The vehicle is towing a trailer.
- \* Not available on all models

# ■ Examples of conditions under which the camera may not correctly detect the vehicle ahead of you

- A vehicle suddenly crosses in front of you.
- The interval between your vehicle and the vehicle ahead of you is too short.
- When the vehicle ahead of you blends in with the background, preventing the system from recognising it.
- The headlights of the vehicle ahead of you are lit on one side or not lit on either side in a dark place.


#### **■** Examples of conditions under which the system may not work properly

- A vehicle ahead of you stops and the speed difference between your vehicle and the vehicle ahead of you is significantly large.
- When the vehicle ahead of you slows suddenly.
- When the vehicle ahead of you is a specially shaped vehicle.
- When a vehicle is lower in the rear than the front such as lorries that are not carrying a load, or a narrow vehicle.



1 Camera detects upper section of an empty carrier lorry.


- When your vehicle or the vehicle ahead of you is driving on the edge of the lane.
- When the vehicle ahead of you is a narrow vehicle such as a motorcycle.
- When the minimum ground clearance of a vehicle ahead of you is extremely high.



• When the camera cannot correctly identify the shape of the vehicle ahead of you.

# ■ To Adjust the Vehicle Speed

Increase or decrease the vehicle speed using the **RES/+/SET/-** switch on the steering wheel.

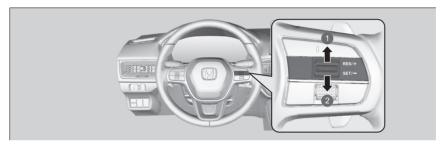

- 1 To increase speed
- 2 To decrease speed
- Each time you press the **RES/+/SET/-** switch up or down, the vehicle speed is increased or decreased by about 1 km/h or 1 mph accordingly.
- If you keep the **RES/+/SET/-** switch pressed up or down, the vehicle speed increases or decreases by about 10 km/h or 10 mph accordingly.

#### ™To Adjust the Vehicle Speed

If a vehicle detected ahead is going at a speed slower than your increased set speed, ACC with Low Speed Follow may not accelerate your vehicle. This is to maintain the set interval between your vehicle and the vehicle ahead.

When you depress the accelerator pedal and then press down and release the **RES/+/SET/-** switch, the current speed of the vehicle is set.

# ■ To Set or Change Following-interval



Interval Button

Press the interval button to change the ACC with Low Speed Follow following-interval. Each time you press the button, the following-interval (the interval behind a vehicle detected ahead of you) setting cycles through extra long, long, middle, and short following-intervals.

Determine the most appropriate followinginterval setting based on your specific driving conditions. Be sure to adhere to any following-interval requirements set by local regulation. The higher your vehicle's following-speed is, the longer the short, middle, long or extra long following-interval becomes. See the following examples for your reference.

Following-interval		When the Set Speed is:	
		80 km/h (50 mph)	104 km/h (65 mph)
Short		26.6 metres 87.3 feet 1.2 sec	33.7 metres 110.6 feet 1.2 sec
Middle	1 A 2	34.6 metres 113.5 feet 1.6 sec	44.9 metres 147.2 feet 1.6 sec
Long		44.0 metres 144.2 feet 2.0 sec	57.1 metres 187.3 feet 2.0 sec
Extra Long		53.6 metres 175.9 feet 2.4 sec	70.0 metres 229.6 feet 2.4 sec


When your vehicle stops automatically because a vehicle detected ahead of you has stopped, the interval between the two vehicles will vary based on the ACC with Low Speed Follow interval setting.

- \*1: Models with A-type meter
- \*2: Models with B-type meter

## ∑To Set or Change Following-interval

The driver must in all circumstances preserve a sufficient braking interval from the vehicle which precedes it and be aware that minimum intervals or times of spacing can be provided by the provisions of the Motorway Code locally applicable and that it is the driver's responsibility to respect those laws.

## ■ To Cancel



- CANCEL Button
- 2 R Button
- 3 LIM Button

To cancel ACC with Low Speed Follow, do any of the following:

- Press the **CANCEL** button.
  - ► The 🔝 indicator (green) on the gauge changes to the 🛃 indicator (white).
- Press the 🔂 button.
  - ▶ 🕏 indicator (green) goes off.
- Press the **LIM** button.
- Depress the brake pedal while the vehicle is moving forward.
  - ► The indicator (green) on the gauge changes to the indicator (white).

#### ∑To Cancel

Resuming the prior set speed: After you have cancelled ACC with Low Speed Follow, you can activate the ACC with Low Speed Follow with the prior set speed displayed on the gauge (in grey) by pressing the **RES/+/SET/-** switch up even if the vehicle is stopped.

When you turn the ACC with Low Speed Follow off by pressing the **CANCEL** button or depressing the brake pedal, the prior set speed is displayed on the gauge in grey.

When pressing the **RES/+/SET/-** switch up, the ACC with Low Speed Follow is activated with displayed speed.

If the similarity indicator (white) is displayed and you press the RES/+/SET/- switch up, but no prior set speed (in grey) is displayed, the speed will be set to your vehicle's current speed.


The set speed cannot be set or resumed when ACC with Low Speed Follow has been turned off using the button. Press the button to activate the system, then set the desired speed.

#### **■** Automatic cancellation

The beeper sounds and a message appears on the gauge when ACC with Low Speed Follow is automatically cancelled. Any of these conditions may cause the ACC with Low Speed Follow to automatically cancel:

- Bad weather (rain, fog, snow, etc.)
- The vehicle ahead of you cannot be detected.
- An abnormal tyre condition is detected, or the tyres are skidding.
- Driving on a mountainous road for extended periods, or driving off road.
- · Abrupt steering wheel movement.
- When the ABS, VSA, or CMBS is activated.
- When the VSA system indicator comes on.
- When the vehicle is stopped on a very steep slope.
- When you manually apply the parking brake.
- Water is sprayed by or snow blown from a vehicle ahead.
- Driving into low sunlight (e.g., at dawn or dusk).
- When the detected vehicle within the ACC with Low Speed Follow range is too close to your vehicle.
- When accelerating rapidly.
- The front of the camera is obstructed by dirt, fog, rain, mud, wet snow, accessories, decals, stickers, film, etc.
- The vehicle is loaded heavy luggage in the luggage area or rear seats.
- When passing through a dark place, such as tunnel.
- When the parking brake and brake system indicator (amber) comes on.
- The vehicle has repeatedly applied the brakes to maintain the set speed (for example, you are descending a long slope).
- When the system doesn't detect any driving actions from the driver for a certain amount of time while the LKAS is also activated.

#### ∑To Cancel



- 1 (White)
- Prior Set Speed (Grey)



- 1 (White)
- Prior Set Speed (Grey)

The ACC with Low Speed Follow automatic cancellation can be also triggered by the following causes. In these cases, the parking brake will be automatically applied.

- The driver's seat belt is unfastened when the vehicle is stationary.
- The vehicle stops for more than 10 minutes.
- The power system is turned off.

# Lane Keeping Assist System (LKAS)


Provides steering input to help to keep the vehicle in the middle of a detected lane and provides tactile, audible and visual alerts if the vehicle is detected drifting out of its lane.

## ■ Steering input assist

The system applies torque to the steering to keep the vehicle between the left and right lane lines. The applied torque becomes stronger as the vehicle gets closer to either of the lane lines.

### **■** Tactile, audible and visual alerts

Rapid vibrations on the steering wheel, audible and a warning display alert you that the vehicle is drifting out of a detected lane.

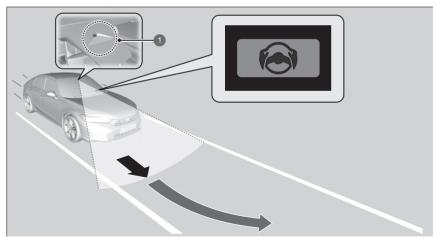

1 Front wide view camera: Monitors the lane lines

∑Lane Keeping Assist System (LKAS)

#### **Important Safety Reminders**

The LKAS is for your convenience only. It is not an autonomous driving system and always requires driver attention and control. The system does not work if you take your hands off the steering wheel or fail to steer the vehicle.

The LKAS is convenient when it is used on motorways or a dual carriage way.

Do not place objects on the instrument panel. Objects may reflect on the windscreen and prevent correct detection of the traffic lanes.

The LKAS only alerts you when lane drift is detected without a turn signal in use. The LKAS may not detect all lane markings or lane departures; accuracy will vary based on weather, speed, and lane marker condition. It is always your responsibility to safely operate the vehicle and avoid collisions.

The LKAS may not function as designed while driving in frequent stop and go traffic, or on roads with sharp curves.

You can read about handling information for the camera equipped with this system.

Front Wide View Camera P. 544

The LKAS may not work properly or may work improperly under the certain conditions:


**EXAS Conditions and Limitations** P. 522

When you operate the turn signals to change lanes, the system is suspended, and resumes after the signals are off.

If you make a lane change without operating the turn signals, the LKAS alerts activate, and torque is applied to the steering.

# ■ Lane Keep Support Function

Provides assistance to keep the vehicle in the centre of the lane. When the vehicle nears a white or yellow line, steering force of the electric power steering will become stronger.

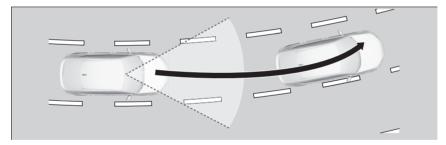


## ∑Lane Keeping Assist System (LKAS)

When it fails to detect lanes, the system will temporarily be cancelled. When a lane is detected, the system will recover automatically.

# ■ Lane Departure Warning Function

When the vehicle enters the warning area, the LKAS alerts you with slight steering wheel vibration, and audible and visual warnings.

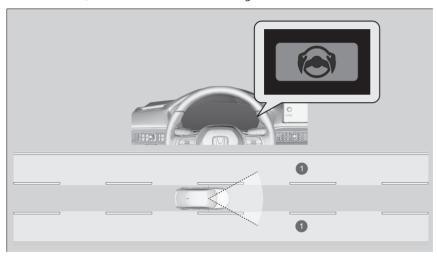

Warning Area

# ■ When the System can be Used

The system can be used when the following conditions are met.

- The lane in which you are driving has detectable lane markers on both sides, and your vehicle is in the centre of the lane.
- You are driving on a straight or slightly curved road.
- The turn signals are off.
- The brake pedal is not suddenly depressed.
- The vehicle is travelling between about 72 and 180 km/h (45 and 112 mph).

#### 


If the vehicle drifts towards either left or right lane line due to the system applying torque, turn off the LKAS and have your vehicle checked by a dealer.

Follow the points below to properly activate the system:


- Always keep the windscreen around the camera clean.
- When cleaning the windscreen, be careful not to apply windscreen cleanser to the camera lens.
- Do not touch the camera lens.
- Do not attach a sticker to the area around the camera.

If LKAS button is pressed when the system can be used, LKAS is on without standby.

## ■ How to activate the system




- LKAS Button
- White Lines
- 3 Lane Keeping Assist System (LKAS) Indicator (White)




- LKAS Button
- White Lines
- 3 Lane Keeping Assist System (LKAS) Indicator (White)

- 1. Press the LKAS button.
  - LKAS indicator (White) appears on the gauge.
    - The system is standby.
  - ► If traffic lane lines are detected, white lines appear on the gauge.



- Green Lines
- 2 Lane Keeping Assist System (LKAS) Indicator (Green)



- Green Lines
- 2 Lane Keeping Assist System (LKAS) Indicator (Green)

- **2.** Keep your vehicle near the centre of the lane while driving.
  - ➤ The LKAS indicator changes from white to green, and white lines change to green once the system starts operating after detecting the left and right lane markings.

# ■ To Cancel




Press the LKAS button.

The LKAS is turned off every time you turn the power system off, even if you turned it on the last time you drove the vehicle.


LKAS Button

## ■ The LKAS may be automatically suspended when:

When the LKAS is suspended under the following circumstances, green lines on the gauge change to white lines or disappear, and the beeper sounds (if activated).



- White Lines
- 2 Lane Keeping Assist System (LKAS) Indicator (White)



- White Lines
- 2 Lane Keeping Assist System (LKAS) Indicator (White)

- Your vehicle is driving to the right or the left of the lane.
- The system fails to detect lane lines.
- The steering wheel is turned quickly.
- You fail to steer the vehicle.
- Driving through a sharp curve.
- The ABS or VSA system engages.
- The brake pedal is suddenly depressed.
- Driving at a speed in excess of approximately 185 km/h (115 mph).

Once these conditions no longer exist, the LKAS automatically resumes.

∑The LKAS may be automatically suspended when:

You can change the setting for the LKAS. LKAS suspended beep on and off can be selected.

**■ Customized Features** P. 351

## ■ The LKAS may be automatically cancelled when:

In the following cases, traffic lane lines may disappear on the gauge, the beeper may sound, and the LKAS may be automatically cancelled:

- The camera temperature gets extremely high.
- The camera behind the rearview mirror, or the area around the camera, including the windscreen, is dirty.

## LKAS Conditions and Limitations

The system may not detect lane markings (in white or yellow), and LKAS may not function properly under certain conditions, including the following:

#### **■** Environmental conditions

- There is little contrast between lane lines and the roadway surface.
- Driving in bad weather (rain, fog, snow, etc.).
- Driving on a snowy or wet roadway.
- Driving into low sunlight (e.g., at dawn or dusk).
- Shadows of adjacent objects (trees, buildings, guard rails, vehicles, etc.) are parallel to white (or yellow) lines.
- Sudden changes between light and dark, such as the entrance or exit of a tunnel or the shadows of trees, buildings, etc.
- Driving at night or in a dark place such as a tunnel (due to low-light conditions, lane lines or the road surface may not be illuminated).
- The distance between your vehicle and the vehicle ahead of you is too short, and lane lines and the road surface are not visible.
- Strong light is reflected onto the roadway.

## **■** Roadway conditions

- Driving on a road with temporary lane markings.
- Faint, multiple, or varied lane markings are visible on the roadway due to road repairs or deteriorated lane markings.




- Faded lines
- 2 Duplicate lines
- Tyre tracks
- The roadway has merging, split, or crossing lines, such as at an intersection or crosswalk.
- The lane markings are extremely narrow, wide, or changing.



- Very wide or narrow traffic lane
- Part of the lane markings are hidden by an object, such as a vehicle.
- The road is hilly or the vehicle is approaching the crest of a hill.
- Your vehicle is strongly shaken on uneven road surfaces.
- When objects on the road (curb, guard rail, pylons, etc.) are recognised as white (or yellow) lines.
- Driving on rough or unpaved roads, or over bumpy surfaces.

- Driving on roads with double lane lines.
- Driving on snowy or slippery roads.
- The pavement is only partially visible due to snow or puddles on the road.
- There is a film of water or puddles on the road surface.
- White (or yellow) lines are not recognised correctly due to road conditions such as curves, twists, or hills.
- Driving on unpaved or rutted roads.
- Passing through a junction.



Lane void of lines at junction

525

#### ■ Vehicle conditions

- When lighting is weak due to dirt covering the headlight lenses, or there is poor visibility in a dark place due to the headlights being improperly adjusted.
- The front of the camera is obstructed by dirt, fog, rain, mud, wet snow, accessories, decals, stickers, film, etc.
- Driving at night or in a dark place (e.g., a tunnel) with the headlights off.
- There is residue on the windscreen from the windscreen wipers.
- An abnormal tyre or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tyre\*, etc.).
- The vehicle is tilted due to a heavy luggage in the luggage area or rear seats.
- The suspension has been modified.
- Tyre chains are installed.
- The vehicle is towing a trailer.

\* Not available on all models


# **Traffic Jam Assist**

The Traffic Jam Assist system uses a front wide view camera mounted to the upper portion of the windscreen to detect and monitor left and right white (or yellow) traffic Jane Jines.

Based on inputs from the camera, the system can apply steering torque to keep your vehicle in the centre of the detected lane.

#### **■** How Traffic Jam Assist works

When you are in heavy traffic and Lane Keeping Assist System (LKAS) is active, the Traffic Jam Assist system, upon detecting the traffic lane lines, will apply steering torque to help keep your vehicle in the centre of the lane.

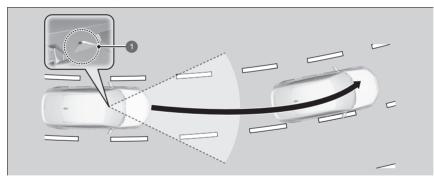

Front Wide View Camera Detects left and right white (or yellow) traffic lane lines

When you use the turn signal to indicate a lane change, Traffic Jam Assist is temporarily deactivated. It is reactivated once the vehicle is travelling in the centre of the lane and the system has detected the traffic lane lines.

#### Traffic Jam Assist

#### **Important Safety Reminders**

Traffic Jam Assist is for your convenience only. It is not an autonomous driving system and always requires driver attention and control. The system does not work if you take your hands off the steering wheel or fail to steer the vehicle.

Traffic Jam Assist is convenient when it is used on motorways or a dual carriage way.

You can read about handling information for the camera equipped with this system.

Front Wide View Camera P. 544

The Traffic Jam Assist only alerts you when lane drift is detected without a turn signal in use. The Traffic Jam Assist may not detect all lane markings or lane departures; accuracy will vary based on weather, speed, and lane marker condition.

It is always your responsibility to safely operate the vehicle and avoid collisions.

Traffic Jam Assist may not work properly under certain conditions:


Traffic Jam Assist Conditions and Limitations P. 531

When the driver takes full control of the steering, the steering assist function is temporarily cancelled.

The torque applied to the steering may not be noticeable when the driver has full control of the steering, or when the surface of the road is rough or uneven.

# ■ Lane Departure Warning Function

When the vehicle enters the warning area, the Traffic Jam Assist alerts you with slight steering wheel vibration, and audible and visual warnings.

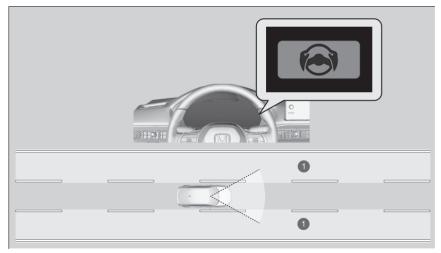

Warning Area

### ■ Traffic Jam Assist Activation

Traffic Jam Assist is activated when all of the following conditions exist:

- LKAS is activated.
- The lane in which you are driving has detectable lane markers on both sides, and your vehicle is in the centre of the lane.
- The vehicle is travelling between about 0 and 72 km/h (0 and 45 mph).
- You are driving on a straight or slightly curved road.
- The driver is gripping the steering wheel.
- The shift position is in **D**.

Do not use Traffic Jam Assist in any of the following situations:

- You are travelling on a road with sharp curves.
  - ▶ The system may not allow your vehicle to respond in a manner best suited for the road conditions.
- You are entering a toll booth, interchange, service area, or parking area.
- You are driving in adverse weather (rain, fog, snow, etc.).
- The surface of the road is slippery; for example, it is icy or covered with snow.
  - ▶ The tyres may slip, causing you to lose control of the vehicle.

#### ∑Traffic Jam Assist Activation


Refer to the following page for proper handling of the LKAS:

**■ Lane Keeping Assist System (LKAS)** P. 513


Refer to the following page for steering buttons and displays:

- ☑ Operation Switches for the Adaptive Cruise Control (ACC) with Low Speed Follow/Lane Keeping Assist System (LKAS)/Traffic Jam Assist P. 466
- **B** Gauge Content P. 467

## ■ How Traffic Jam Assist Works



- Green Lines
- 2 LKAS Indicator (Green)



- Green Lines
- 2 LKAS Indicator (Green)

Keep your vehicle near the centre of the lane while driving.

➤ The LKAS indicator changes from white to green, and white lines change to green once the system starts operating after detecting the left and right lane markings.


#### 

If your vehicle veers too far to the right or the left of the white (or yellow) traffic lane lines while Traffic Jam Assist is active, deactivate Traffic Jam Assist and have your vehicle checked by a dealer.

In some cases the system cannot properly detect the traffic lane lines and, as a result, will not provide steering assistance.

# **► Traffic Jam Assist Conditions and Limitations** P. 531

If the driver takes their hands off the steering wheel or does not adequately maintain control of steering, the warning below will appear.



If the driver does not grip the steering wheel after the warning above has repeatedly appeared, a warning buzzer will sound and Traffic Jam Assist will be cancelled.

# Cancelling Traffic Jam Assist

Press the LKAS button to cancel Traffic Jam Assist.

## ■ Traffic Jam Assist may be automatically suspended when:

- The system fails to detect lane lines.
- The steering wheel is turned sharply.
- You fail to steer the vehicle.
- You are driving through a sharp curve.
- The brake pedal is suddenly depressed.

Once these conditions no longer exist, Traffic Jam Assist automatically resumes.

## ■ Traffic Jam Assist may be automatically cancelled when:

- The temperature of the camera is too high.
- The camera behind the rearview mirror, or the area around the camera, including the windscreen, is dirty.

Upon cancelation, the lane lines will disappear from the screen and the beeper may sound.

∑Traffic Jam Assist may be automatically suspended when:

You can change the setting for the Traffic Jam Assist suspended beep on and off when you select the **Lane keep assist beep** on the audio/information screen.

Customized Features P. 351

## ■ Traffic Jam Assist Conditions and Limitations

The system may not detect lane markings and therefore may not keep the vehicle in the middle of the lane under certain conditions, including the following:

#### ■ Environmental conditions


- There is little contrast between lane lines and the roadway surface.
- Driving in bad weather (rain, fog, snow, etc.).
- Driving on a snowy or wet roadway.
- Driving into low sunlight (e.g., at dawn or dusk).
- Shadows of adjacent objects (trees, buildings, guard rails, vehicles, etc.) are parallel to white (or yellow) lines.
- Sudden changes between light and dark, such as the entrance or exit of a tunnel or the shadows of trees, buildings, etc.
- Driving at night or in a dark place such as a tunnel (due to low-light conditions, lane lines or the road surface may not be illuminated).
- When the lane lines or road surface are not visible, such as when the distance to the vehicle in front of you is extremely short or when at a junction.
- Strong light is reflected onto the roadway.

## **■** Roadway conditions

- Driving on a road with temporary lane markings.
- Faint, multiple, or varied lane markings are visible on the roadway due to road repairs or deteriorated lane markings.




- Faded lines
- 2 Duplicate lines
- Tyre tracks
- The roadway has merging, split, or crossing lines, such as at an intersection or crosswalk.
- The lane markings are extremely narrow, wide, or changing.



- 1 Very wide or narrow traffic lane
- Part of the lane markings are hidden by an object, such as a vehicle.
- The road is hilly or the vehicle is approaching the crest of a hill.
- Your vehicle is strongly shaken on uneven road surfaces.
- When objects on the road (curb, guard rail, pylons, etc.) are recognised as white (or yellow) lines.

- Driving on rough or unpaved roads, or over bumpy surfaces.
- Driving on roads with double lane lines.
- Driving on snowy or slippery roads.
- The pavement is only partially visible due to snow or puddles on the road.
- There is a film of water or puddles on the road surface.
- White (or yellow) lines are not recognised correctly due to road conditions such as curves, twists, or hills.
- Driving on unpaved or rutted roads.
- Passing through a junction.



Lane void of lines at junction

#### ■ Vehicle conditions


- When lighting is weak due to dirt covering the headlight lenses, or there is poor visibility in a dark place due to the headlights being improperly adjusted.
- The front of the camera is obstructed by dirt, fog, rain, mud, wet snow, accessories, decals, stickers, film, etc.
- Driving at night or in a dark place (e.g., a tunnel) with the headlights off.
- There is residue on the windscreen from the windscreen wipers.
- An abnormal tyre or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tyre\*, etc.).
- The vehicle is tilted due to a heavy luggage in the luggage area or rear seats.
- The suspension has been modified.
- Tyre chains are installed.
- The vehicle is towing a trailer.

# **Traffic Sign Recognition System**

Reminds you of road sign information, such as the current speed limit and that overtaking is prohibited, and notifies you if your vehicle is exceeding the speed limit.

# How the System Works

The system displays signs recognised as designated for your vehicle using information captured by the camera located behind the rear view mirror from traffic signs and data from the system while driving. The sign icon is usually displayed before passing the sign, and continues to be displayed until another sign is recognised.

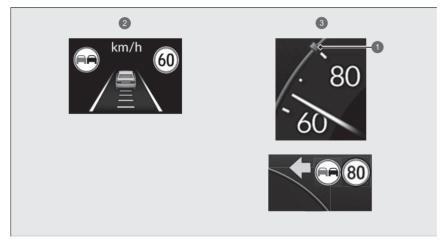

- Speed Limit Sign
- Models with A-type meter
- Models with B-type meter

#### 

#### Turkish models

In order to maintain system functionality, it is necessary to keep speed limit information on the ISA data up to date. Update the ISA data regularly.

# Refer to the separate manual for details on updates.

#### Except Turkish models

In order to maintain system functionality, it is necessary to keep speed limit information on the Navigation System up to date. Update Navigation System map information regularly.

## Refer to the Navigation System Manual

## **Important Safety Reminder**

The system is designed to detect signs that follow the Vienna Convention standards. Not all signs may be displayed, but any signs posted on roadsides should not be ignored. The system does not work on the designated traffic signs of all the countries you travel, nor in all situations.


Do not rely too much on the system. It is always your responsibility to drive at speeds appropriate for the road conditions.

Never apply a film or attach any objects to the windscreen that could obstruct the front wide view camera's field of vision and cause the system to operate abnormally.

The sign icon also may switch to another one, or disappear when:

- The end of speed limit or other designated limit is detected.
- Your vehicle enters/exits a road with a different speed limit.
- You make a turn with a turn signal at an intersection.

If the system does not detect any traffic signs while you are driving, the  $\bigcirc$  (white) will appear.



### ∑Traffic Sign Recognition System

Scratches, nicks, and other damage to the windscreen within the front wide view camera's field of vision can cause the system to operate abnormally. If this occurs, we recommend that you replace the windscreen with a genuine Honda replacement windscreen. Making even minor repairs within the front wide view camera's field of vision or installing an aftermarket replacement windscreen may also cause the system to operate abnormally. After replacing the windscreen, have a dealer recalibrate the front wide view camera. Proper calibration of the front wide view camera is

Proper calibration of the front wide view camera is necessary for the system to operate properly.

The Traffic Sign Recognition System is not activated for about 15 seconds after the power system is turned on.

To help reduce the likelihood that high interior temperatures will cause the front wide view camera's sensing system to shut off, find a shady area or face the front of the vehicle away from the sun when parking. If you use a reflective sun shade, do not allow it to cover the camera housing.

Covering the front wide view camera can concentrate heat on it.

You can read about handling information for the front wide view camera equipped with this system.

Front Wide View Camera P. 544

537

#### 

You can change the settings for the notification sound that plays when the detected speed limit changes.

Customized Features P. 351

You can turn the traffic sign recognition system on and off. If **None** is selected,  $\bigcirc$  (grey) will appear.

**■ Customized Features** P. 351

If your vehicle exceeds the detected speed limit, an icon representing the speed limit sign for the current area will blink in the display, and the beeper will sound if you continue to exceed the detected speed limit. However, the beeper will not sound if your vehicle is slowing down.

The system's ability to accurately notify the driver of the speed limit is dependent on certain conditions such as the units displayed on the traffic sign as well as the speed and direction of travel of the vehicle. In some cases, the system may display false warnings or other inaccurate information.

■ Traffic Sign Recognition System Conditions and Limitations P. 538

The unit for speed limits (mph or km/h) varies from country to country. Just after entering a country whose unit differs to the one of the country from which you came, the Traffic Sign Recognition System may not work correctly.

Speed/Distance Units P. 170, 190

**■ Customized Features** P. 351

# ■ Traffic Sign Recognition System Conditions and Limitations

The Traffic Sign Recognition system may incorrectly recognise, be slow to identify, or fail to recognise the traffic sign in the following cases.

#### **■** Environmental conditions

- Driving into low sunlight (e.g., at dawn or dusk).
- Strong light is reflected onto the roadway.
- Driving at night, in dark areas such as long tunnels.
- Driving in bad weather (rain, fog, snow, etc.).
- Sudden changes between light and dark, such as the entrance or exit of a tunnel or the shadows of trees, buildings, etc.
- Water is sprayed by or snow blown from a vehicle ahead.
- Reflections on the interior of the windscreen.

### ■ Roadway conditions

• Your vehicle is strongly shaken on uneven road surfaces.

#### ■ Vehicle conditions

- When lighting is weak due to dirt covering the headlight lenses, or there is poor visibility in a dark place due to the headlights being improperly adjusted.
- The front of the camera is obstructed by dirt, fog, rain, mud, wet snow, accessories, decals, stickers, film, etc.
- There is residue on the windscreen from the windscreen wipers.
- An abnormal tyre or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tyre\*, etc.).
- The vehicle is tilted due to heavy luggage in the luggage area or rear seats.
- The suspension has been modified.
- Tyre chains are installed.

(amber) appears on the gauge in the following cases. If this message does not disappear, have your vehicle checked by a dealer.

- There is a problem with the Traffic Sign Recognition System.
- Immediately after turning on the power system (including when it is started remotely).
- The system data is being updated.



- Driving at night or in a dark place (e.g., a tunnel) with the headlights off.
- The vehicle is towing a trailer.

### ■ The position or the condition of the traffic sign

- The sign is in a place that makes it hard to find.
- The sign is located far away from your vehicle.
- The sign is located where it is hard for headlight beams to reach.
- The sign is on a corner or bend in the road.
- The sign is faded or bent.
- The sign is rotated or damaged.
- The sign is covered with mud, snow, or frost.
- Part of the sign is hidden by the trees, or is in the shadow of a vehicle or other object.
- Light (such as a streetlight) is reflected on the surface of the sign, or it is hidden in shadow
- The sign is too bright or too dark (electric signs).
- Small signs (auxiliary signs, etc.).

#### **■** Other conditions

• When you are driving at a high speed.

The Traffic Sign Recognition System may not operate correctly, such as displaying signs that do not adhere to the actual regulations for the roadway or do not exist at all in the following cases:

- ► A speed limit sign may display at a higher or lower speed than the actual speed limit
- There is a supplementary sign with further information such as weather, time, vehicle type, etc.
- Figures on the sign are hard to read (electric sign, numbers on the signs are blurred, etc.).
- The sign is in the vicinity of the lane you are driving in, even though it is not for the lane, such as a speed limit sign situated at a junction between the side road and the main road.
- There are things that look similar in colour or shape to recognised objects (similar sign, electric sign, signboard, structure, etc.).


# ■ Situations where correct speed limit sign information cannot be provided for the area

In the following situations, the display may differ from the regulations of the roadway you are driving on, and/or the display may be delayed:


- A new road has been built.
- The speed limit has changed.
- The speed limit information stored in the database is outdated or inaccurate.
- When driving in areas where the information cannot be used or on alleyways without signs.
- The vehicle path that the sensor detected and the actual vehicle path are different
- There are adjacent roads with speed limits different from the one you are driving on.
- The sign is a temporary speed limit sign with non-standard features (such as design, etc.).
- When driving in a place with poor GPS reception, such as in tunnels or around skyscrapers.
- The vehicle repeatedly stops and starts at a low speed.
- When driving on a route different from the navigation guidance.\*
- There are continuous steep slopes or curves.
- There is a variable speed limit.

# ■ Signs Displayed on the Gauge

Two traffic signs can be simultaneously displayed next to each other when detected. The speed limit sign icon is displayed on the screen. The overtaking prohibition sign icon appears on the left. Any additional sign that indicated speed limit based on weather (snow, etc.) or specific period of time will appear on the left side.



- Overtaking Prohibition Sign
- Speed Limit Sign
- 3 Additional Speed Limit Sign Based on Conditions
- Speed Limit Sign

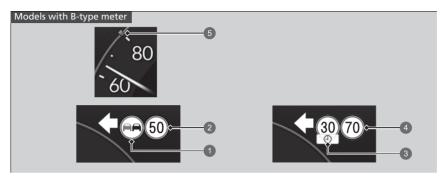


- Overtaking Prohibition Sign
- Speed Limit Sign
- 3 Additional Speed Limit Sign Based on Conditions
- 4 Speed Limit Sign
- **5** Speed Limit Sign

### **Front Wide View Camera**

The camera, used in systems such as Auto High-Beam\*, Adaptive Driving Beam\*, Collision Mitigation Braking System (CMBS), Road Departure Mitigation System, Adaptive Cruise Control (ACC) with Low Speed Follow, Lane Keeping Assist System (LKAS), Traffic Jam Assist, and Traffic Sign Recognition System, is designed to detect an object that triggers any of the systems to operate their functions.

# Camera Location and Handling Tips



Front Wide View Camera

This camera is located behind the rearview mirror.

To help to reduce the likelihood that high interior temperatures will cause the camera's sensing system to shut off, find a shady area or face the front of the vehicle away from the sun when parking. If you use a reflective sun shade, do not allow it to cover the camera housing. Covering the camera can concentrate heat on it.

#### ∑Front Wide View Camera

Never apply a film or attach any objects to the windscreen, the bonnet, or the front grille that could obstruct the camera's field of vision and cause the system to operate abnormally.

Scratches, nicks, and other damage to the windscreen within the camera's field of vision can cause the system to operate abnormally. If this occurs, we recommend that you replace the windscreen with a genuine Honda replacement windscreen. Making even minor repairs within the camera's field of vision or installing an aftermarket replacement windscreen may also cause the system to operate abnormally.

After replacing the windscreen, have a dealer recalibrate the camera. Proper calibration of the camera is necessary for the system to operate properly.

Do not place an object on the top of the instrument panel. It may reflect onto the windscreen and prevent the system from detecting lane lines properly.

#### >> Front Wide View Camera

If the Some driver assist systems cannot operate: Camera temperature too high message appears:

- Use the climate control system to cool down the interior and, if necessary, also use demister mode with the air flow directed towards the camera.
- Start driving the vehicle to lower the windscreen temperature, which cools down the area around the camera.

If the Some driver assist system cannot operate: Clean front windscreen or poor viewing condition. message appears:

• Park your vehicle in a safe place, and make sure the windscreen is clean.

Clean the windscreen if it is dirty. If the message does not disappear after driven for a while, have your vehicle checked by a dealer.

# **Brake System**

### Parking Brake

Use the parking brake to keep the vehicle stationary when parked. When the parking brake is applied, you can manually or automatically release it.



1 Electric Parking Brake Switch



Electric Parking Brake Switch

### ■ To apply

The electric parking brake can be applied any time the vehicle has battery, no matter which position the power mode is in.

Pull the electric parking brake switch up gently and securely.

- ▶ The indicator in the switch comes on.
- ► The parking brake and brake system indicator (red) comes on.

#### ■ To release

The power mode must be in ON in order to release the electric parking brake.

- **1.** Depress the brake pedal.
- **2.** Press the electric parking brake switch.
  - ► The indicator in the switch goes off.
  - ➤ The parking brake and brake system indicator (red) goes off.

Manually releasing the parking brake using the switch helps your vehicle to start slowly and smoothly when facing downhill on steep hills.

#### Braking

When you depress the brake pedal, you may hear a whirring sound from the engine compartment. This is because the brake system is in operation, and it is normal.

#### ▶ Parking Brake

### NOTICE

You may hear the electric parking brake system motor operating from the rear wheel area when you apply or release the parking brake. This is normal.

The brake pedal may slightly move due to the electric parking brake system operation when you apply or release the parking brake. This is normal.

You cannot apply or release the parking brake if the 12-volt battery goes dead.

**If the 12-Volt Battery Is Dead** P. 680 **Dead** P. 680

If you pull up and hold the electric parking brake switch while driving, the brakes on all four wheels are applied by the electric servo brake system until the vehicle come to a stop. The electric parking brake then applies, and the switch should be released.

### ■ Automatic parking brake feature operation

If the automatic parking brake feature has been activated:


- The parking brake is applied automatically when you set the power mode to OFF.
- To confirm that the parking brake is applied, check if the parking brake and brake system indicator (red) is on.

# Activating and deactivating the automatic parking brake feature P. 548

### ■ To release automatically

Depressing the accelerator pedal releases the parking brake.

Use the accelerator pedal to release the brake when you are starting the vehicle facing uphill, or in a traffic jam.



Gently depress the accelerator pedal. When on a hill, it may require more accelerator input to release.

► The parking brake and brake system indicator (red) goes off.

### 1 Accelerator Pedal

You can release the parking brake automatically when:

- You are wearing the driver's seat belt.
- The power system is on.
- The transmission is not in **P** or **N**.

#### ▶ Parking Brake

In the following situations, the parking brake automatically operates.

- When the vehicle stops more than 10 minutes while ACC with Low Speed Follow is activated.
- When the driver's seat belt is unfastened while your vehicle is stopped automatically by ACC with Low Speed Follow.
- When the power system is turned off while ACC with Low Speed Follow is activated.
- When the vehicle stops with the automatic brake hold system activated for more than 10 minutes.
- When the driver's seat belt is unfastened while your vehicle is stopped and brake hold is applied.
- When the power system is turned off while brake hold is applied.
- When there is a problem with the Brake Hold System while brake hold is applied.

### ∑To release automatically

If the parking brake cannot be released automatically, release it manually.

When the vehicle is travelling uphill, the accelerator pedal may need to be pressed farther to automatically release the electric parking brake.

Continued 547

### ■ Activating and deactivating the automatic parking brake feature

With the power mode in ON, carry out the following steps to either activate or deactivate the automatic parking brake feature.

- **1.** Put the transmission into **P**.
- **2.** Without depressing the brake pedal, pull up the electric parking brake switch.
  - ▶ Check that the parking brake and brake system indicator (red) has come on.
- **3.** Pull up and hold the parking brake switch. When you hear a beeping sound, release the switch and within three seconds pull up and hold the switch again.
- **4.** When you hear a sound indicating that the procedure is completed, release the switch.
  - Two beeps indicate that the feature has been activated.
  - ▶ One beep indicates that the feature has been deactivated.
  - ▶ When you have completed activating the feature, the parking brake will remain applied after you turn off the power system.
  - To confirm that the parking brake is applied, check if the parking brake and brake system indicator (red) is on.

If you need to temporarily deactivate the feature for when having your vehicle towed, you can follow the procedure explained below.

- **1.** Depress the brake pedal and bring the vehicle to a stop.
- **2.** Set the power mode to VEHICLE OFF and then within two seconds push down the electric parking brake switch.
  - Activation and deactivation settings for the feature will not be affected.
  - ▶ Before temporarily deactivating the feature, make sure to first turn off both Adaptive Cruise Control (ACC) with Low Speed Follow and the automatic brake hold system.
  - ➤ To confirm that the parking brake is applied, check if the parking brake and brake system indicator (red) is on.

#### ∑To release automatically

The parking brake cannot be released automatically while the following indicators are on:

- Malfunction indicator lamp
- Transmission system indicator

The parking brake may not be released automatically while the following indicators are on:

- Parking brake and brake system indicator (amber)
- VSA system indicator
- ABS indicator
- Supplemental restraint system indicator

#### Mactivating and deactivating the automatic parking brake feature

In cold climates, the parking brake may freeze in place if applied.

When parking the vehicle, chock the wheels and make sure the automatic parking brake feature is deactivated.

Also, when putting your vehicle through a conveyortype car wash or when having your vehicle towed, deactivate the automatic parking brake feature and leave the parking brake released.

### ■ Foot Brake

Your vehicle is equipped with disc brakes at all four wheels. The brake assist system increases the stopping force when you depress the brake pedal hard in an emergency situation. The anti-lock brake system (ABS) helps you to retain steering control when braking very hard.

**Brake Assist System** P. 554

**► Anti-lock Brake System (ABS)** P. 553

#### ≫Foot Brake

Check the brakes after driving through deep water, or if there is a buildup of road surface water. If necessary, dry the brakes by lightly depressing the pedal several times.

If you hear a continuous metallic friction sound when applying the brakes, the brake pads need to be replaced. Have your vehicle checked by a dealer.

Applying constant pressure to the brakes while going down a long hill can cause the brakes to heat up, resulting in a loss of stopping power.

Therefore, when descending a long hill, release the accelerator pedal and allow regenerative braking to slow the vehicle down.

To adjust the rate of deceleration, use the deceleration paddle selector.

When the high voltage battery has fully recharged, regenerative braking may not be possible.

POWER Gauge P. 150

▶ High Voltage Battery Charge Level Gauge P. 150

**Deceleration Paddle Selector** P. 425

Do not rest your foot on the brake pedal while driving, as it will lightly apply the brakes and cause them to lose effectiveness over time and reduce pad life. It will also confuse drivers behind you.

Continued 549

#### Automatic Brake Hold

Keeps the brake applied after releasing the brake pedal until the accelerator pedal is pressed. You can use this system while the vehicle is temporarily stopped, like at traffic lights and in heavy traffic.

### **■** Turning on the system



- Automatic Brake Hold Button
- 2 Comes On

Fasten your seat belt properly, then start the power system. Press the automatic brake hold button.

➤ The automatic brake hold system indicator comes on. The system is turned on.

The system is in the previously selected on or off setting each time you fasten the driver's seat belt and start the power system.

■ Automatic Brake Hold

# **AWARNING**

Activating the automatic brake hold system on steep hills or slippery roads may still allow the vehicle to move if you remove your foot from the brake pedal.

If a vehicle unexpectedly moves, it may cause a crash resulting in serious injury or death.

Never activate the automatic brake hold system or rely on it to keep a vehicle from moving when stopped on a steep hill or slippery roads.


# **AWARNING**

Using the automatic brake hold system to park the vehicle may result in the vehicle unexpectedly moving.

If a vehicle moves unexpectedly, it may cause a crash, resulting in serious injury or death.

Never leave the vehicle when braking is temporarily kept by automatic brake hold and always park the vehicle by putting the transmission in P and applying the parking brake.

### ■ Activating the system




- Brake Pedal
- 2 On
- Comes On

Depress the brake pedal to come to a complete stop. The transmission must not be in P or R.

- ➤ The automatic brake hold indicator comes on. Braking is kept for up to 10 minutes.
- Release the brake pedal after the automatic brake hold indicator comes on.

### **■** Cancelling the system



- Accelerator Pedal
- 2 On
- Goes Off

Depress the accelerator pedal while the transmission is in a position other than  $\boxed{\textbf{P}}$  or  $\boxed{\textbf{N}}$ . The system is cancelled and the vehicle starts to move.

► The automatic brake hold indicator goes off. The system continues to be on.

# **AWARNING**

When using the automatic brake hold, keep your foot on the brake pedal until the automatic brake hold indicator comes on. If the vehicle unexpectedly moves, it may cause a crash resulting in serious injury or death.

Release your foot from the brake pedal after the automatic brake hold indicator comes on.

While the system is activated, you can turn off the power system or park the vehicle through the same procedure as you normally do.

**When Stopped** P. 556

You may hear an operating noise if the vehicle moves while the automatic brake hold system is in operation.


### ■ The system automatically cancels when:

- You engage the parking brake.
- You depress the brake pedal and put the transmission into P or R.

### ■ The system automatically cancels and the parking brake is applied when:

- Braking is kept for more than 10 minutes.
- The driver's seat belt is unfastened
- The power system is turned off.
- There is a problem with automatic brake hold system.

### ■ Turning off the automatic brake hold system



Automatic Brake Hold Button

2 Goes Off

Goes Off

Only the automatic brake hold system indicator comes on:

- Press the automatic brake hold button.
  - ➤ The automatic brake hold system indicator goes off.

When the automatic brake hold indicator comes on at the same time:

- Press the automatic brake hold button with the brake pedal depressed.
  - ➤ The automatic brake hold system indicator and the automatic brake hold indicator go off.

#### ∑Turning off the automatic brake hold system

Make sure to turn off the automatic brake hold system before using an automated car wash.

If you turn off the power system or unfasten the driver's seat belt while the automatic brake hold system is on, the automatic brake hold system will automatically turn off. In this case, when the driver's seat belt is fastened and the power system is turned back on, the automatic brake hold system will turn on without needing to press the automatic brake hold button

# **Anti-lock Brake System (ABS)**

### ABS

Helps to prevent the wheels from locking up, and helps you to retain steering control by pumping the brakes rapidly, much faster than you can.

The electronic brake distribution (EBD) system, which is part of the ABS, also balances the front-to-rear braking distribution according to vehicle loading.

You should never pump the brake pedal. Let the ABS work for you by always keeping firm, steady pressure on the brake pedal. This is sometimes referred to as "stomp and steer."

### **■** ABS operation

The brake pedal may pulsate slightly when the ABS is working. Depress the brake pedal and keep holding the pedal firmly down. On dry pavement, you will need to press on the brake pedal very hard before the ABS activates. However, you may feel the ABS activate immediately if you are trying to stop on snow or ice.

ABS may activate when you depress the brake pedal when driving on:

- Wet or snow covered roads.
- Roads paved with stone.
- Roads with uneven surfaces, such as potholes, cracks, manholes, etc.

When the vehicle speed goes under 10 km/h (6 mph), the ABS stops.

Mari-lock Brake System (ABS)

### NOTICE

The ABS may not function correctly if you use a tyre of the incorrect size or type.

If the **ABS** indicator comes on while driving, there may be a problem with the system.

While normal braking will not be affected, there is a possibility that the ABS will not be operating. Have your vehicle checked by a dealer immediately.

The ABS is not designed for the purpose of reducing the time or distance it takes for a vehicle to stop: It is designed to limit brake lockup which can lead to skidding and loss of steering control.

In the following cases, your vehicle may need more distance to stop than a vehicle without the ABS:

- You are driving on rough or uneven road surfaces, such as gravel or snow.
- The tyres are equipped with tyre chains.

The following may be observed with the ABS system:

- Motor sounds coming from the engine compartment when the brakes are applied, or when system checks are being performed after the power system has been started and while the vehicle accelerates.
- Brake pedal and/or the vehicle body vibration when ABS activates.

These vibrations and sounds are normal to ABS systems and are no cause for concern.

# **Brake Assist System**

Is designed to assist the driver by generating greater braking force when you depress the brake pedal hard during emergency braking.

### ■ Brake assist system operation


Press the brake pedal firmly for more powerful braking.

When brake assist operates, the pedal may wiggle slightly and an operating noise may be heard. This is normal. Keep holding the brake pedal firmly down.

# **Emergency Stop Signal**

Activates when you brake hard while driving at 60 km/h (37 mph) or above to alert drivers behind you about sudden braking by rapidly flashing hazard warning lights. This may help to alert drivers behind you to take appropriate means to avoid a possible collision with your vehicle.

### ■ When the system activates:

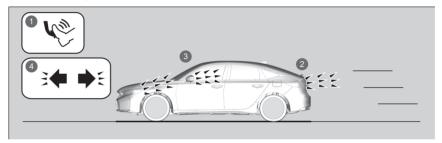

- Hard Braking
- Brake Lights Come On
- Hazard Warning Lights Flash
- 4 Hazard Warning Indicators Blink

The hazard warning lights stop flashing when:

- You release the brake pedal.
- The ABS is deactivated.
- Your vehicle's decelerating speed becomes moderate.
- You press the hazard warning button.

### Emergency Stop Signal

The emergency stop signal is not a system that can prevent a possible rear-end collision caused by your hard braking. It flashes the hazard warning lights at the time you are braking hard. It is always recommended to avoid hard braking unless it is absolutely necessary.

The emergency stop signal does not activate with the hazard warning button pressed in.

If the ABS stops working for a certain period during braking, the emergency stop signal may not activate at all.

# Parking Your Vehicle

# When Stopped

- **1.** Depress the brake pedal firmly and come to a complete stop.
- **2.** With the brake pedal depressed, pull up the electric parking brake switch slowly, but fully.
- **3.** Change the shift position to  $\boxed{P}$ .
  - ▶ Do not release the brake pedal until you have confirmed that P is shown on the shift position indicator.
- **4.** Turn off the power system.

Always set the parking brake, especially if you are parked on an incline.

#### When Stopped

Do not park your vehicle near flammable objects, such as dry grass, oil, or timber.

Heat from the exhaust can cause a fire.

# **AWARNING**

The vehicle can roll away if left unattended without confirming that Park is engaged.

A vehicle that rolls away could cause a crash resulting in serious injury or death.

Always keep your foot on the brake pedal until you have confirmed that P is shown on the shift position indicator.

#### NOTICE

The following can damage the driveline:

- Depressing the accelerator and brake pedals simultaneously.
- Changing to P before the vehicle stops completely.

When facing uphill, do not hold the vehicle by depressing the accelerator pedal.

Doing so may cause the power system to overheat and fail


### When Stopped

In extremely cold temperatures, the parking brake may freeze up if applied. If such temperatures are expected, do not apply the parking brake but if parking on a slope, either turn the front wheels so they will contact the curb if the vehicle rolls down the slope or block the wheels to keep the vehicle from moving. If you do not take either precaution, the vehicle may roll unexpectedly, leading to a crash.

# **Parking Sensor System**

The corner and centre sensors monitor obstacles around your vehicle, and the beeper, driver information interface, and audio/information screen let you know the approximate distance between your vehicle and the obstacle.

# ■ The sensor location and range

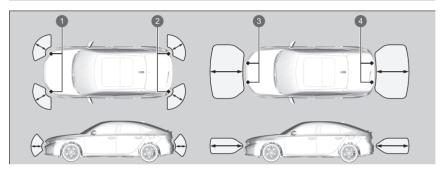

- Front Corner Sensors
- 2 Rear Corner Sensors
- Front Centre Sensors
- Rear Centre Sensors

#### ▶ Parking Sensor System

Even when the system is on, always confirm if there is no obstacle near your vehicle before parking.

The system may not work properly when:

- The sensors are covered with snow, ice, mud, or dirt.
- The vehicle has been out in hot or cold weather.
- There is something nearby that emits ultrasonic waves or high frequency sounds.
- Driving in bad weather (rain, fog, snow, etc.).

The system may not detect these obstacles:

- Thin or low objects.
- Sonic-absorptive materials, such as snow, cotton, or sponge.
- Objects directly under the bumper.

The system may falsely detect obstacles in the following situations:

- The vehicle is on uneven surface, such as grass, bumps, or a hill.
- When close to other vehicles with sonar sensors or other objects that emit ultrasonic waves.
- There is splashing water near the sensors due to heavy rains, etc.

Do not put any accessories on or around the sensors.

- ▶If you put any accessories (such as a towing hitch or bicycle rack) on or around the rear sensors, the system may activate if it detects these accessories as an obstacle. In this case, turn off the rear sensor.
  - Customized Features P. 351

### Parking sensor system on and off

You can turn the system on and off using the driver information interface.

- ▶ The beeper and the warning display are turned off when the system is off.
- Switching the Display P. 154, 175
- **Safety Support** P. 168, 188

The front corner, rear corner and rear centre sensors start to detect an obstacle when the transmission is in  $\boxed{\mathbf{R}}$ , and the vehicle speed is less than 8 km/h (5 mph).

The front corner and front centre sensors start to detect an obstacle when the transmission is in any position other than  $\boxed{P}$  or  $\boxed{R}$ , and the vehicle speed is less than 8 km/h (5 mph).

### ▶ Parking sensor system on and off


When you set the power mode to ON, the system will be in the previously selected condition.

You can turn the rear parking sensor system on and off using the audio/information screen.

**■ Customized Features** P. 351

Continued 559

# ■ Screen Operation



You can switch between split view off and split view on by touching the split screen tab.

- Split View Off
- Split Screen Tab



Split View On

# ■ When the distance between your vehicle and obstacles becomes shorter



### **Parking Sensor Indicator**

The parking sensor indicator blinks.

▶ If the system is turned off, only the parking sensor indicator will blink when an obstacle is detected.

Interval between beeps	Distance between the Bumper and Obstacle		Indicator	Driver information	Audio/Information
	Corner Sensors	Centre Sensors	maicator	interface	Screen
Moderate	-	Front: About 90-70 cm (35-28 inches) Rear: About 111-60 cm (44-24 inches)	Comes on*1/ Blinks*2 in Yellow*3		APPROACHING ORJECT
Short	About 60-45 cm (24-18 inches)	Front: About 70-55 cm (28-22 inches) Rear: About 60-45 cm (24-18 inches)	Comes on*1/		
Very short	About 45-35 cm (18-14 inches)	Front: About 55-45 cm (22-18 inches) Rear: About 45-35 cm (18-14 inches)	Blinks* <sup>2</sup> in Amber		
Continuous	About 35 cm (14 inches) or less	Front: About 45 cm (18 inches) or less Rear: About 35 cm (14 inches) or less	Comes on*1/ Blinks*2 in Red		

<sup>\*1:</sup>On the driver information interface

<sup>\*2:</sup>On the audio/information screen

<sup>\*3:</sup>At this stage, only the centre sensors detect obstacles.

1 Indicators light up where the sensor detects an obstacle.

To temporarily turn off the beeper, press the left\*1/right\*2 selector wheel while it is sounding. Temporary OFF will be cancelled when the shift position is switched or the vehicle speed reaches 14 km/h (9 mph) or higher.

<sup>\*1:</sup> Models with A-type meter

<sup>\*2:</sup> Models with B-type meter

### **Cross Traffic Monitor\***

Monitors the rear corner areas using the radar sensors when reversing, and alerts you if a vehicle approaching from a rear corner is detected.

The system is convenient when you are backing out of a parking space.

Cross Traffic Monitor\*

# **ACAUTION**


Cross Traffic Monitor cannot detect all approaching vehicles and may not detect an approaching vehicle at all.

Failure to visually confirm that it is safe to back up the vehicle before doing so may result in a collision.

Do not solely rely on the system when reversing; always also use your mirrors, and look behind and to the sides of your vehicle before reversing.

The parking sensor system's alerting buzzer overrides the Cross Traffic Monitor buzzer when the sensors are detecting obstacles at the closest range.

### How the System Works



The system activates when:

- The power mode is in ON.
- The Cross Traffic Monitor is turned on.

  Cross Traffic Monitor On and Off P. 567
  - Customized Features P. 351
- The transmission is in **R**.
- Your vehicle is moving at 5 km/h (3 mph) or lower.

 Radar sensors: underneath the rear bumper corners.

When a vehicle is detected approaching from a rear corner, Cross Traffic Monitor alerts you with a buzzer and a displayed warning.

The system will not detect a vehicle that approaches from directly behind your vehicle, nor will it provide alerts about a detected vehicle when it moves directly behind your vehicle.

The system does not provide alerts for a vehicle that is moving away from your vehicle, and it may alert for pedestrians, bicycles, or stationary objects.

#### 

Cross traffic monitor may not detect or may delay detecting an approaching vehicle, or may alert detection without an approaching vehicle under the following conditions:

- An obstacle, such as another vehicle or a wall near your vehicle's rear bumper, is blocking the radar sensor's scope.
- Your vehicle is moving at a speed of about 5 km/h (3 mph) or higher.
- A vehicle is approaching at a speed other than between about 10 km/h (6 mph) and 25 km/h (16 mph).
- The system picks up external interference such as other radar sensors from another vehicle or strong radio waves transmitted from a facility nearby.
- Either corner of the rear bumper is covered with snow, ice, mud or dirt.
- When there is bad weather.
- Your vehicle is on an incline.
- Your vehicle is tilted due to a heavy load in the rear.
- Your vehicle is reversing towards a wall, a pole, a vehicle, and so on.

If the rear bumper or the sensors have been improperly repaired or the rear bumper has been deformed. Have your vehicle checked by a dealer.

For proper operation, always keep the rear bumper corner area clean.

Do not cover the rear bumper corner area with labels or stickers of any kind.

### ■ When the System Detects a Vehicle

An arrow icon appears on the side a vehicle is approaching on the audio/information screen.



- Arrow Icon
- 2 Normal View
- Wide View
- 4 Top Down View

#### **≫**When the System Detects a Vehicle

If the on the lower right changes to in amber when the transmission is in n, mud, snow, ice and other debris may have accumulated in the vicinity of the sensor. The system is temporarily cancelled. Check the bumper corners for any obstructions, and thoroughly clean the area if necessary.

If the second comes on when the transmission is in R, there may be a problem with the Cross Traffic Monitor system. Do not use the system and have your vehicle checked by a dealer.

If the display remains the same with the transmission in  $\boxed{\mathbf{R}}$ , there may be a problem with the rear camera system and the Cross Traffic Monitor system. Do not use the system and have your vehicle checked by a dealer.

### ■ Cross Traffic Monitor On and Off



Cross Traffic Monitor Icon

The system can be turned on and off on the audio/information screen by pressing the Cross Traffic Monitor icon.

#### ■ Cross Traffic Monitor On and Off

You can also switch the system on and off from the customized feature on the audio/information screen.


Customized Features P. 351

# Multi-View Rear Camera

# **About Your Multi-View Rear Camera**

The audio/information screen can display your vehicle's rear view. The display automatically changes to the rear view when the transmission is put into  $\mathbb{R}$ .

# ■ Multi-View Rear Camera Display Area

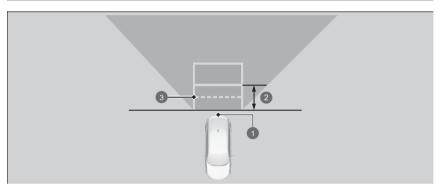

- Camera
- 2 Approx. 1 metre (39 inches)
- 3 Approx. 50 cm (19 inches)

#### 

The rear camera view is restricted. You cannot see the corner ends of the bumper or what is underneath the bumper. Its unique lens also makes objects appear closer or farther than they actually are.

Visually confirm that it is safe to drive before backing up. Certain conditions (such as weather, lighting, and high temperatures) may also restrict the rear view. Do not rely on the rearview display which does not give you all information about conditions at the back of your vehicle.

The rear camera view is displayed prior to the audio/information screen.

If the camera lens is covered with dirt or moisture, use a soft, moist cloth to keep the lens clean and free of debris.

You can change the **Fixed Guideline** and **Dynamic Guideline** settings.

Customized Features P. 351

#### **Fixed Guideline**

**ON:** Guidelines appear when you put the transmission into  $\boxed{\mathbf{R}}$ .


**OFF:** Guidelines do not appear.

**Dynamic Guideline** 

**ON:** Guidelines move according to the steering wheel direction.

OFF: Guidelines do not move.

You can view three different camera modes on the audio/information screen. Touch the appropriate icon to switch the mode.

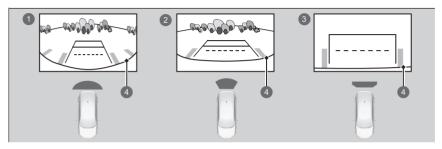

**1** ₩ide View Mode

2 Normal View Mode

Top Down View Mode

4 Bumper

- If you were last using Wide view mode or Normal view mode, the same view mode will be activated the next time you put the transmission into R.
- If you were using Top down view mode before you turned off the power system, Wide view mode will be activated the next time you set the power mode to ON and put the transmission into R.
- If you were using Top down view mode and 10 seconds elapsed after you took the transmission out of  $\boxed{\mathbf{R}}$ , Wide view mode will be activated the next time you put the transmission into  $\boxed{\mathbf{R}}$ .
- If you were using Top down view mode and put the transmission back into R
  within 10 seconds after you took it out of R, Top down view mode will be
  activated.

### ■ About Your Multi-View Rear Camera

If the vehicle's rear view is not displayed on the audio/ information screen while the shift position is in  $\boxed{\mathbb{R}}$ , there may be a problem with the system. Have your vehicle checked by a dealer immediately.

# Refueling

# **Fuel Information**

### **■** Fuel recommendation

EN 228 standards petrol/gasohol fuel

Unleaded premium petrol/gasohol up to E10 (90% petrol and 10% ethanol), research octane number 95 or higher

Your vehicle is designed to operate on premium unleaded petrol with a research octane of 95 or higher.

If this octane grade is unavailable, regular unleaded petrol with a research octane of 91 or higher may be used temporarily.

The use of regular unleaded petrol can cause metallic knocking noises in the engine and will result in decreased engine performance. The long-term use of regular-grade petrol can lead to engine damage.

### ■ Fuel tank capacity: 40 L (8.8 Imp gal)

### **■** Engine cleaner

Fuel quality varies by region. Add genuine injector cleaner agent according to the time and distance instructions in the maintenance schedule.

Please use a genuine Honda injector cleaner agent. If not available, please use a PEA (polyetheramine) based cleaning agent instead.

Regular use of injector cleaner may be needed in countries or regions without a maintenance schedule. Consult your dealer for more information.

#### ≫ Fuel Information

#### NOTICE

Use of petrol that contains lead presents the following risks:


- Damage to the exhaust system including the catalytic converter
- Damage to the engine and fuel system
- Detrimental effects on the engine and other systems



### Oxygenated Fuels

Oxygenated fuels are blended with petrol and ethanol or ether compounds. Your vehicle is also designed to operate on oxygenated fuels containing up to 10% ethanol by volume and up to 22% ETBE by volume, based on the EN 228 standards. For more information, ask your dealer.

### **How to Refuel**



- 1 Fuel fill door
- 2 Press



1 Cap

- **1.** Stop your vehicle with the service station pump on the left side of the vehicle in the rear.
- 2. Turn the power system off.
- 3. Unlock the driver's door.
  - ➤ The fuel fill door on the outer side of the vehicle will unlock.
- **4.** Press and release the area indicated by the arrow to release the fuel fill door. You will hear a click and the lid will open slightly.
- **5.** Manually pull the fuel fill door to a fully open position.
- **6.** Remove the fuel fill cap slowly. If you hear a release of air, wait until this stops, then turn the knob slowly to open the fuel fill cap.
- **7.** Place the fuel fill cap in the holder.
- **8.** Insert the fuel filler nozzle fully.
  - ➤ When the tank is full, the filler nozzle will click off automatically. This leaves space in the fuel tank in case the fuel expands with a change in the temperature.

# **AWARNING**

Petrol is highly flammable and explosive. You can be burned or seriously injured when handling fuel.

- Stop the power system, and keep heat, sparks, and flames away.
- Handle fuel only outdoors.
- Wipe up spills immediately.

# **ACAUTION**

The filler nozzle automatically stops to leave space in the fuel tank so that fuel does not overflow as a result of changes in air temperature.

Do not continue to add fuel after the filler nozzle has automatically stopped.
Additional fuel can exceed the full tank capacity and cause fuel to spill.

Use the lock tab or the master door lock switch to unlock the fuel fill door.

The vehicle doors and fuel fill door automatically relock if the remote unlock function is used. This can be deactivated by briefly opening then closing the driver's door.



- Cap
- 2 Holder

- **9.** After filling, replace the fuel fill cap, tightening it until you hear it click at least once.
  - ► Shut the fuel fill door by hand.

# Fuel Economy and CO<sub>2</sub> Emissions

# Improving Fuel Economy and Reducing CO<sub>2</sub> Emissions

Achieving fuel economy and reducing  $\mathrm{CO}_2$  emissions is dependent on several factors, including driving conditions, load weight, idling time, driving habits, and vehicle condition. Depending on these and other factors, you may not achieve the rated fuel economy of this vehicle.

# ■ Maintenance and Fuel Economy

You can optimize your fuel economy with proper maintenance of your vehicle. Follow the maintenance schedule and, if necessary, consult the service information provided for your vehicle.

On vehicles without service reminder system\*, follow the Maintenance schedule\*.

### **▶ Maintenance Schedule**\* P. 588

- Use engine oil with the viscosity recommended.
  - Recommended Engine Oil P. 600
- Maintain the specified tyre pressure.
- Do not load the vehicle with excess luggage.
- Keep your vehicle clean. A buildup of snow or mud on your vehicle's underside adds weight and increases wind resistance.

#### 

Direct calculation is the recommended method to determine actual fuel consumed while driving.



\* Not available on all models



This chapter discusses basic maintenance.

before refronting manifemance	
Inspection and Maintenance	. 576
Safety When Performing Maintenance	. 577
Parts and Fluids Used in Maintenanc	e
Service	. 579
About Your Maintenance Service	. 580
Service Reminder System*	. 581
Maintenance Schedule*	. 588
Maintenance Under the Bonnet	
Maintenance Items Under the Bonnet .	. 597
Opening the Bonnet	. 598
Recommended Engine Oil	. 600
Oil Check	. 602

Refore Performing Maintenance

Adding Engine Oil	603
Engine Coolant	
Transmission Fluid	608
Brake Fluid	609
Refilling Window Washer Fluid	610
Fuel Filter	611
Resetting Oil Level Check Reminder	611
Replacing Light Bulbs	612
<b>Checking and Maintaining Wiper</b>	
Blades	620
Checking and Maintaining Tyres	
Checking Tyres	623
Wear Indicators	624

Tyre Service Life	625
Tyre and Wheel Replacement	
Tyre Rotation	626
Snow Traction Devices	627
12-Volt Battery	
Remote Transmitter Care	
Replacing the Remote Battery	635
Climate Control System Maintenance	
Cleaning	
Interior Care	640
Exterior Care	643
Accessories and Modifications	646

# Before Performing Maintenance

# **Inspection and Maintenance**

For your safety, perform all listed inspections and maintenance to keep your vehicle in good condition. If you become aware of any abnormality (noise, smell, insufficient brake fluid, oil residue on the ground, etc.), have your vehicle inspected by a dealer. Refer to the service information available for your vehicle /maintenance schedule in this owner's manual for detailed maintenance and inspection information.

Maintenance Schedule\* P. 588

# ■ Types of Inspection and Maintenance

### **■** Routine inspections

Perform inspections before long distance trips, when washing the vehicle, or when refueling.

### **■** Periodic inspections

- Check the brake fluid level monthly.
  - **Brake Fluid** P. 609
- Check the tyre pressure monthly. Examine the tread for wear and foreign objects.
  - **► Checking and Maintaining Tyres** P. 623
- Check the operation of the exterior lights monthly.
  - Replacing Light Bulbs P. 612
- Check the condition of the wiper blades at least every six months.
  - **► Checking and Maintaining Wiper Blades** P. 620

# **Safety When Performing Maintenance**

Some of the most important safety precautions are given here. However, we cannot warn you of every conceivable hazard that can arise in performing maintenance. Only you can decide whether you should perform a given task.

# ■ Maintenance Safety

- To reduce the possibility of fire or explosion, keep cigarettes, sparks, and flames away from the 12-volt battery, all High Voltage systems, and all fuel related parts.
- Never leave rags, towels, or other flammable objects under the bonnet.
   Heat from the surrounding parts can ignite them, causing a fire.
- To clean parts, use a commercially available degreaser or parts cleaner, not petrol.
- Wear eye protection and protective clothing when working with the battery or compressed air.
- Engine exhaust contains carbon monoxide, which is poisonous and can kill you.
   Only operate the engine if there is sufficient ventilation.

# ■ Vehicle Safety

- The vehicle must be in a stationary condition.
  - ► Make sure your vehicle is parked on level ground, the parking brake is set, and the power system is turned off.
- Make sure that the radiator fan is stopped before inspecting the engine compartment.
  - ▶ Depending on the vehicle condition, the radiator fan may operate even when the power mode is in VEHICLE OFF.
- Be aware that hot parts can burn you.
  - ► Make sure to let the power system including the engine and exhaust system cool thoroughly before touching vehicle parts.

Safety When Performing Maintenance

# **AWARNING**

Improperly maintaining this vehicle or failing to correct a problem before driving can cause a crash in which you can be seriously hurt or killed.

Always follow the inspection and maintenance recommendations and schedules in this owner's manual/service information available for your vehicle.

# **AWARNING**

Failure to properly follow maintenance instructions and precautions can cause you to be seriously hurt or killed.

Always follow the procedures and precautions in this owner's manual.

- Be aware that moving parts can injure you.
  - ▶ Do not activate the power system unless instructed, and keep your hands and limbs away from moving parts. When the power mode is on, the engine can automatically start, or the radiator fan may start operating without the engine running.
- Do not touch the high voltage battery and wiring (orange).

# **Parts and Fluids Used in Maintenance Service**

The use of Honda Genuine Parts and fluids is recommended when maintaining and servicing your vehicle. Honda Genuine Parts are manufactured according to the same high quality standards used in Honda vehicles.

▶ Parts and Fluids Used in Maintenance Service

#### NOTICE

Do not press the engine cover forcibly. This may damage the engine cover and component parts.

### **About Your Maintenance Service**

If the service reminder system is available in your vehicle, you are informed by the driver information interface when your vehicle's maintenance services are due. Refer to the service information available for your vehicle for an explanation of the service item codes that appear on the display.

Service Reminder System\* P. 581

If the service reminder system is not available, follow the maintenance schedules in the service book\* that came with your vehicle.

If your vehicle is without the service book\*, follow the maintenance schedule in this owner's manual.

**► Maintenance Schedule**\* P. 588

#### 

#### Models with service reminder system

If you are planning to take your vehicle outside the service reminder system applied countries, consult a dealer for how to record your service reminder information and schedule your maintenance service under the conditions of that country.

Provides information of which service items are to be performed. Service items are represented by a code and icon. The system tells you when to take your vehicle to a dealer by days remaining.

When the next maintenance service timing is near, coming or passed, a warning icon will also appear on the driver information interface every time you set the power mode to ON.

#### Service Reminder System<sup>∗</sup>

You can choose to have a corresponding warning message displayed with the warning icon on the driver information interface.

### Displaying the Service Reminder Information

#### Models with A-type meter

- 1. Set the power mode to ON.
- 2. Press the (home) button.
- **3.** Roll the left selector wheel until is displayed.
- **4.** Press the left selector wheel to go to the service reminder information screen. The maintenance item(s) appears on the driver information interface along with maintenance items due soon.



- 1 (home) Button
- Remaining Days
- B Day Icon
- 4 Maintenance Item Code(s)
- **6** Left Selector Wheel


The system message indicator (1) comes on along with the service reminder information

#### Displaying the Service Reminder Information

Based on engine operating conditions and engine oil conditions, the system calculates the remaining days before the next service is to be performed.

### Models with B-type meter

- 1. Set the power mode to ON.
- **2.** Roll the right selector wheel until the service reminder information screen is displayed. The maintenance item(s) appears on the driver information interface along with maintenance items due soon.

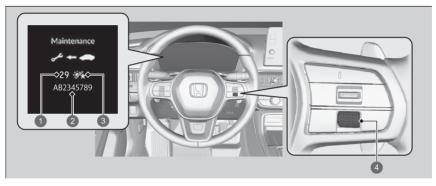

- Remaining Days
- Maintenance Item Code(s)
- B Day Icon
- 4 Right Selector Wheel

The system message indicator (①) comes on along with the service reminder information.

# ■ Warning Icons and Service Reminder Information on the Driver Information Interface

Warning Icon	Service Reminder Information	Explanation	Information
Service Due Soon	*1  Maintenance  *29 */*  AB2345789  AB2345789  *20  AB2345789	One or more of the service items are required in less than 30 days. The remaining days are estimated based on your driving conditions.	The remaining days will be counted down per day.
Service Due Now	*1 *2  Maintenance  15 */* AB2345789  AB2345789  *2	One or more of the service items are required in less than 10 days. The remaining days are estimated based on your driving conditions.	Have the indicated service performed as soon as possible.
Service Over Due	*1 *2  Maintenance  -10 */*  AB2345789 -10 */*  AB2345789	The indicated maintenance service is still not done after the remaining time reaches 0.	Your vehicle has passed the service required point. Immediately have the service performed and make sure to reset the service reminder system.

<sup>\*1:</sup>Models with A-type meter \*2:Models with B-type meter

### ■ Service Reminder Items

Service items displayed on the driver information interface are in code and icon. For an explanation of the service reminder codes and icons, refer to the service information available for your vehicle.

### ■ Availability of the Service Reminder System

Even if the service reminder information appears on the driver information interface while pressing the (home) button, this system is not available in some countries. Refer to the service information available for your vehicle, or ask a dealer if you can use the service reminder system.

#### 

If you are planning to take your vehicle outside the service reminder system applied countries, consult a dealer on how to record your service reminder information and schedule your maintenance service under the conditions of that country.


Continued 585

# Resetting the Display

Reset the service reminder information display if you have performed the maintenance service.

#### Models with A-type meter

- 1. Set the power mode to ON.
- 2. Press the (home) button.
- **3.** Roll the left selector wheel until is displayed.
- **4.** Press the left selector wheel to go to the service reminder information screen.
- **5.** Press and hold the left selector wheel until the reset mode is displayed.
- **6.** Roll the left selector wheel to select the item you want to reset (You can also select **Cancel** to end the process).
  - To reset all items simultaneously, select **All Due Items**.
- 7. Press the left selector wheel to reset the selected item.
- **8.** Repeat from step 5 for other items you wish to reset.

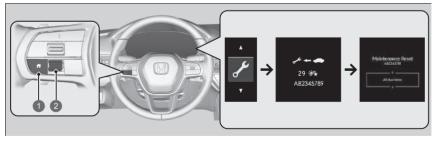

- 1 (home) Button
- 2 Left Selector Wheel

#### ■ Resetting the Display

#### NOTICE

Failure to reset the service reminder information after a maintenance service results in the system showing incorrect maintenance intervals, which can lead to serious mechanical problems.


You can also reset the service reminder system information display using the audio/information screen.

#### Customized Features P. 351

The dealer will reset the service reminder information display after completing the required maintenance service. If someone other than a dealer performs maintenance service, reset the service reminder information display yourself.

### Models with B-type meter

- 1. Set the power mode to ON.
- 2. Roll the right selector wheel until the service reminder information screen is displayed.
- **3.** Press and hold the right selector wheel for about 10 seconds to enter the reset mode.
- **4.** Roll the right selector wheel to select a maintenance item to reset, or to select **All due items** (You can also select **Cancel** to end the process).
- **5.** Press the right selector wheel to reset the selected item.
- **6.** Repeat from step 3 for other items you wish to reset.

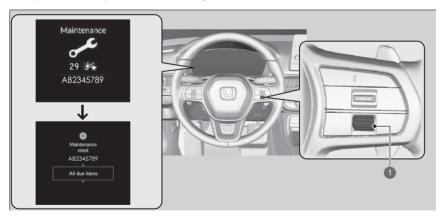

Right Selector Wheel

# Maintenance Schedule\*

Maintenance information for your vehicle can be found with the service information for your vehicle (if available). If service information is not available, refer to the following maintenance schedules.

The maintenance schedule outlines the minimum required maintenance that you should perform to ensure the troublefree operation of your vehicle. Due to regional and climatic differences, some additional servicing may be required. Please consult the service information provided for your vehicle for a more detailed description.

Maintenance work should be performed by properly trained and equipped technicians. Your authorised dealer meets all of these requirements.

## Except Ukrainian models

	20	40	60	80	100	120	140	160	180	200
miles x 1,000	12.5	25.0	37.5	50.0	62.5	75.0	87.5	100.0	112.5	125.0
months	12	24	36	48	60	72	84	96	108	120
Normal	Every 10,000 km (6,000 miles) or 1 year									
Severe			Every !	5,000 k	m (3,00	0 miles	) or 6 m	nonths		
Normal			Every 2	20,000	km (12,	000 mi	les) or 2	2 years		
Severe			Every	10,000	) km (6,	000 mil	les) or 1	year		
	Every 30,000 km (18,500 miles)									
	Every 100,000 km (62,000 miles)									
n S	nonths Iormal evere Iormal	nonths 12 Iormal evere Iormal	nonths 12 24 Iormal evere Iormal	nonths 12 24 36 Iormal Every evere Every Iormal Every evere Every Every	nonths         12         24         36         48           Iormal         Every 10,000           evere         Every 5,000 k           Iormal         Every 20,000           evere         Every 10,000           Every 30         Every 30	nonths         12         24         36         48         60           Iormal         Every 10,000 km (6, evere         Every 5,000 km (3,00 km (12, evere)         Every 20,000 km (12, evere)         Every 10,000 km (6, every 30,000 km	nonths         12         24         36         48         60         72           Iormal         Every 10,000 km (6,000 mi           evere         Every 5,000 km (3,000 miles           Iormal         Every 20,000 km (12,000 mi           evere         Every 10,000 km (6,000 mi           Every 30,000 km (18,50	nonths         12         24         36         48         60         72         84           Iormal         Every 10,000 km (6,000 miles) or 1           evere         Every 5,000 km (3,000 miles) or 6 m           Iormal         Every 20,000 km (12,000 miles) or 2           evere         Every 10,000 km (6,000 miles) or 1           Every 30,000 km (18,500 miles)         Every 30,000 km (18,500 miles)	nonths         12         24         36         48         60         72         84         96           Iormal         Every 10,000 km (6,000 miles) or 1 year           evere         Every 5,000 km (3,000 miles) or 6 months           Iormal         Every 20,000 km (12,000 miles) or 2 years           evere         Every 10,000 km (6,000 miles) or 1 year           Every 30,000 km (18,500 miles)	12   24   36   48   60   72   84   96   108

<sup>\*1:</sup>Inspect 20,000km (Algeria models)

Service at the indicated distance or	km x 1,000	20	40	60	80	100	120	140	160	180	200	
time - whichever comes first.	miles x 1,000	12.5	25.0	37.5	50.0	62.5	75.0	87.5	100.0	112.5	125.0	
time - whichever comes mst.	months	12	24	36	48	60	72	84	96	108	120	
Replace engine coolant				At 200	•				,			
			there	eafter ev		-				years		
Add genuine injector cleaner agent*1 Every 10,000 km (6,000miles) or 1year												
Replace transmission fluid*2	Normal Every 150,000 km (93,000 miles) or 6 years											
	Severe	Every 75,000 km (46,500 miles) or 3 years										
Replace dust and pollen filter		•	•	•	•	•	•	•	•	•	•	
Inspect front and rear brakes		Every 10,000 km (6,000 miles) or 1 year										
Replace brake fluid		Every 3 years										
Replace fuel filter in tank	Normal			Eve	ry 180,	000 km	111,5	00 mile	s)* <sup>3</sup>			
Replace fuel lifter in tank	Severe	Every 110,000 km (68,000 miles)*4										
Check expiry date for tyre repair kit bottle (If equipped)			Every 1 year									
Rotate tyres (Check tyre inflation and coper month)			ı	Every 10	0,000 ki	m (6,00	0 miles	)				

<sup>\*1:</sup>Regular use of injector cleaner is required for models designated for Honduras, Nicaragua, Gambia, Nigeria, Cape Verde, Peru, Djibouti, Guinea, Guatemala, Venezuela, Haiti, Togo, Equatorial Guinea, Afghanistan, Iraq, Liberia, Philippines, Sierra Leone, Dominica, Grand Cayman, Bangladesh

<sup>\*2:</sup>Hongkong, Macao: 80,000km/4years, Jordan, Lebanon, Morocco, Tunisia: Normal 150,000km/6years, Severe 80,000km/4years

<sup>\*3:</sup>Africa (except South Africa) and South America (except Brazil) and Indonesia models Normal: Every 150,000km(93,750miles)

Severe: Every 70,000km(43,750miles)

<sup>\*4:</sup>It is recommended that you replace the fuel filter if the fuel you are using is suspected to be contaminated with dust, etc. because the filter may be clogged sooner.

Coming at the indicated distance on	km x 1,000	20	40	60	80	100	120	140	160	180	200
Service at the indicated distance or time - whichever comes first.	miles x 1,000	12.5	25.0	37.5	50.0	62.5	75.0	87.5	100.0	112.5	125.0
time - whichever comes mist.	months	12	24	36	48	60	72	84	96	108	120

Visually inspect the following items:

Driveshaft boots										
Tie rod ends, steering gearbox, and boots			Every	10,000	) km (6,	000 mi	les) or 1	year		
Suspension components										
Brake hoses and lines (including ABS/VSA)										
Exhaust system		_	_		_	_	_			
Fuel lines and connections	•	•	•	•	•	•	•	•	•	•
All fluid levels and condition of fluid										

### Ukrainian models

Service at the indicated distance or	km X 1,000	15	30	45	60	75	90	105	120	135	150	165	180	195	
time - whichever comes first.	months	12	24	36	48	60	72	84	96	108	120	132	144	156	
Replace engine oil	Normal	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Severe					Every	7,500	) km c	or 6 m	onths					
Replace engine oil filter	Normal	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Severe					Every	7,500	) km c	or 6 m	onths					
Replace air cleaner element		Every 30,000 km													
Replace spark plugs*1		Every 120,000 km													
Replace engine coolant		At 200,000 km or 10 years, thereafter every 100,000 km or 5 years					S								
Add genuine injector cleaner agent						Evei	y 10,0	000 kr	n or 1	year					
Replace transmission fluid						Every	y 80,0	00 km	or 4	years					
Replace dust and pollen filter		•	•	•	•	•	•	•	•	•	•	•	•	•	
Inspect front and rear brakes		•	٠	•	•	•	•	•	•	•	•	•	•	•	
Replace brake fluid							Eve	ry 3 ye	ears						
Replace fuel filter in tank	Normal						Every	180,0	00 km						
Replace ruei filter in tank	Severe	Every 105,000 km* <sup>2</sup>													
Check expiry date for tyre repair kit bottle	e (If equipped)	ped) Every 1 year													
Rotate tyres (Check tyre inflation and coronce per month)															

<sup>\*1:</sup>Inspect 15,000 km

<sup>\*2:</sup>It is recommended that you replace the fuel filter if the fuel you are using is suspected to be contaminated with dust, etc. because the filter may be clogged sooner.

Service at the indicated distance or time	km X 1,000	15	30	45	60	75	90	105	120	135	150	165	180	195
- whichever comes first.	months	12	24	36	48	60	72	84	96	108	120	132	144	156
	Visually in	spect	t the f	ollow	ing it	tems:								
Driveshaft boots														
Tie rod ends, steering gearbox, and boots														
Suspension components														
Brake hoses and lines (including ABS/VSA)														
Exhaust system														
Fuel lines and connections														

### **Severe Conditions**

Follow the Severe Conditions Maintenance Schedule if you drive your car MAINLY under one or more of the following conditions:

- Driving less than 8 km (5 miles) per trip or, in freezing temperatures, driving less than 16 km (10 miles) per trip.
- Driving in extremely hot, over 35°C condition.
- Extensive idling or long periods of stop-and-go driving.
- Towing trailer, driving with a loaded car-top carrier, or driving in mountainous conditions.
- Driving on muddy, dusty, or de-iced roads.

NOTE: If you only OCCASIONALLY drive under "severe" conditions, you should follow the Normal Conditions Maintenance Schedule.

# Maintenance Record (on vehicles without separate service record)

Have your servicing dealer record all required maintenance below. Keep receipts for all work done on your vehicle.

### Except Ukrainian models


	Km or Month	Date	Sign or Stamp
<b>20,000 km</b> 12,500 Mi. (or 12 Mo.)			
<b>40,000 km</b> 25,000 Mi. (or 24 Mo.)			
<b>60,000 km</b> 37,500 Mi. (or 36 Mo.)			
<b>80,000 km</b> 50,000 Mi. (or 48 Mo.)			
<b>100,000 km</b> 62,500 Mi. (or 60 Mo.)			
<b>120,000 km</b> 75,000 Mi. (or 72 Mo.)			
<b>140,000 km</b> 87,500 Mi. (or 84 Mo.)			
<b>160,000 km</b> 100,000 Mi. (or 96 Mo.)			
<b>180,000 km</b> 112,500 Mi. (or 108 Mo.)			
<b>200,000 km</b> 125,000 Mi. (or 120 Mo.)			

# Ukrainian models

	Km or Month	Date	Sign or Stamp
<b>15,000 km</b> (or 12 Mo.)			
<b>30,000 km</b> (or 24 Mo.)			
<b>45,000 km</b> (or 36 Mo.)			
<b>60,000 km</b> (or 48 Mo.)			
<b>75,000 km</b> (or 60 Mo.)			
<b>90,000 km</b> (or 72 Mo.)			
<b>105,000 km</b> (or 84 Mo.)			
<b>120,000 km</b> (or 96 Mo.)			
<b>135,000 km</b> (or 108 Mo.)			
<b>150,000 km</b> (or 120 Mo.)			
<b>165,000 km</b> (or 132 Mo.)			
<b>180,000 km</b> (or 144 Mo.)			
<b>195,000 km</b> (or 156 Mo.)			

# Maintenance Under the Bonnet

# **Maintenance Items Under the Bonnet**

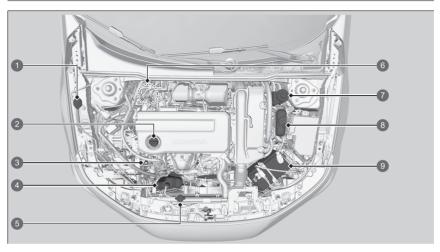


- Washer Fluid (Blue Cap)
- Engine Oil Fill Cap
- 3 Engine Oil Dipstick (Orange)
- 4 Engine Coolant Reserve Tank
- 6 Radiator Cap
- 6 Brake Fluid (Black Cap) (Right-hand Drive Type)
- Brake Fluid (Black Cap) (Left-hand Drive Type)
- 8 High Voltage System Coolant Tank
- 12-Volt Battery

# **Opening the Bonnet**



- **1.** Park the vehicle on a level surface, and set the parking brake.
- 2. Pull the bonnet release handle under the driver's side lower outside corner of the dashboard
  - ► The bonnet will pop up slightly.

- Bonnet Release Handle
- 2 Pull



3. Push the bonnet latch lever (located under the front edge of the bonnet to the centre) to the side and raise the bonnet. Once you have raised the bonnet slightly, you can release the lever.

○ Opening the Bonnet

# **AWARNING**

The bonnet support rod can become very hot due to heat from the engine.

To ensure against possible burns, do not handle the metal section of the rod: Use the foam grip instead.

#### NOTICE

Do not open the bonnet when the wiper arms are raised. The bonnet will strike the wipers, resulting in possible damage to the bonnet and/or the wipers.


#### NOTICE

Do not press the engine cover forcibly. This may damage the engine cover and component parts.

When closing the bonnet, check that the bonnet is securely latched.

If the bonnet latch lever moves stiffly, or if you can open the bonnet without lifting the lever, the latch mechanism should be cleaned and lubricated.

Lever



- 1 Grip
- 2 Support Rod
- Clamp

**4.** Remove the support rod from the clamp using the grip. Mount the support rod in the bonnet.

When closing, remove the support rod and stow it in the clamp, then gently lower the bonnet. Remove your hand at a height of approximately 30 cm (12 inches) and let the bonnet close.

### ○ Opening the Bonnet



- Grab the foam.
- The support rod gets very hot.
- Refer to the owner's manual.

# **Recommended Engine Oil**

Use a genuine engine oil or another commercial engine oil of suitable type and viscosity (for the ambient temperature) as shown in the image that follows.

Oil is a major contributor to your engine's performance and longevity. If you drive the vehicle with insufficient or deteriorated oil, the engine may fail or be damaged. European and Ukrainian models

#### European and Ukrainian models


Genuine Engine Oil	Commercial Engine Oil
<ul><li> Honda Engine OIL Type 2.0</li><li> Honda Genuine Motor Oil</li></ul>	• ACEA C5
Honda Engine Oil Type 2.0*1  Genuine Motor Oil 0W-20  -30 -20 -10 0 10 20 30 40(°C)  Ambient Temperature	-30 -20 -10 0 10 20 30 40(°C)  Ambient Temperature

<sup>\*1:</sup>Formulated to improve fuel economy.

#### ≥ Recommended Engine Oil

You cannot use Engine Oil Additives.

### Except European and Ukrainian models

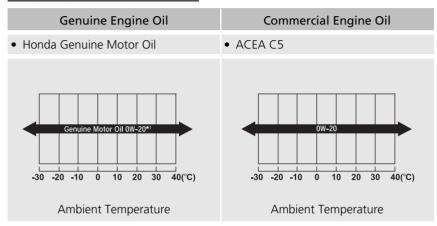

<sup>\*1:</sup>Formulated to improve fuel economy.

## Oil Check

We recommend that you check the engine oil level every time you refuel. Park the vehicle on level ground.

Turn off the power system. You can check the oil level without the engine having run beforehand. If the engine has been running, wait approximately three minutes before you check the oil.



- 1. Remove the dipstick (orange).
- **2.** Wipe the dipstick with a clean cloth or paper towel.
- **3.** Insert the dipstick back all the way into its hole.

**4.** Remove the dipstick again, and check the level. It should be between the upper and



- **5.** Reset the Oil Level Check Reminder.
  - Resetting Oil Level Check Reminder
    P. 611
- lower marks. Add oil if necessary.

○ Oil Check

If the oil level is near or below the lower mark, slowly add oil, being careful not to overfill.

The amount of oil consumed depends on how the vehicle is driven and the climatic and road conditions encountered. The rate of oil consumption can be up to 1 litre per 1,000 km/625 miles.

Consumption is likely to be higher when the engine is new.

If your vehicle is not equipped with a Service Reminder System, the Oil Level Check Reminder should also be reset after changing the oil.

Resetting Oil Level Check Reminder P. 611

- Upper Mark
- 2 Lower Mark

# **Adding Engine Oil**



Engine Oil Fill Cap

- **1.** Unscrew and remove the engine oil fill cap.
- 2. Add oil slowly.
- **3.** Reinstall the engine oil fill cap, and tighten it securely.
- **4.** Wait for three minutes and recheck the engine oil dipstick.
- **5.** Reset the Oil Level Check Reminder.
  - Resetting Oil Level Check Reminder
    P. 611

#### NOTICE

Do not fill the engine oil above the upper mark. Overfilling the engine oil may result in leaks and engine damage.

If any oil spills, wipe it away immediately. Spilled oil may damage the engine compartment components.

Use a neutral detergent to remove it if it spills on the engine cover. Do not use organic solvents such as brake cleaner.

If your vehicle is not equipped with a Service Reminder System, the Oil Level Check Reminder should also be reset after changing the oil.

Resetting Oil Level Check Reminder P. 611


# **Engine Coolant**

# Specified coolant: Honda All Season Antifreeze/Coolant Type 2

This coolant is premixed with 50% antifreeze and 50% water. Do not add any straight antifreeze or water.

We recommend you check the engine coolant level every time you refuel. Check the reserve tank first. If it is completely empty, also check the coolant level in the radiator. Add the engine coolant accordingly.

#### Reserve Tank



- 1. Make sure the engine and radiator are cool.
- **2.** Check the amount of coolant in the reserve tank.
  - ► If the coolant level is below the MIN mark, add the specified coolant until it reaches the MAX mark.

# **AWARNING**

Removing the radiator cap while the engine is hot can cause the coolant to spray out, seriously scalding you.

Always let the engine and radiator cool down before removing the radiator cap.


#### NOTICE

If temperatures consistently below –30°C are expected, the coolant mixture should be changed to a higher concentration. Consult your Honda dealer for details about a suitable coolant mixture.

If Honda antifreeze/coolant is not available, you may use another major brand of non-silicate coolant as a temporary replacement. Check that it is a high quality coolant recommended for aluminium engines. Continued use of any non-Honda coolant can result in corrosion, causing the cooling system to malfunction or fail. Have the cooling system flushed and refilled with Honda antifreeze/coolant as soon as possible.


Do not add rust inhibitors or other additives to your vehicle's cooling system. They may not be compatible with the coolant or with the engine components.

- Reserve Tank
- MAX
- MIN



**3.** Inspect the cooling system for leaks.

### Radiator



Radiator Cap

- 1. Make sure the engine and radiator are cool.
- **2.** Turn the radiator cap 1/8th turn anticlockwise and relieve any pressure in the cooling system.
- **3.** Push down and turn the radiator cap anticlockwise to remove it.
- **4.** The coolant level should be up to the base of the filler neck. Add coolant if it is low.
- **5.** Put the radiator cap back on, and tighten it fully.

### **≥**Radiator

### NOTICE

Pour the fluid slowly and carefully so you do not spill any. Clean up any spills immediately; they can damage components in the engine compartment.

Continued 605

# ■ Radiator Cap



- Never open when hot.
- Hot coolant will scald you.
- Relief pressure valve begins to open at 108 kPa.

# **High Voltage System Coolant**

When checking the coolant level, make sure to follow the procedures listed below. If the coolant level is below the **MIN** mark, have your vehicle inspected by a dealer.


dealer.

leaks.

**1.** Check the coolant level in the tank. 2. If the coolant level has dropped below the MIN level, have your vehicle serviced at a

► Only a properly trained technician can refill the coolant and check the system to

# **Coolant Tank**



- Coolant Tank
- MAX
- MIN

Do not add rust inhibitors or other additives to your vehicle's coolant system. They may not be compatible with the coolant or with the motor components.

# **Transmission Fluid**

### Specified fluid: Honda HEVF-Type 1

Have a dealer check the fluid level and replace if necessary. Follow your vehicle's maintenance service timing of when to change transmission fluid.

**► Maintenance Schedule**\* P. 588

Do not attempt to check or change the transmission fluid by yourself.

>> Transmission Fluid

#### NOTIC<u>E</u>

# Do not mix Honda HEVF-Type 1 with other transmission fluids.


Using a transmission fluid other than Honda HEVF-Type 1 may adversely affect the operation and durability of your vehicle's transmission, and damage the transmission.

Any damage caused by using a transmission fluid that is not equivalent to Honda HEVF-Type 1 is not covered by Honda's new vehicle limited warranty.

# **Brake Fluid**


# Specified fluid: Brake Fluid with DOT 3 or DOT 4

# ■ Checking the Brake Fluid



The fluid level should be between the **MIN** and **MAX** marks on the side of the reserve tank.

- Reserve Tank
- MAX
- MIN



- Reserve Tank
- MAX
- MIN

#### ≫ Brake Fluid

#### NOTICE

Brake fluid marked DOT 5 is not compatible with your vehicle's braking system and can cause extensive damage.

We recommend using a genuine product.

If the brake fluid level is at or below the **MIN** mark, have a dealer inspect the vehicle for leaks or worn brake pads as soon as possible.

# **Refilling Window Washer Fluid**



Check the amount of window washer fluid by looking at the reservoir.

If the level is low, fill the washer reservoir.

Pour the washer fluid carefully. Do not overflow the reservoir.

### ■ Refilling Window Washer Fluid

#### NOTICE

Do not use engine antifreeze or a vinegar/water solution in the windscreen washer reservoir. Antifreeze can damage your vehicle's paint. A vinegar/water solution can damage the windscreen washer pump.

Use only commercially available windscreen washer fluid.

Avoid prolonged use of hard water to prevent lime scale buildup.

### **Fuel Filter**

Replace the fuel filter according to the time and distance recommendations in the maintenance schedule.

Have a qualified technician change the fuel filter. Fuel in the system can spray out and create a hazard if all fuel line connections are not handled correctly.

# **Resetting Oil Level Check Reminder**

Reset the Oil Level Check Reminder if you have checked the oil level. You can reset the Oil Level Check Reminder using the audio/information screen.

Customized Features P. 351

#### ≫ Fuel Filter

#### Models with service reminder system

The fuel filter should be replaced according to the service reminder indication.

# **Replacing Light Bulbs**

# Headlights

Headlights are LED type. Have an authorised Honda dealer inspect and replace the light assembly.

## **Front Turn Signal Lights**

Front turn signal lights are LED type. Have an authorised Honda dealer inspect and replace the light assembly.

# **Position/Daytime Running Lights**

Position/daytime running lights are LED type. Have an authorised Honda dealer inspect and replace the light assembly.

# **Active Cornering Lights\***

Active cornering lights are LED type. Have an authorised Honda dealer inspect and replace the light assembly.

# **Side Turn Signal/Emergency Indicator Lights**

Door mirror side turn lights are LED type. Have an authorised Honda dealer inspect and replace the light assembly.

#### 


The headlight aim is set by the factory, and does not need to be adjusted. However, if you regularly carry heavy items in the luggage area, or tow a trailer, have the aiming readjusted at a dealer or by a qualified technician.

# Brake Lights, Taillights, and Rear Turn Signal Light Bulbs

When replacing, use the following bulbs.


**Brake Light: LED** Taillight: LED

Rear Turn Signal Light: 21W\_Amber\_(WY21W)



- **1.** Pry on the edge of the cover using a flat-tip screwdriver to remove the cover.
  - ► Wrap the flat-tip screwdriver with a cloth to prevent scratches.

Cover



Bolts

2. Unscrew the bolts

**≥** Brake Lights, Taillights, and Rear Turn Signal Light Bulbs


Brake light and taillights are LED type. Have an authorised Honda dealer inspect and replace the light assembly.

Continued 613



**3.** Grasp underneath the taillight and rotate it upward to release the lower snap pin.

1 Lower Snap Pin



1 Upper Snap Pin

- **4.** Rotate the taillight outward to release the upper snap pin.
- **5.** Pull the light assembly out of the rear pillar.



- Bulb
- 2 Socket

- **6.** Turn the socket anticlockwise and remove it.
- 7. Remove the old bulb and insert a new bulb.
- **8.** Align the pins with the body grommets, then push in until they fully seat.

# **Taillight and Back-Up Light Bulbs**

When replacing, use the following bulbs.

Taillight: LED

Back-Up Light: 16 W W16W



- **1.** Remove the cover by prying on the edge using a flat-tip screwdriver.
  - ► Wrap the flat-tip screwdriver with a cloth to prevent scratches.

2. Turn the socket anticlockwise and remove

Cover



- it. Remove the old bulb.
- 3. Insert a new bulb.

#### ▼Taillight and Back-Up Light Bulbs

Taillights are LED type. Have an authorised Honda dealer inspect and replace the light assembly.

1 Bulb

Socket

# **Rear Licence Plate Light**

Rear licence plate light is LED type. Have an authorised Honda dealer inspect and replace the light assembly.

# **High-Mount Brake Light**

High-mount brake light is LED type. Have an authorised Honda dealer inspect and replace the light assembly.

# **Rear Fog Light**

Rear fog light is LED type. Have an authorised Honda dealer inspect and replace the light assembly.

# **Other Light Bulbs**


### ■ Vanity Mirror Light Bulbs

#### Models with Panoramic Roof


When replacing, use the following bulbs.

### Vanity Mirror Light: 2.3 W

- **1.** Pry on the edge of the cover using a flattip screwdriver to remove the cover.
  - ➤ Wrap the flat-tip screwdriver with a cloth to prevent scratches.



**2.** Remove the old bulb and insert a new bulb.




Bulb

### Models without Panoramic Roof

When replacing, use the following bulbs.

### Vanity Mirror Light: 2 W

- **1.** Pry on the edge of the cover using a flattip screwdriver to remove the cover.
  - ➤ Wrap the flat-tip screwdriver with a cloth to prevent scratches.



**2.** Remove the old bulb and insert a new bulb.




1 Bulb

## **■ Luggage Area Light Bulb**


When replacing, use the following bulb.

### Luggage Area Light: 5 W

- **1.** Pry on the edge of the cover using a flattip screwdriver to remove the cover.
  - ➤ Wrap the flat-tip screwdriver with a cloth to prevent scratches.



**2.** Remove the old bulb and insert a new bulb.



1 Bulb

# Checking and Maintaining Wiper Blades

# **Checking Wiper Blades**

If the wiper blade rubber has deteriorated, it will leave streaks and become noisy, and the hard surfaces of the blade may scratch the window glass.

## **Lifting the Front Wiper Arms**





- **1.** Set the power mode to ON, then to VEHICLE OFF.
- **2.** Within 10 seconds of setting the power mode to VEHICLE OFF, hold the wiper switch in the **MIST** position for more than two seconds.
  - ▶ Both wiper arms are set to the maintenance position as shown in the image.
- **3.** Lift both wiper arms.


∑Lifting the Front Wiper Arms

#### NOTICE

When lifting the wiper arms, always follow the instructions to move them into the maintenance position.

The wiper arms may be damaged if they are moved manually.

# **Changing the Front Wiper Blade**



1 Tab

**1.** Lift both wiper arms.

### Lifting the Front Wiper Arms P. 620


- **2.** Depress the lock tab, then slide the wiper blade off the wiper arm.
- **3.** Slide the new wiper blade onto the wiper arm until it clicks into place.
- **4.** Lower both wiper arms.
- **5.** Set the power mode to ON, then set the wiper switch to the **MIST** position once.
  - ► The wiper arms return to the standard position.

■ Changing the Front Wiper Blade

#### NOTICE

Avoid dropping the wiper arm onto the windscreen, as it may damage the wiper arm and/or the windscreen.

# **Changing the Rear Wiper Blade**



- 1. Hold up the wiper arm.
- **2.** Insert a flat tip screwdriver into the groove of the wiper arm to remove the wiper blade.
  - ➤ Wrap the flat-tip screwdriver with a cloth to prevent scratches.
- **3.** Insert a new wiper blade and put the wiper arm back.

∑Changing the Rear Wiper Blade

#### NOTICE

Do not try to forcefully lift up the wiper arm.

The wiper arm may be damaged if it is lifted too high.

# **Checking and Maintaining Tyres**

## **Checking Tyres**

To safely operate your vehicle, your tyres must be of the proper type and size, in good condition with adequate tread, and properly inflated.

### **■** Inflation guidelines

Properly inflated tyres provide the best combination of handling, tread life, and comfort. Refer to the driver's doorjamb label for the specified pressure.

Underinflated tyres wear unevenly, adversely affect handling and fuel economy, and are more likely to fail from overheating.

Overinflated tyres make your vehicle ride harshly, are more prone to road hazards, and wear unevenly.

Every day before you drive, look at each of the tyres. If one looks lower than the others, check the pressure with a tyre gauge.

At least once a month or before long trips, use a gauge to measure the pressure in all tyres, including the spare\*. Even tyres in good condition can lose 10-20 kPa (0.1–0.2 bar, 1–2 psi) per month.

#### ■ Inspection guidelines

Every time you check inflation, also examine the tyres and valve stems. Look for:

- Bumps or bulges on the side or in the tread. Replace the tyre if you find any cuts, splits, or cracks in the side of the tyre. Replace it if you see fabric or cord.
- Remove any foreign objects and inspect for air leaks.
- Uneven tread wear. Have a dealer check the wheel alignment.
- Excessive tread wear.

#### **Wear Indicators** P. 624

Cracks or other damage around valve stem.

\* Not available on all models

#### ○ Checking Tyres

### **AWARNING**

Using tyres that are excessively worn or improperly inflated can cause a crash in which you can be seriously hurt or killed.

Follow all instructions in this owner's manual regarding tyre inflation and maintenance.

Measure the air pressure when tyres are cold. This means the vehicle has been parked for at least three hours, or driven less than 1.6 km (1 mile). If necessary, add or release air until the specified pressure is reached.

If checked when hot, tyre pressure can be as much as 30–40 kPa (0.3–0.4 bar, 4–6 psi) higher than if checked when cold.


Whenever tyre pressure is adjusted, you must calibrate the deflation warning system.

**Deflation Warning System** P. 454

Have a dealer check the tyres if you feel a consistent vibration while driving. New tyres and any that have been removed and reinstalled should be properly balanced.

623

## **Wear Indicators**



Example of a Wear Indicator mark

The groove where the wear indicator is located is about 1.6 mm (about 1/16 inch) shallower than elsewhere on the tyre. If the tread has worn so that the indicator is exposed, replace the tyre.

Worn out tyres have poor traction on wet roads.

## **Tyre Service Life**

The life of your tyres is dependent on many factors, including driving habits, road conditions, vehicle loading, inflation pressure, maintenance history, speed, and environmental conditions (even when the tyres are not in use).

In addition to regular inspections and inflation pressure maintenance, it is recommended that you have annual inspections performed once the tyres reach five years old. All tyres, including the spare\*, should be removed from service after 10 years from the date of manufacture, regardless of their condition or state of wear.

## **Tyre and Wheel Replacement**

Replace your tyres with radials of the same size, load range, speed rating, and maximum cold tyre pressure rating (as shown on the tyre's sidewall). Using tyres of a different size or construction can cause certain vehicle systems such as the ABS and Vehicle Stability Assist (VSA) system to work incorrectly.

It is best to replace all four tyres at the same time. If that isn't possible, replace the front or rear tyres in pairs.

Make sure that the wheel's specifications match those of the original wheels.

∑Tyre and Wheel Replacement

## **AWARNING**

Installing improper tyres on your vehicle can affect handling and stability. This can cause a crash in which you can be seriously hurt or killed.


Always use the size and type of tyres recommended in the tyre information label on your vehicle.

\* Not available on all models

## **Tyre Rotation**

Rotating tyres according to the maintenance schedule helps to distribute wear more evenly and increase tyre life.


### **■** Tyres without rotation marks



Rotate the tyres as shown here.

Front


### ■ Tyres with rotation marks



Rotate the tyres as shown here.

#### ∑Tyre Rotation

Tyres with directional tread patterns should only be rotated front to back (not from one side to the other). Directional tyres should be mounted with the rotation indication mark facing forward, as shown below.



- 1 Front
- 2 Rotation Mark

When the tyres are rotated, make sure the air pressures are checked.

Whenever tyre pressure is rotated, you must calibrate the deflation warning system.

**Deflation Warning System** P. 454

Wheel nut torque for the tyres that come standard-equipped with your vehicle is as follows.

#### Wheel nut torque:

108 N·m (11 kgf·m, 80 lbf·ft)

Front

### **Snow Traction Devices**

If driving on snowy or frozen roads, mount winter tyres, or tyre chains; reduce speed; and maintain sufficient distance between vehicles when driving.

Be particularly careful when operating the steering wheel or brakes to prevent skidding.

Use tyre chains, winter tyres, or all season tyres when necessary or according to the law.

When mounting, refer to the following points.

#### For winter tyres:

- Select the size and load ranges that are the same as the original tyres.
- Mount the tyres to all four wheels.

Snow Traction Devices

### **AWARNING**

Using the wrong chains, or not properly installing chains, can damage the brake lines and cause a crash in which you can be seriously injured or killed.

Follow all instructions in this owner's manual regarding the selection and use of tyre chains.

#### NOTICE

Traction devices that are the wrong size or improperly installed can damage your vehicle's brake lines, suspension, body, and wheels. Stop driving if they are hitting any part of the vehicle.

According to the EU legislation for tyres, when winter tyres are used, it is necessary to affix a sticker with the allowable max. speed of the winter tyres clearly in the field of view of the driver, if the designed max. speed of vehicle is higher than the allowed max. speed of winter tyre. A sticker is obtainable from your tyre dealer. If you have any question, consult a dealer.

When tyre chains are mounted, follow the chain manufacturer's instructions regarding vehicle operational limits.

Continued 627

### For tyre chains:

- Consult a dealer before purchasing any type of chains for your vehicle.
- Install them on the front tyres only.
- Because your vehicle has limited tyre clearance, we strongly recommend using the chains listed below:

Original Tyre Size*1	Chain Type
215/50R17 95W	RUD-matic CLASSIC 48489
235/40ZR18 95Y	Auto Trac 0154705

- \*1:Original tyre size is mentioned on the tyre information label on the driver's doorjamb.
- Follow the chain manufacturer's instruction when installing. Mount them as tightly as you can.
- Check that the chains do not touch the brake lines or suspension.
- Drive slowly.

#### Snow Traction Devices


Use tyre chains only in an emergency or when they are legally required for driving through a certain area.

Use greater caution when driving with tyre chains on snow or ice. They may have less-predictable handling than good winter tyres without chains.

If your vehicle is equipped with summer tyres, be aware that these tyres are not designed for winter driving conditions. For more information, contact a dealer.

# 12-Volt Battery

## **Checking the 12-Volt Battery**



The condition of the battery is monitored by a sensor located on the negative terminal of the battery. If there is a problem with this sensor, the driver information interface will display a warning message. If this happens, have your vehicle inspected by a dealer.

Check the battery terminals for corrosion monthly.

If your vehicle's battery is disconnected or goes dead:

- The audio system is disabled.
  - Reactivating the audio system P. 289
- The clock resets.
  - **≥ Clock** P. 194

#### Right-hand Drive Type

- The immobilizer system needs to be reset.
  - Immobilizer System Indicator P. 127

≥ 12-Volt Battery

## **AWARNING**

The battery gives off explosive hydrogen gas during normal operation.

A spark or open flame can cause the battery to explode with enough force to kill or seriously hurt you.

Keep all sparks, open flames, and smoking materials away from the battery.

Wear protective clothing and a face shield, or have a skilled technician do any battery maintenance.

### **AWARNING**

The battery contains sulfuric acid (electrolyte) which is highly corrosive and poisonous.

Getting electrolyte in your eyes or on your skin can cause serious burns. Wear protective clothing and eye protection when working on or near the battery.

Swallowing electrolyte can cause fatal poisoning if immediate action is not taken.

KEEP OUT OF THE REACH OF CHILDREN

# **Charging the 12-Volt Battery**

Disconnect both battery cables to prevent damaging your vehicle's electrical system. Always disconnect the negative (-) cable first, and reconnect it last.

If the battery cable is removed while a system update is being performed, the electrical system can be permanently damaged. Only remove the battery cable when a system update is not being performed.

#### ≥ 12-Volt Battery

#### **Emergency Procedures**

Eyes: Flush with water from a cup or other container for at least 15 minutes. (Water under pressure can damage the eye.) Call a physician immediately. Skin: Remove contaminated clothing. Flush the skin with large quantities of water. Call a physician immediately.

Swallowing: Drink water or milk. Call a physician immediately.

When you find corrosion, clean the battery terminals by applying a baking powder and water solution. Clean the terminals with a damp towel. Cloth/towel dry the battery. Coat the terminals with grease to help prevent future corrosion.

When replacing the battery, the replacement must be of the same specifications.

Consult a dealer for more information.

The 12-volt battery installed in this vehicle is specifically designed for a model with System Updates.

Using a 12-volt battery other than this specified type may shorten the battery life, and prevent System Updates from activating. If you need to replace the battery, make sure to select the specified type and size. Ask a dealer for more details.

**12-Volt Battery** P. 710

#### ≥ 12-Volt Battery

The Adaptive Cruise Control (ACC) with Low Speed Follow, Vehicle Stability Assist (VSA) System, Vehicle Stability Assist (VSA) **OFF**\*, Safety Support, Collision Mitigation Braking System, Road Departure Mitigation, Low Tyre Pressure/Deflation Warning System indicators may come on when you turn the power mode to on after reconnecting a 12-volt battery.

Drive a short distance at more than 20 km/h (12 mph). Each indicator should go off. If it does not, have your vehicle checked by a dealer.


#### European and Turkish models

# **Replacing the 12-Volt Battery**

When you remove and replace the 12-volt battery, always follow the maintenance safety and the warnings for when checking the battery to prevent potential hazards.

- **► Maintenance Safety** P. 577
- **► Checking the 12-Volt Battery** P. 629

If the battery cable is removed while a system update is being performed, the electrical system can be permanently damaged. Only remove the battery cable when a system update is not being performed.



- **1.** Set the power mode to VEHICLE OFF. Open the bonnet.
- **2.** Loosen the nut on the negative battery cable, then disconnect the cable from the negative (–) terminal.
- **3.** Open the positive battery terminal cover. Loosen the nut on the positive battery cable, then disconnect the cable from the positive (+) terminal.

■ Replacing the 12-Volt Battery

#### NOTICE

An improperly disposed of battery can be harmful to the environment and human health. Always confirm local regulations for battery disposal.


This symbol on the battery means that this product must not be treated as household waste.



To install a new battery, reverse this procedure.


Always disconnect the negative (–) cable first, and reconnect it last.

- Nut
- 2 Cover



- **4.** Loosen the nut on each side of the battery bracket with a wrench.
- **5.** Pull the bottom end of each battery stay out of the hole on the battery base, and remove the combination of the battery bracket and the stays.

- Stay
- 2 Nut



Battery cover

- **6.** Remove the battery cover.
- **7.** Take out the battery carefully.

# **Battery Label**



#### ■ Battery Label

#### DANGER

- Keep flames and sparks away from the battery. The battery produces explosive gas that can cause an explosion.
- Wear eye protection and rubber gloves when handling the battery to avoid risk of burns or loss of eyesight if exposed to battery electrolyte.
- Do not allow children to handle the battery, under any circumstance. Ensure that anyone handling the battery has a proper understanding of the hazards and correct handling procedures involved.
- Handle battery electrolyte with extreme care, as it contains dilute sulfuric acid. Exposure to eyes or skin can cause burns or loss of eyesight.
- Read this manual carefully, and understand it before handling the battery. Failure to do so can cause personal injury and damage to the vehicle.
- Do not use the battery if the level of electrolyte is at or below the recommended level. Using the battery with low electrolyte can cause it to explode, causing serious injury.

## **Remote Transmitter Care**

## **Replacing the Remote Battery**

If the indicator does not come on when the button is pressed, replace the battery.



Battery type: Manganese dioxide Lithium battery CR2032

**1.** Remove the built-in key.



- **2.** With the buttons facing down, remove the upper half of the cover by carefully prying on the slot with the key grip.
  - ➤ Wrap a key grip with a cloth to prevent scratching the keyless remote.

■ Replacing the Remote Battery

## **A A** WARNING

CHEMICAL BURN HAZARD

The battery that powers the remote transmitter can cause severe internal burns and can even lead to death if swallowed. Keep new and used batteries away from children.

If you suspect that a child has swallowed the battery, seek medical attention immediately.


**CAUTION:** Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type.

**CAUTION:** Do not exposed to excessive heat such as sunshine, fire or the like, that can result in an explosion or the leakage of flammable liquid or gas during use, storage or transportation.

**CAUTION:** Do not dispose of a battery into fire or a hot oven, or give mechanically crushing or cutting of a battery, that can result in an explosion.

**CAUTION:** Do not subjected to extremely low air pressure at high altitude that may result in an explosion or the leakage of flammable liquid or gas.

Continued 635



- **3.** Remove the battery by prying on the edge with flat-tip screwdriver. Make sure to replace the battery with the correct polarity.
  - ➤ Wrap a flat-tip screwdriver with a cloth to prevent scratching the keyless remote.

#### ■ Replacing the Remote Battery

A warning mark is located adjacent to the button battery\*.

#### NOTICE

An improperly disposed of battery can damage the environment. Always confirm local regulations for battery disposal.

#### European and Turkish models

The following symbol means that this product must not be treated as household waste.



Replacement batteries are commercially available or at a dealer.

# 1 Battery

# **Button Battery Information**



Manufacturer Information:

Panasonic Energy Co., Ltd.

Trade name: Panasonic

Postal address: 1-1 Matsushita-cho, Moriguchi-city, Osaka, 570-8511, Japan

# Climate Control System Maintenance

## **Air Conditioning**

For proper and safe operation of the climate control system, the refrigerant system should only be served by a qualified technician.

Never repair or replace the air conditioning evaporator (cooling coil) with one removed from a used or salvaged vehicle.

The climate control system in this vehicle contains fluorinated greenhouse gases.

#### ■ Air Conditioning

#### NOTICE

Vented refrigerant is harmful to the environment. To avoid refrigerant from venting, never replace the evaporator with one removed from a used or salvaged vehicle.

Refrigerant in your vehicle's air conditioning system is flammable and can be ignited during servicing if proper procedures are not followed.


The air conditioner label is found under the bonnet:

- Safety Labels P. 110
- **Specifications** P. 710

#### Left-hand Drive Type









: Air Conditioning System

#### Right-hand Drive Type



∴ : Caution

👑 : Flammable Refrigerant

Requires a qualified technician to service

X: Air Conditioning System


### **Dust and Pollen Filter**

### When to Replace the Dust and Pollen Filter

Replace the dust and pollen filter according to your vehicle's recommended maintenance schedule. It is recommended to replace the filter even sooner if the vehicle has been driven in a dusty environment.

**► Maintenance Schedule**\* P. 588

## ■ How to Replace the Dust and Pollen Filter



**1.** Open the glove box.


- Handle
- 2 Pull

#### Dust and Pollen Filter

If the airflow from the climate control system deteriorates noticeably, and the windows fog up easily, the filter may need to be replaced.


The dust and pollen filter collects pollen, dust, and other debris in the air.

If you are not sure how to replace the dust and pollen filter, have it replaced by a dealer.



- **2.** Push the stopper on the driver's side of the glove box to detach it from the glove box.
- **3.** Disengage the two tabs by pushing on each side panel.
- **4.** Pivot the glove box out of the way.
- **5.** Remove the glove box by pulling out the claws.

- 1 Tabs
- Stopper
- Claws



- **6.** Push in the tabs on the corners of the filter case cover, and remove it.
- **7.** Remove the filter from the case.
- **8.** Install a new filter in the case.
  - ▶ Put the **AIR FLOW** arrow directed side down.

- 1 Tabs
- 2 Push
- Cover
- 4 Dust and Pollen Filter

## Cleaning

### **Interior Care**

Use a vacuum cleaner to remove dust before using a cloth.

Use a damp cloth with a mixture of mild detergent and warm water to remove dirt. Use a clean cloth to remove detergent residue.

### ■ Cleaning Seat Belts

Use a soft brush with a mixture of mild soap and warm water to clean the seat belts. Let the belts air dry. Wipe the openings of the seat belt anchorages using a clean cloth.



Opening

## ■ Cleaning the Window

Wipe using a glass cleaner.

#### 

Do not spill liquids inside the vehicle. Electrical devices and systems may malfunction if liquids are splashed on them.

Do not use silicone-based sprays on electrical devices such as audio devices and switches. Doing so may cause the items to malfunction or cause a fire inside the vehicle.

If a silicone-based spray is inadvertently used on electrical devices, consult a dealer.

Depending on their composition, chemicals and liquid aromatics may cause discolouration, wrinkles, and cracking to resin-based parts and textiles. Do not use alkali solvents or organic solvents such as benzene or petrol.

After using chemicals, make sure to gently wipe them away using a dry cloth.

Do not place used cloths on top of resin-based parts or textiles for long periods of time without washing.


Be careful not to spill a liquid type air freshener.

#### ○ Cleaning the Window

Wires are mounted to the inside of the rear window. Wipe along the same direction as the wires with a soft cloth so as not to damage them.

Be careful not to spill fluids, such as water or glass cleaner, on or around the cover of the electrical components around the rearview mirror.

#### ■ Floor Mats



The driver's floor mat hooks over floor anchorages, which keep the mat from sliding forward.

Do not put any additional floor mats on top of the anchored mat.

#### ≫Floor Mats

If you use any floor mats that were not originally provided with your vehicle, make sure they are designed for your specific vehicle, fit correctly, and are securely anchored by the floor anchorages. Position any rear seat floor mats properly. If not properly positioned, the floor mats can interfere with the front seat functions.

1 Unlock

2 Lock

Continued 641

### ■ Maintaining Genuine Leather

To properly clean leather:

- **1.** Use a vacuum or soft dry cloth first to remove any dirt or dust.
- **2.** Clean the leather with a soft cloth dampened with a solution comprised of 90% water and 10% neutral soap.
- **3.** Wipe away any soap residue with a clean damp cloth.
- **4.** Wipe away residual water and allow leather to air dry in the shade.

#### Maintaining Genuine Leather Maintainin

It is important to clean or wipe away dirt or dust as soon as possible. Spills can soak into leather, resulting in stains. Dirt or dust can cause abrasions in the leather. In addition, please note that some dark coloured clothing can rub onto the leather seats, resulting in discolouration or stains.

### **Exterior Care**

Dust off the vehicle body after you drive. Regularly inspect your vehicle for scratches on painted surfaces. A scratch on a painted surface can result in body rust. If you find a scratch, promptly repair it.

### ■ Washing the Vehicle

Wash the vehicle regularly. Wash more frequently when driving in the following conditions:

- If driving on roads with road salt.
- If driving in coastal areas.
- If tar, soot, bird droppings, insects, or tree sap is stuck to painted surfaces.

#### **≥** Washing the Vehicle

Do not spray water into the air intake vents. It can cause a malfunction.



#### Air Intake Vents

Lock the doors when washing the vehicle. Do not spray water onto the fuel fill door directly. A high-pressure spray may cause it to open.

If you need to lift the wiper arms away from the windscreen, first set the wiper arms to the maintenance position.

Lifting the Front Wiper Arms P. 620

If water and any chemicals are on the brakes when your vehicle is being washed, drive a short distance and apply the brakes several times before parking. Parking while brakes are wet may cause them to be stuck by rust.

### Using an Automated Car Wash

- Make sure to follow the instructions indicated on the automated car wash.
- Fold in the door mirrors.
- For models equipped with automatic intermittent wipers, turn the wipers off.

### Using High Pressure Cleaners

- Keep sufficient distance between the cleaning nozzle and the vehicle body.
- Take particular care around the windows. Standing too close may cause water to enter the vehicle interior
- Do not spray high pressure water directly into the engine compartment. Instead, use low pressure water and a mild detergent.
- Do not spray water directly onto the camera or the area around it. Water may enter the lens and cause the camera to malfunction.

### Applying Wax

A good coat of automotive body wax helps to protect your vehicle's paint from the elements. Wax will wear off over time and expose your vehicle's paint to the elements, so reapply as necessary.

## ■ Maintaining the Bumpers and Other Resin-Coated Parts

If you get petrol, oil, engine coolant, or battery fluid on resin-coated parts, they may stain or the coating may peel. Promptly wipe it away using a soft cloth and clean water.

#### ∑Using an Automated Car Wash

When using an automated car wash that pulls the vehicle through with a conveyor, make sure the transmission in  $\boxed{\mathbb{N}}$  position.

**▶** If you want to keep the transmission in N position (car wash mode) P. 423

#### 

#### NOTICE

Chemical solvents and strong cleaners can damage the paint, metal, and plastic on your vehicle. Wipe away spills immediately.

### ➤ Maintaining the Bumpers and Other Resin-Coated Parts

Ask a dealer about the correct coating material when you want to repair the painted surface of the parts made of resin.

### Cleaning the Window

Wipe using a glass cleaner.

### Maintaining Aluminium Wheels

Aluminium is susceptible to deterioration caused by salt and other road contaminants. When necessary, as early as possible use a sponge and mild detergent to wipe away these contaminants. Do not use a stiff brush or harsh chemicals (including some commercial wheel cleaners). These can damage the protective finish on aluminium alloy wheels, resulting in corrosion. Depending on the type of finish, the wheels also may lose their lustre or appear burnished. To avoid water stains, wipe the wheels dry with a cloth while they are still wet.

### ■ Fogged Exterior Light Lenses

The inside lenses of exterior lights (headlights, brake lights, etc.) may fog temporarily if you have driven in the rain, or after the vehicle has been run through a car wash. Dew condensation also may build up inside the lenses when there is a significant enough difference between the ambient and inside lens temperatures (similar to vehicle windows fogging up in rainy conditions). These conditions are natural processes, not structural design problems in the exterior lights. Lens design characteristics may result in moisture developing on the light lens frame surfaces. This also is not a malfunction.

However, if you see large amounts of water accumulation, or large water drops building up inside the lenses, have your vehicle inspected by a dealer.

## **Accessories and Modifications**

### **Accessories**

When installing accessories, check the following:

- Do not install accessories on the windscreen. They can obstruct your view and delay your reaction to driving conditions.
- Do not install any items other than Honda Genuine Accessories designated for your vehicle over areas marked SRS AIRBAG, on the sides or backs of the front seats, on the sides of the rear seats, on front or side pillars, or near the side windows.
  - Items other than Honda Genuine Accessories designated for your vehicle installed in these areas may interfere with proper operation of the vehicle's airbags or may be propelled into you or another occupant if the airbags deploy.
- Be sure electronic accessories do not overload electrical circuits or interfere with proper operation of your vehicle.

**Fuses** P. 693

 Before installing any electronic accessory, have the installer contact a dealer for assistance. If possible, have a dealer inspect the final installation. ■ Accessories and Modifications

## **AWARNING**

Improper accessories or modifications can affect your vehicle's handling, stability, and performance, and cause a crash in which you can be seriously hurt or killed.

Follow all instructions in this owner's manual regarding accessories and modifications.

## **AWARNING**

Use of improperly designed, engineered or manufactured high voltage battery assemblies could cause a fire in your vehicle.

A vehicle fire could result in a crash or injury.

Only use a genuine Honda high voltage battery assembly, or its equivalent, in your vehicle.

### **Modifications**

Do not modify your vehicle in a manner that may affect its handling, stability, or reliability, or install non-genuine Honda parts or accessories that may have a similar effect.

Even minor modifications to vehicle systems can affect overall vehicle performance. Always make sure all equipment is properly installed and maintained, and do not make any modification to your vehicle or its systems that might cause your vehicle to no longer meet your country's and local regulations.

The on-board diagnostic port (OBD-II/SAE J1962 connector) installed on this vehicle is intended to be used with automobile system diagnostic devices or with other devices that Honda has approved. Use of any other type of device may adversely affect the vehicle's electronic systems or allow them to be compromised, possibly resulting in a system malfunction, drained battery, or other unexpected problems.

Do not modify or attempt to repair your vehicle's high voltage hybrid power system or otherwise modify vehicle electrical systems. Disassembling or modifying electrical equipment can result in a crash or a fire.

If you ever need to replace your vehicle's high voltage battery assembly outside of warranty coverage, we highly recommend that you only use a genuine Honda high voltage battery assembly. Genuine Honda high voltage battery assemblies are designed to work with your vehicle's hybrid power system and have been designed, engineered and manufactured to avoid overcharging situations. Non-genuine high voltage battery assemblies may not have been similarly designed, engineered and manufactured, and installation of such assemblies could result in overcharging, fires, loss of power, or other conditions that may increase the likelihood of a crash or injury.

#### ■ Accessories and Modifications

When properly installed, mobile phones, alarms, twoway radios, radio antennas, and low-powered audio systems should not interfere with your vehicle's computer controlled systems, such as your airbags and anti-lock brakes.

Honda Genuine Accessories are recommended to ensure proper operation on your vehicle.

Some Honda Genuine Accessories are supplied with an exclusive owner's manual for the operation and care detail of the product. If an accessory owner's manual is provided to you, please refer to it for full detail.

If any Honda Genuine Accessories become inoperable, refer to the separate accessory owner's manual (if applicable) or consult a dealer for assistance to troubleshoot the potential faulty condition.

# **Handling the Unexpected**

This chapter explains how to handle unexpected troubles.


1 00IS	. 65U
If a Tyre Goes Flat	652
Handling of the Jack	675
Power System Won't Start	
Checking the Procedure	676
If the Keyless Remote Battery is Weak .	. 677
Emergency Power System On	678
Emergency Power System Off	679
If the 12-Volt Battery Is Dead	680
Overheating	683

#### Indicator Coming On/Blinking

f the Engine oil pressure low Warning
Appears 685
f the 12-Volt Battery Charging System
Indicator Comes On 686
f the Reduced Stopping Power Warning
Appears 686
f the Malfunction Indicator Lamp Comes
On or Blinks 687
f the Brake System Indicator (Red) Comes
On or Blinks 688
f the Electric Power Steering (EPS) System
Indicator Comes On 689

If the Brake System Indicator (Red) on or Blinks at the Same Time Wh	en the
Brake System Indicator (Amber) Co	mes
On	. 690
If the Low Tyre Pressure/Deflation Warn	ing
System Indicator Comes On or Blinks	691
If the Transmission System Indicator	Blinks
along with the Warning Message	. 692
uses	. 693
mergency Towing	. 700
You Cannot Unlock the Fuel Fill Door	
You Cannot Open the Hatch	. 702
mergency Call (eCall)	703


# **Types of Tools**

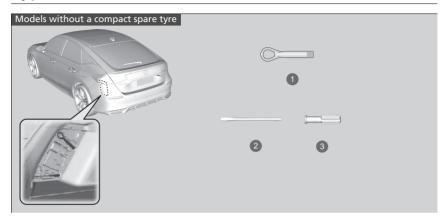

- Detachable Towing Hook
- 2 Flat-tip Screwdriver
- Grip

#### ∑Types of Tools

The tools are stored in the luggage area.

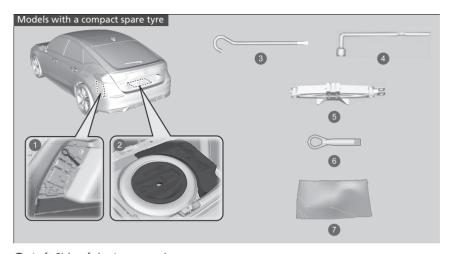

- 1 Left Side of the Luggage Area
- 2 Tool Case
- 3 Jack Handle Bar
- 4 Wheel Nut Wrench/Jack Handle
- Jack
- **6** Detachable Towing Hook
- Storage Bag

### If a Tyre Goes Flat

### **Temporarily Repairing a Flat Tyre**

If the tyre has a large cut or is otherwise severely damaged, you will need to have the vehicle towed. If the tyre only has a small puncture, from a nail for instance, you can use the temporary tyre repair kit so that you can drive to the nearest service station for a more permanent repair.


If a tyre goes flat while driving, grasp the steering wheel firmly and brake gradually to reduce speed. Then, stop in a safe place.

- 1. Park the vehicle on a firm, level, non-slippery surface and apply the parking brake.
- **2.** Put the transmission into **P**.
- 3. Turn on the hazard warning lights and set the power mode to VEHICLE OFF.

#### ∑Temporarily Repairing a Flat Tyre

The kit should not be used in the following situations. Instead, contact a dealer or a roadside assistant to have the vehicle towed.

- The tyre sealant has expired.
- More than one tyre is punctured.
- The puncture or cut is larger than 4 mm (5/32 inch).
- The tyre side wall is damaged or the puncture is outside the contact area.




#### Contact Area

When the puncture is:	Kit Use
Smaller than 4 mm (5/32 inch)	Yes
Larger than 4 mm (5/32 inch)	No

- Damage has been caused by driving with the tyres extremely under inflated.
- The tyre bead is no longer seated.
- The rim is damaged.

Do not remove a nail or screw that punctured the tyre. If you remove it from the tyre, you may not be able to repair the puncture using the kit.

### ■ Getting Ready to Temporarily Repair the Flat Tyre

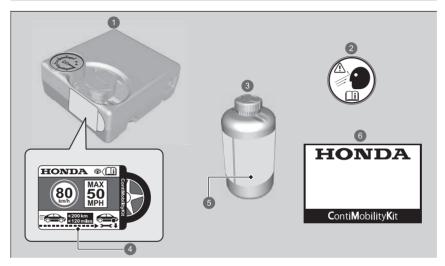

- Air Compressor
- Wheel Label
- Sealant Bottle
- 4 Speed Restriction Label
- **6** Expiration Date
- **6** Handling Manual

#### ■ Getting Ready to Temporarily Repair the Flat Tyre


Speed restriction label are applied to the side of the temporary tyre repair kit.

When making a temporary repair, carefully read the instruction manual provided with the kit.



- **1.** Remove the lid on left side of the luggage area by rotating the knob, then take the kit out from inside.
- **2.** Place the kit, face up on flat ground near the flat tyre away from traffic. Do not place the kit on its side.

- 1 Lid
- 2 Knob



1 Tyre Repair Kit

### **■** Injecting Sealant and Air



**1.** Take the air compressor hose and plug cord out of the back of the air compressor.

- 1 Plug Cord
- 2 Air Compressor Hose



**2.** Remove the cap from the air compressor.

∑Injecting Sealant and Air

### **AWARNING**


Tyre sealant contains substances that are harmful and can be fatal if swallowed.

If accidentally swallowed, do not induce vomiting. Drink plenty of water and get medical attention immediately.

For skin or eye contact, flush with cool water and get medical attention if necessary.

Keep the sealant bottle out of the reach of children.

The sealant can permanently stain clothing and other materials. Be careful during handling and wipe away any spills immediately.



**3.** Shake the bottle well.



**4.** Remove the bottle cap.

▶ Do not remove the sealed cover.

#### 


Do not remove the empty bottle after injecting the sealant.

See a Honda dealer for a replacement of sealant bottle and proper disposal of the empty bottle.

- Bottle Cap
- 2 Not Removed

657







- Valve Cap
- 2 Valve

- **5.** Screw the sealed bottle onto the air compressor.
  - Screw the bottle tightly so that it does not become loose.

**6.** Unscrew the valve cap.



- Air Valve
- 2 Air Compressor Hose
- S Valve



- Plug
- Accessory Power Socket

- 7. Screw the air compressor hose onto the tyre valve.
  - Make sure the air valve is closed and the air compressor is turned off.

- **8.** Plug in the compressor to the accessory power socket.
  - Accessory Power Sockets P. 274
- **9.** Turn on the vehicle's power system.
  - Carbon Monoxide Gas P 109

### **AWARNING**


Running the engine with the vehicle in an enclosed or even partly enclosed area can cause a rapid buildup of toxic carbon monoxide.

Breathing this colourless, odourless gas can cause unconsciousness and even death. Only run the engine to power the air compressor with the vehicle outdoors.

Turn the air compressor off when connecting the air compressor hose.

You hear a motor sound coming from the activated air compressor. This is normal.

If the specified air pressure is not reached within 10 minutes, the tyre may be too severely damaged for the kit to provide the necessary seal and your vehicle will need to be towed



- Air Valve
- 2 Switch
- OFF
- 4 ON

- **10.** Turn on the air compressor and inflate the tyre to the specified air pressure.
  - ► The compressor starts injecting sealant and air into the tyre.
  - ➤ Refer to the driver's doorjamb label for the specified pressure.
- **11.** After the air pressure reaches the specified pressure, turn off the compressor.
  - ► Check the air pressure gauge on the air compressor.
  - ▶ If overinflated, release the air by turning the air valve. Be careful not to spill any sealant.
- **12.** Unplug the plug from the accessory power socket.
- **13.** Unscrew the air compressor hose from the tyre valve. Install the hose cap.
  - ▶ Be careful not to spill any sealant when the hose is disconnected. Wipe away any spills.


#### 

If you want to measure the air pressure using a gauge, turn the air compressor off first.

Inform the use of tyre sealant when you ask a Honda dealer or the road assistant service for replacing or repairing the flat tyre.

This air compressor is designed for the automotive tyre. Check the following:


- The power supply of the air compressor is limited to your vehicle's 12-volt DC accessory power socket.
- Do not operate the temporary tyre repair kit compressor for more than 10 minutes. The compressor can overheat and become permanently damaged.
  - Make it cool down when using the compressor continuously.



Wheel Label

- **14.** Apply the wheel label to the flat surface of the wheel.
  - ► The wheel surface must be clean to ensure the label adheres properly.
- **15.** Store the tyre repair kit in the luggage area.
  - ▶ Do not remove the sealant bottle from the air compressor.

### ■ Distributing the Sealant in the Tyre



Speed Restriction Label

- **1.** Apply the speed restriction label to the location as shown.
- **2.** Drive the vehicle for about 10 minutes or 3 to 10 kilometres (2 to 6 miles).
  - ▶ Do not exceed 80 km/h (50 mph).
- **3.** Stop the vehicle in a safe place.

Distributing the Sealant in the Tyre

### **AWARNING**

Running the engine with the vehicle in an enclosed or even partly enclosed area can cause a rapid buildup of toxic carbon monoxide.

Breathing this colourless, odourless gas can cause unconsciousness and even death.
Only run the engine to power the air compressor with the vehicle outdoors.

Refer to the driver's doorjamb label for the specified pressure.



- Air Compressor
- OFF
- ON

- **4.** Recheck the air pressure using the gauge on the air compressor.
  - ▶ Do not turn the air compressor on to check the pressure.
- **5.** If the air pressure is
  - Less than 130 kPa (1.3 bar, 19 psi): Do not add air and continue driving. The leak is too severe. Call for help and have your vehicle towed.

#### **Emergency Towing** P. 700

- Specified air pressure (See the label on driver's doorjamb.) or more: Continue driving until you reach the nearest service station. Do not exceed 80 km/h (50 mph).
- Greater than 130 kPa (1.3 bar, 19 psi), but less than specified air pressure (See the label on driver's doorjamb.): Inflate the tyre to the specified air pressure.


# ► Inflating an Under-inflated Tyre P. 663

And repeat steps 2 to 4 until you reach the nearest service station. Do not exceed 80 km/h (50 mph).

- ➤ The distance to the nearest service station has to be within about 200 kilometres (120 miles).
- **6.** Repackage and properly stow the kit.

### Inflating an Under-inflated Tyre

You can use the kit to inflate a non-punctured under-inflated tyre.



- **1.** Take the air compressor out of the luggage area.
- **2.** Place the kit face up on flat ground near the tyre to be inflated, away from traffic. Do not place the kit on its side.
- **3.** Remove the valve cap.
- **4.** Attach the air compressor hose onto the tyre valve stem. Screw it until it is tight.
  - ► Make sure the air valve is closed.

- Air Valve
- 2 Air Compressor Hose



- Plug
- 2 Accessory Power Socket

- **5.** Plug in the compressor to the accessory power socket.
  - ▶ Be careful not to pinch the cord in a door or window.
    - Accessory Power Sockets P. 274
- **6.** Turn on the vehicle's power system.
  - Carbon Monoxide Gas P. 109
  - Turning on the Power P. 411


Inflating an Under-inflated Tyre

### **AWARNING**

Running the engine with the vehicle in an enclosed or even partly enclosed area can cause a rapid buildup of toxic carbon monoxide.

Breathing this colourless, odourless gas can cause unconsciousness and even death.

Only run the engine to power the air compressor with the vehicle outdoors.



- Air Valve
- 2 Switch
- OFF
- 4 ON

- **7.** Turn the air compressor switch on to inflate the tyre.
  - ► The compressor starts to inject air into the tyre.
  - ► If you have started the power system, leave it running while injecting air.
- **8.** Inflate the tyre to the specified air pressure.
- 9. Turn off the kit.
  - ► Check the pressure gauge on the air compressor.
  - ► If overinflated, turn the air valve to deflate.
- **10.** Turn off the vehicle's power system off, then unplug the air compressor from the accessory power socket.
- **11.** Unscrew the air compressor hose from the tyre valve stem. Reinstall the valve cap.
- **12.** Store the air compressor in the luggage area.

#### ≥ Inflating an Under-inflated Tyre

#### NOTICE

Do not operate the temporary tyre repair kit compressor for more than 10 minutes. The compressor can overheat and become permanently damaged.

#### Models with a compact spare tyre

### **Changing a Flat Tyre**

If a tyre goes flat while driving, grasp the steering wheel firmly, and brake gradually to reduce speed. Then, stop in a safe place. Replace the flat tyre with a compact spare tyre. Go to a dealer as soon as possible to have the regular tyre repaired or replaced.

- **1.** Park the vehicle on a firm, level, non-slippery surface and apply the parking brake.
- **2.** Put the transmission into **P**.
- **3.** Turn on the hazard warning lights and set the power mode to VEHICLE OFF.

#### 

Follow compact spare precautions:

Periodically check the tyre pressure of the compact spare. It should be set to the specified pressure. Specified Pressure: 420 kPa (4.2 bar, 60 psi)

When driving with the compact spare tyre, keep the vehicle speed under 80 km/h (50 mph). Replace with a regular tyre as soon as possible.

The compact spare tyre and wheel in your vehicle are specifically for this model. Do not use them with another vehicle. Do not use another type of compact spare tyre or wheel with your vehicle.

Do not mount tyre chains on a compact spare tyre. If a chain-mounted front tyre goes flat, remove one of the regular rear tyres and replace it with the compact spare tyre. Remove the flat front tyre and replace it with the regular tyre that was removed from the rear. Mount the tyre chains on the front tyre.

A compact spare tyre gives a harsher ride and less traction on some road surfaces. Use greater caution while driving.

The compact spare tyre is smaller than the regular tyre. Your vehicle's ground clearance reduces when the compact spare tyre is installed. Driving over road debris or bumps could possibly damage the underside of your vehicle.

### ■ Getting Ready to Replace the Flat Tyre



**1.** Pull the strap on the floor lid and open the lid.

Strap



- Compact Spare Tyre
- 2 Tool Case

- **2.** Take the tool case out of the luggage area.
- **3.** Take the jack, wheel nut wrench, and jack handle bar out of the tool case.
- **4.** Unscrew the wing bolt, and remove the spacer cone. Then, remove the compact spare tyre.


#### ○ Changing a Flat Tyre

**WARNING:** The jack can only be used for helping an emergency vehicle breakdown, not for changing the regular seasonal tyre or any other normal maintenance or repair operation.

#### NOTICE

Do not use the jack if it doesn't work properly. Call your dealer or a professional towing service.

Do not use more than one compact spare tyre at the same time.



**5.** Place a wheel block or rock in front and rear of the wheel diagonal to the flat tyre.

- The tyre to be replaced.
- Wheel Blocks




**6.** Place the compact spare tyre (wheel side up) under the vehicle body, near the tyre that needs to be replaced.



**7.** Loosen each wheel nut about one turn using the wheel nut wrench.

### How to Set Up the Jack



**1.** Place the jack under the jacking point closest to the tyre to be changed.

Jacking Points



Jacking Point

- **2.** Turn the end bracket clockwise as shown in the image until the top of the jack contacts the jacking point.
  - ► Make sure that the jacking point tab is resting in the jack notch.

Mow to Set Up the Jack
 The state of the sta


### **AWARNING**

The vehicle can easily roll off the jack, seriously injuring anyone underneath.


Follow the directions for changing a tyre exactly, and no person should place any portion of their body under a vehicle that is supported by a jack.

**WARNING:** The jack shall be placed on a flat and stable surface on the same level as the vehicle is parked.

The jack that came with your vehicle has the following label.



- 1. See Owner's Manual.
- 2. Never get under vehicle when supported by jack.
- 3. Place jack underneath reinforced area.



- 1 Jack Handle Bar
- 2 Wheel Nut Wrench as Jack Handle

**3.** Raise the vehicle, using the jack handle bar and the jack handle, until the tyre is off the ground.

#### Mow to Set Up the Jack


Do not use the jack with people or luggage in the vehicle.

Use the jack provided in your vehicle. Other jacks may not support the weight ("load") or may not fit the jacking point.

The following instructions must be followed to use the jack safely:

- Do not use while the power system on.
- Use only where the ground is firm and level.
- Use only at the jacking points.
- Do not get in the vehicle while using the jack.
- Do not put anything on top of or underneath the jack.

### ■ Replacing the Flat Tyre



1. Remove the wheel nuts and flat tyre.



- **2.** Wipe the mounting surfaces of the wheel with a clean cloth.
- **3.** Mount the compact spare tyre.
- **4.** Screw the wheel nuts until they touch the lips around the mounting holes, then stop rotating.



**5.** Lower the vehicle and remove the jack. Tighten the wheel nuts in the order indicated in the image. Go around tightening the nuts two to three times in this order.

#### Wheel nut torque:

108 N·m (11 kgf·m, 80 lbf·ft)

#### ■ Replacing the Flat Tyre

Do not over tighten the wheel nuts by applying extra torque using your foot or a pipe.

### ■ Storing the Flat Tyre



- **1.** Put the flat tyre in the storage bag provided with your vehicle.
- ► The storage bag is in the tool case.
- **2.** Knot the top of the storage bag.
- **3.** Securely put the jack, jack handle bar and wheel nut wrench back in the tool case.



**4.** Bore through the bag, and pass the holding belt through the hole of the bag and the wheel of the flat tyre as shown.


Storing the Flat Tyre

### **AWARNING**

Loose items can fly around the interior in a crash and can seriously injure the occupants.

Store the wheel, jack, and tools securely before driving.

Belt



Rear Anchorage

- **5.** Place the flat tyre in the luggage area, and thread the belt through the rear anchorage as shown.
- **6.** Pass the belt through the ring, and tighten the belt to secure the flat tyre in place.

### ■ Deflation Warning System and the Compact Spare Tyre

If you replace a flat tyre with the compact spare tyre, the low tyre pressure/deflation warning system indicator comes on while you are driving. After driving for a few kilometers (miles), Tyre pressure monitor system problem will appear on the driver information interface and the indicator will start blinking for a short time and then stay on; however, this is normal and is no cause for concern.


Calibrate the deflation warning system when you replace the tyre with a specified regular tyre.

**Deflation Warning System Calibration** P. 456

# Handling of the Jack

#### Models without a compact spare tyre

Your vehicle has jacking points as shown. When replacing your tyres, consult a dealer.



Jacking Points

### Power System Won't Start

### **Checking the Procedure**

If the power system won't start, check the following items and take appropriate action.

Checklist	Condition	What to Do
Check if the related indicator or driver information interface messages come on.	<b>没具 Temperature too low for vehicle to operate</b> appears.	<ul> <li>You must wait for an increase in the ambient temperature or move the vehicle to a warmer location.</li> <li>Contact a dealer if necessary.</li> </ul>
	☐ To start, touch start button with emblem side of remote appears.	▶ If the Keyless Remote Battery is Weak P. 677
	The transmission system indicator blinks and  Transmission system problem. Apply parking brake when parked. message appears.	☑ If the Transmission System Indicator Blinks along with the Warning Message P. 692
Check the shift position.	The transmission is not in P.	Put the transmission into P.
Check the immobilizer system indicator.	When the immobilizer system indicator is blinking, the power system cannot be turned on.	<ul><li>Immobilizer System P. 211</li><li>Immobilizer System Indicator P. 127</li></ul>
Check the power system sta	rting procedure.	Follow the instructions, and try to start the power system again.  Turning on the Power P. 411
Check the fuses.		Check all fuses, or have your vehicle checked by a dealer.  Inspecting and Changing Fuses P. 697

If you cannot turn on the power system after checking all the items in the list above, have your vehicle checked by a dealer.

If you must start the vehicle immediately, use an assisting vehicle or booster battery to jump start it.


**▶ If the 12-Volt Battery Is Dead** P. 680


Depending on the situation, it may be possible to temporarily turn the power system on using the emergency starting procedure.

**Emergency Power System Off** P. 679

### If the Keyless Remote Battery is Weak

If the beeper sounds, the To start, touch start button with emblem side of remote message appears on the driver information interface, the POWER button flashes, and the (Ready) indicator does not come on, turn on the power system as follows:





- 1. Press the **POWER** button.
  - ► The beeper sounds and the **POWER** button flashes for about 30 seconds.
- **2.** Touch the center of the **POWER** button with the **H** logo on the keyless remote while the **POWER** button is flashing. The buttons on the keyless remote should be facing you.
  - ► The beeper sounds, and the **POWER** button stays on for about 10 seconds.
- Depress the brake pedal and press the POWER button while the POWER button is on.
  - ► The (Ready) indicator comes on.
  - ► If you don't depress the pedal, the mode will change to ACCESSORY.

### **Emergency Power System On**

If the power system cannot be turned on using the normal starting procedure, you may be able to turn it on using the emergency starting procedure below. Do not use this procedure if it is not an emergency.

- 1. Make sure the parking brake is applied.
- **2.** Check that the transmission is in  $\boxed{P}$ , then set the power mode to ACCESSORY.
- **3.** Firmly depress the brake pedal, then press and hold the **POWER** button for at least 15 seconds

This should be considered a system malfunction even if you are able to turn the power system on using the above procedure.

Have your vehicle checked by a dealer immediately.

### **Emergency Power System Off**

The **POWER** button may be used to turn the power system off due to an emergency situation even while driving. If you must turn the power system off, do either of the following operations:

- Press and hold the **POWER** button for about two seconds.
- Firmly press the **POWER** button three times.

The steering wheel will not lock. However, because turning off the power system disables the power assist the power system provides to the steering and braking systems, it will require significantly more physical effort and time to steer and slow the vehicle. Use both feet on the brake pedal to slow down the vehicle and stop immediately in a safe place.

The transmission automatically changes to  $\boxed{\textbf{P}}$  after the vehicle comes to a complete stop. Then, the power mode changes to VEHICLE OFF.

#### 

#### NOTICE


Do not press the **POWER** button while driving unless it is absolutely necessary for the power system to be turned off.

If you press the **POWER** button while driving, the beeper sounds.

### If the 12-Volt Battery Is Dead

### **Jump Starting Procedure**

Turn off the power to electric devices, such as audio and lights. Turn off the power system, then open the bonnet.



Booster Battery

- **1.** Open the cover on the positive ① terminal.
- **2.** Connect the first jumper cable to your vehicle's 12-volt battery  $\oplus$  terminal.
- **3.** Connect the other end of the first jumper cable to the booster battery  $\oplus$  terminal.
  - ▶ Use a 12-volt booster battery only.
  - ➤ When using an automotive battery charger to boost your 12-volt battery, select a lower charging voltage than 15-volt. Check the charger manual for the proper setting.

≥ If the 12-Volt Battery Is Dead

### **AWARNING**


A 12-volt battery can explode if you do not follow the correct procedure, seriously injuring anyone nearby.

Keep all sparks, open flames, and smoking materials away from the 12-volt battery.

#### NOTICE

If a 12-volt battery sits in extreme cold, the electrolyte inside can freeze. Attempting to jump start with a frozen 12-volt battery can cause it to rupture.

Securely attach the jumper cables clips so that they do not come off when the engine vibrates. Be careful not to tangle the jumper cables or allow the cable ends to touch each other while attaching or detaching the jumper cables.



Stud Bolt

- **4.** Connect the second jumper cable to the booster battery ⊕ terminal.
- **5.** Connect the other end of the second jumper cable to the stud bolt as shown. Do not connect this jumper cable to any other part.
- **6.** If your vehicle is connected to another vehicle, start the assisting vehicle's engine and increase its RPM slightly.
- **7.** Attempt to start your vehicle's engine. If it turns over slowly, check that the jumper cables have good metal-to-metal contact.

#### ≥ If the 12-Volt Battery Is Dead

12-volt battery performance degrades in cold conditions and may prevent the engine from starting.

### ■ What to Do After the Power System Starts

Once your vehicle's power system has started, remove the jumper cables in the following order.

- **1.** Disconnect the jumper cable from your vehicle's ground.
- **2.** Disconnect the other end of the jumper cable from the booster battery  $\bigcirc$  terminal.
- **3.** Disconnect the jumper cable from your vehicle's 12-volt battery  $\oplus$  terminal.
- **4.** Disconnect the other end of the jumper cable from the booster battery  $\oplus$  terminal.

Have your vehicle inspected by a nearby service station or a dealer.

#### ≥ If the 12-Volt Battery Is Dead

The Adaptive Cruise Control (ACC) with Low Speed Follow, Vehicle Stability Assist (VSA) System, Vehicle Stability Assist (VSA) **OFF**\*, Safety Support, Collision Mitigation Braking System, Road Departure Mitigation, Low Tyre Pressure/ Deflation Warning System indicators may come on when you turn the power mode to on after reconnecting a 12-volt battery.

Drive a short distance at more than 20 km/h (12 mph). Each indicator should go off. If it does not, have your vehicle checked by a dealer.

## Overheating

## **How to Handle Overheating**

Overheating symptoms are as follows:

- Power system temperature high. Power may be reduced. appears on the driver information interface.
- Engine temperature too hot. Do not drive. Allow engine to cool. appears on the driver information interface.
- Steam or spray comes out of the engine compartment.

## Power system temperature high. Power may be reduced. Appears on the Driver Information Interface

**Power system temperature high. Power may be reduced.** appears on the driver information interface when the power system temperature is high.

- 1. Immediately park the vehicle in a safe place.
  - ➤ Set the parking brake, and put the transmission into P. Turn off all accessories and turn on the hazard warning lights.
- 2. Keep the power mode in ON, and wait until the message disappears.
  - ▶ If the message does not disappear, have your vehicle inspected at a dealer.

## **Engine temperature too hot. Do not drive. Allow engine to cool. Appears on the Driver Information Interface**

#### ■ First thing to do

- **1.** Immediately park the vehicle in a safe place.
- 2. Turn off all accessories and turn on the hazard warning lights.
  - ▶ No steam or spray present: Keep the power system on and open the bonnet
  - ▶ Steam or spray is present: Turn off the power system and wait until it subsides. Then, open the bonnet.

∑How to Handle Overheating

## **AWARNING**

Steam and spray from an overheated engine can seriously scald you.

Do not open the bonnet if steam is coming out.


If **Power system temperature high. Power may be reduced.** appears on the driver information interface, your vehicle has less ability to accelerate and may be harder to start on an incline.

#### NOTICE

Continuing to drive with <u>E</u> Engine temperature too hot. Do not drive. Allow engine to cool. on the driver information interface may damage the engine.

Continued 683

#### ■ Next thing to do



- MAX
- MIN
- 3 Reserve Tank

- Check that the cooling fan is operating and turn the power system off once Engine temperature too hot. Do not drive.
   Allow engine to cool. on the driver information interface disappears.
  - ► If the cooling fan is not operating, immediately turn the power system off.
- **2.** Once the engine has cooled down, inspect the coolant level and check the cooling system components for leaks.
  - If the coolant level in the reserve tank is low, add coolant until it reaches the MAX mark.
  - ▶ If there is no coolant in the reserve tank, check that the radiator is cool. Cover the radiator cap with a heavy cloth and open the cap. If necessary, add coolant up to the base of the filler neck, and put the cap back on.

## **AWARNING**

Removing the radiator cap while the engine is hot can cause the coolant to spray out, seriously scalding you.

Always let the engine and radiator cool down before removing the radiator cap.

If the coolant is leaking, contact a dealer for repairs.

Use water as an emergency/temporary measure only. Have a dealer flush the system with proper antifreeze as soon as possible.

#### ■ Last thing to do

Once the engine has cooled sufficiently, turn the power system on.

If **Engine temperature too hot. Do not drive. Allow engine to cool.** does not appear, resume driving. If it appears again, contact a dealer for repairs.

## Indicator Coming On/Blinking

## If the Engine oil pressure low Warning Appears



■ Reasons for the warning to appear

Appears when the engine oil pressure is low.

- What to do as soon as the warning appears
- **1.** Immediately park the vehicle on level ground in a safe place.
- 2. If necessary, turn the hazard warning lights on.
- What to do after parking the vehicle
- Turn the power system off, and let it sit for approximately three minutes.
- 2. Open the bonnet and check the oil level.
  - Add oil as necessary.

**○ Oil Check** P. 602

- **3.** Start the engine and check the **Engine oil pressure low** warning.
  - ► The warning disappears: Start driving again.
  - ► The warning does not disappear within 10 seconds: Immediately stop the engine and contact a dealer for repairs.

≥ If the Engine oil pressure low Warning Appears

#### NOTICE

Running the engine with low oil pressure can cause serious mechanical damage almost immediately.

# If the 12-Volt Battery Charging System Indicator Comes On



■ Reasons for the indicator to come on

Comes on when there is a problem with the charging system.

■ What to do when the indicator comes on

Stop in a safe place and have your vehicle checked by a dealer immediately.

## If the Reduced Stopping Power Warning Appears



■ Reasons for the warning to appear

Appears when braking ability is reduced.

■ What to do as soon as the warning appears

Slow down and drive carefully. Have your vehicle checked by a dealer.

≥ If the 12-Volt Battery Charging System Indicator Comes On

If you need to stop temporarily, do not turn off the power system. The power system uses the 12-volt battery to activate. You may not be able to turn the power system on again if you have turned it off with this indicator on.

## If the Malfunction Indicator Lamp Comes On or Blinks



#### ■ Reasons for the indicator lamp to come on or blink

- Comes on when there is a problem with the engine emissions control system or electric vehicle system.
- Blinks when engine misfiring is detected.
- What to do when the indicator lamp comes on

Avoid high speeds and immediately get your vehicle inspected at a dealer.

- Comes on when there is no petrol in the fuel tank, and goes off after vehicle is refueled, power mode is turned on, vehicle is driven, and the power system is turned off multiple times. If it does not go off, have your vehicle checked by a dealer.
- What to do when the indicator lamp blinks

Park the vehicle in a safe place with no flammable items and wait at least 10 minutes or more with the engine stopped until it cools.

≥ If the Malfunction Indicator Lamp Comes On or Blinks

#### NOTICE

If you drive with the malfunction indicator lamp on, the emissions control system and the engine could be damaged.

If the malfunction indicator lamp blinks again when restarting the engine, drive to the nearest dealer at 50 km/h (31 mph) or less. Have your vehicle inspected.

## If the Brake System Indicator (Red) Comes On or Blinks



(Red)

■ Reasons for the indicator to come on

- The brake fluid is low.
- There is a malfunction in the brake system.

#### ■ What to do when the indicator comes on while driving

Depress the brake pedal lightly to check pedal pressure.

- If normal, check the brake fluid level the next time you stop.
- If abnormal, take immediate action. Pull the deceleration paddle selector several times to help slow the vehicle using regenerative braking.

#### ■ Reasons for the indicator to blink

• There is a problem with the electric parking brake system.

#### ■ What to do when the indicator blinks

 Avoid using the parking brake and have your vehicle checked by a dealer immediately. ≥ If the Brake System Indicator (Red) Comes On or Blinks

Have your vehicle repaired immediately. It is dangerous to drive with low brake fluid. If there is no resistance from the brake pedal, stop immediately in a safe place. If necessary, pull the deceleration paddle selector to help slow the vehicle using regenerative braking.

If the brake system indicator (red) and **ABS** indicator come on simultaneously, the electronic brake distribution system is not working. This can result in vehicle instability under sudden braking. Have your vehicle inspected by a dealer immediately.

If the brake system indicator (red) blinks at the same time when the brake system indicator (amber) comes on, the parking brake may not work.

Avoid using the parking brake and have your vehicle checked by a dealer immediately.

☑ If the Brake System Indicator (Red) Comes On or Blinks at the Same Time When the Brake System Indicator (Amber) Comes On P. 690

## If the Electric Power Steering (EPS) System Indicator Comes On



#### ■ Reasons for the indicator to come on

- Comes on when there is a problem with the EPS system or Driver Attention Monitor System.
- What to do when the indicator comes on
- Stop the vehicle in a safe place and turn on the power system again. If the indicator comes on and stays on, immediately have your vehicle inspected by a dealer.
- If **Do not drive** displays on the driver information interface, immediately stop in a safe place and contact a dealer.

# If the Brake System Indicator (Red) Comes On or Blinks at the Same Time When the Brake System Indicator (Amber) Comes On



(Red)



(Amber)

- If the brake system indicator (red) comes on or blinks at the same time when the brake system indicator (amber) comes on, release the parking brake manually or automatically.

  ▶ Parking Brake P. 546
- If the brake system indicator (red) continuously comes on or blinks at the same time when the brake system indicator (amber) comes on, stop the vehicle in a safe place and have it inspected by a dealer immediately.
  - ► To prevent the vehicle from moving, put the transmission into P.
- If only the brake system indicator (red) is turned off, avoid using the parking brake and have your vehicle checked by a dealer immediately.

If the Brake System Indicator (Red) Comes On or Blinks at the Same Time When the Brake System Indicator (Amber) Comes On

If you apply the parking brake, you may not be able to release it.

If the brake system indicator (red) and the brake system indicator (amber) come on at the same time, the parking brake is working.

If the brake system indicator (red) blinks at the same time when the brake system indicator (amber) comes on, the parking brake may not work because it is checking the system.

If you repeatedly operate the electric parking brake in a short period of time, the brake stops operating to prevent heating of the system and the indicator blinks.

It returns to its original state in approximately 1 minute

## If the Low Tyre Pressure/Deflation Warning System Indicator Comes On or Blinks



#### ■ Reasons for the indicator to come on or blink

A tyre pressure is significantly low, or the deflation warning system has not been calibrated. If there is a problem with the deflation warning system, the indicator blinks for about one minute, and then stays on. If the compact spare tyre\* is installed, the indicator will either come on or it will first blink for about one minute, then stay on.

#### ■ What to do when the indicator comes on

Drive carefully and avoid abrupt cornering and hard braking. Stop your vehicle in a safe place. Check the tyre pressure and adjust the pressure to the specified level. The specified tyre pressure is on a label on the driver side doorjamb.

► Calibrate the deflation warning system after the tyre pressure is adjusted.

If the compact spare tyre\* causes the indicator to come on, change the tyre to a regular tyre. The indicator goes off after calibrating the deflation warning system.

**Deflation Warning System** P. 454

#### ■ What to do when the indicator blinks, then remains on

Have the tyre inspected by a dealer as soon as possible. If the compact spare tyre\* causes the indicator to first blink, and then stay on, change the tyre to a regular tyre. The indicator goes off after calibrating the deflation warning system.


■If the Low Tyre Pressure/Deflation Warning System Indicator Comes On or Blinks

#### NOTICE

Driving on an extremely underinflated tyre can cause it to overheat. An overheated tyre can fail. Always inflate your tyres to the prescribed level.

\* Not available on all models

# If the Transmission System Indicator Blinks along with the Warning Message



- Reasons for the indicator to blink The transmission is malfunctioning.
- What to do when the indicator blinks
- •Immediately have your vehicle inspected by a dealer.

If the Transmission System Indicator Blinks along with the Warning Message

You may not be able to turn on the power system.

Make sure to set the parking brake when parking your vehicle.

Call a professional towing service if you need to tow your vehicle.

**Emergency Towing** P. 700


## **Fuses**

### **Fuse Locations**

If any electrical devices are not working, set the power mode to VEHICLE OFF and check to see if any applicable fuse is blown.

### **■** Engine Compartment Fuse Box

Located near the 12-volt battery. Push the tabs to open the box. Fuse locations are shown on the image below. Locate the fuse in question by the fuse number in the image and chart.

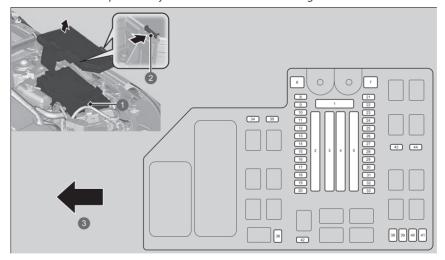

- Fuse Box
- 2 Tab
- Front

Continued 693


## **■** Circuit protected and fuse rating

Circuit Protected		Amps
1	Battery	175 A
		40 A
	_	40 A
	Fuse Box Option	60 A
2	_	40 A
	Fuse Box Option2	40 A
	_	30 A
	Fuse Box Main	60 A
		40 A
	_	40 A
	_	40 A
3	Rear Defroster	40 A
	A/C PTC1	40 A
	Blower Motor	40 A
	A/C PTC2	40 A
	ESB	40 A
	ABS/VSA Motor	40 A
4	RFC	40 A
	P-ACT Motor	30 A
	IG Main	30 A
		30 A
•	Relay Module2	30 A

	Circuit Protected	Amps		
_	Option6	30 A		
_	Front Wiper	30 A		
	EPS	70 A		
5	Relay Module1	30 A		
	ABS/VSA FSR	40 A		
	ENG WATER PUMP	40 A		
	Fuse Box Main2	40 A		
6	_	_		
7	IG Main2	30 A		
8	_	_		
9	_	_		
10	AUDIO SUB	7.5 A		
11	USB Charger 10 A			
12				
13	Heated Steering* (10 A)			
14	BATT IR 10 A			
15				
16	_	_		
17	Washer	15 A		
18	Horn	10 A		
19	BACKUP	15 A		
20	AUDIO	15 A		
21	IGP	15 A		
22	BACKUP FI-ECU	10 A		
23	DBW	15 A		
24	RFC Relay 7.5 A			
25	PCU EWP 7.5 A			

	Circuit Protected	Amps
26	P-ACT ECU	7.5 A
27	LCM L	15 A
28	INJ	15 A
29	Stop Lights	10 A
30	LCM R	15 A
31	IG Coil	15 A
32	EVTC	20 A
33	Hazard	15 A
34	SHIFTER	7.5 A
35	_	_
36	MON2	7.5 A
38	IGB	10 A
39	IGA	15 A
40		
41	IGPS(LAF)	10 A
42	ESB 7.5 A	
43	_	_
44	_	_

#### **■ Interior Fuse Box**

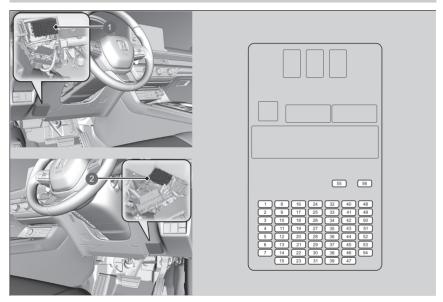

- Fuse Box (Left-hand Drive Type)
- 2 Fuse Box (Right-hand Drive Type)

Located under the dashboard.

Fuse locations are shown on the image below.

Locate the fuse in question by the fuse number in the image and chart.

## **■** Circuit protected and fuse rating


Circuit Protected Amps			
1	Driver's Side Power Window		
2	Passenger's Side Power Window 20 A		
3	Rear Right Side Power Window	20 A	
4	Rear Left Side Power Window	20 A	
5	Option	10 A	
6	SRS	10 A	
7	Hatch MTR	10 A	
8	=	-	
9	Front Accessory Socket	20 A	
10	Door Lock	20 A	
11	METER	10 A	
12	Option3 (ST CUT)	10 A	
13	Option2 (RR WIP)	(10 A)	
14	Option6 (VB SOL)	10 A	
15	Driver's Door Unlock	10 A	
16	Panoramic Roof*	20 A	
17	SBW1	10 A	
18	_	_	
19	-	-	
20	Rear Fog Light	10 A	
21	Cargo Accessory Socket	20 A	

	Circuit Protected	Amps
22	keyless access system	10 A
23	Driver's Door Lock	10 A
24	SBW2	7.5 A
25	IMG	10 A
26	SRS	10 A
27	ST CUT RLY	20 A
28	Option5	10 A
29	Fuel Pump	15 A
30	Left Side Door Unlock	10 A
31	Right Side Door Unlock	10 A
32	<del>-</del>	_
33	-	_
34	-	-
35	-	_
36	Option3 (SUNSHADE)*	20 A
37	IGA2	15 A
38		
39	Right Side Door Lock	10 A
40	Driver's Power Seat (REC / RR H)*	(20 A)

	Circuit Protected	Amps		
41	Driver's Power Seat (SLIDE / FR HI)*	(20 A)		
42	_	(10 A)		
43	AIRCON	10 A		
44	Daytime Running Lights	10 A		
45	ACC	10 A		
46	ACC KEY LOCK	10 A		
47	7 Left Side Door Lock 1			
48	Front Seat Heaters	20 A		
49	Passenger's Power Seat (REC)* (20			
50	Driver's Power Seat Lumbar Support	10 A		
51	Passenger's Power Seat Lumbar Support*	10 A		
52	-	(20 A)		
53	Passenger's Power Seat (SLIDE)* (20			
54	Option1 / Fuel Lid	10 A		
55	AUDIO AMP*	(30 A)		
56	_	(30 A)		

<sup>\*</sup> Not available on all models

## **Inspecting and Changing Fuses**



- 1 Hole
- Main Fuse

- **1.** Set the power mode to VEHICLE OFF. Turn headlights and all accessories off.
- 2. Remove the fuse box cover.
- **3.** Check the large fuse in the engine compartment.
  - ► Look at the fuse through the hole.
  - ► If the fuse is blown, have it replaced by a dealer.

#### 

#### NOTICE


Replacing a fuse with one that has a higher rating greatly increases the chances of damaging the electrical system.

Use the charts to locate the fuse in question and confirm the specified amperage.

Fuse Locations P. 693

Replace with a fuse of the same specified amperage.


Continued 697



- **4.** Check the combined fuses in the engine compartment fuse box.
  - Look into the space between the fuses.
  - ► If the fuse is blown, have it replaced by a dealer.

1 Blown Fuse

2 Combined Fuse



1 Fuse Puller

- **5.** Inspect the small fuses in the engine compartment and the vehicle interior.
  - ▶ If there is a blown fuse, remove it with a commercially available fuse puller and replace it with a new one.

## **Emergency Towing**

Call a professional towing service if you need to tow your vehicle.

#### **■** Flatbed equipment

The operator loads your vehicle on the back of a truck.

This is the best way to transport your vehicle.

#### ■ Wheel lift equipment

The tow truck uses two pivoting arms that go under the front tyres and lift them off the ground. The rear tyres remain on the ground. **This is an acceptable way to tow your vehicle.** 

#### Emergency Towing

#### NOTICE

Trying to lift or tow your vehicle by the bumpers will cause serious damage. The bumpers are not designed to support the vehicle's weight.

Make sure the parking brake is released. If you cannot release the parking brake, your vehicle must be transported by the flatbed equipment.

Parking Brake P. 546

#### NOTICE

Improper towing such as towing behind a motorhome or other motor vehicle can damage the transmission.

Never tow your vehicle with just a rope or chain. It is very dangerous since ropes or chains may shift from side to side or break.

#### Right-hand Drive Type


Before towing your vehicle, deactivate the security system's tilt sensor if you have to set the system.

Tilt Sensor\* P. 215

## If You Cannot Unlock the Fuel Fill Door

#### ■ What to Do If Unable to Unlock the Fuel Fill Door

If you cannot unlock the fuel fill door, use the following procedure.



**1.** Open the hatch and remove the cover on the left side of luggage area.

Cover



Release Cord

- 2. Pull the release cord toward you.
  - ► The release cord unlocks the fuel fill door when it is pulled.
- 3. Open the fuel fill door.

**▶ How to Refuel** P. 571


#### What to Do If Unable to Unlock the Fuel Fill Door

After taking these steps, contact a dealer to have the vehicle checked.

## If You Cannot Open the Hatch


### ■ What to Do If Unable to Open the Hatch

If you cannot open the hatch, use the following procedure.



- **1.** Use a flat-tip screwdriver and remove the cover on the back of the hatch.
  - ➤ Wrap the flat-tip screwdriver with a cloth to prevent scratches.

Cover



- Sliding
- 2 Lever

#### **>** What to Do If Unable to Open the Hatch


After taking these steps, contact a dealer to have your vehicle checked.

When you open the hatch from inside, make sure there is enough space around the hatch, and it does not hit anyone or any object.

**2.** To open the hatch, push the hatch while sliding the lever with the flat-tip screw driver.

## **Emergency Call (eCall)**

## **Automatic emergency call**



If your vehicle is involved in a collision, the vehicle will attempt to connect to a Public Safety Answering Point (PSAP) operator. Once a connection is established, various information about the vehicle will be sent to a PSAP operator with whom you will be able to speak. This information includes:

#### eCall Indicator

- Vehicle identification number (VIN)
- Type of vehicle (passenger vehicle or light-weight commercial vehicle)
- Type of energy stored for vehicle propulsion (gasoline/diesel/CNG/LPG/electricity/hydrogen)
- Last three locations of the vehicle
- · Direction of travel
- Triggering mode (automatic or manual)
- Timestamp

When an emergency call is initiated, the vehicle speakers are disabled so that you can hear the operator.

When the power mode is set to ON, the eCall indicator lights up in green for 1 second, then in red for 1 second.

#### Emergency Call (eCall)

Your vehicle is equipped with the 112-based eCall service system.

The 112-based eCall service is a public service of general interest and is accessible free of charge.

The 112-based eCall in-vehicle system is activated when the power mode is set to ON. In the event of a collision, the system will determine the degree of the impact based on information collected from the onboard sensors and, depending on the severity of the collision, will initiate the emergency call.

The 112-based eCall in-vehicle system can also be triggered manually, if needed.

#### **► Manual emergency call** P. 707

Any processing of personal data through the 112-based eCall in-vehicle system shall comply with the personal data protection rules provided for in Directives 95/46/EC (replaced by Regulation (EU) 2016/679) and 2002/58/EC, and in particular, shall be based on the necessity to protect the vital interests of the individuals in accordance with Article 7(d) of Directive 95/46/EC (replaced by Regulation (EU) 2016/679).

Processing of such data is strictly limited to the purpose of for which the single European emergency number 112 is designated.

Continued 703

If the eCall system is working properly, the indicator will light up in green.

- Green: eCall system is ready.
- Blinking in green: eCall system is connected and making an eCall to a PSAP operator.
- Repeating a pattern of short flashes of the red light: The eCall system has failed to connect to an operator. The eCall indicator will continue this pattern for 5 seconds\*1/30 seconds\*2, then it will light up in green.

If the 112-based eCall system is disabled in the event of a critical system failure, the following warning will be given to the occupants of the vehicle:

- Red or blacked out: A problem with the eCall system has occurred. If the indicator stays red or blacked out even after you have restarted the vehicle, have the system check by a dealer.
- Blinking in red: The level of the backup battery is too low. While the power is in ON, the battery undergoes recharging. Once the battery has been recharged to a certain level, the eCall indicator lights up in green.

#### Emergency Call (eCall)

Recipients of data processed by the 112-based eCall in-vehicle system are the relevant public safety answering points designated by the respective public authorities of the country in which they are located and are the first to receive and for which the single European emergency number 112 is designated.

Your vehicle may NOT be able to connect to a PSAP operator if:

- both the 12V battery and backup battery are too low.
- your vehicle is in an area without adequate cellular coverage (including when the 2G/3G network is out of service).
- There is a problem with the eCall system itself or its peripheral equipment such as the microphone or speakers.

<sup>\*1:</sup> Except Turkish models

<sup>\*2:</sup> Turkish models

### **■** Emergency Call (eCall) Unit Backup Battery Information

The backup battery is designed to operate for at least 3 years, after which it may need to be replaced.

The backup battery is not available for direct purchase. For replacement, visit a dealer.

#### **CAUTION**

Risk of explosion if the battery is replaced by an incorrect type.

Replace battery with the same type.

#### **CAUTION**

Risk of explosion or the leakage of flammable liquid or gas.

Do not use in/store in/bring into environment of extremely high temperature or extremely low pressure due to the very high altitude.

Do not attempt to burn, crush, or cut used battery.

 $\label{lem:manufacturer} \mbox{Manufacturer information for the backup battery: DENSO CORPORATION}$ 

Trade name: DENSO

Postal address: 1-1, Showa-cho, Kariya-shi, Aichi-ken, 448-8661, Japan

#### Emergency Call (eCall)

#### Data privacy

The 112-based eCall in-vehicle system is designed to ensure that:

- Data contained in the system memory is not available outside the system before an eCall is triggered.
- It is not traceable or subject to any constant tracking during its normal operation status.
- Data in the internal memory of the system is automatically and continuously removed.

For the system to function normally, the vehicle location data is constantly overwritten in the internal memory of the system so that the last three locations of the vehicle are kept up-to-date.

The log of activity data in the 112-based eCall invehicle system is kept for no longer than necessary for attaining the purpose of handling the emergency eCall and in any case not beyond 13 hours from the moment an emergency eCall was initiated.

Continued 705

#### Emergency Call (eCall)

#### Owner's rights

The data subject (the vehicle's owner) has a right of access to data and as appropriate to request the rectification, erasure or blocking of data, concerning him or her, the processing of which does not comply with the provisions of Directive 95/46/EC (replaced by Regulation (EU) 2016/679).

Any third parties to whom the data have been disclosed have to be notified of such rectification, erasure or blocking carried out in compliance with this Directive, unless it proves impossible or involves a disproportionate effort.

The data subject has a right to complain to the competent data protection authority if he or she considers that his or her rights have been infringed as a result of the processing of his or her personal data.

#### Honda eCall Service Information:

If you have any questions about eCall, contact the office relevant to the country in which you reside. See the service book or your local Honda website for a list of offices.

## Manual emergency call



If you need to make an emergency call, you can establish a connection manually: Press the **SOS** button and hold it for more than 0.5 seconds.

To cancel a call, press the **SOS** cancel button for more than 0.5 seconds, before 5 seconds has elapsed since the **SOS** button was pressed.

- Microphone
- 2 SOS Cancel Button
- **3 SOS** Button
- 4 Cover

The **SOS** button is protected by a cover. Open the cover to gain access.

When an emergency call is initiated, the vehicle speakers are disabled so that you can hear the operator.

#### Manual emergency call

Do NOT press the button while you are driving. If you need to contact an operator, park the vehicle in a safe place before you make a call.

If the eCall system at first fails to connect to a PSAP operator, it will try again until a connection is established. However, if 2 minutes have elapsed since the first try was attempted, the system will no longer attempt to establish a connection.

The **SOS** cancel button does not cancel a call once the system is connected to an operator.

#### Israeli models

מוצר: נתונים תקשורת מודול

סימן רשום: DENSO

ארץ ייצור: ראה מוצר

סGEY10 : דגם

שנת ייצור: ראה מוצר

Name of Importer: **Mayer's Cars and Trucks Co. Ltd.** 

Importer's Address: 17 Yitzhak Sadeh St. Tel Aviv 67775, Israel

## Information

This chapter includes your vehicle's specifications, locations of identification numbers, and other information required by regulation.

Specifications	1(
Identification Numbers	
Vehicle Identification Number (VIN),	
Engine Number, Motor Number and	
Transmission Number 7	13
Devices that Emit Radio Waves* 7	14
<b>Declaration of Conformity Content</b>	
Outline* 7	56
Open Source Licence 7	6

\* Not available on all models 709

## Specifications

#### **■** Vehicle Specifications

Model	Civic
Curb Weight	1,442-1,514 kg (3,179-3,338 lbs)
Maximum Permissible Weight	See the certification label on the driver's doorjamb' <sup>1</sup> See the certification label on the passenger's doorjamb' <sup>2</sup>
Maximum Permissible Axle Weight	See the certification label on the driver's doorjamb*1 See the certification label on the passenger's doorjamb*2

<sup>\*1:</sup> Left-hand drive type \*2: Right-hand drive type

#### **■** Engine Specifications

Туре	Water-cooled in-line 4-cylinder DOHC	
Bore x Stroke	81.0 x 96.7 mm (3.19 x 3.81 in)	
Displacement	1,993 cm³ (121.57 cu-in)	
Compression Ratio	13.9 : 1	
Spark Plugs	NGK DILZKAR7G11Y	

#### ■ Fuol

= i uei	
Туре	EN 228 standards petrol/gasohol fuel     Unleaded premium petrol/gasohol up to E10 (90% petrol and 10% ethanol), research octane number 95 or higher
Fuel Tank Capacity	40.0L (8.80 Imp gal)

#### ■ 12-Volt Battery

Capacity	36Ah (5) /45Ah (20)

#### ■ Washer Fluid

Tank Capacity	1.5 L (1.32 Imp qt)

■ Light Bulbs	
Headlights (Low Beam)	LED
Headlights (High Beam)	LED
Front Turn Signal Lights	LED
Active Cornering Lights*	LED
Position/Daytime Running Lights	LED
Side Turn Signal Lights (on Door Mirrors)	LED
Brake/Tail-lights	LED
Taillights	LED
Rear Turn Signal Lights	21 W Amber (WY21W)
Back-Up Lights	16 W (W16W)
Rear Fog Light	LED
High-Mount Brake Light	LED
Rear Licence Plate Light	LED
Interior Lights	
Map Lights	LED
Ceiling Light	LED
Ambient Lights	LED
Vanity Mirror Lights	2 W*1 2.3 W*2
Centre Pocket Light	LED
Luggage Area Light	5 W
Glove Box Light	LED
Foot Lights*	LED

<sup>\*1:</sup> Models without panoramic roof \*2: Models with panoramic roof

#### ■ Air Conditioning

Refrigerant Type	HFO-1234yf (R-1234yf)
Charge Quantity	435 - 485 g (15.3 - 17.1 oz)*1
Charge Quantity	445 - 495 g (15.7 - 17.5 oz)*2

- \*1: Left-hand drive type \*2: Right-hand drive type

#### ■ Brake Fluid

	Specified	Brake Fluid with DOT 3 or DOT 4
--	-----------	---------------------------------

#### ■ Transmission Fluid

Specified	Honda HEVF-Type 1	
Capacity	Change	2.2 L (1.94 Imp qt)

**■** Engine Oil

	European and U models	Ikrainian
	Honda Engine OIL Type 2.0	
	Honda Genuine Motor	Oil 0W-20
Recommended	ACEA C5 0W-20	
	Except European and	
	Ukrainian models	
	Honda Genuine Motor Oil 0W-20 ACEA C5 0W-20	
Canacity	Change	3.7 L (3.3 Imp qt)
Capacity	Change including filter 4.0 L (3.5 Imp qt)	

#### **■** Engine Coolant

Specified	Honda All Season Antifreeze/Coolant Type 2
Ratio	50/50 with distilled water
	5.54 L (1.22 Imp gal)
Capacity	(change including the remaining 0.62 L (0.14
	Imp gal) in the reserve tank)

#### **■** Tyre

Regular	Size	215/50R17 95W*1 235/40ZR18 95Y*2
	Pressure	See the label on driver's doorjamb
Commont	Size	T125/85D16 99M
Compact Spare*	Pressure kPa (bar [psi])	420 (4.2 [60])
Wheel Size	Regular	17 x 7J*1 18 x 8J* <sup>2</sup>
Compact Spa	re*	16 x 4T

<sup>\*1:</sup> Models with 17 inch wheel

#### ■ Honda TRK Air Compressor

A weighted emission sound pressure level	81 dB (A)
A weighted sound power level	90 dB (A)

#### ■ Brake

Туре	Power assisted
Front	Ventilated disc
Rear	Solid disc
Parking	Electric Parking Brake

#### ■ Vehicle Dimensions

Length		4,560 mm (179.5 in)
Width		1,802 mm (70.9 in)
Height		1,408 mm (55.4 in)
Wheelbase		2,734 mm (107.6 in)
	Front	1,537 mm (60.5 in)*2
Track	FIUIIL	1,547 mm (60.9 in)*1
Hack	Rear	1,576 mm (62.1 in)*2
	iteai	1,586 mm (62.4 in)*1

<sup>\*1:</sup> Models with 17 inch wheel


\* Not available on all models

<sup>\*2:</sup> Models with 18 inch wheel

<sup>\*2:</sup> Models with 18 inch wheel

## ■ The mounting point/rear over hang of coupling device

#### Dimensions



- **1** 662 mm (26.1 in)
- 2 523 mm (20.6 in)
- 3 476 mm (18.7 in)
- 4 915 mm (36.0 in)
- **6** 925 mm (36.4 in)
- 6 986 mm (38.8 in)
- **1**,045 mm (41.1 in)
- **8** 1,048 mm (41.3 in)
- **9** 1,055 mm (41.5 in)
- **10** 965 mm (38.0 in)

#### NOTE:

- **1.** marks show towbar fixing points.
- **2.**  $\spadesuit$  mark shows towbar coupling point.


#### **■** Max. Towing Weight

Trailer with brakes	750 kg (1,654 lbs)
Trailer without brakes	600 kg (1,323 lbs)
The maximum permissible vertical load on the coupling device	75 kg (165 lbs)

## **Identification Numbers**

## Vehicle Identification Number (VIN), Engine Number, Motor Number and Transmission Number

Your vehicle has a 17-digit vehicle identification number (VIN) used to register your vehicle for warranty purposes, and for licensing and insuring your vehicle. The locations of your vehicle's VIN, engine number, motor number and transmission number are shown as follows.

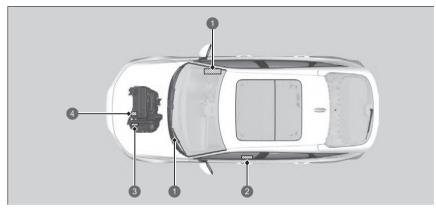

- Vehicle Identification Number
- 2 Certification Label/Vehicle Identification Number/Engine Number
- 3 Continuously Variable Transmission Number
- Motor Number
- 4 Engine Number

Vehicle Identification Number (VIN), Engine Number, Motor Number and Transmission Number

The interior vehicle identification number (VIN) is located under the cover.



Cover

## **Devices that Emit Radio Waves\***

The following products and systems on your vehicle emit radio waves when in operation.

#### Israeli models

BCM
Keyless Access System
55-14070

#### Israeli models

FOB	
Keyless Access System	
55-15374	

#### Devices that Emit Radio Waves<sup>∗</sup>

#### Israeli models

Due to concerns about radio interference, it is prohibited to operate the device with modified wireless characteristics of this device without obtaining the approval of the Ministry of Communications. This includes such as modifying the software, replacing the genuine antenna, and adding the connection option to external antenna. Due to concerns about radio interference, outdoor operation of this device is prohibited.

#### Israeli models

Hands-Free Telephone System	Blind spot information System*/Cross Traffic Monitor*
55-14369	51-87033
מספר אישור התאמה מטעם משרד התקשורת:	
חל איסור לבצע פעולות במכשיר שיש בהן כדי לשנות את תכונותיו	
האלחוטיות של המכשיר, ובכלל זה שינויי תוכנה, החלפת אנטנה	
מקורית או הוספת אפשרות	
לחיבור לאנטנה חיצונית, בלא קבלת אישור משרד התקשורת,	
בשל החשש להפרעות אלחוטיות.	

#### Israeli models

Wireless Charger	
55-13915	

\* Not available on all models

#### North Macedonia, Monaco, Montenegrin, Tahiti, New Caledonia and EU countries models

#### BCM

#### **Keyless Access System**

http://continental-homologation.com/honda



Hereby, Continental Automotive GmbH declares that this model

[41580430] is in compliance with the essential requirements and other

relevant provisions of Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the

following internet address:

https://continental-homologation.com/honda

Instructions and safety information:

Short range device for remote control

Postal address:

Siemensstrasse 12

D-93055 Regensburg

Germany

Manufacturer name:

Continental Automotive GmbH

Frequency band: 125KHz

Maximum transmitted output: 10mW

Importer Name:

Honda Motor Europe Ltd - Aalst Office

Postal address:

Wijngaardveld 1 (Noord V) 9300 Aalst - Belgium

#### North Macedonia, Monaco, Montenegrin, Tahiti, New Caledonia and EU countries models

#### **FOB**

#### **Keyless Access System**

http://continental-homologation.com/honda



Hereby, Continental Automotive GmbH declares that this model [TP\_4] is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the

following internet address:

https://continental-homologation.com/honda

Instructions and safety information:

Short range device for remote control

Postal address:

Siemensstrasse 12

D-93055 Regensburg

Germany

Manufacturer name:

Continental Automotive GmbH Frequency band: 433.92MHz

Maximum transmitted output: 1mW

Importer Name:

Honda Motor Europe Ltd - Aalst Office

Postal address:

Wijngaardveld 1 (Noord V) 9300 Aalst - Belgium

#### Tahiti, New Caledonia and EU countries models

#### Hands-Free Telephone System Display Audio

http://www.ptc.panasonic.eu/



Hereby, Panasonic Automotive Systems Co., Ltd declares that the radio equipment type Listed above is in compliance with Directive 2014/53/EU. Access to http://www.ptc.panasonic.eu/,click "Declaration of Conformity", enter the below Keyword into the keyword search box, you can download the latest "DECLARATION of CONFORMITY" (DoC). Keyword:: Model No.

Keyword [ \* ]

CL-MH-----. CA-9H-----.

CL-MH1EXTJT,CL-MH1EXUJT,CL-MH1EXVJT,CL-MH1EXWJT,CL-MH1EXQJT,CL-MH1EXRJT,CL-MH1EXATT,CL-MH1EXBTT,CL-

MH1EXCTT,CL-MH1EXDTT

You can see "Ref No" in unit label.

Intended use: Car Audio System (Bluetooth and WLAN)

Postal address: 4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, 224-8520, Japan

Manufacturer name: Panasonic Automotive Systems Co., Ltd.

Specifications of Bluetooth

Frequency band: 2402 - 2480 MHz Specifications of 2.4GHz WLAN Frequency band: 2412 - 2472 MHz

Specifications of Bluetooth Maximum output power: 0.1 dBm Specifications of 2.4GHz WLAN Maximum output power: 11.9 dBm

Importer Name: Honda Motor Europe Ltd - Aalst Office

Postal address:

Wijngaardveld 1 (Noord V) 9300 Aalst - Belgium

# Blind spot information System\*/Cross Traffic Monitor\*

https://www.veoneer.com/en/regulatory



Hereby, Veoneer US, LLC. declares that the object of the declaration described above is in conformity with the relevant harmonization legislation.

https://www.veoneer.com/en/regulatory

Intended use:

24 GHz Short Range Radar Sensor

Postal address:

26360 American Drive Southfield, Michigan, 48034 United States of America

Operational frequency band:

24.05 - 24.25 GHz

Maximum Output Power:

13 dBm peak

Importer Name:

Honda Motor Europe LTD - Aalst Office

Postal address:

Wijngaardveld 1 (Noord V) 9300 Aalst - Belgium

\* Not available on all models

### **Telematics Control Unit**

https://www.denso.com/global/en/contact-us/doc/



Hereby, DENSO CORPORATION declares that the radio equipment type is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

https://www.denso.com/global/en/contact-us/doc/

Intended use:

Telematics and Wi-Fi Hotspot device for Vehicle

Postal address:

1-1, Showa-cho, Kariya-shi, Aichi-ken, 448-8661, Japan

Operation frequency:

1) GSM900 (Tx: 880-915 MHz, Rx: 925-960 MHz) 2) GSM1800 (Tx: 1710-1785 MHz, Rx: 1805-1880 MHz) 3) WCDMA Band1 (Tx: 1920-1980 MHz, Rx: 2110-2170 MHz) 4) WCDMA Band8 (Tx: 880-915 MHz, Rx: 925-960 MHz) 5) LTE Band1 (Tx: 1920-1980MHz, Rx: 2110-2170 MHz) 6) LTE Band3 (Tx: 1710-1785 MHz, Rx: 1805-1880 MHz) 7) LTE Band7 (Tx: 2500-2570 MHz, Rx: 2620-2690 MHz) 8) LTE Band8 (Tx: 880-915 MHz, Rx: 925-960 MHz) 9) LTE Band20 (Tx: 832-862 MHz, Rx: 791-821 MHz) 10) WLAN IEEE802.11b (Tx/Rx: 2412-2462 MHz) 11) WLAN IEEE802.11g (Tx/Rx: 2412-2462 MHz) 12) WLAN IEEE802.11n (Tx/Rx: 2412-2462 MHz) 13) GPS (Rx: 1575.42 MHz) 14) GALILEO (Rx: 1575.42 MHz) 15) EGNOS (Rx: 1575.42 MHz)

Maximum output power:

GSM900 2W, GSM1800 1W

W-CDMA Band1 0.25W, Band8 0.25W

LTE Band1 0.2W, Band3 0.2W, Band7 0.2W, Band8 0.2W, Band20 0.2W

WLAN IEEE802.11b 0.032W, WLAN IEEE802.11g 0.016W, WLAN IEEE802.11n 0.016W

Importer Name:

Honda Motor Europe Ltd - Aalst Office

Postal address:

Wijngaardveld 1 (Noord V) 9300 Aalst - Belgium

#### Bluetooth Unit\*

https://continental-homologation.com/honda



Hereby, Continental declares that the radio equipment type A2C192350/ A2C192351 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

https://continental-homologation.com/honda

Intended use:

Vehicle Access System

Postal address:

Continental Automotive GmbH

Siemensstraße 12, D-93055 Regensburg, Germany

BLE frequency range:

2.402GHz to 2.48GHz

**BLE Maximum Output Power:** 

+20dBm

Importer Name:

Honda Motor Europe Ltd - Aalst Office

Postal address:

Wijngaardveld 1 (Noord V) 9300 Aalst - Belgium

\* Not available on all models

# Wireless Charger

http://bhevs.co.kr/bbs/board.php?tbl=e\_bbs42\_2

Hereby, BH EVS Co., Ltd. declares that the radio equipment type WC500HOCI21 is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address:

http://bhevs.co.kr/bbs/board.php?tbl=e\_bbs42\_2

Intended use:

Wireless Power Charger for vehicle

Postal address:

Am Kronberger Hang 2 65824 Schwalbach am Taunus Germany

Manufacturer name:

BH EVS Co.,Ltd.

Operational frequency band:

111kHz

Maximum output power:

42dBuA/m @10m

Importer name:

Honda Motor Europe Ltd - Aalst Office

Postal address;

Wijngaardveld 1 (Noord V) 9300 Aalst - Belgium

#### Remote Tuner

http://www.ptc.panasonic.eu/



Hereby, Panasonic Automotive Systems Co., Ltd. declares that the radio equipment type Listed above is in compliance with Directive 2014/53/EU. Access to <a href="http://www.ptc.panasonic.eu/">http://www.ptc.panasonic.eu/</a>, click "Declaration of Conformity", enter the below Keyword into the keyword search box, you can download the latest "DECLARATION of CONFORMITY" (DoC). Keyword: Model No.

Keyword: [CQ-TH1BE1AJ]

You can see "Ref No" in unit label.

Intended use:

RADIO UNIT (Car radio tuner)

Postal Address:

4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, 224-8520, Japan

Importer name:

Honda Motor Europe Ltd - Aalst Office

Postal address;

Wijngaardveld 1 (Noord V) 9300 Aalst - Belgium

Cain Road, Bracknell, Berkshire, RG12 1HL, United Kingdom

# British models

BCM	FOB
Keyless Access System	Keyless Remote
http://continental-homologation.com/honda	http://continental-homologation.com/honda
UK CA	UK CA
Hereby, Continental Automotive GmbH declares that this model	Hereby, Continental Automotive GmbH declares that this model
[41580430] is in compliance with the essential requirements and	[TP_4] is in compliance with the essential requirements and other
other relevant provisions of Radio Equipment Regulations 2017.	relevant provisions of Radio Equipment Regulations 2017.
The full text of the UK declaration of conformity is available at the	The full text of the UK declaration of conformity is available at the
following internet address:	following internet address:
http://continental-homologation.com/honda	http://continental-homologation.com/honda
Instructions and safety information:	Instructions and safety information:
Short range device for remote control	Short range device for remote control
Postal address:	Postal address:
Continental Automotive GmbH	Continental Automotive GmbH
Siemensstrasse 12	Siemensstrasse 12
D-93055 Regensburg	D-93055 Regensburg
Germany	Germany
Frequency band;	Frequency band;
125kHz +/- 3kHz	433.66MHz +/- 16kHz
Maximum transmitted output;	434.18MHz +/- 16kHz
10mW	Maximum transmitted output;
Importer Name: Honda Motor Europe Ltd	1mW
Postal address:	Importer Name: Honda Motor Europe Ltd

Postal address:

725

#### British models

# Hands-Free Telephone System Display Audio

http://www.ptc.panasonic.eu/



Hereby, Panasonic Automotive Systems Co., Ltd. declares that the radio equipment type [\*] is in compliance with The Radio Equipment Regulations 2017.

The full text of the UK declaration of conformity is available at the following internet address: http://www.ptc.panasonic.eu/ enter the below Keyword into the keyword search box, you can download the latest "DECLARATION of CONFORMITY" (DoC).

Hereby, Panasonic Automotive Systems Co., Ltd. declares that the radio equipment type Listed above is in compliance with Directive 2014/53/EU. Access to http://www.ptc.panasonic.eu/.click "Declaration of Conformity". enter the below Keyword into the keyword search box, you can download the latest

"DECLARATION of CONFORMITY" (DoC).

Kevword::

Model No. Keyword [ \* ]

CL-MH-----, ĆA-9H-----

CL-MH1EXOJT, CL-MH1EXRJT

You can see "Ref No" in unit label

Intended use: Car Audio System (Bluetooth and WLAN)

Postal address: 4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, 224-8520, Japan

Manufacturer name: Panasonic Automotive Systems Co., Ltd.

Specifications of Bluetooth

Frequency band: 2402 - 2480 MHz

Specifications of 2.4GHz WLAN

Frequency band: 2412 - 2472 MHz

Specifications of Bluetooth

Maximum output power: 0.1 dBm

Specifications of 2.4GHz WLAN

Maximum output power: 11.9 dBm Importer Name: Honda Motor Europe Ltd

Postal address:

# Blind spot information System\*/Cross Traffic Monitor\*

https://www.veoneer.com/en/regulatory



Hereby, Veoneer US, LLC. declares that the object of the declaration described above is in conformity with the relevant harmonization legislation.

https://www.veoneer.com/en/regulatory

Intended use:

24 GHz Short Range Radar Sensor

Postal address:

26360 American Drive Southfield, Michigan, 48034 United States of America

Operational frequency band:

24.05 - 24.25 GHz

Maximum Output Power:

13 dBm peak

Importer Name:

Honda Motor Europe Ltd

Postal address:

#### **Telematics Control Unit**

https://www.denso.com/global/en/contact-us/doc/



Hereby, DENSO CORPORATION declares that the radio equipment type is in compliance with the relevant statutory requirements.

The full text of the UK declaration of conformity is available at the following internet address:

https://www.denso.com/global/en/contact-us/doc/

Intended use:

Telematics and Wi-Fi Hotspot device for Vehicle

Postal address:

1-1, Showa-cho, Kariya-shi, Aichi-ken, 448-8661, Japan

Operation frequency:

1) GSM900 (Tx: 880-915 MHz, Rx: 925-960 MHz) 2) GSM1800 (Tx: 1710-1785 MHz, Rx: 1805-1880 MHz) 3) WCDMA Band1 (Tx: 1920-1980 MHz, Rx: 2110-2170 MHz) 4) WCDMA Band8 (Tx: 880-915 MHz, Rx: 925-960 MHz) 5) LTE Band1 (Tx: 1920-1980MHz, Rx: 2110-2170 MHz) 6) LTE Band3 (Tx: 1710-1785 MHz, Rx: 1805-1880 MHz) 7) LTE Band7 (Tx: 2500-2570 MHz, Rx: 2620-2690 MHz) 8) LTE Band8 (Tx: 880-915 MHz, Rx: 925-960 MHz) 9) LTE Band20 (Tx: 832-862 MHz, Rx: 791-821 MHz) 10) WLAN IEEE802.11b (Tx/Rx: 2412-2462 MHz) 11) WLAN IEEE802.11g (Tx/Rx: 2412-2462 MHz) 12)

WLAN IEEE802.11n (Tx/Rx: 2412-2462 MHz) 13) GPS (Rx: 1575.42 MHz) 14) GALILEO (Rx: 1575.42 MHz) 15) EGNOS (Rx: 1575.42 MHz)

Maximum output power:

GSM900 2W, GSM1800 1W

W-CDMA Band1 0.25W, Band8 0.25W

LTE Band1 0.2W, Band3 0.2W, Band7 0.2W, Band8 0.2W, Band20 0.2W

WLAN IEEE802.11b 0.032W, WLAN IEEE802.11g 0.016W, WLAN IEEE802.11n 0.016W

Importer Name:

Honda Motor Europe Ltd

Postal address:

## Bluetooth Unit\*

https://continental-homologation.com/honda



Hereby, Continental Automotive GmbH declares that this model [A2C775684] is in compliance with the essential requirements and other relevant provisions of Radio Equipment Regulations 2017.

The full text of the UK declaration of conformity is available at the following internet address:

https://continental-homologation.com/honda

Intended use:

Control Unit

Postal address:

Continental Automotive GmbH

Siemensstraße 12, D-93055 Regensburg, Germany

BLE frequency range:

2.402GHz to 2.48GHz

**BLE Maximum Output Power:** 

+20dBm

Importer Name:

Honda Motor Europe Ltd

Postal address:

#### Remote Tuner

http://www.ptc.panasonic.eu/



Hereby, Panasonic Automotive Systems Co., Ltd. declares that the radio equipment type [ \* ] is in compliance with The Radio Equipment Regulations 2017.

The full text of the UK declaration of conformity is available at the following internet address:

https://www.ptc.panasonic.eu/

enter the below Keyword into the keyword search box, you can download the

latest "DECLARATION of CONFORMITY" (DoC).

Keyword: Model No. Keyword: [CQ-TH1BE1AJ]

You can see "Ref No" in unit label.

Intended use:

RADIO UNIT (Car radio tuner)

Postal Address:

4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, 224-8520, Japan

Importer Name:

Honda Motor Europe Ltd

Postal address:

# Wireless Charger

http://bhevs.co.kr/bbs/board.php?tbl=e\_bbs42\_2

Hereby, BH EVS Co.,Ltd. declares that the radio equipment type WC500HOCI21 is in compliance with the Radio Equipment Regulations 2017. The full text of the declaration of conformity is available at the following internet address:

http://bhevs.co.kr/bbs/board.php?tbl=e\_bbs42\_2

Intended use:

Wireless Power Charger for vehicle

Postal address: Am Kronberger Hang 2 65824 Schwalbach am Taunus Germany

Manufacturer name: BH EVS Co.,Ltd.

Operational frequency band:

111kHz

Maximum output power:

42dBuA/m @10m

Importer Name:

Honda Motor Europe Ltd

Postal address:

# BCM FOB Keyless Access System Keyless Access System



# Hands-Free Telephone System

#### **Panasonic Panasonic EU Declaration of Conformity** Document Number 245,230027-01 FU Declaration of Conformity Manufacturer : Panasonic Automotive Systems Co., Ltd. Danagemin Automotive Systems Co., 188 : 6261/korobe-cho, Tuzzaki-ku, Yokohama-shi, Kanagawa-keo, 236-6520, Kapen 4390 konobe cho Yuzuki ku Yukobana shi Kanariwa ken 234 8926 Jasan Address Object of Declaration Product Name : CAR AUDIO(UNIT ASSY DA) CAR AUDIDIOWIT ASSY DAS Trade Name Trade Name Panagonic : CL-MHEDIGIT, CL-MHEDIRIT, CL-MHEDIGES, CL-MHEDIESES Model Number CLAMBERTIT, CLAMBERIUT, CLAMBERNIT, CLAMBERWIT, CLAMBERWIT CL-MHIEXBET, CL-MHIEXCET, CL-MHIEXDET, CL-MHIEXZIS, CL-MHIEXZIS CL-MHIEXXIS, CL-MHIEXXIS Model to Model (D CE Requirements This declaration of coeformity is issued under the sole responsibility of the manufacturer, the object of the declaration described above is in conformity with the requirements of the following EU legislation and harmonized standards: This declaration of conformity is issued under the sole responsibility of the manufacturer. The object of the declaration described above it in conformity with the requirements of the following (to legislation and harmoniced standards: Council Directive 2014/53/EU 485 PM 677111-2008 KES Applicable Standards EN 62368-1:2014 +A11:2017 EN 101 489-1 V2 2 1 2019 EN 62513, 2008; EN 62566-1-2014 +A11:2017; EN 501 489-1 V2.2:3:2019 EN 501 489-3 V2.1:1:2017; EN 301 489-37 V3.2:2:2020 EN 501 489-3 VZ.1.1:2017 EN 901 489-19 V2.1.0.2017; EN 900 828 V2.2.2.2019; EN 301 893 V2.2.1.2017 EN 300 440 V2.1.2017; EN 303 443 V1.2.1.2021 EN 301 489-17 V3 2 4:3020 EN 301 489-19 V2 1 0:2017 SW 300 328 V2 2 2-2019 MICOM Labs Inc., Notified Body Number 2280, performed assessment of the tests and technical notified node DN 301 893 V2 1 1:2017 documentation provided by the applicant with the exsential representation for the RED 2014/13/EU, and issued EU-TYPE EXAMINATION CRITIFICATE (DIXISS) / 13 pp 2013 / flow A. EN 300 440 V2 1 1:2017 EN 303 413 V1 2 1:2021 NICOM Labs Inc., Notified Body Number 1280, performed assessment of the tests and technical documentation provided by the applicant with the asserbid requirements of the BCD 2054/53/EU, and isseed to 1777 EXAMINATION CENTRACT CONSISTS, 17 JAP 2012, Fire A. Direct Street Street, k. Nishimura k Nishimura W ditw 22.05.2023 Date of Issue / Signature Wolfram Kühl Wolfram Kühl Authorised Representative - Authorised Regresentative - Panazonic Marketing Durope GmbH, Panazonic Testing Centre - Authorised Representative -Panasonic Marketing Europe Grafins, Panasonic Testing Contre Winsbergring 15, 22525 Hamburg, Germany Windowgring 55, 23525 Hamburg, Germany

# Blind spot information System\*/Cross Traffic Monitor\*

idvarski faboratorije d.o.o. Beograd Volgina 15, 11060 Beograd tat: +381 11 0776329 Idvorski laboratorije POTVRDA O USAGLAŠENOSTI broj 00688 01115 DATUM IZDAVANJA: 12.07.2021 VAŽI DO: 11.07.2024 RTTE Consulting doo Kneza Višeslava 63/2.7, 11090 Beognad PODNOSILAC ZAHTEVA: NAZIV / VRSTA OPREME: Radarski senzor (24 GHz SRS Radar Sensor) ROBNA MARKA Vegneer Vecheer US, Inc. PROIZVOĐAČ: 26380 American Drive, Southfield, Michigan, 48034, USA TIP / MODEL: NB24G20V0 Pregledom dole navedene tehničke dokumentacije dostavljene od strane podnosioca zahteva, utvidena je usaglašenost opreme sa bitnim zahtevima Pravilnika o radio opremi i terminalnoj telekomunikacionoj opremi (Službeni glasnik RS br.11/2012): Vrsta dokumenta 06.04.2021 20054147-19273-0 Health test report Safety test report IBL-Lati Gritiri 20054147-18184-0 31.05.2021 20054147-18186-1 09.02.2021 EMC test report IBL-Lab GribH 20054147-18185-1 12.03.2021 Radio spectrum test report IBL-Lab GmbH EU-type examination certificate KL-Certification Ombi-I T-2021-04-0003 02.06.2021

Mesto izdavanja Beograd





otricasi A,GB 701.0301.
Pilotria ir usagationesi vetti tii godine nit tiinni intervery za vei ta, natovani mau, aprame alag procvolatia. Umere na prauvido kide etito mi usagatiannik a Prosindoro masao se pilaviti livrato istosatoriama. Podroplac perinni since objevennet za susevitrisat dississiponi zitiu-familiaza.

\* Not available on all models

# **Telematics Control Unit**

Овиме, DENSO CORPORATION изјављује да је радио опрема тип усаглашена са Директивом 2014/53/EU. Цео текст ЕУ декларације о усаглашености доступам је на следећој интернет адреси:

https://www.denso.com/global/en/contact-us/doc/



granges are surje as exemples on surger surject surjec

#### **Telematics Control Unit**

# Wireless Charger

Horing considered the above neutrinoid arbeiteried depowerations, it has been determined that the conferency of the above neutrinoid engineeme with the exestinal repolarosists referred to its Act of Plates on Bulle Engineeric and Teleconomications: Terminal Equipment (Official Genetic of 85, no. 11/12) had been duly proved. The full responsibility for the above mentioned submitted decreasatedities shall be summed by the applicant. The certificate shall be sufficiency pour from the date of iscussive.

Spoj npastern: -Appendis number:

Buson og: 08.02.2022. Falld from:


Basen po: 08.02.2025, Valid well?



2/2



Continued

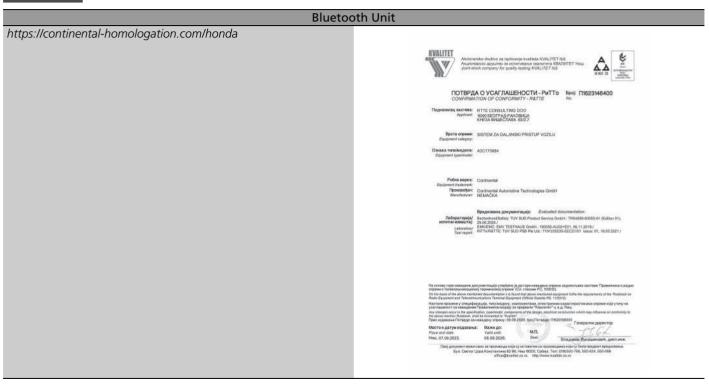

#### Remote Tuner



#### **BCM**

# **Keyless Access System**

http://continental-homologation.com/honda



Hereby, Continental Automotive GmbH declares that this model [41580430] is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address:

https://continental-homologation.com/honda

Instructions and safety information:

Short range device for remote control

Postal address:

Siemensstrasse 12

D-93055 Regensburg

Germany

Manufacturer name:

Continental Automotive GmbH

Frequency band: 125KHz

Maximum transmitted output: 10mW

Importer Name: Honda Turkiye A. S. Postal address:

#### **FOB**

# **Keyless Access System**

http://continental-homologation.com/honda



Hereby, Continental Automotive GmbH declares that this model [TP\_4] is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address:

https://continental-homologation.com/honda

Instructions and safety information:

Short range device for remote control

Postal address:

Siemensstrasse 12

D-93055 Regensburg

Germany

Manufacturer name:

Continental Automotive GmbH

Frequency band: 433.92MHz

Maximum transmitted output: 1mW

Importer Name:

Honda Turkiye A. S.

Postal address:

# Hands-Free Telephone System Display Audio

http://www.ptc.panasonic.eu/



İşbu belge ile Panasonic Automotive Systems Co., Ltd., yukarıda listelenen radyo ekipmanı tipinin

2014/53/AB Direktifine uygun olduğunu beyan etmektedir.

http://www.ptc.panasonic.eu/ adresinden "Declaration of Conformity (Uygunluk beyani)" başlığına tıkladıktan sonra, asağıdaki anahtar kelimeyi arama kutusuna girerek en son

"DECLARATION of CONFORMITY (UYGUNLUK BEYANI)"nı (DoC) indirebilirsiniz.

Anahtar kelime: [type of equipment]

Kevword::

Model No. Keyword [\*]

CL-MH-----, ĆA-9H-----,

CL-MH1EXTJT,CL-MH1EXUJT,CL-MH1EXVJT,CL-MH1EXWJT,CL-MH1EXRJT,CL-MH1EXRJT,CL-MH1EXBTT,CL-MH1

MH1EXCTT,CL-MH1EXDTT

You can see "Ref No" in unit label.

Intended use: Car Audio System (Bluetooth and WLAN)

Postal address: 4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, 224-8520, Japan

Manufacturer name: Panasonic Automotive Systems Co., Ltd.

Specifications of Bluetooth

Frequency band: 2402 - 2480 MHz Specifications of 2.4GHz WLAN

Frequency band: 2412 - 2472 MHz

Specifications of Bluetooth

Maximum output power: 0.1 dBm Specifications of 2.4GHz WLAN

Maximum output power: 11.9 dBm

Importer Name: Honda Turkiye A. S.

Postal address:

# Blind spot information System\*/Cross Traffic Monitor\*

https://www.veoneer.com/en/regulatory



Hereby, Veoneer US, LLC. declares that the object of the declaration described above is in conformity with the relevant harmonization legislation.

https://www.veoneer.com/en/regulatory

Intended use:

24 GHz Short Range Radar Sensor

Postal address:

26360 American Drive Southfield, Michigan, 48034 United States of America

Operational frequency band:

24.05 - 24.25 GHz

Maximum Output Power:

13 dBm peak

Importer Name:

Honda Turkiye A. S.

Postal address:

Aydinevler Mahallesi, Sanayi Caddesi No:1, 34854 Maltepe, Istanbul

\* Not available on all models

# Emergency Call (eCall)

https://www.denso.com/global/en/contact-us/doc/



İşbu belge; DENSO CORPORATION telsiz ekipmanı tipinin 2014/53/AB sayılı Direktif'e uygun olduğunu beyan eder.

AB uvgunluk bevanının tam metni asağıdaki internet adresinde mevcuttur:

https://www.denso.com/global/en/contact-us/doc/

Intended use:

ECALL device for vehicle

Postal address:

1-1, Showa-cho, Kariya-shi, Aichi-ken, 448-8661, Japan

Operation frequency:

- 1) GSM900 (Tx: 880-915 MHz, Rx: 925-960 MHz)
- 2) GSM1800 (Tx: 1710-1785 MHz, Rx: 1805-1880 MHz)
- 3) WCDMA Band1 (Tx: 1920-1980MHz, Rx: 2110-2170 MHz)
- 4) WCDMA Band8 (Tx: 880-915 MHz, Rx: 925-960 MHz)
- 5) GPS (Rx: 1575.42 MHz)
- 6) GALILEO (Rx: 1575.42 MHz)
- 7) GLONASS (RX: 1601.709 MHz)
- 8) EGNOS (Rx: 1575.42 MHz)

Maximum output power:

GSM900 2W, GSM1800 1W

W-CDMA Band1 0.25W, Band8 0.25W

Importer Name:

Honda Turkiye A. S.

Postal address:

#### Bluetooth Unit\*

https://continental-homologation.com/honda



Hereby, Continental declares that the radio equipment type A2C192350/ A2C192351 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

https://continental-homologation.com/honda

Intended use:

Vehicle Access System

Postal address:

Continental Automotive GmbH

Siemensstraße 12, D-93055 Regensburg, Germany

BLE frequency range:

2.402GHz to 2.48GHz

BLE Maximum Output Power:

+20dBm

Importer Name:

Honda Turkiye A. S.

Postal address:

Aydinevler Mahallesi, Sanayi Caddesi No:1, 34854 Maltepe, Istanbul

\* Not available on all models

# Wireless Charger

http://bhevs.co.kr/bbs/board.php?tbl=e\_bbs42\_2

Hereby, BH EVS Co., Ltd. declares that the radio equipment type WC500HOCI21 is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address:

http://bhevs.co.kr/bbs/board.php?tbl=e\_bbs42\_2

Intended use:

Wireless Power Charger for vehicle

Postal address: Am Kronberger Hang 2 65824 Schwalbach am Taunus Germany

Manufacturer name: BH EVS Co.,Ltd.

Operational frequency band:

111kHz

Maximum output power:

42dBuA/m @10m

Importer name:

Honda Turkiye A. S.

Postal address;

#### Remote Tuner

http://www.ptc.panasonic.eu/



Hereby, Panasonic Automotive Systems Co., Ltd. declares that the radio equipment type Listed above is in compliance with Directive 2014/53/EU. Access to <a href="http://www.ptc.panasonic.eu/">http://www.ptc.panasonic.eu/</a>, click "Declaration of Conformity", enter the below Keyword into the keyword search box, you can download the latest "DECLARATION of CONFORMITY" (DoC). Keyword: Model No.

Keyword: [CQ-TH1BE1AJ]

You can see "Ref No" in unit label.

Intended use:

RADIO UNIT (Car radio tuner)

Postal Address:

4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, 224-8520, Japan

Importer name:

Honda Turkiye A. S.

Postal address:

# BCM Keyless Access System

http://continental-homologation.com/honda

Postal address: Siemensstrasse 12 D-93055 Regensburg

Germany

Manufacturer name:

Continental Automotive GmbH

Frequency band: 125KHz

Maximum transmitted output: 10mW

Importer Name: Pride Motor LLC Postal address:



# FOB Keyless Access System

http://continental-homologation.com/honda

Postal address:

Siemensstrasse 12

D-93055 Regensburg

Germany

Manufacturer name:

Continental Automotive GmbH Frequency band: 433.92MHz

Maximum transmitted output: 1mW

Importer Name: Pride Motor LLC Postal address:



# Hands-Free Telephone System

справжнім Panasonic Automotive Systems Co., Ltd заявляє, що тип радіообладнання \* відповідає Технічному регламенту радіообладнання;

повний текст декларації про відповідність доступний

на веб-сайті за такою адресою: https://service.panasonic.ua/

(розділ «Технічне регулювання»)

моделі; [АН2001]

Postal address:

4261 Ikonobe-cho, Tsuzuki-ku, Yokohama City, 224-8520, Japan

Manufacturer name:

Panasonic Automotive Systems Co., Ltd.

Specifications of Bluetooth

Frequency band: 2402-2480MHz Specifications of 2.4GHz WLAN Frequency band: 2412-2472MHz Specifications of Bluetooth

Maximum output power: 0.1dBm Specifications of 2.4GHz WLAN Maximum output power: 11.9dBm

Importer Name: Pride Motor LLC Postal address:

73, Lesi Ukrainky Str., Vyshneve, Kyiv oblast, 08132, Ukraine

#### ДЕКЛАРАЦІЯ ПРО ВІДПОВІДНІСТЬ Panasonic Corporation AH2001

- Автомобільний аудіопристрій з дисплеєм (UNIT ASSY DA) т.м Panasonic Corporation моделі AH2001 з обладнанням радіодоступу (інтерфейс передачі даних IEEE 802.11 a/b/g/n/ac, IEEE 802.15. Bluetooth) та GPS-приймачем.
- Уповноважений представник виробника ТОВ «Радіо Тест Стандарт» (03115, м. Київ, вул. Львівська, 22А, к. 135, ЄДРПОУ 39205151) діє за дорученням "Panasonic Automotive Systems Co., Ltd.", 4261 ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken 224-8520, Japan.
- наименувания та адреса вирооника воо ного уповноваменого представника

  3. Ця декларація відповідності видана під особисту відповідальність виробник
- Об'єкт декларації (зображення об'єкта декларації для ідентифікації):
   об'єкт декларації (ідентифікація радіообладизния, яка дъє змогу забезпечити його простежуваність; може включати кольорове



- Об'єкт декларації відповідає вимогам Технічного регламенту радіообладнання, затвердженого постановою КМ України від 24.05.2017 № 355.
- 6. Об'єкт декларації відповідає вимогам наступних НД:

JCCT BN 62886-1-2017, EG 62886-1-2016 (Second Edition), JCCT BN 62311-2014, JCCT ET EN 89.01 483-1-2019, ETER BN 90.483-1-2019, ETER BN 90.483-1-2019, ETER BN 90.483-1-2019, JCCT ETER BN 90.483-1-2014, JCCT ETER BN 90.483-1-2016, JCCT ETER BN 90.481-1-2016, JCCT ETER BN 90.481-1-1-2016, JCCT ETE

Посилання на відповідні стандарти з переліку національних стандартів, що були застосовані, або посилання на інші техніг специфікації, щодо яких декларується відповідність (із зазначенням ідентифікаційного номера, версії та дати видання)

7. Призначений орган з оцінки відповідності:

виконав добровільну оцінку відповідності технічного проекту радіообладнання Технічного регламенту радіообладнання, затвердженого постановою КМ Укря № 355 за процедурюю ексертизи типу (модуль В) та видав сертифікт № UA.R.TR.052.040-22 від 07 квітня 2022 р.

Программе забезпечення застосовується: Не застосовується. НW: B\_2S
 Indianosia, их випадках опис компонентів та аксесуарів, у тому числі програмного забезпечення, завез

Укра — експертизи ем РАДІО ТЕСТ СТАНДАРТ В ма засробла и динств

# Hands-Free Telephone System

- 9. Додаткова інформація; Виробник «Панасонік Аутомотів Системс Ко., Лтд.», Японія, 4261 Іконобе-чо. Тсузукі-ку, Йокохама-ші, Канагава-кен 224-8520 ("Panasonic Automotive Systems Co., Ltd.", 4261 ikonobecho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken 224-8520, Japan) на підприємствах: 1) «Панасонік Аутомотів Системс де Мехіко С.А.», Мексика, ("Panasonic Automotive Systems de Mexico S.A.", de C.V Carretera Reynosa Mike Allen 1231 S/N Parque Industrial Reynosa Reynosa, Tamaulipas, C.P. 88780, Mexico); 2) «Панасонік Аутомотів Системс Даліан Ко., Лтд.», Китай, ("Panasonic Automotive Systems Dalian Co., Ltd.", No.300, Honggang Road, Ganjingzi District Dalian City, Liaoning Province, 116033 P.R. China); 3) «Панасонік Avтомотів Системс Асіа Пасифік Ко., Лтд.». Таїланд. ("Panasonic Automotive Systems Asia Pacific Co., Ltd.". 101 M.2 Teparak Rd., T.Bangsaothong, A.Bangsaothong, Samutprakarn 10570, Thailand); 4) «Панасонік До Брасіл Лімітада Руа Матрінх'а», Бразилія, ("Panasonic Do Brasil Limitada Rua Matrinx'a", 1155 - Distrito Industrial 69075-150 -Manaus - AM Brasil); 5) «Панасонік Корпорешин Аутомотів & Індастріал Системс Компані Аутоматів Інфотаінмент Системс Бізнес Дівісіон Матсумото Сайт», Японія, ("Panasonic Corporation Automotive & Industrial Systems Company Automotive Infotainment Systems Business Division Matsumoto Site", 5652, Sasaga, Matsumoto-shi, Nagano-ken, 399-8730, Japan); 6) «Панасонік Аутомотів Системс Чех, c.p.o.», Yexia, ("Panasonic Automotive Systems Czech, s.r.o.", U Panasonicu 266, Staré Čivice 53006 Pardubice Czech Republic); 7) «Панасонік Тайвань Ко., Лтд.», Тайвань, ("Panasonic Taiwan Co., Ltd.", Car Electric Division, PAS Technology Domain Business 579, Yuan Shan Road, Chung-Ho District, New Taipei City, Taiwan); 8) «Панасонік Аутомотів Системс», Малайзія, ("Panasonic Automotive Systems", Malaysia Sdn. Bhd. Plot 10, Phase 4, Prai Industrial Estate, 13600 Prai Penang, Malaysia).
  - 10. Підписано ТОВ «Радіо Тест Стандарт», 03115, м. Київ, вул. Львівська, 22А, к. 135, ЄДРПОУ 39205151 від імені та за дорученням "Panasonic Automotive Systems Co., Ltd.", Японія.



#### Шуман Д.В.

Директор ТОВ «Радіо Тест Стандарт»

Декларація взята на облік:

ООВ УКРЧАСТОТНАГЛЯД 03179, м. Київ, пр-т Перемоги, 151; тел. +38 (044) 422-85-44 НА ТВ 052

(назва призначеного органу, адреса, ідентифікаційний код ресстру призначених ОО

РАДІО ТЕСТ СТАНДАРТ:

Ибліковий номер: Звіт про оцінювання № УЧН-22/D.034 від 07.04.2022



Чинність Декларації можна перевірити в базі даних ООВ УКРЧАСТОТНАГЛЯД на <a href="http://ucrf.gov.ua">http://ucrf.gov.ua</a>

Декларація взята на облік ООВ УКРЧАСТОТНАГЛЯД за зверненням Виробника

# Blind spot information System\*/Cross Traffic Monitor\*

Postal address:

26360 American Drive, Southfield, Michigan, 48034, United States of America Manufacturer name:

Veoneer US, Inc.

Operational frequency band:

24.125 GHz

Maximum Output Power:

13 dBm

Importer Name:

Pride Motor LLC

Postal address:



### **Telematics Control Unit**



модель: OGEY10 смуга радіочастот:

GSM900 (Rx: від 925 до 960 МГц)
GSM1800 (Rx: від 1805 до 1880 МГц)
WCDMA Band1 (Rx: від 2110 до 2170 МГц)
WCDMA Band3 (Rx: від 1805 до 1880 МГц)
WCDMA Band8 (Rx: від 925 до 960 МГц)
LTE Band1 (Rx: від 2110 до 2170 МГц)
LTE Band3 (Rx: від 1805 до 1880 МГц)
LTE Band7 (Rx: від 2620 до 2690 МГц)

LTE Band8 (Rx: від 925 до 960 МГц) LTE Band20 (Rx: від 791 до 821 МГц) GPS/GALILEO/EGNOS (Rx: 1575.42 МГц)

справжнім DENSO CORPORATION заявляє, що тип радіообладнання відповідає Технічному регламенту

радіообладнання;

повний текст декларації про відповідність доступний на

веб-сайті за такою адресою:

https://www.denso.com/global/en/contact-us/doc/

виробник: DENSO CORPORATION

адреса: 1-1, Showa-cho, Kariya-shi, Aichi-ken, 448-8661 Japan

Importer Name: Pride Motor LLC

Postal address:

## **Bluetooth Unit**

Postal address:

Siemensstraße 12, D-93055 Regensburg, Germany

Manufacturer name:

Continental Automotive GmbH

BLE frequency range:

2.402GHz to 2.48GHz

BLE Maximum Output Power:

+20dBm

Importer Name:

Pride Motor LLC

Postal address:



# Wireless Charger

справжнім Баш IBC Ко., Лтд.заявляє, що тип радіообладнання WC500HOCl21 відповідає Технічному регламенту радіообладнання;

повний текст декларації про відповідність доступний на веб-сайті за такою адресою:

http://bhevs.co.kr/bbs/board.php?tbl=e\_bbs42\_2 моделі: WC500HOCl21

Postal address:

Баш ІВС Ко., Лтд.

25. Пхенчхон-ро 199біон-джіл, Бапйонг-гу. Інчон.

Республіка Корея

Manufacturer name:

BH EVS Co..Ltd.

Operational frequency band:

111kHz

Maximum Output Power:

42dBuA/m @10m

Importer Name:

Pride Motor LLC

Postal address:



#### Remote Tuner

справжнім Panasonic Automotive Systems Co., Ltd. заявляє,

що тип радіообладнання \* відповідає Технічному

регламенту радіообладнання;

повний текст декларації про відповідність доступний на

веб-сайті за такою адресою:

https://service.panasonic.ua/

(розділ «Технічне регулювання»)

моделі; [\*]

CQ-TH1BE1AJ

Об'єкт декларації відповідає вимогам Технічного

регламенту радіообладнання, затвердженого постановою

КМ України від 24.05.2017 № 355

Поштова адреса:

4261 Іконобе-чо, Цузукі-ку, Йокогама-ши, Канагава-кен,

224-8520, Японія

Назва виробника: Panasonic Automotive Systems Co., Ltd.

Importer Name:

Pride Motor LLC

Postal address:

## Ukrainian models

## Remote Tuner

### ДЕКЛАРАЦІЯ ПРО ВІДПОВІДНІСТЬ № RTS.UKR.355-1123/22

- 1. Радіообладнання (виріб, тип, номер партії чи серійний номер):
- Автомагнітоли торговельної марки Panasonic моделей CQ-TH1BE1AJ, CQ-TH1BE1BJ, CQ-THVCEOAD, CQ-THVCEOBD.
- 2. Найменування та адреса виробника або його уповноваженого представника: Уповноважений представник - ТОВ "Радіо Тест Стандарт", Україна, 03115, м. Київ, вул. Львівська, 22А, к. 135, код СДРПОУ 39205151 [Довіреність "Панасонік Аутомотів Системо Ко, Лтл." ("Panasonic Automotive Systems Co, Ltd."), Японіз).
- 3. Ця декларація відповідності виданя під особисту відповідальність виробника: "Панасонік Аутомотів Системс Ко. "Этл.", 4261 Іконобе-чо, Теузукі-му, Йокохама-ші, Канагава-кен 224-8520, Японія ("Panasonic Automotive Systems Co., Ltd.", 4261 Ікоnобе-cho, Тяцикі-іки, Yokohama-shi, Kanagawa-ken 224-8520, Japan).
- Об'єкт декларації (дентифікація радіообладнання, яка дає змогу забезнечити його простежуваність; може включати кольорове чітке зображення у разі потреби для ідентифікації зазначеного радіообладиання): Автомагнітоли торговельної марки Рапазопіс моделей СС-ТНІВЕТА, СС-ТНІВЕТВІ, СС-ТНІVЄЕОАD, СС-ТНІVЄЕОВD.
  - 5. Об'єкт декларації відповідає вимогам таких технічних регламентів: Технічного регламенту радіообладнання;
- Посилання на відповідні стандарти з переліку національних стандартів, що були застосовані, або посилання на інші технічні специфікації, щодо яких декларується відповідність (із зазначенням ідентифікаційного номера, версії та датя видання);

Пункти "Технічного регламенту радіообладнання"	Стандарти	Номер протоколу випробувань	Випробувальна лабораторія (атестат акредитації)/ додаткова інформація
Застосовані станда	рти, що включені до "Переліку наг презумицію відновідності радіообл		
п.7	ETSI EN 300 345 V1.1.7 (2017-03)	13002135Y-A-R4 від 06.11.2020 р.	№ UA.TR.032 (ЦСМВ) (1O175)
	царти, що не включені до "Переліку дас презумицію відновідності радіо		
п.6, абзац 1	ДСТУ EN 62368-1:2017	4789705515 від 11.11.2020 р.	№ UA.TR.032 (ЦСМВ) (1O175)
п.6, абзац 2	ДСТУ EN 55032:2017 ДСТУ ETSI EN 55035:2019	13002135Y-B-R4, 13002575S-R3 nig 06.11.2020 p.	№ UA.TR.032 (ЦСМВ) (10175)
сертифікації матер	ений орган з оцінки відпові, ріалів та виробів", Ресстрацій ном снування, ідентифікаційний номер згід	rep: UA.TR.032	3
виконав	експертизу та		E CTAHLAPT.

(опис виконаних ним дій)
та видав сертифікат експертизи типу № UA.032.CT.0206-21 від 23.04.2021 р.

8. У відповідних винадках опис компонентів та аксесуарів, у тому числі програмного забезпечення, завдяки якому радіообладнання функціонує за призначенням і ня яке поширносться дія декларації про відповідність.

Версія ПЗ (SW/FW version), яка впливає на дотримання суттевих вимог: не визначена;

#### Додаткова інформація: Підприємства-виробники:

«Ilausconic Ayrosocyria Curerea Ko. Jra. Manysoro Caliro, Яполів / "Panasonic Automotive System Co., Lad Matumoto Sie", 5625, Sasaga, Matusumoto-hi, Nagano-ken, 399-8730, Japan. «Panasonic Automotive Systems Dalina Co., Lada (No. 30), Hongang, Road, Ganjinga) District Dalina Chy, Lioning Province I 16033, P. R. China) / «Ilausconic Ayrosovira Curerea Zhanina Ko., Jraz. (de 300, System Foast, Taucastori Jücepler Jasaina Cri., Jihaniur Ilponiune I 16033). Kuralin.

#### Підписано від імені та за дорученням:

"Панасонік Аутомотів Системс Ко., Лтд." ("Panasonic Automotive Systems Co., Ltd."), Японія, уповноваження представников - TOB "Pagio Teer Стандарт", Україна. Декларація згідно листа про зміну назви виробника від 06.10.2021 "Infotainment Systems Business Division, Automotive Company, Panasonic Corporation".



M.II.

# Declaration of Conformity Content Outline\*



#### Deutsch (German) Français (French) FG-Konformitätserklärung Déclaration de conformité CE 1. Der Unterzeichner, Herr Kensuke Hiraki. Le soussigné, M. Kensuke Hiraki. représentant les fabricants, déclare par la Vertreter der Hersteller, erklärt hiermit, das die unten beschriebenen Maschinen den présente que les machines décrites cirelevanten Bestimmungen von folgender dessous satisfont toutes les dispositions Richtlinie entsprechen: pertinentes de: \*EG-Richtlinie 2006/42/EC für Maschinen La Directive CE 2006/42/EC concernant 2. Beschreibung der Maschine les machines a) Allgemeine Bezeichnung Description des machines Scherenwagenheber a) Dénomination générique : b) Funktion : Anhebung des Kraftfahrzeugs Cric pantographe b) Fonction : levage de véhicule à moteur c) Modell d) Typ 3. Hersteller (1) c) Modèle d) Type 4. Hersteller (2) 3. Fabricant (1) 5. Juristische Person, die bevollmächtig ist, 4. Fabricant (2) die technische Datei zu erstellen 5. Personne morale habilitée à compiler le 6. Bezug auf Standardübereinstimmungen fichier technique 7. Andere Standards oder Spezifikationen Références aux normes harmonisées 8. Ausgestellt in 9. Datum 7. Autres normes ou spécifications 8. Fait à 9. Date Nederland (Dutch) Dansk (Danish) EG-conformiteitsverklaring EF-overensstemmelseserklæring 1. De ondergetekende, dhr. Kensuke Hiraki, 1. Undertegnede, hr. Kensuke Hiraki, som die de fabrikanten vertegenwoordigt. repræsenterer producenterne, erklærer verklaart hierbij dat de hieronder hermed, at de herunder beskrevne beschreven machine voldoet aan alle maskiner overholder alle de relevante relevante voorzieningen van: bestemmelser i: \*De EG-richtliin 2006/42/EG voor machines Maskindirektivet. EU-direktiv 2006/42/EF 2. Beschrijving van de machine Beskrivelse af maskinerne a) Generieke benaming : Pantograafkrik a) Generisk betegnelse : Saksedonkraft b) Functie: Motorvoertuig opheffen b) Funktion : Til at løfte motorkørtøj c) Model d) Type c) Model d) Type 3. Fabrikant (1) 3. Producent (1) 4. Fabrikant (2) 4. Producent (2) 5. Rechtspersoon geautoriseerd voor de 5. Juridisk person med bemyndigelse til at samenstelling van het technische dossier udarbeide den tekniske fil 6. Referentie geharmoniseerde normen Henvisninger til harmoniserede 7. Andere normen of specificaties standarder 8. Plaats 9. Datum 7. Andre standarder eller specifikationer 8 Sted 9. Dato

## Italiano (Italian) Dichiarazione CF di Conformità 1. Il sottoscritto. Sig. Kensuke Hiraki. rappresentante delle fabbriche, dichiara che il veicolo sotto riportato è conforme alle disposizioni pertinenti alla: \*Direttiva 2006/42/CE relative agli autoveicoli 2. Descrizione della vettura a) Denominazione generica : Martinetto a pantografo b) Funzione

sollevamento veicolo a motore c) Modello d) Tipo 3. Fabbrica (1)

4. Fabbrica (2) 5. Legale autorizzato a costituire il fascicolo tecnico

6. Riferimento norme standard 7. Altre norme e specifiche 8. Eseguito a 9. Data

Português (Portuguese) Declaração de Conformidade CE 1. O abaixo-assinado, Kensuke Hiraki, representando os fabricantes através desta, declara que a maquinaria descrita abaixo cumpre todas as disposições referentes à:

\*Directiva 2006/42/CE, sobre máquinas. Descrição da maquinaria

a) Denominação genérica: Macaco de tesoura

b) Função : Elevação de veículo motor c) Modelo d) Tipo

3. Fabricante (1) 4. Fabricante (2)

5. Pessoa jurídica autorizada a compilar o processo técnico

6. Referências às normas harmonizadas 7. Outras normas ou especificações

8. Elaborado em 9. Data

Svenska (Swedish) EG-försäkran om överensstämmelse 1 Undertecknad representant för tillverkaren, Mr. Kensuke Hiraki, försäkrar härmed att den nedan beskrivna maskinutrustningen uppfyller alla tillämpliga bestämmelser i: \*EU:s maskindirektiv 2006/42/EG 2. Beskrivning av maskinutrustningen a) Generisk benämning : Saxdomkraft b) Funktion : Lvft av motorfordon c) Modell d) Typ 3. Tillverkare (1) 4. Tillverkare (2) 5. Juridisk person behörig att sammanställa den tekniska dokumentationen 6. Hänvisningar till harmoniserade normer 7. Övriga normer eller specifikationer 8. Utfärdad i 9. Datum

Ελληνικά (Greek)

Δήλωση Συμμόρφωσης ΕΚ

τις σχετικές διατάξεις της:

2. Περιγραφή του μηχανήματος

τη σύνταξη του τεχνικού φακέλου

7. Άλλα πρότυπα ή προδιαγραφές

με μηγανήματα

οχημάτων

ν) Μοντέλο

3. Κατασκευαστής (1)

4. Κατασκευαστής (2)

8. Συντάχθηκε στη

1. Ο υπογεγραμμένος, κ. Kensuke Hiraki,

δηλώνει δια του παρόντος ότι το μηγάνημα

που περιγράφεται παρακάτω πληροί όλες

Κοινοτικής Οδηνίας 2006/42/ΕΚ σχετικά

α) Συνήθης ονομασία: Γρύλος αυτοκινήτου

δ) Τύπος

9. Ημερομηνία

β) Λειτουργία : Ανύψωση μηγανοκίνητων

5. Νομικό πρόσωπο εξουσιοδοτημένο για

6. Αναφορές στα εναρμονισμένα πρότυπα

ως εκπρόσωπος των κατασκευαστών.

Suomi / Suomen kieli (Finnish) FY Vaatimustenmukaisuusvakuutus 1. Allekirioittanut. Mr. Kensuke Hiraki. valmistajan edustaja, vakuuttaa täten, että alla kuvattu laite täyttää kaikki seuraavissa säännöksissä annetut asianmukaiset velvoitteet Koneita koskeva EY-direktiivi 2006/42/EC. 2. Laitteen kuvaus a) Yleisnimike : Saksinosturi b) Käyttötarkoitus ; moottoriaioneuvon nostaminen d) Tyyppi

3. Valmistaja (1) 4. Valmistaia (2)

5. Teknisen tiedoston kokoamiseen valtuutettu oikeushenkilö 6. Yhdenmukaistettuien standardien

7. Muut standardit tai tiedot 8 Paikka 9. Paivavs

## Cestina (Czech)

FS - Prohlášení o shodě 1. Níže podepsaný Kensuke Hiraki jako zástupce výrobce, tímto prohlašuje, že uvedené stroiní zařízení splňuje příslušné požadavky Směrnice evropské komise 2006/42/EC pro stroini zařízení. 2. Popis stroiniho zařízení

a) Obecný název : nůžkový zvedák b) Funkce : zvedání motorových vozidel

c) Model d) Typ 3. Výrobce (1) 4. Výrobce (2)

5. Právnická osoba oprávněná k předložení technické dokumetace 6. Odkazy na harmonizované normy 7. Jiné normy nebo specifikace

8. Misto 9 Datum

## Polski (Polish)

viitetiedot

Deklaracia zgodności WE

1. Niżej podpisany. Pan Kensuke Hiraki. reprezentujący producentów, niniejszym oświadcza, że opisane poniżej urzadzenie iest zgodne z wszystkimi stosownymi postanowieniami:

 Dyrektywy maszynowej Wspólnoty Europejskiej 2006/42/WE

2. Opis urzadzenia

a) Nazwa ogólna : podnośnik nożycowy b) Przeznaczenie : podnoszenie pojazdów

silnikowych c) Model d) Typ

3. Producent (1) 4. Producent (2)

5. Osoba prawna upoważniona do

kompilacji dokumentacji technicznej 6. Odniesienie do zharmonizowanych norm

7. Inne normy lub specyfikacie 8. Sporzadzono w 9. Data

## Slovenčina (Slovak)

ES vyhlásenie o zhode

1. Podpísaný Kensuke Hiraki, zástupca výrobcov, týmto vyhlasuje, že nižšie opísané strojové zariadenie spĺňa všetky príslušné ustanovenia tejto smernice: ·Smernica 2006/42/ES o stroiových zariadeniach

2. Opis strojového zariadenia a) Generické určenie : pantografický

b) Funkcia : zdvíhanie motorových vozidiel

c) Model d) Typ 3. Výrobca (1)

4. Výrobca (2)

Autorizovaný zástupca schopný predložiť technickú dokumentáciu 6. Odkazy na harmonizované normy

7. Iné normy alebo požiadavky 8. Miesto 9. Dátum

#### Magyar (Hungarian) Eesti (Estonian) EK megfelelőségi nyilatkozat EÜ vastavusdeklaratsioon 1. Alulírott, Mr. Kensuke Hiraki, a gyártók 1. Tootjate esindaja hr. Kensuke Hiraki képviseletében ezennel kijelenti, hogy az kinnitab käesolevaga, et alloool kirjeldatud alább megnevezett gép teljesíti: seadmed vastavad järgmise õigusakti a gépekre vonatkozó 2006/42/EK irányely kõigile asiakohastele sätetele: összes vonatkozó előírását: •EÜ masinadirektiiv 2006/42/EÜ 2. A gép leirása 2. Seadmete kirieldus a) Általános megnevezés : ollós emelő a) Üldnimetus : käärtungraud b) Rendeltetés : gépkocsiemelő b) Funktsioon : mootorsõiduki tõstmine c) Modell d) Tipus c) Mudel d) Tüüp 3. Gvártó (1) 3. Tootia (1) 4. Gyártó (2) 4. Tootia (2) 5. A műszaki dokumentáció összeállítására 5. Juriidiline isik, kes on volitatud koostama meghatalmazott jogi személy tehnilist toimikut 6. Harmonizált szabványhivatkozások 6. Viited harmoneeritud standarditele 7. Egyéb szabványok vagy műszaki 7. Muud standardid ja spetsifikatsioonid iellemzők 8. Koht 9. Kuupäev 8. Kiállítás helve 9. Kiállítás dátuma Latviešu (Latvian) Slovensčina (Slovenian) EK pazinojums par atbilstību Izjava o skladnosti ES 1. Podpisani g. Kensuke Hiraki, ki zastopa Zemäk parakstījies Kensuke Hiraki, kas pārstāv ražotājus, ar šo paziņo, ka zemāk proizvajaloe, s tem izjavlja, da naprava, ki aprakstītā mašīna atbilst piemērojamām je opisana spodaj, izpolnjuje vse relevantne določbe: šīs direktīvas prasībām: Direktive o napravah 2006/42/ES •EK Mašīnu direktīva 2006/42/EK 2. Mašīnas apraksts 2. Opis naprave a) Generično ime : Pantografski dvigalnik a) Vispārīgs apzīmējums : Vītnes domkrats b) Funkcija : Spēkratu celšana b) Funkcija : dvigovanje motornega vozila c) Modelis c) Model d) Tip d) Tips 3. Ražotājs (1) 3. Proizvajalec (1) 4. Proizvaialec (2) 4 Ražotāis (2) 5. Juridiskā persona, kas pilnvarota 5. Pravna oseba, ki je upravičena do sestave tehničnega dokumenta apkopot tehnisko failu 6. Atsauces uz harmonizētajiem 6. Reference glede harmoniziranih standardov standartiem 7. Drugi standardi ali specifikacije 7. Citi standarti vai specifikācijas 8. Ustvarjeno v/na 9. Datum 8. Vieta 9. Laiks

Вългарски (Bulgarian)  ЕС декларация за съответствие  1. Долулодписаният г-н Кенсуке Хираки, представляващ производителите, декларирам с настоящата, че машината описана по-долу напълно изпълнява всички съответни разпоредби на:  - Европейската директивата 2006/42/ЕС за машиностроенето  2. Описание на машината  а) Генерично наименование: Пантографен крик  b) Функция: повдигане на моторни превозни средства  с) Модел  d) Тип  3. Производител (1)  4. Производител (2)  5. Юридическо лице упълномощено да състави техническия файл  6. Препратки към хармонизирани стандарти  7. Други стандарти или спецификации  8. Изготвено в  9. Дата	Român (Romanian) Declaraţie de conformitate CE 1. Subsemnatul Kensuke Hiraki, reprezentant el producătorilor, declar prin prezenta că utilajul descris mai jos respectă toate prevederile relevante ale: •Directivei CE 2006/42/CE referitoare la maşini 2. Descrierea utilajului a) Denumire generică : Cric tip pantograf b) Funcţie : ridicarea vehiculeilor cu motor c) Model d) Tip 3. Producător (1) 4. Producător (2) 5. Persoana juridică autorizată să redacteze fișierul tehnic 6. Trimiteri la standardele armonizate 7. Alte standarde sau specificaţii 8. Intocmită in 9. Data
Türk (Turkish) AT Uygunluk Beyanı 1. Aşağıda imzası bulunan Sn. Kensuke Hiraki, imalâtçıları temsilen, tarif edilen makinelerin aşağıda adı geçen yonetmeliğin liğili hükümlerine uygun olduğunu beyan eder: AT makine direktifi 2006/42/EC 2. Makinelerin tanımı a) Jenerik adı: Pantograf kriko b) İşlevi: motorlu taştıları kaldırma c) Model 3. İmalâtçı (1) 4. İmalâtçı (2) 5. Teknik dosyayı düzenlemeye yetkili tüzel kişi 6. Uyumlaştırılmış standartlara atıflar 7. Diğer standartlar ya da şartnameler 8. Düzenlendiği yer 9. Tarih	İslenska (Icelandic) EB-samræmisyfiriysing 1. Undirriladur, nerra Kensuke Hiraki, fulltrü iramleiolanda, İşsir yfir aö vélbünaölnum, sem lyst er hér aö neðan, uppfylir oll viðelgandi ákvæði: -EB-tilskipunarinnar 2006/42/EC um vélbünaö 2. Lýsing á vélbünaölnum a) Almennt heiti: Tvíarma tjakkur b) Hlutverk: að lyfta vélknúnum ökutækjum c) Gerö d) Tegund 3. Framleiðandi (1) 4. Framleiðandi (2) 5. Lógaðili sem hefur heimild að taka saman tækniskjal 6. Tilvísanir í samhæsíða staðila 7. Aðri staðilar eða tæknilýsingar 8. Staður 9. Dagsetning

## Español (Spanish)

Declaración de Conformidad CE

1. El abajo firmante, Sr. Kensuke Hiraki, en representación de los fabricantes, por la presente declara que la maquinaria descrita a continuación cumple con las disposiciones aplicables de:

- ·La directiva 2006/42/CE relativa a maquinarias 2. Descripción de la maquinaria
- a) Denominación genérica : Gato pantográfico b) Función :
- Elevación de vehículo automotor c) Modelo d) Tipo
- 3. Fabricante (1)
- 4. Fabricante (2) 5. Persona jurídica autorizada para recopilar el archivo técnico
- 6. Referencias de normas armonizadas
- 7. Otras normas o especificaciones 8. Elaborada en 9. Fecha

## Norsk (Norwegian) EF-samsvarserklæring

- 1. Undertegnede, Kensuke Hiraki, som representerer produsentene, erklærer herved at maskinen beskrevet nedenfor oppfyller alle relevante bestemmelser i \*EU-maskindirektiv 2006/42/EU
- 2. Beskrivelse av maskineriet a) Generisk betegnelse
- Pantografiekk (biliekk)
- b) Funksjon : løfting av motorkjøretøyer c) Modell d) Type
- 3. Produsent (1)
- 4. Produsent (2)
- 5. Juridisk person med fullmakt til å utarbeide den tekniske dokumentasionen
- 6. Henvisninger til harmoniserte standarder 7. Andre standarder eller spesifikasjoner
- 8 Utarbeidet i 9 Dato

## Lietuviu kalba (Lithuanian)

EB atitikties deklaracija 1. Toliau pasirašes gamintoju atstovas Kensuke Hiraki deklaruoja, kad toliau aprašytoji įranga atitinka visas atitinkamas nuostatas, išdėstytas:

\*EB Direktyvoie 2006/42/EB del mašinu 2. Jrangos aprašymas

d) Tipas

- a) Bendras pavadinimas : pantografo kéliklis
- b) Funkcija

motorinės transporto priemonės kėlimas

- c) Modelis
- 3. Gamintojas (1) 4. Gamintojas (2)
- 5. Juridinis asmuo, igaliotas sudaryti technine byla
- 6. Nuoroda i lygiaverčius standartus 7. Kiti standartai arba specifikacijos
- 8. Atlikta 9. Data

## Hrvatski (Croatian)

Izjava o sukladnosti EK

1. Ja. dolie potpisani Kensuke Hiraki. predstavnik proizvođača, ovime izjavljujem da su strojevi opisani u nastavku sukladni s bitnim odredbama:

- Direktive 2006/42/EZ Europskog parlamenta i vijeća o strojevima
- 2. Opis stroia
- a) Generički naziv : pantografska dizalica b) Funkcija : podizanje motornog vozila
- c) Model d) Tip
- 3. Proizvođač (1)
- 4. Proizvođač (2)
- 5. Pravna osoba ovlaštena za sastavljanje tehničke dokumentacije
- 6. Upućivanje na usklađene norme 7. Ostale norme ili specifikacije
- 8. Miesto 9. Datum



# Open Source Licence

## **■** Meter Open Source Licence

The software embedded in this product includes open source software. Refer to the following website for details regarding the open source software. https://www.nippon-seiki.co.jp/global/business\_ic\_meter/

Numbers		Headlights	464	Anti-lock Brake System (ABS)	55
		Mirrors	248	Indicator	12
12-Volt Battery	110	Rear Seats	255	App Shortcut Function	30
Charging System Indicator		Steering Wheel	247	Apple CarPlay	33
Maintenance (Replacing)	632	Adjusting the Sound	309	Armrest	26
12-Volt Battery Charging System	606	Agile Handling Assist	453	Audio	16
Indicator 119,	686	Air Conditioning System		Audio Remote Controls	29 <sup>,</sup>
		(Climate Control System)	280	Audio System	28
Α		Changing the Mode	281	Adjusting the Sound	30
ABS (Anti lock Brake System)	EEO	Defrosting the Windscreen and		Android Auto™	34
ABS (Anti-lock Brake System) Accessories and Modifications		Windows	282	App Shortcut Function	30
		Dust and Pollen Filter	638	Apple CarPlay	33'
Accessory Power Socket		Recirculation/Fresh Air Mode	281	Audio Remote Controls	
Acoustic Vehicle Alerting System		Sensors	285	Audio System Function	29
Active Cornering Lights	233	Using Automatic Climate Control	280	Audio/Information Screen	30
Adaptive Cruise Control (ACC) with	400	Air Pressure		Basic Operation	29
Low Speed Follow		Airbags	58	Bluetooth® Audio	33
Indicator (Amber)		After a Collision	60, 83	Clock Setup	30
Indicator (White/Green)		Airbag Care	79	DAB	32
Adaptive Driving Beam		Centre Airbag		Display Setup	
Indicator	124	Event Data Recorder		Error Messages	
Adding		Front Airbags (SRS)	60	FLAC/PCM/WAVE/MP4/AVI/MKV/AS	
Coolant		Indicator		WMV	32
Engine Oil		Knee Airbags	•	FM/AM Radio	31
Washer		Passenger Airbag Off Indicator		General Information	38'
Additives, Engine Oil		Sensors		How to Update	
Adjustable Speed Limiter		Side Airbag		How to Update Wirelessly	
Indicator	130	Side Curtain Airbag		How to Update with a USB Device	
Adjusting		AM/FM Radio		MP3/WMA/AAC	
Armrest		Ambient Meter		Power Flow	
Front Head Restraints	258	Ambient weter		1 OVC1 1 IOVV	

Android Auto™ ...... 345

Radio Data System (RDS) ...... 319

Reactivating	289	If the 12-Volt Battery Is Dead 680	Bulb Specifications	710
Security Code	289	Maintenance (Checking the Battery) 629		
Selecting an Audio Source	305	Maintenance (Replacing) 632, 635	C	
Start Up	290	Belts (Seat) 47	C	
Status Bar	305	Beverage Holders 266	Car Wash Mode	423
System Updates	311	Blind Spot Information System 458	Carbon Monoxide Gas	109
System Updates Settings	312	Bluetooth® Audio 330		405
Theft Protection	289	Booster Seats (For Children) 107	Certification Label	713
USB Flash Drives	326, 389	Brake System 546	Changing Bulbs 6	612
USB Ports	293	Anti-lock Brake System (ABS) 553	CHARGE/DECEL Gauge	150
Voice Control Operation	298	Automatic Brake Hold 550	Child Restraint System	83
Wallpaper Setup	307	Brake Assist System 554	Booster Seats	107
Wi-Fi Connection	337	Fluid 609	Child Restraint System for Infants	86
Wired Connection	324	Foot Brake549	Child Restraint System for Small Children	88
Audio System Theft Protection	289	Indicator 116, 117, 118	Installing a Child Restraint System with a	
Audio/Information Screen	301	Parking Brake 546	Lap/Shoulder Seat Belt	102
Auto High-Beam	235	Brightness Control	Larger Children	106
Indicator	124	(Instrument Panel) 244, 245	Rear-facing Child Restraint System	86
Automatic Brake Hold	550	Bulb Replacement 612	Selecting a Child Restraint System	89
Indicator	118, 550	Back-Up Lights 616	Using Tether	104
Automatic Folding Door Mirror		Brake Lights 613	Child Safety	83
Function	249	Front Turn Signal Lights612	Childproof Door Locks	
Average Fuel Economy	158, 179	Headlights612	Cleaning the Exterior	643
Average Speed	160, 181	High-Mount Brake Light 617	Cleaning the Interior	540
		Luggage Area Light 619	Climate Control System	280
В		Position/Daytime Running Lights 612		280
D		Rear Licence Plate Light 617	Defrosting the Windscreen and	
Battery	14, 629	Rear Turn Signal Light 613	Windows	282
12-Volt Battery Charging System		Side Turn Signal/Emergency Indicator	Dust and Pollen Filter 6	638
Indicator	•	Lights 612		
High Voltage	14, 463	Vanity Mirror Light 618	Sensors	285

Using Automatic Climate Control 280	Declaration of	Dust and Pollen Filter 638
Clock 153, 172, 194	Conformity Content Outline	
Clock Setup 306	Defaulting All the Settings 368	-
CMBS	Deflation Warning System 454	E
(Collision Mitigation Braking System) 469	Calibration	e:HEV
Coat Hooks 268	Indicator 123, 691	eCall Indicator 703
Collision Mitigation Braking System	Defrosting the Windscreen and	ECON Mode Indicator 126
(CMBS) 469	Windows 282	Elapsed Time 160, 181
Console Compartment 265	Devices that Emit Radio Waves 714	Electric Power Steering (EPS) System 689
Controls	Dimming	Indicator 121, 689
Coolant (Engine) 604	Headlights 227	<b>Emergency</b> 700
Adding to the Radiator 605	Rearview Mirror248	Emergency Call (eCall) 703
Adding to the Reserve Tank 604	Dipstick (Engine Oil)602	Automatic Emergency Call 703
Overheating 683	Display Audio290	Manual Emergency Call 707
Coolant (High Voltage System) 607	Display Setup 310	Emergency Stop Signal 555
Creeping 417	Door Mirrors 249	Engine
Cross Traffic Monitor 564	<b>Doors</b> 195	Coolant604
Cup Holders 266	Door Open Message	If the 12-Volt Battery Is Dead 680
Current Mode for ACC with	Keys 195	Oil 600
Low Speed Follow, the LKAS, and	Locking/Unlocking the Doors from	Switch Buzzer
Traffic Jam Assist 153	the Inside	Engine Coolant 604
Customize Display 171, 173, 191	Locking/Unlocking the Doors from	Adding to the Radiator 605
Customized Features 351, 361	the Outside	Adding to the Reserve Tank 604
	Drive Mode Switch 429	Overheating 683
D	Driver Attention Monitor 163, 183	Engine Oil 600
D	Driver Information Interface 154, 172, 175	Adding 603
DAB 321	Switching the Display 154, 175	Checking 602
Daytime Running Lights 232	Driving 401	Engine oil pressure low Warning 685
Dead 12-Volt Battery 680	Braking 546	If the Engine oil pressure
Deceleration Paddle Selector 425	Shifting Gear	low Warning Appears 685
Deceleration Paddle Selector Indicator 120	Transmission	Recommended Engine Oil 600

Engine oil pressure low Warning 685 Fuel	371
	ual Operation 372
, , ,	
1 115	all 386
,	en 375
. 9	376
	385
g · · · · · · · · · · · · · · · · · · ·	380
· Programme and the state of th	208
Fuel Economy and CO <sub>2</sub> Emissions	619
Features	702
Filter Fuel Fill Door	ton 6, 7
Dust and Pollen	258
Flat Tyre	227
Floor Mats	jhts 233
Fluids Adaptive Driving Bo	am 238
Brake Fluid	612
Engine Coolant	235
High Voltage System Coolant	ghts 232
Windscreen Washer	227
	228
	227
Folding Down the Rear Seats	227
	246
Front Airbags (SRS)	eel 278
	279
· · · D · · · · · · · · · · · · · ·	ephone) 369
	228
5 1 6 1 1	y 463
Front Wide View Camera	
	v Charge

High Voltage System Coolant 60	7 Collision Mitigation Braking System	Road Departure Mitigation System
Hill Start Assist System 41.	3 (CMBS) (Grey)131	Steering Assist Auto OFF
Honda SENSING 46	Deceleration Paddle Selector 120	Safety Support (Amber)
Honda TRK 65	2 ECON Mode 126	Safety Support (Green/Grey)
Hybrid Vehicle	Electric Power Steering (EPS) System 121	Seat Belt Reminder 120
e:HEV 1:	B EV 118	Security System Alarm 128
	High Beam 124	Shift Position
	Immobilizer System 127	SPORT Mode 126
1	INDIVIDUAL Mode 126	Supplemental Restraint System 121
Identification Numbers71	Intelligent Speed Limiter	System Message
Engine and Transmission 71.	Lane Keeping Assist System (LKAS)	Transmission System 119, 692
Vehicle Identification71	3 (Amber)	Turn Signal and Hazard Warning 124
Illumination Control 244, 24	Lane Keeping Assist System (LKAS)	Vehicle Stability Assist (VSA) OFF 122
Immobilizer System21	(White/Green)	Vehicle Stability Assist (VSA) System 122
Indicator 12	<sup>7</sup> Lights On 124	VSA OFF
Indicators 11	Low Fuel 120	INDIVIDUAL Mode Indicator 126
12-Volt Battery Charging System 11	Low Tyre Pressure/	Information 171, 709
Adaptive Cruise Control (ACC) with	Deflation Warning System 123, 691	Instant Fuel Economy 158, 179
Low Speed Follow (Amber) 12	Malfunction Indicator Lamp 119	Instrument Panel 113
Adaptive Cruise Control (ACC) with	NORMAL Mode 126	Brightness Control 244, 245
Low Speed Follow (White/Green) 13	Parking Brake and Brake System	Intelligent Speed Limiter 443
Adaptive Cruise Control (ACC) with	(Amber) 118	Indicator 130
Low Speed Follow Interval	Parking Brake and Brake System	Interior Convenience Items 262
Adaptive Driving Beam 12	116, 117 (Red)	Interior Lights 262
Adjustable Speed Limiter 13	Parking Sensor 123	Interior Rearview Mirror 248
Anti-lock Brake System (ABS) 12	Passenger Front Airbag On/Off 121	iPhone389
Auto High-Beam 12	Power System 118	iPod 389
Automatic Brake Hold11	Ready 118	
Automatic Brake Hold System 11	Rear Fog Light 124	
Collision Mitigation Braking System	Road Departure Mitigation (Amber) 131	
(CMBS) (Amber)	Road Departure Mitigation (Grey)	

J		High Beam Indicator 124	Coolant 604	, 607
Jack (Wheel Nut Wrench)	660	High Beams 228	Oil	
		Interior	Precautions	. 576
Jump Starting	680	Light Switches	Radiator	. 605
		Lights On Indicator 124	Remote Transmitter	. 635
K		Position Lights	Replacing Light Bulbs	. 612
Key	105	Load Limits	Safety	
Number Tag		Lock Presetting 201	Service Reminder System	. 58′
Rear Door Won't Open		Locking/Unlocking 195	Transmission Fluid	. 608
Remote Transmitter		Childproof Door Locks	Tyres	. 623
Types and Functions		From Inside	Under the Bonnet	. 597
Key Number Tag		From Outside 198	Malfunction Indicator Lamp 119	, 687
Kickdown		Keys 195	Maximum Permissible Weight	. 405
Knee Airbags		Using a Key 203	Message	. 333
Kriee Airbags	00	Low 12-Volt Battery Charge 686	Mirrors	. 248
		Low Fuel Indicator 120	Adjusting	. 248
L		Low Tyre Pressure/Deflation	Door	. 249
Lane Keeping Assist System (LKAS)	513	Warning System Indicator 123, 691	Exterior	. 249
Indicator (Amber)		Lower Anchorages 97	Interior Rearview Mirror	. 248
Indicator (White/Green)		Lubricant Specifications Chart 711	Modifications (and Accessories)	. 646
Legal Information on Apple CarPlay/	150	Luggage (Load Limit) 405	MP3/WMA/AAC	. 326
Android Auto	397	Luggage Area Cover 270	Multi-View Rear Camera	. 568
Lights 22		Luggage Hook 268		
Active Cornering Lights		Lumbar Support 253	N	
Adaptive Driving Beam				
Auto High-Beam		М	Navigation 161	•
Bulb Replacement			No content	
Daytime Running Lights		Maintenance 167, 187, 575	NORMAL Mode Indicator	
Fog Light		Battery 629	Numbers (Identification)	. 713
Front Fog Lights		Brake Fluid 609		
Headlights		Cleaning 640		

## Passenger Front Airbag On/Off Indicator 121 Passing Indicators 227 Oil (Engine) ...... 600 Adding ...... 603 Fuel Economy and CO<sub>2</sub> Emissions ........... 573 Checking ...... 602 Engine oil pressure low Warning ............ 685 Information ...... 570 Recommended Engine Oil ...... 600 Open Source Licences ...... 392, 761 Refueling ...... 570 Opening Hatch...... 702 Playing Bluetooth® Audio ...... 330 Opening/Closing Pop-up Hood System ...... 80 Pop-up Hood System Care ...... 82 Power Windows 218 Position Lights ...... 227 Other Interior Convenience Items .......... 273 Outside Temperature Display ...... 151 Power Flow 348 Overheating ...... 683 Power Flow Monitor ...... 177 Power Flow/Engine Status Display/ High Voltage Battery Charge Level Gauge ...... 156 Paddle Selector **POWER Gauge** ...... 150 Indicator ...... 120 Power System Indicator...... 118 Panoramic Roof...... 221 Precautions While Driving ...... 415 Parking Brake ...... 546 Parking Brake and Brake System Pregnant Women ...... 55 Indicator (Amber) ...... 118 Puncture (Tyre) ...... 652, 665 Parking Brake and Brake System Indicator (Red)...... 116, 117 Parking Sensor Indicator ...... 123 Parking Sensor System ...... 558

Passenger Airbag Off Indicator...... 78

Radiator		605
Radio (FM/AM)		
Radio Data System (RDS)		
Range		
•		
RDS (Radio Data System)		
Ready Indicator Rear Demister		
Rear Fog Light		
Rear Fog Light Indicator		
Rear Seat Reminder		
Rear Seats (Folding Down)		
Rear Wiper/Washer		
Refuel Recommend		
Refueling		
Fuel Gauge		
Low Fuel Indicator		120
Petrol	. 570,	710
Regulations		714
Remote Transmitter		202
Replacement		
12-Volt Battery		632
Battery	. 632,	635
Bulbs		612
Fuses	. 693,	695
Tyres		665
Wiper Blade Rubber		620
Resetting a Trip Meter	. 158,	179
Road Departure Mitigation		
Indicator		
On and Off		

# Safety Labels ...... 110 Safety Message ...... 0 **Safety Support** ...... 168, 188 Seat Belts...... 47. 167. 187 Adjusting the Shoulder Anchorage ........... 54 Checking...... 56 Fastening...... 52 Installing a Child Restraint System with a Lap/Shoulder Seat Belt ...... 102 Pregnant Women ...... 55 Warning Indicator...... 49, 120 Seats 250 Security System ...... 211 Immobilizer System Indicator ...... 127 Selecting a Child Restraint System...... 89

Selecting an Audio Source		30!
Service Reminder System		
Setting the Clock		194
Shift Position Indicator		119
Shifting (Transmission)	'	418
Shoulder Anchorage		54
Side Airbags		72
Side Curtain Airbag		7
SOS Button		70
SOS Cancel Button		70
Spark Plugs		710
Specifications		710
Specified Fuel		570
Speed Alarm	162,	182
Speed Limiter, Adjustable	'	436
Speed Limiter, Intelligent	'	443
Speed/Distance Units		
Speedometer		149
SPORT Mode Indicator		126
SRS Airbags (Airbags)		60
Starting the Power System		
Buzzer		22!
Does Not Start		676
If the 12-Volt Battery Is Dead		680
Status Bar		30!
Steering Wheel		247
Adjusting		24
Stopping		556
Storage Items		264
Sun Visor		273
Sunglasses Holder		272

Super Locking	21
Supplemental Restraint System (SRS)	
Indicator	12
Switches	
(Around the Steering Wheel) 6, 7, 8,	22
System Message Indicator	
System Updates	31
Т	
Temperature	
Outside Temperature Display	15
Temperature Sensor 151,	
Temporary Repair Kit (TRK)	65
Tie-down Anchorages	
Tilt Sensor	21
Time (Setting)	19
Tools	65
Towing a Trailer	40
Equipment and Accessories	40
Load Limits	40
Towing Your Vehicle	
Emergency	70
Traffic Sign Recognition System 152,	53
Transmission	41
Creeping	41
Fluid	60
Indicator	11
Kickdown	41
Number	71

Shifting.....

Trip Meter 158, 160, 179, 181	Unlo
TRK (Temporary Repair Kit) 652	the
Troubleshooting 649	USB
Blown Fuse 693, 695	USB
Brake Pedal Vibrates	
Buzzer Sounds When Opening Door 39	V
Emergency Towing 700	V
Noise When Braking 40	Van
Overheating 683	Veh
Power System Won't Start 676	Veh
Puncture/Flat Tyre 665	O
Rear Door Won't Open 38	0
Warning Indicators 114	Sy
Turn signals	Visc
Indicators (Instrument Panel) 124	Void
Turning on the Power 411	Αι
Tyres 623	G
Air Pressure 711	Lis
Checking and Maintaining 623	Na
Inspection 623	Ph
Puncture (Flat Tyre) 665	St
Rotation 626	Vo
Temporary Repair Kit (TRK) 652	Vo
Tyre Chains 627	VSA
Wear Indicators 624	
Winter 627	W
	Wal
U	War
Ultrasonic Sensors	War
O1010301110 JC113013	

U	
Ultrasonic Sensors	214
Unlocking the Doors	198

Unlocking the Front Doors from		
the Inside		205
USB Flash Drives	326,	389
USB Ports		293
V		

V	
Vanity Mirrors	11
Vehicle Identification Numbers	713
Vehicle Stability Assist (VSA)	451
OFF Indicator	122
Off Switch	452
System Indicator	122
Viscosity (Oil)	. 600, 711
Voice Control Operation	298
Audio Commands	299
General Commands	299
List Commands	300
Navigation Commands	300
Phone Commands	299
Standard Commands	300
Voice Portal Screen	299
Voice Recognition	298
VSA (Vehicle Stability Assist)	45´

Wallpaper	30
Warning and Information Message	135
Warning Indicator On/Blinking	685
Warning Labels	110

Warnings	192
Watts	710
Wear Indicators (Tyre)	624
Wheel Nut Wrench (Jack Handle)	670
Wi-Fi Connection	337
Window Washers	241
Adding/Refilling Fluid	610
Switch	241
Windows (Opening and Closing)	218
Windscreen	241
Cleaning 640,	645
Defrosting/Defogging	282
Washer Fluid	610
Wiper Blades	620
Wipers and Washers	241
Winter Tyres	627
Tyre Chains	627
Wipers and Washers	241
Checking and Replacing Wiper Blades	620
Wireless Charger	275
WMA	326
Worn Tyres	623